

IBM Application Performance Analyzer for
z/OS
Version 14.2

User's Guide



Note

Before using this information and the product it supports, be sure to read the general information under [Notices](#).

January 2022 edition

This edition applies to IBM Application Performance Analyzer for z/OS Version 14.2 (5655-Q49) and to any subsequent releases until otherwise indicated in new editions. Make sure you are using the correct edition for the level of Application Performance Analyzer.

You can order publications online at www.ibm.com/shop/publications/order, or order by phone or fax. IBM® Software Manufacturing Solutions takes publication orders between 8:30 a.m. and 7:00 p.m. Eastern Standard Time (EST). The phone number is (800) 879-2755. The fax number is (800) 445-9269.

You can find out more about IBM Application Performance Analyzer for z/OS by visiting the product page for Application Performance Analyzer at: <https://www.ibm.com/products/application-performance-analyzer>.

© Copyright IBM Corporation and BankNet 2010, 2022. All rights reserved.

© Copyright International Business Machines Corporation 2010, 2022.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Tables.....	xxxiii
--------------------	---------------

About this document.....	xxxv
---------------------------------	-------------

Documentation conventions.....	xxxv
--------------------------------	------

Changes introduced with IBM Application Performance Analyzer for z/OS V14.2xxxvii

Chapter 1. Using Application Performance Analyzer/ISPF.....	1
--	----------

ISPF reports: navigation and control.....	1
Scrolling.....	1
Report headings.....	1
Action (menu) bar.....	1
Retaining open reports.....	2
Displaying HELP.....	2
Primary commands for report navigation.....	2
Line commands for report navigation.....	4
R02 - Observation session list.....	7
Input fields.....	8
Description of detail lines.....	8
Detail window.....	11
R01 - Application Performance Analyzer performance reports menu.....	12

Chapter 2. Entering observation requests.....	15
--	-----------

Entering an observation request.....	15
Using the NEW command.....	15
Using the MOD line command.....	16
Schedule New Measurement panels.....	16
Panel 1 – Job Information.....	17
Panel 2 – Options.....	21
Panel 3 – Multi-steps.....	26
Panel 4 – Active Jobs.....	28
Panel 5 – Subsystems.....	29
Panel 6 – Sysplex.....	34
Panel 7 – Schedule.....	35
Panel 8 – Sched Options.....	37
Entering a Threshold Monitor request.....	40
Overview.....	40
Using the TNEW command.....	40
Setting Threshold Requirements panels.....	41
Panel 3 - Criteria.....	41
Entering a Trigger request.....	42
Overview.....	42
Using the TR line command.....	42

Chapter 3. Performance analysis reports.....	43
---	-----------

Performance analysis basics.....	44
Sampling and system states.....	44
Types of system states.....	45
System objects.....	45

Quantities expressed as percentages.....	45
Margin of error.....	46
Color coding of graphs.....	46
Report categories and codes.....	46
S01 - Measurement profile.....	51
Usage.....	51
Performance graphs.....	51
Overall CPU activity.....	51
CPU usage distribution.....	52
Most CPU active modules.....	52
Most CPU active CSECTs.....	53
CPU modes.....	53
Most active IMS PSBs.....	54
Most active DLI calls.....	54
Most active DB2 plans.....	54
Most active packages/DBRMs.....	55
Most active SQL statements.....	55
Measurement values.....	55
Request parameters.....	55
Measurement environment.....	57
Measurement statistics.....	58
CPU consumption.....	59
zAAP CPU consumption.....	59
DDF CPU consumption.....	60
Client enclave consumption.....	60
Virtual Storage Map.....	60
Sample reports.....	60
S02 - Load module attributes.....	64
SETUP options.....	64
S03 - Load module summary.....	65
Detail line descriptions.....	65
Line commands.....	66
SETUP options.....	66
Detail window.....	66
S04 - TCB summary.....	67
Overview.....	67
Detail line descriptions.....	67
Line commands.....	68
Detail window.....	68
S05 - Memory usage timeline.....	69
Overview.....	69
Detail line descriptions.....	69
Line commands.....	70
SETUP options.....	70
S06 - Data space usage timeline.....	70
Overview.....	70
Detail line descriptions.....	71
Line commands.....	71
SETUP options.....	72
S07 - TCB execution summary.....	72
Overview.....	72
Detail line descriptions.....	72
Line commands.....	73
S08 - Processor utilization summary.....	73
Usage.....	73
Quantification.....	73
Core IDs Quantification.....	75
Sample reports.....	75

S09 - Measurement analysis.....	76
Usage.....	76
Sample reports.....	76
S10 - Observation Session Messages.....	77
Usage.....	77
Category Descriptions.....	77
SETUP options.....	78
C01 - CPU usage by category.....	78
Overview.....	78
Detail line descriptions.....	79
Subset reports.....	82
Line commands.....	82
SETUP options.....	84
Detail window.....	85
C02 - CPU usage by module.....	85
Overview.....	85
Detail line descriptions.....	86
Line commands.....	87
Detail window.....	88
SETUP options.....	88
C03 - CPU usage by code slice.....	89
Overview.....	89
Detail line descriptions	90
Line commands.....	90
SETUP options.....	91
Detail window.....	91
C04 - CPU usage timeline.....	92
Overview.....	92
Detail line descriptions.....	93
Subset reports.....	93
Line commands	93
SETUP options.....	94
Detail window.....	94
C05 - CPU usage by task/category.....	95
Overview.....	95
Detail line descriptions.....	96
Line commands.....	99
SETUP options.....	100
Detail window.....	101
C06 - CPU usage by task/module.....	102
Overview.....	102
Detail line descriptions	102
Sample reports.....	103
Line commands.....	103
SETUP options.....	104
Detail window.....	105
C07 - CPU usage by procedure.....	105
Usage.....	105
Quantification.....	106
Detail line hierarchy.....	106
Detail line descriptions.....	106
Sample reports	106
Line commands	107
SETUP options	107
Detail window	108
C08 - CPU usage referred attribution.....	109
Usage	109
Quantification.....	109

Detail line hierarchy	109
Detail line descriptions.....	110
Sample reports.....	111
Line commands.....	112
SETUP options.....	113
Detail window	114
C09 - CPU usage by PSW/object code.....	115
Quantification.....	115
Detail line hierarchy.....	115
Detail line descriptions.....	115
Sample reports	116
Line commands.....	116
SETUP options.....	117
Detail window.....	117
C10 - CPU Usage by Natural Program.....	118
Quantification.....	118
Detail line hierarchy.....	118
Detail line descriptions.....	118
Sample reports	119
Line commands.....	119
SETUP options.....	120
Detail window.....	120
W01 - WAIT time by task/category.....	121
Overview	121
Detail line descriptions	122
Line commands.....	124
SETUP options.....	125
Detail window.....	126
W02 - WAIT time by task/module.....	126
Overview	126
Detail line descriptions	126
Line commands	128
SETUP options.....	129
Detail window	129
W03 - WAIT time referred attribution.....	129
Usage	130
Quantification	130
Detail line hierarchy.....	130
Detail line descriptions.....	130
Sample reports.....	132
Line commands.....	132
SETUP options.....	133
W04 - WAIT time by task ENQ/RESERVE.....	133
Usage	133
Quantification	134
Detail line hierarchy.....	134
Detail line descriptions.....	134
Sample reports.....	134
Line commands.....	135
SETUP options.....	136
Detail window	136
W05 - WAIT time by tape DDNAME.....	136
Usage	136
Quantification	137
Detail line descriptions.....	137
Sample reports.....	137
Line commands.....	137
SETUP options.....	137

Detail window	138
D01 - DASD usage by device.....	138
Overview.....	138
Detail line descriptions.....	139
Line commands.....	139
Detail window.....	140
SETUP options	140
D02 - DASD usage by DDNAME.....	140
Overview.....	140
Detail line descriptions.....	141
Line commands.....	141
Detail window	142
SETUP options.....	143
D03 - DASD usage by data set.....	143
Overview.....	143
Detail line descriptions.....	143
Line commands	143
Detail window.....	144
SETUP options.....	144
D04 - Data set attributes.....	144
D05 - DASD EXCP summary.....	147
Usage	147
Quantification	147
Detail line hierarchy	147
Detail line descriptions.....	147
Sample reports	147
Line commands	148
SETUP options.....	148
Detail window.....	149
D06 - DASD VSAM statistics.....	149
Usage	149
Quantification	149
Detail line hierarchy.....	149
Detail line descriptions.....	149
Sample reports	150
Line commands.....	150
SETUP options	151
Detail window	151
D07 - DASD activity timeline.....	152
Usage	152
Quantification.....	152
Detail line descriptions.....	152
Sample reports.....	152
Line commands.....	153
SETUP options	153
Detail window.....	154
D08 - DASD I/O wait time.....	154
Usage.....	154
Quantification.....	154
Detail line hierarchy	155
Detail line descriptions.....	155
Sample reports.....	156
Line commands.....	157
Detail window.....	157
D09 - VSAM buffer pool usage.....	158
Usage	158
Quantification	159
Sample reports	159

G01 - Coupling facility summary.....	160
Usage	160
Facility summary.....	160
Sample reports.....	160
G02 - Coupling facility mean times.....	161
Usage	161
Quantification	161
Detail line hierarchy.....	161
Detail line descriptions.....	161
Sample reports.....	162
G03 - Coupling facility total times.....	162
Usage.....	162
Quantification.....	162
Detail line hierarchy	162
Detail line descriptions.....	162
Sample reports	163
K01- CPU SRB Usage by SRB Type.....	163
Usage.....	163
Quantification.....	163
Detail Line Hierarchy.....	163
Detail Line Descriptions.....	164
Sample reports.....	166
Line commands.....	167
Detail Window.....	168
SETUP Options.....	168
K02- CPU SRB Usage by PSW/ObjCode.....	168
Usage.....	168
Quantification.....	169
Detail Line Hierarchy.....	169
Detail Line Descriptions.....	169
Sample reports.....	170
Line commands.....	170
Detail Window.....	171
V01 - Measurement variance summary.....	171
Usage.....	171
Measurements analyzed.....	172
Variances.....	172
Sample reports	172
V02 - CICS variance summary.....	173
Usage.....	174
Measurements analyzed.....	174
Variances.....	174
Sample reports.....	175
V03 - DB2 variance summary.....	175
Usage.....	176
Measurements analyzed.....	176
Variances.....	176
Sample reports.....	177
V04 - IMS variance summary.....	180
Usage.....	180
Measurements analyzed.....	180
Variances.....	180
Sample reports.....	182
Chapter 4. CICS performance analysis reports.....	185
Overview of CICS data extractor.....	185
Session statistics	185

Transaction measurement data	186
CICS+ Extractor.....	186
Overview of CICS Multiple Address Space Support.....	186
E01 - CICS session statistics.....	187
Usage	187
Detail line descriptions.....	187
Sample reports.....	188
E02 - CICS CPU and use count by program.....	189
Usage	189
Quantification.....	189
Detail line hierarchy	190
Sample reports.....	190
Detail line descriptions.....	190
Line commands	190
Detail window	191
E03 - CICS CPU usage by transaction.....	191
Usage	191
Quantification.....	191
Detail line hierarchy	192
Sample reports.....	192
Detail line descriptions.....	193
Line commands	195
Detail window	196
SETUP options.....	197
E04 - CICS mean service time by transaction.....	198
Usage	198
Quantification	198
Detail line hierarchy	198
Sample reports.....	198
Detail line descriptions.....	199
Line commands.....	206
Detail window.....	206
E05 - CICS total service time by Txn.....	208
Usage	208
Quantification.....	208
Detail line hierarchy	208
Detail line descriptions.....	209
Sample reports	215
Line commands.....	216
Detail window.....	217
E06 - CICS service time by task ID.....	219
Usage	219
Quantification	219
Detail line hierarchy.....	219
Detail line descriptions.....	220
Sample reports	226
Line commands.....	227
Detail window.....	228
E07 - CICS wait by Txn.....	228
Usage.....	228
Quantification.....	228
Detail line hierarchy	228
Detail line descriptions.....	229
Sample reports.....	229
Line commands.....	230
E08 - CICS mean service time by terminal ID.....	230
Usage.....	230
Quantification.....	230

Detail line hierarchy	230
Detail line descriptions.....	231
Sample reports.....	235
Line commands.....	236
Detail window.....	237
E09 - CICS total service time by terminal ID.....	238
Usage.....	238
Quantification.....	238
Detail line hierarchy	238
Detail line descriptions.....	239
Sample reports.....	243
Line commands.....	244
Detail window.....	245
E10 - CICS mean service time by user ID.....	246
Usage.....	246
Quantification.....	246
Detail line hierarchy	246
Detail line descriptions.....	247
Sample reports.....	251
Line commands.....	252
Detail window.....	253
E11 - CICS total service time by user ID.....	253
Usage.....	253
Quantification.....	254
Detail line hierarchy	254
Detail line descriptions.....	254
Sample reports.....	259
Line commands.....	259
Detail window.....	260
E12 - CICS CPU/service time by transaction.....	261
Usage.....	261
Quantification.....	261
Detail line hierarchy	261
Detail line descriptions.....	261
Sample reports.....	262
Line commands.....	262
Detail window.....	263

Chapter 5. IMS performance analysis reports..... 265

Overview of IMS data extractor	266
IMS+ extractor.....	266
Overview of IMS Multiple Address Space Support.....	266
I01 - IMS measurement profile.....	267
Usage	267
IMS environment.....	267
Performance graphs	267
Transaction statistics	269
DLI call statistics.....	269
Sample reports.....	270
I02 - IMS DL/I call timeline.....	271
Usage	271
Quantification.....	271
Detail line hierarchy.....	271
Detail line descriptions.....	271
Sample reports.....	272
Line commands.....	272
I03 - IMS transaction timeline.....	272

Usage	272
Quantification.....	272
Detail line hierarchy.....	273
Detail line descriptions.....	273
Sample reports.....	273
Line commands.....	274
I04 - IMS transaction activity timeline.....	274
Usage	274
Quantification.....	274
Detail line descriptions.....	275
Sample reports.....	275
Line commands.....	275
Detail lines for reports I05 through I13.....	276
Detail lines reported for PSW sampling.....	276
I05 - IMS DL/I CPU usage by PSB.....	280
Usage	280
Quantification.....	280
Detail line hierarchy.....	280
Detail line descriptions.....	280
Sample reports.....	281
Line commands.....	281
Detail window.....	282
I06 - IMS DL/I CPU usage by transaction.....	283
Usage	283
Quantification.....	283
Detail line hierarchy.....	283
Detail line descriptions.....	284
Sample reports.....	284
Line commands.....	285
Detail window.....	286
I07 - IMS DL/I CPU usage by DL/I call.....	286
Usage	286
Quantification.....	287
Detail line hierarchy.....	287
Detail line descriptions.....	287
Sample reports.....	287
Line commands.....	287
Detail window.....	288
I08 - IMS DL/I WAIT time by PSB.....	289
Usage	289
Quantification.....	289
Detail line hierarchy.....	289
Detail line descriptions.....	290
Sample reports.....	290
Line commands.....	290
Detail window.....	291
I09 - IMS DL/I WAIT time by transaction.....	292
Usage	292
Quantification.....	292
Detail line hierarchy.....	292
Detail line descriptions.....	293
Sample reports.....	293
Line commands.....	294
Detail window.....	295
I10 - IMS DL/I WAIT time by DL/I call.....	295
Usage	295
Quantification.....	295
Detail line hierarchy.....	295

Detail line descriptions.....	296
Sample reports.....	296
Line commands.....	296
Detail window.....	297
I11 - IMS DL/I activity by PSB.....	297
Usage	297
Quantification.....	298
Detail line hierarchy.....	298
Detail line descriptions.....	298
Sample reports.....	299
Line commands.....	299
Detail window.....	300
I12 - IMS DL/I activity by transaction.....	301
Usage	301
Quantification.....	301
Detail line hierarchy.....	301
Detail line descriptions.....	301
Sample reports.....	302
Line commands.....	302
Detail window.....	303
I13 - IMS DL/I activity by DL/I call.....	304
Usage	304
Quantification.....	304
Detail line hierarchy.....	304
Detail line descriptions.....	304
Sample reports.....	304
Line commands.....	305
Detail window.....	306
I14 - IMS PSB/PCB attributes.....	306
Usage	306
Detail line descriptions.....	307
Sample reports.....	307
I15 - IMS DL/I call attributes.....	308
Usage	308
Detail line descriptions.....	308
Sample reports.....	309
I16 - IMS transaction service times.....	309
Usage	309
Quantification	309
Detail line hierarchy.....	309
Detail line descriptions.....	310
Sample reports.....	310
Line commands.....	310
Detail window.....	311
I17 - IMS transaction DL/I call counts.....	311
Usage	311
Quantification	311
Detail line hierarchy.....	311
Detail line descriptions.....	311
Sample reports.....	312
Line commands.....	312
Detail window.....	313
I18 - IMS CPU/Svc time by DL/I calls.....	313
Usage	313
Quantification	313
Detail line hierarchy.....	313
Detail line descriptions.....	313
Sample reports.....	314

Line commands.....	314
Detail window.....	315
I19 - IMS CPU/Svc time by PSB.....	315
Usage	315
Quantification	315
Detail line hierarchy.....	315
Detail line descriptions.....	315
Sample reports.....	315
Line commands.....	316
Detail window.....	316
I20 - IMS CPU/Svc time by transaction.....	317
Usage	317
Quantification	317
Detail line hierarchy.....	317
Detail line descriptions.....	317
Sample reports.....	318
Line commands.....	318
Detail window.....	318
I21 - IMS CPU/Svc time by PCB.....	319
Usage	319
Quantification	319
Detail line hierarchy.....	319
Detail line descriptions.....	319
Sample reports.....	319
Line commands.....	320
Detail window.....	320
I22 - IMS Region Transaction Summary.....	321
Usage.....	321
Quantification.....	321
Detail line hierarchy.....	322
Detail line descriptions.....	322
Sample reports.....	322
Line commands.....	322
Detail window.....	323

Chapter 6. DB2 performance analysis reports..... 325

Overview of DB2 data extractor.....	326
The DB2+ data extractor.....	326
Measuring DDF activity.....	326
Displaying SQL Statement Text.....	327
SQL statement text formatting.....	327
SQL statement sequence numbers.....	328
Overview of DB2 Multiple Address Space Support.....	328
F01 - DB2 measurement.....	328
Usage.....	329
Performance graphs	329
Most Active DB2 Plans.....	329
Most active package/DBRMs.....	329
Most active SQL statements.....	329
Most CPU consumptive SQL.....	330
Most frequent SQL statements	330
Single SQL call service time.....	330
DB2 measurement statistics	330
Sample reports	331
F02 - DB2 SQL activity timeline.....	332
Usage	333
Quantification	333

Detail line hierarchy	333
Detail line descriptions.....	333
Sample reports	334
Line commands	335
Detail window.....	335
F03 - DB2 SQL activity by DBRM.....	336
Usage	336
Quantification	336
Detail line hierarchy	336
Detail line descriptions.....	337
Sample reports.....	337
Line commands.....	338
Detail window.....	339
SETUP options.....	339
F04 - DB2 SQL activity by statement.....	339
Usage	340
Quantification	340
Detail line hierarchy	340
Detail line descriptions.....	340
Sample reports	340
Line commands.....	341
Detail window	342
SETUP options.....	343
F05 - DB2 SQL activity by plan.....	343
Usage	343
Quantification	343
Detail line hierarchy	344
Detail line descriptions.....	344
Sample reports.....	344
Line commands.....	345
Detail window.....	346
SETUP options.....	346
F06 - DB2 SQL statement attributes.....	346
Usage.....	346
Sample reports	348
F07 - DB2 SQL wait time by DBRM.....	348
Usage	348
Quantification	349
Detail line hierarchy	349
Detail line descriptions.....	349
Sample reports.....	350
Line commands	350
SETUP options	351
F08 - DB2 SQL wait time by statement.....	351
Usage	351
Quantification	352
Detail line hierarchy	352
Detail line descriptions.....	352
Sample reports	352
Line commands.....	353
SETUP options	353
F09 - DB2 SQL wait time by plan.....	354
Usage	354
Quantification	354
Detail line hierarchy	354
Detail line descriptions.....	354
Sample reports	355
Line commands.....	356

SETUP options	356
F10 - DB2 SQL CPU/Svc time by DBRM.....	356
Usage	356
Quantification	357
Detail line descriptions.....	357
Sample reports	358
Line commands.....	359
SETUP options	359
F11 - DB2 SQL CPU/Svc time by stmt.....	359
Usage	360
Quantification	360
Detail line hierarchy	360
Detail line descriptions.....	360
Sample reports.....	361
Line commands.....	361
SETUP options.....	362
F12 - DB2 SQL CPU/Svc time by plan.....	363
Usage.....	363
Quantification.....	363
Detail line hierarchy	363
Detail line descriptions.....	363
Sample reports.....	364
Line commands.....	365
SETUP options	366
F13 - DB2 SQL threads analysis.....	366
Usage	366
Quantification	366
Detail line hierarchy	366
Detail line descriptions.....	366
Sample reports	367
F14 - DB2 CPU by plan/stored proc.....	367
Usage	367
Quantification	367
Detail line hierarchy	367
Detail line descriptions.....	368
Sample reports	369
Line commands.....	369
SETUP options.....	370
F15 - DB2 SQL CPU/Svc Time by Rq Loc.....	371
Usage.....	371
Quantification	371
Detail line hierarchy	371
Detail line descriptions.....	371
Sample reports	372
Line commands.....	373
SETUP options	373
F16 - DB2 SQL CPU/Svc Time by Enclave.....	374
Usage	374
Quantification	374
Detail line hierarchy	374
Detail line descriptions.....	374
Sample reports	375
Line commands.....	376
SETUP options	377
F17 - DB2 SQL CPU/Svc Time by Corrid.....	377
Usage	377
Quantification	377
Detail line hierarchy	378

Detail line descriptions.....	378
Sample reports	379
Line commands.....	379
SETUP options	380
F18 - DB2 SQL CPU/Svc Time by Wkstn.....	380
Usage	380
Quantification.....	381
Detail line hierarchy	381
Detail line descriptions.....	381
Sample reports	382
Line commands.....	383
SETUP options	384
F19 - DB2 SQL CPU/Svc Time by EndUsr.....	384
Usage	384
Quantification.....	384
Detail line hierarchy	385
Detail line descriptions.....	385
Sample reports	386
Line commands.....	386
SETUP options	387
F20 - DB2 Class 3 Wait Times.....	387
Usage.....	387
Detail Line descriptions.....	388
Sample reports.....	389
DB2 EXPLAIN report.....	389
Usage	389
Static EXPLAIN.....	389
Dynamic EXPLAIN.....	389
Field descriptions.....	390
Sample reports.....	390
Line commands.....	391
Detail window.....	391
DB2SQL category in C01 report.....	392

Chapter 7. MQSeries performance analysis reports.....395

Overview of MQSeries data extractor	395
Q01 - MQSeries activity summary.....	396
Usage.....	396
Detail line descriptions.....	396
Sample reports	398
Q02 - MQSeries CPU usage by queue.....	398
Usage	398
Quantification	399
Detail line hierarchy	399
Detail line descriptions.....	399
Sample reports.....	399
Line commands.....	400
Detail window	400
Q03 - MQSeries CPU usage by request.....	401
Usage	401
Quantification	401
Detail line descriptions.....	401
Sample reports	402
Line commands	402
Detail window.....	403
Q04 - MQSeries CPU usage by Txn.....	403
Usage	403

Quantification	403
Detail line hierarchy	403
Detail line descriptions.....	404
Sample reports.....	404
Line commands	405
Detail window.....	406
Q05 - MQSeries service time by queue.....	406
Usage	406
Quantification	406
Detail line hierarchy	406
Detail line descriptions.....	406
Sample reports.....	407
Line commands.....	407
Detail window	408
Q06 - MQSeries service time by request.....	409
Usage.....	409
Quantification	409
Detail line hierarchy	409
Detail line descriptions.....	409
Sample reports.....	410
Line commands.....	410
Detail window.....	411
Q07 - MQSeries service time by Txn.....	411
Usage	412
Quantification	412
Detail line hierarchy	412
Detail line descriptions.....	412
Sample reports.....	413
Line commands	413
Detail window.....	414
Q08 - MQSeries wait time by queue.....	415
Usage.....	415
Quantification	415
Detail line hierarchy	415
Detail line descriptions.....	415
Sample reports.....	416
Line commands	416
Detail window.....	417
Q09 - MQSeries wait time by request.....	417
Usage	417
Quantification	417
Detail line hierarchy	417
Detail line descriptions.....	418
Sample reports.....	418
Line commands	419
Detail window.....	419
Q10 - MQSeries wait time by Txn.....	420
Usage	420
Quantification	420
Detail line hierarchy	420
Detail line descriptions.....	420
Sample reports.....	421
Line commands	422
Detail window.....	423
Q11 - MQ+ Activity Timeline.....	423
Usage.....	423
Quantification.....	423
Detail Line Hierarchy.....	424

Detail Line Descriptions.....	424
Sample Report.....	424
Line commands.....	425
Detail window.....	425
Q12 - MQ+ CPU/SVC Time by Queue.....	426
Usage.....	426
Quantification.....	426
Detail Line Hierarchy.....	426
Detail Line Descriptions.....	426
Sample reports.....	427
Line Commands.....	428
Detail window.....	428
SETUP options.....	428
Q13 - MQ+ CPU/SVC Time by Request.....	429
Usage.....	429
Quantification.....	429
Detail Line Hierarchy.....	429
Detail Line Descriptions.....	429
Sample reports.....	430
Line Commands.....	431
Detail window.....	431
SETUP options.....	432
Q14 - MQ+ CPU/SVC Time by Txn.....	432
Usage.....	432
Quantification.....	432
Detail Line Hierarchy.....	432
Detail Line Descriptions.....	433
Sample reports.....	434
Line Commands.....	434
Detail window.....	435
SETUP options.....	435

Chapter 8. Java/USS/HFS performance analysis reports.....437

Overview of Java data extractor	438
Considerations for Java.....	438
Using the JVMTI agent.....	438
USS multiple address space measurements.....	439
J01 - Java summary and attributes.....	440
Usage.....	440
Sample reports.....	440
J02 - Java heap usage timeline.....	441
Overview.....	441
Detail line descriptions.....	441
Sample reports.....	442
Line commands	442
Detail window	442
SETUP options.....	443
J03 - Java CPU usage by thread.....	443
Usage.....	443
Quantification.....	443
Detail line descriptions.....	443
Sample reports.....	444
Line commands	444
Detail window	444
J04 - Java CPU usage by package.....	445
Usage.....	445
Quantification.....	445

Detail line hierarchy.....	445
Detail line descriptions.....	445
Sample reports.....	446
Line commands	447
Detail window	447
J05 - Java CPU usage by class.....	448
Usage.....	448
Quantification.....	448
Detail line hierarchy.....	448
Detail line descriptions.....	448
Sample reports.....	449
Line commands	449
Detail window	450
J06 - Java CPU usage by method.....	450
Usage.....	450
Quantification.....	451
Detail line hierarchy.....	451
Detail line descriptions.....	451
Sample reports.....	451
Line commands	452
Detail window	453
J07 - Java CPU usage by call path.....	453
Usage.....	453
Quantification.....	453
Detail line hierarchy.....	454
Detail line descriptions.....	454
Sample reports.....	454
Line commands	455
Detail window	455
J09 - Java service time by package.....	456
Usage.....	456
Quantification.....	456
Detail line hierarchy.....	456
Detail line descriptions.....	456
Sample reports.....	457
Line commands	458
Detail window	459
J10 - Java service time by class.....	459
Usage.....	459
Quantification.....	459
Detail line hierarchy.....	459
Detail line descriptions.....	459
Sample reports.....	460
Line commands	461
Detail window	461
J11 - Java service time by method.....	462
Usage.....	462
Quantification.....	462
Detail line hierarchy.....	462
Detail line descriptions.....	462
Sample reports.....	463
Line commands	464
Detail window	464
J12 - Java service time by call path.....	465
Usage.....	465
Quantification.....	465
Detail line hierarchy.....	465
Detail line descriptions.....	465

Sample reports.....	466
Line commands	466
Detail window	467
J14 - Java wait time by package.....	467
Usage.....	468
Quantification.....	468
Detail line hierarchy.....	468
Detail line descriptions.....	468
Sample reports.....	469
Line commands	469
Detail window	470
J15 - Java wait time by class.....	470
Usage.....	470
Quantification.....	471
Detail line hierarchy.....	471
Detail line descriptions.....	471
Sample reports.....	471
Line commands	472
Detail window	473
J16 - Java wait time by method.....	473
Usage.....	473
Quantification.....	473
Detail line hierarchy.....	474
Detail line descriptions.....	474
Sample reports.....	474
Line commands	475
Detail window	476
J17 - Java wait time by call path.....	476
Usage.....	476
Quantification.....	476
Detail line hierarchy.....	477
Detail line descriptions.....	477
Sample reports.....	477
Line commands	478
Detail window	478
H01 - HFS Service Time by Path Name.....	479
Usage.....	479
Quantification.....	479
Detail line descriptions.....	479
Sample reports.....	479
Line commands	480
Detail window	480
SETUP options.....	481
H02 - HFS Service Time by Device.....	481
Usage.....	481
Quantification.....	481
Detail line hierarchy.....	481
Detail line descriptions.....	482
Sample reports.....	482
Line commands	482
Detail window	483
SETUP options.....	484
H03 - HFS File Activity.....	484
Usage.....	484
Quantification.....	484
Detail line descriptions.....	484
Sample reports.....	484
Line commands	485

Detail window	485
SETUP options.....	486
H04 - HFS File Attributes.....	486
Usage.....	486
Detail line descriptions.....	486
Sample reports.....	487
H05 - HFS Device Activity.....	487
Usage.....	487
Quantification.....	487
Detail line descriptions.....	487
Sample reports.....	488
Line commands	488
Detail window	488
SETUP options.....	489
H06 - HFS Device Attributes.....	489
Usage.....	489
Detail line descriptions.....	489
Sample reports.....	490
H07 - HFS Activity Timeline.....	490
Usage.....	490
Quantification.....	490
Detail line descriptions.....	490
Sample reports.....	491
Line commands	491
Detail window	491
SETUP options.....	492
H08 - HFS Wait Time by Path Name.....	492
Usage.....	492
Quantification.....	492
Detail line descriptions.....	492
Sample reports.....	493
Line commands	493
Detail window	493
SETUP options.....	494
H09- HFS Wait Time by Device.....	494
Usage.....	494
Quantification.....	494
Detail line hierarchy.....	494
Detail line descriptions.....	494
Sample reports.....	495
Line commands	495
Detail window	496
SETUP options.....	496
H10- HFS Service Time by Request.....	497
Usage.....	497
Quantification.....	497
Detail line hierarchy.....	497
Detail line descriptions.....	497
Sample reports.....	498
Line commands	498
Detail window	499
SETUP options.....	499
H11- HFS Wait Time by Request.....	499
Usage.....	499
Quantification.....	499
Detail line hierarchy.....	500
Detail line descriptions.....	500
Sample reports.....	500

Line commands	501
Detail window	501
SETUP options.....	502
Chapter 9. WebSphere performance analysis reports.....	503
Overview of WAS data extractor.....	503
Measuring WAS servant address space activity.....	504
B01 - WAS Summary.....	504
Usage.....	504
Detail Line descriptions.....	504
Sample reports.....	507
B02 - WAS Activity.....	507
Usage.....	507
Quantification.....	508
Detail Line hierarchy.....	508
Detail Line descriptions.....	508
Sample reports.....	510
Line commands.....	510
B03 - WAS Activity by Origin.....	511
Usage.....	511
Quantification.....	511
Detail Line hierarchy.....	511
Detail Line descriptions.....	512
Sample reports.....	514
Line commands.....	515
B04 - WAS Activity by Servant.....	515
Usage.....	515
Quantification.....	515
Detail Line hierarchy.....	516
Detail Line descriptions.....	516
Sample reports.....	518
Line commands.....	519
B05 - WAS EJB Activity.....	520
Usage.....	520
Quantification.....	520
Detail Line hierarchy.....	520
Detail Line descriptions.....	520
Sample reports.....	521
Line commands.....	522
B06 - WAS EJB Activity by Origin.....	523
Usage.....	523
Quantification.....	523
Detail Line hierarchy.....	523
Detail Line descriptions.....	523
Sample reports.....	525
Line commands.....	525
B07 - WAS EJB Activity by Servant.....	526
Usage.....	526
Quantification.....	526
Detail Line hierarchy.....	526
Detail Line descriptions.....	526
Sample reports.....	528
Line commands.....	528
B08 – WAS Servlet/JSP Activity.....	529
Usage.....	529
Quantification.....	529
Detail Line hierarchy.....	530

Detail Line descriptions.....	530
Sample reports.....	531
Line commands.....	531
B09 - WAS Servlet/JSP by Origin.....	532
Usage.....	532
Quantification.....	532
Detail Line hierarchy.....	532
Detail Line descriptions.....	532
Sample reports.....	534
Line commands.....	534
B10 WAS Servlet/JSP by Servant.....	535
Usage.....	535
Quantification.....	535
Detail Line hierarchy.....	535
Detail Line descriptions.....	536
Sample reports.....	537
Line commands.....	538
B11 - WAS/CICS Calls.....	538
Usage.....	538
Quantification.....	538
Detail Line Hierarchy.....	539
Detail Line Descriptions.....	539
Sample reports.....	540
Line Commands.....	540
B12 - WAS/DB2 Calls.....	541
Usage.....	541
Quantification.....	541
Detail Line Hierarchy.....	541
Detail Line Descriptions.....	541
Sample reports.....	543
Line Commands.....	543
SETUP options	544
B13 - Async Work Requests.....	544
Usage.....	544
Quantification.....	545
Detail Line Hierarchy.....	545
Detail Line Descriptions.....	545
Sample reports.....	546
Line Commands.....	546
B14 - Async Work by Work Mgr.....	547
Usage.....	547
Quantification.....	547
Detail Line Hierarchy.....	547
Detail Line Descriptions.....	547
Sample reports.....	548
Line Commands.....	549
B15 - Async Work by Servant.....	549
Usage.....	549
Quantification.....	549
Detail Line Hierarchy.....	550
Detail Line Descriptions.....	550
Sample reports.....	551
Line Commands.....	551
B16 - WOLA Inbound Requests.....	552
Usage.....	552
Quantification.....	552
Detail Line Hierarchy.....	553
Detail Line Descriptions.....	553

Sample reports.....	554
Line Commands.....	555
B17 - WOLA Inbound by Origin.....	555
Usage.....	555
Quantification.....	556
Detail Line Hierarchy.....	556
Detail Line Descriptions.....	556
Sample reports.....	558
Line Commands.....	558
B18 - WOLA Inbound by Servant.....	559
Usage.....	559
Quantification.....	559
Detail Line Hierarchy.....	559
Detail Line Descriptions.....	560
Sample reports.....	562
Line Commands.....	562
B19 - WOLA Outbound Requests.....	563
Usage.....	563
Quantification.....	563
Detail Line Hierarchy.....	563
Detail Line Descriptions.....	563
Sample reports.....	564
Line Commands.....	565
B20 - WOLA Outbound by Register.....	565
Usage.....	565
Quantification.....	565
Detail Line Hierarchy.....	566
Detail Line Descriptions.....	566
Sample reports.....	566
Line Commands.....	567
B21 - WOLA Outbound by Servant.....	567
Usage.....	567
Quantification.....	568
Detail Line Hierarchy.....	568
Detail Line Descriptions.....	568
Sample reports.....	569
Line Commands.....	569

Chapter 10. Multiple address space reports.....571

X01 - CICS mean service time by transaction.....	571
Usage.....	571
Quantification.....	571
Detail line hierarchy	571
Detail line descriptions.....	572
Sample reports.....	576
Line commands.....	577
Detail window.....	578
X02 - CICS total service time by txn.....	578
Usage.....	578
Quantification.....	579
Detail line hierarchy	579
Detail line descriptions.....	579
Sample reports.....	584
Line commands.....	584
Detail window.....	585
X03 - CICS mean service time by terminal ID.....	586
Usage.....	586

Quantification.....	586
Detail line hierarchy	586
Detail line descriptions.....	587
Sample reports.....	592
Line commands.....	593
Detail window.....	594
X04 - CICS total service time by terminal ID.....	594
Usage.....	594
Quantification.....	595
Detail line hierarchy	595
Detail line descriptions.....	595
Sample reports.....	600
Line commands.....	601
Detail window.....	602
X05 - Combined DB2 IMS MQ Timeline.....	602
Usage.....	602
Quantification.....	603
Detail line hierarchy.....	603
Detail line descriptions.....	603
Sample report.....	605
Line commands.....	605
X06 - IMS MASS Region Summary.....	606
Usage.....	606
Quantification.....	606
Detail line hierarchy.....	606
Detail line descriptions.....	606
Sample reports.....	607
Line commands.....	607
Detail window.....	607
X07 - DB2 Stored Procedures Summary.....	608
Usage.....	608
Quantification.....	608
Detail line hierarchy.....	608
Detail line descriptions.....	608
Sample report.....	609
Line commands.....	609
Detail window.....	610

Chapter 11. Miscellaneous Reports..... 611

A06 – Measured Job JCL.....	611
-----------------------------	-----

Chapter 12. Source program mapping..... 613

Introduction to source program mapping.....	613
A01 - Source program mapping panel.....	615
Overview.....	615
File specification input area.....	616
List of existing SPM file associations.....	617
Line commands	618
A03 - Java source program mapping panel.....	618
Overview.....	618
File prefix specification input area.....	619
Detail lines.....	619
Line commands	619
Java report detail window.....	620
A04 - Source mapping dataset list.....	620
Overview.....	620
Match on Compile Date & Time description.....	621

Dataset list description.....	621
Commands to save and edit.....	621
A05 - Source mapping common list.....	622
Overview.....	622
Dataset list description.....	622
Commands to save and edit.....	623
A011 - Source program mapping pick list.....	623
Overview.....	623
Field descriptions.....	624
Pick list description.....	624
P01 - Source program attribution.....	624
Overview	624
Code segments	625
Detail line descriptions.....	626
SETUP options	626
Detail window	627
P03 - DWARF Source Program Attribution.....	628
Overview	628
Detail line descriptions.....	629
SETUP options	630
P04 - DWARF Source Lines.....	630
Overview	630
Detail line descriptions.....	631
Line commands	632
Detail window.....	632
Chapter 13. Printing reports and creating XML documents.....	633
About Application Performance Analyzer's report printing and XML document feature.....	633
Line printer format	633
PDF format.....	634
XML document format.....	634
Report sections	634
Using the ISPF report request facility.....	634
Specifying formatting options	635
The JCL submission/EDIT dialog.....	636
Source program mapping	638
Preparing JCL to print reports or create XML documents.....	638
The input measurement file.....	639
The CAZLOG log file	639
The report output file	640
The PDF output file.....	640
The XML document file.....	640
Specifying control statements.....	640
General syntax rules.....	640
The PROFILE statement.....	641
The MAP statement.....	641
The SECTION statement.....	642
The PRINT statement.....	643
The CONVERT statement.....	643
The DESC Statement.....	644
Reports in PDF format.....	644
Reports in XML document format.....	644
Report SECTION descriptions	644
SECTION statement parameter summary.....	644
SECTION parameter descriptions.....	656
Chapter 14. Batch interface commands.....	661

Command syntax.....	661
Example of NEW command.....	661
Example of TNEW command.....	661
Example of DELETE command.....	662
Example of KEEP command.....	662
Example of CANCEL command.....	662
Command summary diagram.....	662
Sample JCL.....	664
Using the API to submit a command.....	664
Environment.....	665
Input registers.....	665
Output registers.....	665
Syntax.....	666
Parameters.....	666
Return codes.....	667
Reason codes.....	667
Abend code.....	668
Command descriptions.....	669
NEW.....	669
TNEW.....	679
DELETE.....	681
KEEP.....	681
CANCEL.....	681
Batch import.....	681
Using the MVS START command to schedule a new measurement.....	682
Chapter 15. Realtime Monitor.....	685
Auto-refresh mode.....	685
Monitor views.....	685
ACCUM and CURRENT modes	685
SETUP command.....	685
View 1. Measurement overview	685
Measurement progress	686
System resource usage	687
DB2 activity	687
CICS transactions	688
View 2. CPU utilization.....	688
CPU activity	689
CPU usage distribution	690
CPU modes	691
View 3. Measurement environment	693
Request parameters	693
Measurement environment.....	694
View 4. CPU active modules.....	695
Overall CPU activity	695
Current.....	696
Module attribution	696
View 5. Data mgmt service time.....	696
Chapter 16. Application Performance Analyzer plug-in.....	699
Overview of Application Performance Analyzer plug-in.....	699
Installing the Application Performance Analyzer plug-in.....	699
Connecting to Application Performance Analyzer on z/OS.....	699
Using the Application Performance Analyzer plug-in.....	699
Appendix A. Support resources and problem solving information.....	701
Searching knowledge bases.....	701

Searching the Knowledge Center.....	701
Searching product support documents.....	701
Getting fixes.....	702
Subscribing to support updates.....	702
RSS feeds and social media subscriptions.....	703
My Notifications.....	703
Contacting IBM Support	704
Define the problem and determine the severity of the problem.....	704
Gather diagnostic information.....	705
Submit the problem to IBM Support.....	705
Appendix B. Creating side files using CAZLANGX.....	707
CAZLANGX parameters.....	709
Parameters.....	709
Side file compatibility with IBM z/OS Debugger.....	709
Including a CAZLANGX step in your SCLM translator.....	710
High Level Assembler SCLM example.....	710
COBOL SCLM example.....	710
COBOL Report Writer Precompiler.....	711
Required compiler options for creating listings or CAZLANGX side files.....	711
TEST option considerations.....	713
Naming compiler listings or side files.....	713
Naming CSECTs for Application Performance Analyzer.....	713
Compiler listings and side file attributes	713
Appendix C. XML document layout.....	715
XML declaration.....	715
Root tag.....	715
Layout standards.....	715
Measurement information.....	715
Performance analysis reports.....	717
S01 Measurement Profile.....	717
S02 Load Module Attributes.....	724
S03 Load Module Summary.....	725
S04 TCB Summary.....	725
S05 Memory Usage Timeline.....	725
S06 Data Space Usage Timeline.....	726
S07 TCB Execution Summary.....	726
S08 Processor Utilization Summary.....	726
S09 Measurement Analysis.....	727
S10 Observation Session Messages.....	727
C01 CPU Usage by Category.....	727
C02 CPU Usage by Module.....	730
C03 CPU Usage by Code Slice.....	730
C04 CPU Usage Timeline.....	731
C05 CPU Usage by Task/Category.....	731
C06 CPU Usage by Task/Module.....	734
C07 CPU Usage by Procedure.....	735
C08 CPU Usage Referred Attribution.....	735
C09 CPU Usage by PSW/Object Code.....	736
C10 CPU Usage by Natural Program.....	736
W01 WAIT Time by Task/Category.....	737
W02 WAIT Time by Task/Module.....	739
W03 WAIT Referred Attribution by Task.....	740
W04 WAIT Time by Task ENQ/RESERVE.....	741
W05 WAIT Time by Tape DDNAME.....	742
D01 DASD Usage Time by Device.....	742

D02 DASD Usage Time by DDNAME.....	743
D03 DASD Usage Time by Dataset.....	743
D04 Dataset Attributes.....	743
D05 DASD EXCP Summary.....	747
D06 DASD VSAM Statistics.....	747
D07 DASD Activity Timeline.....	748
D08 DASD I/O Wait Time.....	748
D09 VSAM Buffer Pool Usage.....	749
G01 Coupling Facility Statistics.....	750
G02 Coupling Facility Mean Service Times.....	750
G03 Coupling Facility Total Service Times.....	751
K01 CPU SRB Usage by SRB Type.....	751
K02 CPU SRB Usage by PSW/OBbjCode.....	752
V01 Measurement Variance Summary.....	752
V02 CICS Variance Summary.....	754
V03 DB2 Variance Summary.....	756
V04 IMS Variance Summary.....	758
CICS Performance analysis reports.....	762
E01 CICS Session Statistics.....	762
E02 CICS CPU and Use Counts by Pgm.....	763
E03 CICS CPU Usage by Transaction.....	763
E04 CICS Mean Service Time by Txn.....	765
E05 CICS Total Service Time by Txn.....	767
E06 CICS Total Service Time by Task ID.....	769
E07 CICS Wait by Txn.....	772
E08 CICS Mean Service Time by Termid.....	772
E09 CICS Total Service Time by Termid.....	775
E10 CICS Mean Service Time by User ID.....	777
E11 CICS Total Service Time by User ID.....	779
E12 CICS CPU/Service Time by Transaction.....	782
IMS Performance analysis reports.....	782
I01 IMS Measurement Profile.....	782
I02 IMS DL/I Call Timeline.....	785
I03 IMS Transaction Timeline.....	785
I04 IMS Transaction Activity Timeline.....	786
I05 to I13.....	786
I14 IMS PSB/PCB Attributes.....	789
I15 IMS DL/I Call Attributes.....	789
I16 IMS Transaction Service Times.....	790
I17 IMS Transaction DL/I Call Counts.....	790
I18 IMS CPU/Service Time by DL/I Call.....	791
I19 IMS CPU/Service Time by PSB.....	791
I20 IMS CPU/Service Time by Transaction.....	792
I21 IMS CPU/Service Time by PCB.....	792
I22 IMS Region Transaction Summary.....	792
DB2 Performance analysis reports.....	793
F01 DB2 Measurement profile.....	793
F02 DB2 SQL Activity Timeline.....	795
F03 SQL Activity by DBRM.....	796
F04 SQL Activity by Statement.....	796
F05 SQL Activity by Plan.....	797
F06 DB2 SQL Statement Attributes.....	798
F07 SQL WAIT Time by DBRM.....	798
F08 SQL WAIT Time by Statement.....	799
F09 SQL WAIT Time by Plan.....	800
F10 SQL CPU/Service Time by DBRM.....	800
F11 SQL CPU/Service Time by Statement.....	801
F12 SQL CPU/Service Time by Plan.....	802

F13 DB2 Threads Analysis.....	803
F14 DB2 CPU by Plan/Stored Proc.....	804
F15 DB2 SQL CPU/Svc Time by Rq Loc.....	806
F16 DB2 SQL CPU/Svc Time by Enclave.....	807
F17 DB2 SQL CPU/Svc Time by Corrid.....	808
F18 DB2 SQL CPU/Svc Time by Wkstn.....	809
F19 DB2 SQL CPU/Svc Time by EndUsr.....	810
F20 DB2 Class 3 Wait Times.....	811
Java/USS/HFS Performance analysis reports.....	812
J01 Java Summary/Attributes.....	812
J02 Java Heap Usage Timeline.....	813
J03 Java CPU Usage by Thread.....	813
J04 Java CPU Usage by Package.....	813
J05 Java CPU Usage by Class.....	814
J06 Java CPU Usage by Method.....	814
J07 Java CPU Usage by Call Path.....	815
J09 Java Service Time by Package.....	815
J10 Java Service Time by Class.....	816
J11 Java Service Time by Method.....	817
J12 Java Service Time by Call Path.....	817
J14 Java Wait Time by Package.....	817
J15 Java Wait Time by Class.....	818
J16 Java Wait Time by Method.....	819
J17 Java Wait Time by Call Path.....	819
H01 HFS Service Time by Path Name.....	819
H02 HFS Service Time by Device.....	819
H03 HFS File Activity.....	820
H04 HFS File Attributes.....	820
H05 HFS Device Activity.....	821
H06 HFS Device Attributes.....	822
H07 HFS Activity Timeline.....	823
H08 HFS Wait Time by Path Name.....	823
H09 HFS Wait Time by Device.....	823
H10 HFS Service Time by Request.....	824
H11 HFS Wait Time by Request.....	824
MQSeries Performance analysis reports.....	825
Q01 MQSeries Activity Summary.....	825
Q02 MQSeries CPU Usage by Queue.....	825
Q03 MQSeries CPU Usage by Request.....	826
Q04 MQSeries CPU Usage by Txn/Queue.....	826
Q05 MQSeries Service Time by Queue.....	827
Q06 MQSeries Service Time by Request.....	827
Q07 MQSeries Service Time by Txn/Queue.....	827
Q08 MQSeries Wait Time by Queue.....	828
Q09 MQSeries Wait Time by Request.....	828
Q10 MQSeries Wait Time by Txn/Queue.....	829
Q11 MQ+ Activity Timeline.....	829
Q12 MQ+ CPU/SVC Time by Queue.....	830
Q13 MQ+ CPU/SVC Time by Request.....	831
Q14 MQ+ CPU/SVC Time by Txn.....	831
WebSphere performance analysis reports.....	832
B01 WAS Summary.....	833
B02 WAS Activity.....	834
B03 WAS Activity by Origin.....	834
B04 WAS Activity by Servant.....	835
B05 WAS EJB Activity.....	835
B06 WAS EJB Activity by Origin.....	835
B07 WAS EJB Activity by Servant.....	836

B08 WAS Servlet/JSP Activity.....	836
B09 WAS Servlet/JSP Activity by Origin.....	837
B10 WAS Servlet/JSP by Activity by Servant.....	837
B11 WAS/CICS Calls.....	837
B12 WAS/DB2 Calls.....	838
B13 Async Work Requests.....	839
B14 Async Work by Manager.....	839
B15 Async Work by Servant.....	839
B16 WOLA Inbound Requests.....	840
B17 WOLA Inbound by Origin.....	840
B18 WOLA Inbound by Servant.....	840
B19 WOLA Outbound Requests.....	841
B20 WOLA Outbound by Register.....	841
B21 WOLA Outbound by Servant.....	841
Multiple address space reports.....	842
X01 CICS Mean Service Time by Txn.....	842
X02 CICS Total Service Time by Txn.....	844
X03 CICS Mean Service Time by Term.....	847
X04 CICS Total Service Time by Term.....	849
X05 Combined DB2 IMS MQ Timeline.....	852
X06 IMS MASS Region Summary.....	853
X07 DB2 Stored Procedures Summary.....	853
Source Program Attribution.....	854
P01 Source Program Attribution.....	854

Appendix D. Automatic Report Generation Samples.....855

Appendix E. Accessibility.....863

Using assistive technologies.....	863
Keyboard navigation of the user interface.....	863
Accessibility of this document.....	863

Appendix F. Notices.....865

Trademarks.....867

Bibliography.....869

Glossary.....871

Index.....873

Tables

1. Color coding of graphs..... 46

2. Report categories and prefixes..... 47

3. Core IDs Quantification..... 75

4. on objects..... 167

5. on headings..... 168

6. on objects..... 170

7. on headings..... 171

8. Detail Line Descriptions..... 629

9. Mapped Program Header Information..... 629

10. DWARF Source Detail Line Descriptions..... 631

11. DWARF Source Header Information.....631

12. Reason codes..... 667

13. Abend code..... 668

14. S10 Observation Session Messages.....727

15. XML Elements for X04 Report Field Titles..... 849

About this document

This document describes IBM Application Performance Analyzer for z/OS®, Version 14.2 and any subsequent releases until otherwise indicated in new editions.

For the latest Application Performance Analyzer PTF information, see <https://www.ibm.com/support/pages/node/341647>.

Appendix A contains information about IBM Web sites that can help you answer questions and solve problems.

IBM Application Performance Analyzer for z/OS (also referred to as Application Performance Analyzer) is a tool you can use to analyze the performance of user applications throughout the design, development, and maintenance cycle.

If you need to install Application Performance Analyzer, refer to the Application Performance Analyzer *Program Directory* for installation instructions.

Documentation conventions

The following table describes typographical conventions used throughout this document:

Convention	Explanation
boldface	Indicates a command or keyword that you should type exactly as shown.
<i>italics</i>	Indicates a variable for which you should substitute an appropriate value.
monotype	Indicates literal input and output.
Ctrl + D	Indicates two or more keys pressed simultaneously.
[]	Brackets surround an optional value.
	Vertical bars separate alternative values from which you must make a selection.
...	Ellipsis indicates that the preceding element can be repeated.

Changes introduced with IBM Application Performance Analyzer for z/OS V14.2

Read the following sections to learn the new and enhanced capabilities of IBM Application Performance Analyzer for z/OS V14.2 and its later fix levels. For more information about the enhancements and fixes that are available as continuous delivery APAR updates to V14.2, see [Latest Application Performance Analyzer for z/OS Service Information](#).

Version 14.2.4

Enhancements to started tasks, sampling, exits, intercepts, and reporting include:

- New A06 report - capture and report JCL for measured batch jobs
- Report S01 enhancements – display HiperDispatch and MT (multithreading) mode
- Report S08 enhancements – display Core ID, Vertical Priority, and Core ID Table
- Allow customization of JOBCARDS in A02 dialog
- Batch IMPORT – allow multiple sample files to be processed
- Enhancements to CICS filtering functions
- Included samples to demonstrate use of Automatic Report Generation (ARG) to email reports
- Performance, security, and diagnostic enhancements

The following enhancement specific to the plug-in is added:

- Columns now customizable in Observations List view

Version 14.2.3

The following enhancements are added:

- Batch DELETE – allow multiple requests to be deleted
- Support for the SYSOMVS.IEFUSI exit point

Version 14.2.2

The following enhancements are added:

- “About APA” from the Help menu
- Search for jars in A03 HLQ directory
- Support for 64-bit Java JIT compiled methods
- Display 3-digit mod-level for DB2 V12 and higher
- Support for DISALLOW_SSARAUTH=YES for DB2 V12 and higher

Version 14.2.1

- Several miscellaneous bug fixes are applied.
- Introduced CICS 5.6 support

Version 14.2.0

Enhancements to started tasks, sampling, exits, intercepts, and reporting include:

- Full RMODE (64) support (applications executing above the bar)

- Virtual storage map in S01
- R02 expansion (System ID, Expiry, Duration)
- CAZCNFG0 support for additional system symbols
- COBOL TEST (SEPARATE) source program mapping support
- Removal of dynamically loaded JVMTI
- Performance, security, and diagnostic enhancements
- Additional compatibility support:
 - CICS TS 5.5
 - COBOL 6.3
 - PL/I 5.2
 - Adabas – all supported versions up to and including 8.4.2
 - Natural – all supported versions up to and including 9.1.1

Enhancements specific to the plug-in that include:

- Eclipse 4.8 (Photon) support
- Locally stored templates (save/load observation requests)
- New columns added to Observations list (System ID, Duration)

Chapter 1. Using Application Performance Analyzer/ISPF

Application Performance Analyzer/ISPF is the main interface to Application Performance Analyzer. It is used for submitting new observation requests, and for navigating the Performance Analysis Reports generated from observation requests. This chapter describes the Application Performance Analyzer/ISPF environment in general, how to submit observation requests, and how to navigate the reports.

Almost all panels in Application Performance Analyzer/ISPF are implemented as interactive reports. The first screen displayed when entering Application Performance Analyzer, “Observation Session List” follows the same rules and conventions as the Performance Analysis Reports.

For information about ...	See ...
Commands used to navigate ISPF reports.	“ISPF reports: navigation and control” on page 1
Application Performance Analyzer's main entry panel: the observation session list.	“R02 - Observation session list” on page 7
Accessing and using the performance reports menu.	“R01 - Application Performance Analyzer performance reports menu” on page 12

ISPF reports: navigation and control

You navigate and control Application Performance Analyzer/ISPF reports using two types of commands:

- Primary commands - commands that you type on the command line
- Line commands - commands that you type directly in input fields in the body of the report

Scrolling

The vertical and horizontal scrolling commands you are familiar with from using most ISPF applications are applicable when viewing Application Performance Analyzer reports. Use UP and DOWN (PF7 and PF8) to scroll towards the top and the bottom of the report. You can scroll Maximum, Half, a specific number of lines and by cursor position.

Similarly, use LEFT and RIGHT (PF10 and PF11) to scroll the report horizontally.

Report headings

Many reports present information in a tabular format in rows and columns. The table begins with one or more heading lines, which contain title fields for each of the columns. These heading lines will “lock” to the top of the report viewing area and the vertical scrolling commands will affect only the data lines.

Action (menu) bar

Report navigation primary commands can be displayed by selecting “Navigate” on the action bar menu or can be typed directly on the command line. The action bar menu can be removed from the display by entering the PREF command, and de-selecting the “Action Bar Visible” option.

File View Navigate Help

Retaining open reports

Once you have opened and viewed reports, they can be retained for later viewing. Application Performance Analyzer provides this feature so that multiple reports (from multiple observation requests, if desired) can be readily available for viewing without re-generating the reports. You can navigate through all the open reports using the WIN and JUMP (PF4) commands. Reports are retained when you exit them using the CANCEL (PF12) command.

Displaying HELP

For information about the report currently being displayed, position the cursor in the body of the report (not on an input field), and press PF1. Pressing PF1 on an input field will display specific information about that field.

Primary commands for report navigation

The following is a list of the commands used to navigate reports and explanations for using them:

WIN

You can use the WIN (WINDOW) command to display a selection list of open reports in a pop-up panel. From that panel, you can make a selection to jump to the selected report. The main Observation Session List panel will be the report listed at the top of the selection list, so you can use WIN to quickly get back to this panel rather than navigating through all your open reports.

JUMP (PF4)

You can use the JUMP command, or the PF4 key, to jump to another open report. Each time you issue a JUMP request, Application Performance Analyzer will skip to the next open report, on a rotating basis.

END (PF3)

Use the END command, or the PF3 key, to return to the display of the previous report — the one from which the current report was launched. The END command will close (delete) the current report. Entering END from the Report Selection Menu will exit the Application Performance Analyzer Performance Reporting Facility.

CANCEL (PF12)

Use the CANCEL command, or the PF12 key, to return to the display of the previous report — the one from which the current report was launched. The CANCEL command will leave the current report open. You can return to it any time using the JUMP or WIN command. Entering CANCEL from the Report Selection Menu will exit the Application Performance Analyzer Performance Reporting Facility.

REPORT CODE

Once you have selected an observation session, you can enter a three character report code, even if you are not in the report menu. You can be viewing one report, and can immediately open an additional report by typing its code.

UP (PF7)

Use the UP command, or press PF7, to scroll vertically towards the top of the report.

DOWN (PF8)

Use the DOWN command, or press PF8, to scroll vertically towards the bottom of the report.

LEFT (PF10)

Use the LEFT command, or press PF10, to scroll the report horizontally to the left.

RIGHT (PF11)

Use the RIGHT command, or press PF11, to scroll the report horizontally to the right.

FIND

The FIND command (abbreviation “F” can be used) finds all occurrences of a text string. It is similar to an ISPF FIND command, but does not have all the features. All occurrences of the target text string will be highlighted. To remove the highlights, enter the RESET command.

RESET

The RESET command removes the highlights set by the FIND command.

PREF

Use this to set preferences for General Display Settings. Put a slash “/” beside an option to select it. The available options are:

1. Action bar visible on panels
2. Use 3270 graphic characters
3. Show command line in pop-up panels
4. Show long descriptions on multiple lines
5. Suppress use of special +/- character

CONNECT

Only available on the R02 Observation Session List screen. If your installation has multiple Application Performance Analyzer instances running, you can change which one your ISPF session is connected to by typing CONNECT followed by the Application Performance Analyzer identifier. You can use the VER command to view which Application Performance Analyzer instances are currently running on the same z/OS image that you are logged in to.

VERSION

Only available on the R02 Observation Session List screen. Type VERSION or VER and a list of the Application Performance Analyzer started tasks are displayed, along with their version numbers, and when they were started.

You can enter SELECT on the command line of the Started Tasks List panel to connect to a different Application Performance Analyzer started task. The format is ‘SELECT stcid’, where stcid is the value from the ‘Stc Id’ column of the started task you want to connect to. When a valid, active started task is selected, the R02 Observation Session List automatically connects to the specified started task when you exit the VERSION dialog. "S" and "SEL" are aliases of SELECT.

SELECT

Available on the R02 Observation Session List screen. This command starts Performance Analysis Reporting for the selected request number. Specify a request number of a valid request after the command, such as SELECT 1234. The selected request number must contain an observation file. "S" and "SEL" are aliases of SELECT.

SETUP

Use the SETUP command to filter information and select options for reports. This command is useful for reducing the size of reports by removing information that is not critical. The options available using the SETUP command vary by report. You can get more details from the report descriptions.

HIDE

Only available on the R02 Observation Session List screen. Type HIDE to remove the list of commonly used Application Performance Analyzer primary commands from view.

SHOW

Only available on the R02 Observation Session List screen. Type SHOW to redisplay the list of commonly used Application Performance Analyzer primary commands at the top of the screen.

IMPORT

Only available in the R02 Observation Session List screen. Use the IMPORT command to load a sample file, or an exported hierarchy of observations. This can be a native Application Performance Analyzer sample file, or one that has been previously exported using the EXP or EXPH command and is in TSO XMIT format. The IMPORT command displays a pop-up window to enter the fully qualified data set name of the native sample file or TSO XMIT file, and to indicate if that original file is to be deleted after import. A new request description can be optionally entered.

During IMPORT, Application Performance Analyzer creates a new observation, assigns a new request number, and, if provided on the IMPORT pop-up window, adds the description to the imported observation. If a hierarchy is being imported, new request numbers are provided for all observations in the hierarchy. If indicated, Application Performance Analyzer will delete the original files. The date and time of the imported request is set to the current date and time, and the expiry date is recalculated based on the rules of the importing system.

Line commands for report navigation

You enter a line command directly in an input field in the body of a report. The line commands are usually typed directly over the text of the field, such as a column heading, or a data field in the report. Input fields where you can enter line commands are always underlined.

Many of Application Performance Analyzer's performance analysis reports contain input fields on which you can enter various line commands. Generally, you can enter line commands on quantified detail lines on the field under the "Name" heading.

The allowable line commands vary depending on the type of detail line. But, in all cases by entering "/" you can request the display of a Context Menu, which will present a list of the allowable line commands for that input field. The generally available line commands are summarized here, followed by details about each command.

- / Display context menu
- ? Display context help information
- + Expand
- ++ Show additional details (or just press the Enter key as a shortcut)
- - Collapse
- SV Sort by value
- SN Sort by name

"/" Context menu

Enter a slash "/" to display a context menu in a pop-up panel. The context menu lists the line commands that are available for that field. In addition, you are able to select the line command function directly from the context menu.

A sample context menu is shown below:

Enter S to select a function from this menu. The line command (Yellow) can also be entered on the main panel.

<u>Sel</u>	<u>To Perform the Following</u>	<u>LineCmd</u>
_	display context help information	?
_	show additional details about this line	++
_	expand to reveal next level entries	+
_	collapse to hide next level entries	-
_	sort next level entries by value	SV
_	sort next level entries by name	SN

"?" HELP

For context help information about the field, or report line, enter a question mark "?". Alternatively, you can press the PF1 key with the cursor positioned on the input field.

"+" Expand

Enter a plus sign "+" on a report detail line to expand the report to reveal additional detail lines which are at the next hierarchical level under the selected line. This offers a means of breaking down one quantified item into greater detail.

For example, consider the following line item which quantifies CPU time in System/OS Services:

<u>SYSTEM</u>	System/OS Services	44.30	=====
---------------	--------------------	-------	-------

Type a plus sign in the name field – SYSTEM:

<u>±SYSTEM</u>	System/OS Services	44.30	=====
----------------	--------------------	-------	-------

Press the ENTER key and the item will be expanded as illustrated here:

<u>SYSTEM</u>	System/OS Services	44.30 =====
→ <u>SVC</u>	SVC Routines	42.14 =====
→ <u>MVS</u>	MVS System	2.06 ==
→ <u>NUCLEUS</u>	Nucleus Modules	0.06
→ <u>IMS</u>	IMS Subsystem	0.03

The plus sign (+) entered on the Name heading field will fully expand the entire report to show the full hierarchy of detail.

The plus sign (+) entered on the Description heading will expand the width of the description field. The plus sign (+) entered on the heading for the scale (histogram) will 'zoom in' the scale.

You can also use this line command in the “+n” format , where “n” is the number of levels to expand. On the Description heading, this allows you to expand the width of the description field by a specific number of characters, for example “+12” will widen the field by 12 characters.

“++” Additional details

Enter “++” on a report detail line to display detailed information about the selected item. A pop-up panel will appear in which this information is displayed. The nature of the information displayed in these pop-up panels varies widely depending on the type of item selected.

Note: As a shortcut, you can also simply press the Enter key on an item, it will be treated as if you had entered “++”.

As an example, consider the I/O Analysis by DDNAME report:

```

File View Navigate Help
-----
D02: DASD Usage Time by DDNAME (0723/TSTJOB01)          Row 00001 of 00003
Command ==> _____ Scroll ==> CSR

DDName>Cyl   Volume>Unit   Percent of Time * 10.00% ±1.6%
                *....1....2....3....4....5....6....7....8..
VASM1-02      BKNSM2       31.16 =====
OUTFILE       BKNSM2       1.16 ==
INFILE        BKNSM1       0.05

```

Additional detail about the DDNAME VASM1-02, for example, can be displayed by typing ++ (or just pressing Enter) in that field:

```

File View Navigate Help
-----
D02: DASD Usage Time by DDNAME (0723/TSTJOB01)          Row 00001 of 00003
Command ==> _____ Scroll ==> CSR

DDName>Cyl   Volume>Unit   Percent of Time * 10.00% ±1.6%
                *....1....2....3....4....5....6....7....8..
++AM1-02      BKNSM2       31.16 =====
OUTFILE       BKNSM2       1.16 ==
INFILE        BKNSM1       0.05

```

A pop-up panel with detailed information will appear. (This pop-up panel is scrollable, more information is available by scrolling down with PF8):

```

File View Navigate Help
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| VSAM1-02      BKNSM2      31.16 ===== |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+

Calculation Details
The 31.16% quantification represents 1,174 measurements
of DASD I/O unit activity for the DDNAME VSAM1-02 from
a total of 3767 overall measurements. This is the
percentage of the measured run time I/O
was observed for this dataset.

VSAM file VSAM1(2) OPENed at 9:36:17.72 Wednesday Mar 24 2004

DDNAME          VSAM1
Open Intent      KEY,DIR,OUT
Dataset Name     USER1.DATA.TESTPF.DAT
Storage Class    BKNSMS
Device Type      3390
% Free Bytes in CI 10%          Initial      Last
Volume Serial    BKNSM2      CI Splits      0          0
CI Size          8,192      CA Splits      0          0
Record Size (LRECL) 80      Logical Records 1          3,641
Number of Extents 1          Deleted Records 0          1
SHAREOPTIONS     (1 3)      Insrted Records 0          0
Organization     KSDS      Retrved Records 0          1
CIs per CA       78          Updated Records 0          0
Free CIs per CA  11          Byter Free Space 1,908,736 1,622,016
Free Bytes per CI 819        Number of EXCPs  Z          Z,ZZZ
% Free CIs in CA 15%
Strings          1
DATA Buffers     0
INDEX Buffers    0

Index Component of VSAM1(2)

```

“-” Collapse

Enter a minus sign “-” on a report detail line to collapse (hide) all items under the selected line which are at the next hierarchical level of detail.

The minus sign entered on the Name heading field will collapse the entire report so that only items in the first level of the hierarchy are visible.

The minus sign entered on the Description heading will reduce the width of the description field.

The minus sign entered on the heading for the scale (histogram) will “zoom out” the scale.

“SV” Sort by Value

Enter “SV” to sort detail lines by value. When this is entered on a detail line, detail lines under the selected line – at the next hierarchical level – will be sorted by value. Entering the “SV” command repeatedly will toggle between sorting in descending and ascending values.

Enter “SV” on the 'Name' heading field to sort the first level items by value.

“SN” Sort by Name

Enter “SN” to sort detail lines by name. When this is entered on a detail line, detail lines under the selected line – at the next hierarchical level – will be sorted by name.

Entering the “SN” command repeatedly will toggle between sorting in descending and ascending names. Enter “SN” on the "Name" heading field to sort the first level items by name.

Note: The line commands listed above are not a comprehensive list of all that are available in the various reports. See the documentation for each report, or enter a “/” to get a context menu in any input field in any report.

R02 - Observation session list

When you start Application Performance Analyzer/ISPF, the Observation Session List panel is displayed. A list of commonly used primary commands is displayed at the top of the screen to assist those users new to Application Performance Analyzer. Once you become familiar with the Observation Session List, these commands can be hidden from view by entering the HIDE primary command. They can be redisplayed by entering the SHOW primary command.

This panel displays a scrollable list of all the observation session requests, whether they are complete, active, or pending. The list is usually filtered by the owner ID, so each user would only see their own requests. The list can also be filtered by Job Name. The SETUP command is used to specify how the list is to be filtered. When filtering is used to limit the observations which are displayed, the filter will be displayed beneath the appropriate heading.

Note: Although it is not started from the Report Selection Menu, the Observation Session List panel is implemented as a report, and, therefore, follows the same conventions as the Performance Analysis Reports panels.

A sample Observation Session List panel is shown here:

File View Navigate Help

R02: Observation Session List (CAZ0)Row 00078 of 00810

Command ==> Scroll ==> CSR

NEWTo define a new measurement

TNEWTo define a threshold measurement

CONNECTTo connect to another instance of the measurement task

VERSIONTo display version information for all instances

IMPORTTo IMPORT a previously Exported sample file or hierachy

HIDETo remove these commands from the display (recommended)

/On top of any ReqNum to get a list of the line commands

Reqnum	Owned By	Description	Job Name	Date/Time	Samples	Status
01871	USER1		CICS22A	Jan-3 18:12	100	Ended
01870	USER1		CICS22A	Jan-3 18:11	100	Ended
01869	USER1		USER2	Jan-3 18:11	3,450	Cancel
01868	USER2		USER1	Jan-3 18:10	10,000	Ended
01867	+ USER1	repeat m-step a	CICS22A	Jan-3 18:07	100	STEPS
01866	USER1		USER1	Jan-3 18:08	10,000	Ended
01865	+ USER1	repeat m-step a	PFTEST11	Jan-3 17:55	100	STEPS
01864	USER1		USER1	Jan-3 17:56	10,000	Ended
01863	+ USER1	repeat m-step a	PFTEST11	Jan-3 17:54	100	STEPS
01862	USER1		USER1	Jan-3 17:54	10,000	Ended
01842	USER1		USER1	Jan-3 17:52	10,000	Ended
01803	+ USER1	repeat m-step a	PFTEST11	Jan-3 17:51	100	STEPS
01802	USER1	batch interface	USER1	Jan-3 17:46	5,000	Ended
01801	USER1		CICS22A	Jan-3 17:45	100	Cancel
01800	USER1	RT#2 (open/clos	PFTEST02	Jan-3 17:46	17,070	Cancel
01799	USER1		CICS22A	Jan-3 17:30	100	Ended
01798	USER1		CICS22A	Jan-3 17:30	1	Stoppd

This panel is used to initiate a new observation request, by using the “NEW” primary command, or the “NEW” line command (described in the next section). The “NEW” primary command and the “NEW” line command both cause the Schedule New Measurement panels to be displayed. For Threshold Monitor requests, use the “TNEW” primary command. For more information about Threshold Monitor requests, see [“Using the TNEW command” on page 40](#).

This panel is also used to access the Reports menu, by entering the “R” line command on the request number for which you want to generate Performance Reports. The “NEW” and “R” commands are the most commonly used commands on this panel, and provide access to the primary functions of Application Performance Analyzer: submitting Observation Requests, and generating Performance Reports for a completed Observation Request.

Input fields

The inputs fields on this report are the ReqNum title field, and all the request number detail lines under it. The request number detail line input is described below in the section [“Description of detail lines”](#) on page 8.

You can type the following line commands directly on to the ReqNum title field:

- “?” Display context help information
- “+” Expand to reveal next level entries for all observations
- “-” Collapse to hide next level entries for all observations
- “SR” Sort report detail lines by Request Number
- “SJ” Sort report detail lines by Job Name
- “SD” Sort report detail lines by date/time
- “SO” Sort report detail lines by Owned By
- “SW” Sort lines by expiry days warning (only when expiry days warning is enabled)
- “SK” Sort lines with no delete date (only when expiry days warning is enabled)

Description of detail lines

Each detail line shows the following information about the observation session:

Request Number

This is the unique 5-digit request number assigned to identify the observation session. This is also an input field which accepts line commands. Type the line command directly on top of the request number. If the request number has a “+” beside it, this indicates that there are subsequent entries underneath this one. The line commands accepted in the Request Number field are as follows:

“/”

Display context menu.

“?”

Display context help information.

“++”

Show additional details about this request in a pop-up window. As with all reports, you can also press the Enter key instead.

“+”

Expand to reveal next level entries. This is used for multi-step, repeat schedule, USS, threshold and collateral DB2® requests. When there is next level entries available, a “+” will appear beside the request number.

“-”

Collapse to hide next level entries.

“D”

Delete the request.

“R”

Display performance analysis reports menu for this request, or start Realtime Monitor if request is currently active. When entered for parent observations of multi-step, repeat schedule, USS and threshold measurements, this will expand to reveal next level entries.

“S”

Select Reports or Realtime Monitor. When entered for parent observations of multi-step, repeat schedule, USS and threshold measurements, this will expand to reveal next level entries.

“T”

Tag up to 20 measurements at one time. Tagged measurements are used for variance reporting and CICS® multiple address space reporting. For variance reporting, use the “T” line command together

with the “V” line command, which you use to indicate the base measurement and launch variance reporting. For CICS multiple address space reporting, use the “T” line command together with the “R” line command, which you use to launch reporting for one of the CICS regions. In addition to the standard CICS reports, the specific CICS multiple address space reports are generated.

Note: Tagged measurements remain tagged only for the duration of the session.

“TR”

Create a new request to be Triggered when this request starts. This can only be used on a request that is in SCHED status.

“V”

Launch performance analysis reporting in a mode that enables access to variance reports. Use the “V” line command to compare a measurement previously tagged with a “T” line command. The measurement selected by the “V” line command is the base measurement in variance reports.

Note:

The report menu will be displayed in response to the “V” line command.

CAN

Cancel the request (request must be active).

CRAG

Cancel the RUNAGAIN count, specified in the “Times to repeat measurement” field of R03 Panel 8 when the request was created. This prevents any further measurements from being initiated automatically when the job is rerun. The request must not be in active or writing status.

KEEP

Keep this request until it is manually deleted. This overrides the auto delete feature.

MOD

Modify the request.

NEW

Create new observation request with the same attributes as this request.

The NEW line command will display the Schedule New Measurement panel with the input fields pre-filled with entries from the request on which “NEW” was typed. If you want an empty Schedule New Measurement panel, use the “NEW” primary command.

SUB

Create a new observation request with the same attributes as this request and submit it immediately. You use “SUB” instead of the “NEW” line command when you do not need to view or change any of the fields in the original request.

EXP

Export the sample file for this request to a file in XMIT format.

EXPH

Export the hierarchy of observations for this request, and all dependent requests under it, to a file in TSO XMIT format. All of the observations must have completed.

The request numbers can be displayed in different colors. Parent observations inherit the color of the most critical child. Expand the parent to see the color of the individual child observations. The colors that can be displayed are as follows:

Turquoise

The default color having no specific meaning

White

Indicates this observation has been 'tagged'.

Yellow

When the expiry days warning feature is enabled, indicates this observation will be automatically deleted in two or more days. Use the SW line command on the ReqNum heading to sort these observations by delete date. Use the KEEP command to prevent this request from being automatically

deleted. Users with administrator authority will see the yellow for all users' observations. All other users will see the yellow for their own observations only.

Green

When the expiry days warning feature is enabled, indicates this observation has no delete date or is marked 'Do not Delete'. Use the SK line command on the ReqNum heading to sort all these similar observations to the top of the list. Users with administrator authority will see the green for all users' observations. All other users will see the green for their own observations only.

Red

When the expiry days warning feature is enabled, indicates this observation will be automatically deleted within 24 hours. Use the SW line command on the ReqNum heading to sort these observations to the top of the list. Use the KEEP command to prevent this request from being automatically deleted. Users with administrator authority will see the red for all users' observations. All other users will see the red for their own observations only.

Owned By

This is the User ID of the “owner” of the request (the TSO ID of the user who created the request).

Description

This is the descriptive name of the observation session that was entered (optionally) when the request was made.

Job Name

This is the name of the job (or Started Task or TSO ID) that was measured.

Date/Time

This indicates the date and time of the completion of the measurement. If the measurement is not yet complete, the date and time when the request was made is shown.

Samples

If the session has a status of Ended or Active this is the number of observation samples done. If the observation session has not yet started (a status of “Sched” or “Future”) then this shows the number of observation samples requested. This field changes color depending on the status.

Status

This shows the status of the observation session:

- **Active** means the session is currently taking place.
- **Cancel** means the request was cancelled using the “CAN” line command.
- **Ended** means the session has completed.
- **ErrMsg** means the session was completed, but error messages are written during sampling. The sample file might be incomplete. Report S10 displays the error messages that are written during sampling.
- **Failed** means the request failed to complete normally, and did not create a valid sample file.
- **REPEAT** means that this is a repeating schedule request. The requests under this entry can be displayed by using the “+” line command to expand to the next level.
- **Sched** means the session has been scheduled but measurement has not yet been started.
- **STEPS** means that this is a multi-step request. The requests under this entry can be displayed by using the “+” line command to expand to the next level.
- **Stoppd** means the request was stopped for some reason, usually a CPU Usage control issue, look at report S01 and check for the CPU Usage Status field. It will be present if the request was stopped due

to CPU Usage controls. You can also use the “++” (or Enter key) line command directly on the request number field, and a reason will be shown in the detail window.

- **Tagged** means that this measurement has been tagged (with the “T” line command) for use in variance reports or CICS multiple address space reports.
- **Thresh** means that this is a Threshold Monitor request. The request under this entry can be displayed by using the “+” line command to expand to the next level.
- **Trig** means this request will be triggered when the corresponding scheduled request starts.
- **USS** means that this is a USS environment measurement. A separate measurement file is created for each spawned address space. Enter the “+” line command to expand this item to see each completed measurement.
- **MultJb** means that this is a multiple job request, created by entering a jobname with wildcards specified. The measurements under this entry can be displayed by using the “+” line command to expand to the next level.
- **IMS** means that this is an IMS Multiple Address Space (MASS) request. Enter the “+” line command to expand this item to view the individual IMS MPP region observations.

Note: A plus sign (+) that appears after the status means that this request will repeat if the target job runs again. This happens when the “Times to repeat measurement” field is specified, and the specified number of times has not been reached, or the optional specified time interval has not expired. Once the job has been rerun, or the optional time interval passes, the plus sign will disappear.

Sysid

The z/OS System id on which the measurement is executed.

Expiry Date

The date that the measurement will be deleted. If the measurement has no expiry date, “Do not Delete” will be displayed.

Duration

The elapsed time of the measurement.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window is shown here:

File View Navigate Help

General

Request Number	1946
Request Description	No Description entered
Request Status	Ended
Owner Id	USER1
Time of Request	Wednesday Jan 26 2005 11:01:57.13
Session Start Time	Wednesday Jan 26 2005 11:01:57.29
Session End Time	Wednesday Jan 26 2005 11:02:57.50
Session Duration	1 minutes, 0.21 seconds
Session Delete Date	Do not Delete

Measurement Criteria

Select by Job Name	CICS22A
Select by Sys Name	X235
Sample Interval	6000 microseconds
Duration	60 seconds

Measurement Information

Sample File DSN	0.USER1.R1946.CICS22A.SF
Samples Requested	10,000
Samples Done	10,000
ASID	005A

Data Extractors

CICS	Selected
IMS	Not Selected
IMS+	Not Selected
DB2	Selected
DB2+	Selected
MQSeries	Not Selected

R01 - Application Performance Analyzer performance reports menu

This panel is displayed as a result of entering the “R” line command to a line in the Observation Session List panel. It enables you to display Performance Analysis Reports for the selection observation session.

There are two distinct areas on this screen. The first, at the top of the screen, shows you a list of report categories. One of these categories is always highlighted (selected). The area at the lower half of the panel lists the available reports belonging to the highlighted (selected) category.

You can change the report category and hence change the list of available reports, by selecting a category by entering “S” beside the category, or by simply entering the single character code on the command line. You can then select a report from the lower portion of the screen.

As a shortcut, you can select a report directly by entering its three-character code on the command line. Note that if you are selecting by report code, it is not necessary to select the category to which the report belongs first, you can enter any three-character report code regardless of which category is currently highlighted. As a shortcut, you can also enter a report code on the command line while viewing a report, and that report will be opened, so it is not necessary to return to the report menu.

The most recently selected category persists from one session to the next.

This example shows the screen with DB2 Measurement as the currently selected category, note that if reports do not apply to the selected measurement, they category will be displayed in red, and will not be selectable.

```

File View Navigate Help
-----
R01: Performance Reports (1910/TSTJOB01)                      Row 00001 of 00008
Command ==> _____ Scroll ==> CSR

Select a category from the list below to view the available reports
A Admin/Miscellaneous      I IMS Measurement          E CICS Measurement
S Statistics/Storage       F DB2 Measurement         Q MQ Measurement
C CPU Usage Analysis       D DASD I/O Analysis       G Coupling Facility
W CPU WAIT Analysis        V Variance Reports        X Multi Address Space
J Java Measurement         B WebSphere App Server    H HFS Analysis
K SRB Measurement

-----
Enter S to make a selection or enter the report code on the command line

- F01 DB2 Measurement Profile          - F11 DB2 SQL CPU/Svc Time by Stmt
- F02 DB2 SQL Activity Timeline        - F12 DB2 SQL CPU/Svc Time by Plan
- F03 DB2 SQL Activity by DBRM         - F13 DB2 SQL Threads Analysis
- F04 DB2 SQL Activity by Statement    - F14 DB2 CPU by Plan/Stored Proc
- F05 DB2 SQL Activity by Plan         - F15 DB2 SQL CPU/Svc Time by Rq Loc
- F06 DB2 SQL Statement Attributes     - F16 DB2 SQL CPU/Svc Time by Enclav
- F07 DB2 SQL Wait Time by DBRM        - F17 DB2 SQL CPU/Svc Time by Corrid
- F08 DB2 SQL Wait Time by Statement   - F18 DB2 SQL CPU/Svc Time by Wkstn
- F09 DB2 SQL Wait Time by Plan        - F19 DB2 SQL CPU/Svc Time by EndUsr
- F10 DB2 SQL CPU/Svc Time by DBRM

```

The individual reports are described in the chapter [Chapter 3, “Performance analysis reports,”](#) on page [43](#).

Chapter 2. Entering observation requests

This section describes how to enter Observation Requests (measurements).

For information about ...	See ...
Initiating a new observation request	“Using the NEW command” on page 15
Entering job information	“Panel 1 – Job Information” on page 17
Specifying data extractors (CICS, DB2, IMS, MQSeries®, Java™) or entering additional load libraries to search	“Panel 2 – Options” on page 21
Entering multi-step measurements	“Panel 3 – Multi-steps” on page 26
Selecting active jobs from a list	“Panel 4 – Active Jobs” on page 28
Specifying CICS or IMS transactions or DB2 stored procedures or user-defined functions	“Panel 5 – Subsystems” on page 29
Specifying Sysplex systems	“Panel 6 – Sysplex” on page 34
Entering a recurring future scheduled measurement	“Panel 7 – Schedule” on page 35
Additional options related to how the measurement is to be handled	“Panel 8 – Sched Options” on page 37

Entering an observation request

Using the NEW command

New observation requests are initiated from the Application Performance Analyzer Observation Session List panel (this is the panel where Application Performance Analyzer starts). You can use either the “NEW” primary command by entering it on the command line, or use the “NEW” line command by entering it on the request number field of an existing request. The “NEW” primary command will display the Schedule New Measurement panels with blank input fields. The “NEW” line command will display the Schedule New Measurement panels with the input fields pre-filled based on the existing request on which you typed the “NEW” command.

A sample Observation Session List panel with the “NEW” line command entered on the third request in the list is shown below.

File View Navigate Help						
R02: Observation Session List (0)						
Command ==> _____				Scroll ==> CSR		
Regnum	Owned By	Description	Job Name	Date/Time	Samples	Status
00200	USER1	CICS test 2	CICS22A	May-30 14:15	5,000	Ended
00199	USER1	VSAM TEST	PFTEST03	May-29 18:11	3,000	Ended
0NEW8	USER1	VSAM TEST	PFTEST03	May-29 18:11	2,998	Ended
00197	USER1		PFTEST03	May-29 18:10	4,349	Ended
00196	USER1		PFTEST03	May-29 18:07	3,801	Ended
00195	USER1	Loop with open/c	PFTEST02	May-28 18:08	20,000	Ended
00194	USER1	Loop with open/c	PFTEST02	May-24 17:55	20,000	Ended
00193	USER1	Loop with open/c	PFTEST02	May-24 17:56	5,000	Ended
00192	USER1		USER1PF1	May-22 17:54	3,019	Ended
00191	USER1		USER1PF1	May-22 17:54	10,000	Ended
00190	USER1	Loop with open/c	PFTEST02	May-22 17:52	20,000	Ended
00189	USER1	Loop with open/c	PFTEST02	May-20 17:51	20,000	Ended
00188	USER1	Loop with open/c	PFTEST02	May-9 17:46	20,000	Ended
00187	USER1	PF05	CICS22A	May-6 17:45	10,000	Ended
00186	USER1		CICS22B	May-5 17:46	10,000	Ended
00183	USER1	1000/60	ARAOSHOW	Apr-30 17:30	1,000	Ended

Using the MOD line command

If you need to modify a measurement request, you can use the “MOD” line command.

When issued on measurements that are pending, the “MOD” process uses the same panels as the “NEW” process, so all the information in this chapter applies to “MOD” and “NEW”. The “MOD” command can be used to modify future schedule requests, even if some of the generated future requests have run already.

When issued on measurements that are active or have completed, the “MOD” process allows you to change the **Description** field only.

Schedule New Measurement panels

After you have entered the “NEW” line command or “NEW” primary command, the Schedule New Measurement panel group is displayed.

The screens in the Schedule New Measurement dialog are divided into two sections. The top section is fixed and lists the available input panels. The current panel is highlighted. Each panel name is preceded by a symbol indicating if data has been entered to the panel. The symbol appears in green (green light) if data has been entered and is error free. A yellow or red light appears if there are warnings or errors in the data. The lower section of the screen is the input panel. It begins with an identifying heading.

Panel navigation

There are two methods you can use to JUMP from panel to panel:

- Type the panel number on the command line and press ENTER.
- Type a slash, immediately followed by the panel number in the first two positions of any input field.

These can be done in a single operation in combination with entry of input to the current panel. For example, you can enter input to Panel 1, place the cursor on the command line, type 2 and press ENTER. The entry to the Panel 1 input fields will be accepted and Panel 2 will appear. The same applies in this example if you type /2 in one of the data input fields. You must, of course, enter this on a field to which you are not specifying other input.

In some cases, automatic panel navigation occurs, for example, entering a jobname pattern will automatically take you to panel 4 to select from a list of active jobs based on that pattern.

Submitting the request

If you have entered enough data for a complete request to be submitted, “Input more data or ENTER to submit” will be displayed in the panel heading line. Pressing the ENTER key again will submit the request, unless you navigate to another panel to continue entering data.

There is a final confirmation prompt displayed before the request actually gets submitted. If you want to turn off this final confirmation prompt, use the SETUP command while you are in the R03 Schedule New Measurement dialog.

Primary commands

panel number

Enter a single-digit panel number to jump to that panel.

SUBMIT

Use SUBMIT to submit the request immediately and return control to the R02 panel.

JCL

Use JCL to display the JCL and control statements that could be used to request the equivalent measurement request as a batch job using CAZBATCH.

SETUP options

Use the SETUP command to specify various options affecting this dialog:

Prompt for confirmation before submitting ...

By default, this option is selected. Indicate if the final confirmation prompt is to appear or is to be suppressed.

Prompt for confirmation before returning ...

By default, this option is selected. Normally a warning message will appear when the END command (or PF3) is issued after data has been input. This is to warn that the input data will be discarded. Unselect this option to suppress the warning.

Translate CICS trancode ...

By default, this option is selected. CICS transaction codes entered to Panel 5 will be translated to uppercase. Deselect this option to suppress this translation of lowercase characters.

Suppress warning flags ...

By default, this option is not selected. Select to suppress display of the yellow warning symbols that appear to the left of input fields indicating a warning condition.

Panel 1 – Job Information

The R03 Schedule New Measurement dialog always starts with panel 1 (Job Information) selected, it is shown here:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00019
Command ==> _____ Scroll ==> CSR

  1. Job Information      3. Multi Steps      5. Subsystems      7. Schedule
  2. Options              4. Active Jobs      6. Sysplex         8. Sched Options
-----
Panel 1. Job Information
-----
Job Name/Pattern . . (Inactive)      ASID . . . . . PID . . . . .

Step Specification
Step No. . . . . --- Specify step number, program name,
Program Name . . . . . step name or step name + Proc step
Step Name . . . . . name. Use panel 3 to specify more
ProcStepName . . . . . than one step.

Description . . . . .
Number of Samples . . . . . Measure to step end . . . N
Duration (min:sec) . . . . . Delay by (secs) . . . . .
Notify TSO User . . . . . Retain file for (days) . 20
USS observations . . . . . Max. 20

```

The panel shown above was invoked with a NEW primary command, so input fields are mostly blank.

Panel 1 – input fields

Job Name/Pattern

This field is optional. Specify the name of the job, started task, or TSO region to be measured. Either one of Job Name/Pattern, ASID, or PID is required. You can also choose to specify any combination of the three.

Note: ASID and PID are not allowed when the Job Name/Pattern field contains a pattern or a dash ('-').

Searching for active jobs (*)

You can specify a job name pattern; for example, a job name prefix followed by an asterisk (*), a job name suffix preceded by an asterisk, or an asterisk by itself. The asterisk indicates that the region to be measured is currently active. A list of active jobs whose names match the wildcard pattern will be displayed in panel 4, where one or more can be selected for measurement.

Creating multi-job measurements (%)

You can specify wildcards in order to generate measurements for multiple jobs in one request. To sample multiple jobs in one request, use a percent (%) as a wild card character anywhere in the job name. Multiple percent characters may be used in the job name, such as %A%B% to sample any jobs with A and B in the job name separated by 0 to many characters. A job name that is 8 characters long might include a percent as the ninth character to signify sampling all jobs that contain the same 8 character job name. Panel 4 can be used to display the currently active jobs that will be sampled.

A job name pattern is only permitted in NEW or MOD requests. It is not valid for Threshold or Trigger requests. You can not specify a jobname pattern of "%". If a pattern is present in the jobname, then the request will automatically be set to only select active jobs.

You can schedule a multiple job request to start at a future date and time by using panel 7 Schedule, but only one future event is permitted.

The maximum number of jobs that can be measured from a multi-job request is defined during the installation of Application Performance Analyzer. When this limit is exceeded, Application Performance Analyzer stops creating measurements for this request and the status of the request is displayed as 'Stoppd'. The measurements that executed (within the limit) are accessible for report viewing under the request. To increase the limit, contact your system programmer.

Obtaining DB2 DDF Data

To obtain DDF data, you must measure the DB2 DDF address space with the DB2+ extractor turned on. The DDF address space is typically named xxxxDIST, where xxxx is the DB2 subsystem name, unless your organization has changed the name. You have the option of limiting the scope of a DDF measurement by specifying filtering criteria in Panel 5 Subsystems. DDF measurements may be filtered by Correlation Id, End User Id, and/or Workstation Id. For more information on measuring DDF activity, refer to [“Measuring DDF activity”](#) on page 326.

Measuring a specific DB2 stored procedure or user-defined function (-)

To measure a specific DB2 stored procedure or user-defined function, use a dash (-) as the first and only character in the Jobname/Pattern field. The information identifying the DB2 stored procedure or user-defined function must be entered on Panel 5. Subsystems. This feature is only available when the WLM Intercept is activated during Application Performance Analyzer installation, and you are given appropriate security access to it. Contact your system programmer for access if necessary. When measuring a specific DB2 stored procedure or user-defined function, the following measurement options are not applicable and will result in an error if used: Step specification/Multi Steps, Measure to step end, Delay by, Active Jobs, CICS and IMS selection criteria, Schedule and Schedule Options.

Measuring a specific IMS transaction across multiple MPP regions

To measure a specific IMS transaction that executes in multiple MPP regions, you must enter a dash (-) as the first and only character in the Jobname/Pattern field. The IMS transaction name and the IMS subsystem name or IMSPLEX group name must be entered on Panel 5 Subsystems. You must also select the MPP regions you want to monitor in Panel 4. Active Jobs. This feature is only available when the IMS Intercept is activated during Application Performance Analyzer

installation, and you are given appropriate security access to it. Contact your system programmer for access if necessary. When measuring a specific IMS transaction across multiple MPP regions, the following measurement options are not applicable and are ignored if used: Step specification/ Multi Steps, Measure to step end, Delay by, Schedule and Schedule Options.

Active/Inactive indicator

When a NEW command is entered, Application Performance Analyzer checks for and displays the current status of the job, started task, or TSO region immediately below the jobname. When it is detected as active, 'Active' is displayed, otherwise, 'Inactive' is displayed. It is only necessary to use Panel 8 Sched Options if you wish to change the observation status from that detected by Application Performance Analyzer.

When more than one active job is selected for measurement in Panel 4, the phrase '(Active - Multiple Jobs Selected)' is displayed below the Jobname. In this case, the name listed is the first job selected in Panel 4. You must use Panel 4 to view or change the jobs that are selected for measurement.

ASID

This field is optional. Specify the ASID of a job to be measured. ASID must be specified as a decimal number. ASID might be specified in conjunction with Job Name and/or PID and in this circumstance, the ASID must match the Job Name and/or PID.

Either one of Job Name/Pattern, ASID, or PID is required. You can also choose to specify any combination of the three.

Note: ASID is not allowed when the Job Name/Pattern field contains a pattern or a dash ('-').

PID

This field is optional. Specify the USS Process ID of a UNIX process to be measured. PID must be specified as a decimal number. PID might be specified in conjunction with Job Name and/or ASID and in this circumstance, the PID must match the Job Name and/or ASID.

Either one of Job Name/Pattern, ASID, or PID is required. You can also choose to specify any combination of the three.

Note: PID is not allowed when the Job Name/Pattern field contains a pattern or a dash ('-').

System name

This field appears only if the Application Performance Analyzer you are connected to is configured as a member in a SYSPLEX group. Specify the name of the system on which the measured job is to run (or is currently running). Specify an asterisk (*) in this field to indicate that the job could run on any of the systems in the group.

You can also select panel 6 to display a full list of available system names from which you can make a selection.

Note: Specifying an asterisk (*) is not allowed when the PID, ASID, or both are specified.

Step Specification Field Group

Step specification is not applicable when measuring specific DB2 stored procedures or user-defined functions.

The job step to be measured is specified by a group of four fields (Step Number, Step Program, Step Name, ProcStepName). To identify the step, you can specify one of the following:

- Step Number by itself
- Step Program by itself
- Step Name by itself
- Step Name and ProcStepName

If you leave all of these fields blank, the first job step is assumed. You cannot specify any of these fields when you are specifying measurement of a job that is currently active.

To schedule the measurement of multiple steps in the same job, select panel 3.

Step No.

If Step No. is specified, the other three step fields (Step Program, Step Name, and ProcStepName) must be left blank.

Step No. specifies the numeric step number.

For a NEW measurement, you may enter an asterisk (*) in this field to measure all steps in the job.

For a threshold (TNEW) measurement, you may enter an asterisk (*) in this field to measure all steps in the job that meet the threshold criteria entered in the Criteria panel.

Step Program

If Step Program is specified, the other three step fields (Step No., Step Name, and ProcStepName) must be left blank. Program Step specifies the name of the program coded in the PGM= parameter of the EXEC statement for the step you want to measure.

Step Name

If Step Name is specified, then Step Number, and Step Program must be left blank. You can specify Step Name by itself or in combination with ProcStepName.

Step Name specifies the symbol coded in the name field of an EXEC PGM = statement or an EXEC PROC = statement. In the event that the ProcStep name field is also supplied, this field always identifies the symbol coded in an EXEC PROC = statement.

In the event that the ProcStep name field is left blank, and Step Name matches an EXEC PROC = statement, the first step within that proc will be measured.

If the step to be measured is not within a proc, then Step Name specifies the symbol coded in the name field of an EXEC PGM = statement, and ProcStepName must not be specified.

ProcStepName

If ProcStepName is specified, then input must also be supplied in the Step Name field.

ProcStepName specifies the symbol coded in the name field of an EXEC PGM = statement that is part of a PROC.

Description

Enter a description for this observation request. This field is optional unless the option has been set during installation requiring a minimum description of 8 characters.

Number of Samples

Specify the number of times execution of the measured jobstep is to be sampled. Samples are taken in equal intervals. The sampling frequency is determined by dividing the number of samples by the specified measurement duration. If configured during installation, a default value will be displayed in this field for NEW and TNEW requests. An installation default value is used if you do not supply input in this field.

Note: This field is not used when sampling a DB2 DDF address space with the DB2+ extractor turned on, it will be ignored. In the case of DDF measurement, each SQL call is intercepted for the requested duration, no sampling takes place. The number of samples will always be converted to approximately one per second.

Measure to step end

This field is not applicable when measuring specific DB2 stored procedures or user-defined functions.

Specify 'Y' in this field to indicate that the measurement is to continue to the end of the step even if the specified number of samples has been recorded. Measurement will continue at the sampling rate calculated based on the specified duration and number of samples.

Duration (min:sec)

Specify the duration of the measurement. You can specify the value in seconds or in minutes and seconds. To specify the duration in minutes and seconds, separate the minutes value from the seconds value using a colon. If configured during installation, a default value will be displayed in this field for NEW and TNEW requests. An installation default value is used if you do not supply input in this field. Examples:

- 135 specifies 135 seconds
- 2:15 specifies 2 minutes and 15 seconds
- 2: specifies 2 minutes

The measurement will proceed for the specified time and the sampling rate will be established at a frequency that would perform the full number of samples for the specified duration.

The measurement will terminate before the duration ends if the job step ends first.

Delay by (secs)

This field is not applicable when measuring specific DB2 stored procedures or user-defined functions.

Specify a delay time, in seconds, to occur before initiation of the measurement. The delay will occur starting at the time execution of the job step begins. This cannot be specified for measurement of a job that is currently active.

Notify TSO User

Specify a TSO user ID to be notified upon completion of the measurement. Enter blanks in this field for no completion notification.

Retain file for (days)

Specify the number of days after completion of the measurement for which the measurement file is to be retained. The file and all information about the measurement will be deleted after this period. Enter blanks or zero in this field for no automatic deletion of the measurement data.

USS observations

Specify the maximum number of spawned address spaces or substeps to measure for a USS observation, up to the maximum defined in the system configuration. The same sampling frequency will be used for each spawned address space or substep. Sampling overhead can be high if several spawned address spaces are running simultaneously.

When this field is specified, the collection of measurements will be grouped under a USS master record on the Observation List panel.

Note: When you are deciding what values to enter in the Number of Samples and Duration fields, consider that Application Performance Analyzer does not have unlimited resources to store and report measurement data. Data spaces are used for collecting and reporting data. Extremely large amounts of measurement data can cause Application Performance Analyzer to fail in either the data collection or reporting process. Data space requirements for measurement data vary widely depending on the type of job or region being measured, data extractors selected, etc.

Panel 2 – Options

Panel 2 is used to enter extended measurement options (“Data Extractors”), and also to specify additional load libraries or HFS directories to be searched for external symbol information.

Enter a slash “/” beside each of the data extractors required for the measurement. The data extractors are used to measure additional information about CICS, DB2, IMS, Java, MQSERIES, Adabas, Natural, WebSphere® Application Services and Service Request Blocks. When the CICS, DB2, IMS, or WAS data extractor is specified, further transaction information can be specified in panel 5.

Panel 2 is shown here:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00033
Command ==> _____ Scroll ==> CSR
o 1. Job Information      3. Multi Steps      5. Subsystems      7. Schedule
  2. Options              4. Active Jobs      6. Sysplex         8. Sched Options
-----
Panel 2. Measurement Options

Data Extractors. '/'to select extended measurement options:
CICS  CICS information      - CICS+ CICS service/CPU time
IMS   DLI call information  - IMS+  DLI service/CPU time/counts
MQ    MQ call information   - MQ+   MQ service/CPU time/counts
DB2   SQL call information  - DB2+  SQL service/CPU time/counts
CDB2  Collateral DB2 activity - DB2V  SQL Variables
DB2X  DB2 EXPLAIN from bind - SRB   SRB Sampling
Ada   Adabas call information - Nat   Natural information
Java  Java information      - WAS   WebSphere Activity

ARG DSN: _____ Member: _____

Specify up to 10 load libraries, or up to 440 bytes of HFS directories, to
search for external symbol information. The load libraries apply only to
sampled modules that are fetched from dynamically allocated load libraries.
The directories apply only to sampled HFS programs that do not have absolute
path names. Enter multiple directories separated by at least one space.

_ Specify L for load libraries, D for directories
1  _____
2  _____
3  _____
4  _____
5  _____
6  _____
7  _____
8  _____
9  _____
10 _____

```

If your installation has configured Application Performance Analyzer to display the maximum number of trace entries for DB2+, IMS+ and MQ+, additional input fields will be displayed in Panel 2 based on your configuration. The following example shows the DB2, IMS, and MQ intercepts are enabled and the corresponding Max Trace Size settings are set to display their fields on Panel 2:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00033
Command ==> _____ Scroll ==> CSR

o 1. Job Information      3. Multi Steps      5. Subsystems      7. Schedule
  2. Options              4. Active Jobs     6. Sysplex         8. Sched Options
-----
Panel 2. Measurement Options

Data Extractors. '/'to select extended measurement options:
CICS  CICS information      - CICS+ CICS service/CPU time
IMS   DLI call information  - IMS+  DLI service/CPU time/counts
MQ    MQ call information   - MQ+   MQ service/CPU time/counts
DB2   SQL call information  - DB2+  SQL service/CPU time/counts
CDB2  Collateral DB2 activity - DB2V  SQL Variables
DB2X  DB2 EXPLAIN from bind - SRB   SRB Sampling
Ada   Adabas call information - Nat   Natural information
Java  Java information      - WAS   WebSphere Activity

100  DB2+  Maximum number of trace entries in thousands
100  IMS+  Maximum number of trace entries in thousands
100  MQ+   Maximum number of trace entries in thousands

ARG DSN: _____ Member: _____

Specify up to 10 load libraries, or up to 440 bytes of HFS directories, to
search for external symbol information. The load libraries apply only to
sampled modules that are fetched from dynamically allocated load libraries.
The directories apply only to sampled HFS programs that do not have absolute
path names. Enter multiple directories separated by at least one space.

_ Specify L for load libraries, D for directories
1  _____
2  _____
3  _____
4  _____
5  _____
6  _____
7  _____
8  _____
9  _____
10 _____

```

Panel 2 input fields

Data Extractors

The data extractors are selected to direct Application Performance Analyzer to measure additional information about CICS, DB2, IMS, MQSeries, Java, Adabas, Natural or WebSphere Application Services. Use a slash to select one or more appropriate extractors.

CICS

This option is used to collect information about CICS session statistics and CICS transactions. CICS data is reported in the E01 through E11 reports and the CICS Multiple Address Space X series of reports. This extractor can also be selected when the WAS extractor is selected. In this situation, the external CICS interface (EXCI) data will be captured from any WAS Servant observation sessions, and reported in the B11 report.

CICS+

This option is used to collect additional information about CICS transactions, allowing exact transaction counts, service times and CPU times to be measured and reported in the E12 report. When CICS+ is selected, CICS is automatically included. Your installer might have chosen to limit access to this data extractor.

DB2

This option is used to collect information about SQL calls made during measurement. DB2 data is reported in the F01 through F10, F13 and F14 reports.

DB2+

This option is used to collect additional DB2 information, allowing exact call counts, service times, and CPU times to be measured and reported in the F11 and F12 reports. The F15 through F19 reports are produced for DDF measurements only. DB2+ also ensures that accurate SQL text is reported, as without DB2+ turned on it is possible for the SQL text to be incorrect. When DB2+ is selected, DB2 is automatically included. Your installer might have chosen to limit access to this data extractor, as DB2+ causes each DB2 call to be intercepted to collect additional data. This might have a small impact on the performance of the target address space. You should be careful when using this feature with other products that also intercept DB2 calls because unpredictable results might occur.

DB2V

This option is used to activate the DB2 variable extractor during measurement. It will extract SQL variable names for sampled SQL calls. The variable names will then be substituted in place of the `:H` place holders when the SQL text is displayed. When DB2V is selected, DB2 and DB2+ are automatically included.

DB2X

This option is used to activate the static DB2 explain extractor during measurement. When selected, Application Performance Analyzer will extract static EXPLAIN information for observed SQL statements that were bound in a package or plan with the EXPLAIN(YES) option. See [DB2 EXPLAIN report](#) for more details.

CDB2

This option is used to activate the collateral DB2 extractor during measurement. When selected, Application Performance Analyzer measures DB2 activity in other address spaces when that activity is invoked by this original DB2 request; for example calls to stored procedures and user-defined functions. In the R02 Observation List, the collateral DB2 measurements are created separately and are grouped under this observation request. When CDB2 is selected, DB2 and DB2+ are automatically included. The CDB2 extractor is only available when your installation has enabled the WLM intercept in Application Performance Analyzer. Your installer might have chosen to limit access to this data extractor, as CDB2 causes each DB2 call and WLM call to be intercepted to collect additional data. This can have a small impact on the performance of the target address space.

IMS

This option is used to collect information about IMS (DL/I) calls. IMS information is reported in the I01, and I03 through I15 reports.

IMS+

This option is used to collect additional IMS information, allowing exact DL/I call counts, DL/I service times, and CPU times to be measured and reported in the I02, and I16 through I21 reports. When IMS+ is selected, IMS is automatically included. Your installer might have chosen to limit access to this data extractor, as IMS+ causes each DL/I call to be intercepted to collect additional data. This might have a small impact on the performance of the target address space. You should be careful when using this feature with other products that also intercept DL/I calls because unpredictable results might occur.

Java

This option is used to collect detailed information about Java calls. Java information is reported in the J series of reports.

MQ

This option is used to collect information about MQSeries interface calls (both dynamic and static) in Batch, IMS and CICS application programs. This extractor is not used to measure the MQ address space itself. MQSeries information is reported in the Q series of reports.

MQ+

You can select MQ+ option by specifying a forward slash (/). Selecting MQ+ option activates the MQ+ Data Extractor during the measurement. To clear the MQ+ option, specify blank. MQ+ is an MQ measurement option where the precise number of MQ calls, the exact MQ service time and CPU time by MQ call is counted. When you select the MQ+ option, Application Performance Analyzer captures the data that is required to produce the MQ+ timeline and service time reports

Q11 through Q14. This might have a small impact on the performance of the target address space. Be careful when you use the MQ+ feature with other products that also intercept MQ calls because unpredictable results might occur. Activating the MQ+ option automatically activates the MQ option.

Ada

This option is used to collect information about Adabas calls. There are no special Adabas reports. Adabas calls are reported under the ADABAS category in several reports. The C08 CPU Usage Referred Attribution report can also be used to see the Attribution offset for Adabas calls and to source map the program. The Ada extractor is only available when your installation has enabled Adabas in Application Performance Analyzer.

Nat

This option is used to collect information about Natural calls. Natural calls are reported in the C10 report. The Nat extractor is only available when your installation has enabled Natural in Application Performance Analyzer.

WAS

This option is used to collect information about WebSphere Application Services requests. The WAS extractor is available only when your installation has enabled WebSphere Application Services in Application Performance Analyzer. Refer to the WAS checklist in Chapter 1 of the *Application Performance Analyzer Customization Guide* for the steps to enable WebSphere Application Services. Your installer might have chosen to limit access to this data extractor.

The Job Name field on Panel 1 must contain the name of a WebSphere Application Services controller address space. The controller is not actually sampled, since no application code runs in it. Instead, all WebSphere Application Services requests processed by the controller are recorded in the sample file and reported in the B01 to B10 reports. If during measurement of the controller, one or more servant regions become active, and the Application Performance Analyzer WLM Intercept has been enabled during installation, the servant region activity will be measured and reported in separate child observation sessions. You may select any of the following extractors when WAS is selected: CICS, DB2, DB2+, CDB2, DB2V, DB2X, MQ, MQ+, and JAVA. However, these extractors are only enabled for the WebSphere Application Services servant observation sessions.

SRB

This option is used to collect detailed information about Service Request Block (SRB) activity during the measurement. When you select the option, the SRB measurement reports are generated. When measuring a DDF address space, the DB2+ and SRB extractors are mutually exclusive.

Maximum number of trace entries (DB2+, IMS+ and MQ+)

These fields are displayed only when your installation has configured Application Performance Analyzer to display them. Otherwise, your installation default is used.

For DB2+, enter the value (in thousands) to limit the number of DB2+ SQL call interceptions for which full details will be written to the sample file. Collecting full details on every interception allows the F02 Timeline report to report exact times for all SQL calls. The F02 report will be truncated at the number of calls specified in this field. The DB2+ data extractor continues to collect the data it requires for the other reports for the duration of the measurement. The value is entered in thousands of calls to be recorded and cannot exceed the default value specified for DB2IMaxTraceSize during Application Performance Analyzer installation. The default value is displayed in this field for NEW observation requests.

For IMS+, enter the value (in thousands) to limit the number of IMS+ DLI call interceptions for which full details will be written to the sample file. Collecting full details on every interception allows the I02 and I03 Timeline reports to report exact times for all DLI calls and IMS transactions. The I02 and I03 reports will be truncated at the number of calls specified in this field. The IMS+ data extractor continues to collect the data it requires for the other reports for the duration of the measurement. The value is entered in thousands of calls to be recorded and cannot exceed the default value specified for IMSIMaxTraceSize during Application Performance Analyzer installation. The default value is displayed in this field for NEW observation requests.

For MQ+, enter the value in thousands to limit the number of MQ call interceptions for which full details are written to the sample file. By collecting full details on every interception, exact times for all MQ calls can be reported in MQ+ reports. The Q11 report is truncated at the number of calls that are specified in this field. The MQ+ data extractor continues to collect the data that it requires for the other reports during the measurement. The value is entered in thousands of calls to be recorded. And the value cannot exceed the default value that is specified for MQIMaxTraceSize during Application Performance Analyzer installation. The default value is displayed in this field for NEW observation requests.

Automatic Report Generation (ARG)

The Automatic Report Generation Feature (ARG) enables you to request the automatic generation of observation reports immediately upon completion of a successful observation session. Specify a dataset name and optional member name containing JCL and PRINT control statements that will be used to submit the batch job to generate the reports.

ARG DSN

Specifies the dataset name for Automatic Report Generation. This dataset might be partitioned or physical sequential, and it must have a record format that is fixed length and LRECL=80. The dataset or member contains the complete JCL stream to create observation reports. The JCL stream will be submitted after the observation completes.

Member

Specifies a member name of a PDS for Automatic Report Generation. The member must reside in a PDS that contains the fixed length, LRECL=80 records. The member contains the complete JCL stream to create observation reports. The JCL stream will be submitted after the observation completes.

See *hlq.SCAZSAMP(CAZARG)* for a sample ARG member.

Specify L for load libraries, D for directories

Specify either L or D to indicate whether Application Performance Analyzer is to search load libraries or directories.

Libraries

Specify up to 10 load libraries to be searched by Application Performance Analyzer for external symbol information. These are applicable only when sampled modules are fetched from dynamically allocated load libraries. See [“Specifying additional libraries ” on page 26](#) for more information.

Directories

Specify up to 440 bytes of HFS directory path names to be searched by Application Performance Analyzer, each separated by one or more spaces. These are applicable only when sampled HFS programs have relative path names.

Specifying additional libraries

It is sometimes necessary to specify additional libraries for Application Performance Analyzer to use to resolve sampled addresses to CSECT plus offset, instead of load module plus offset.

When one program issues a LOAD or LINK macro to fetch other load modules, they are typically loaded from STEPLIB or JOBLIB or a LINKLIST library. In this case Application Performance Analyzer will find them automatically during sampling.

However, the LOAD macro can be coded to reference a DCB for which a load library was OPENed. The library might have been allocated to a temporary DDNAME and after the LOAD is done, the DCB is closed and the DDNAME released. In this situation, Application Performance Analyzer has no way of determining what load library the module came from. Hence, it is unable to get CSECT (EBE) information. This would prevent such modules from being source mapped.

Panel 3 – Multi-steps

This panel is not applicable when measuring specific DB2 stored procedures or user-defined functions.

Panel 3 is shown here. In this example, three steps have been selected by StepName.

Panel 3 input fields

Step Specification Field Group

- Step Number by itself
- Step Program by itself
- Step Name by itself
- Step Name and ProcStepName

Step No. specifies the numeric step number. Specify an asterisk (*) in the first Step No. field to indicate that all steps in the job are to be measured.

Program Step specifies the name of the program coded in the PGM = parameter of the EXEC statement for the step you want to measure.

Step Name specifies the symbol coded in the name field of an EXEC PGM = statement or an EXEC PROC = statement. In the event that the ProcStep name field is also supplied, this field always identifies the symbol coded in an EXEC PROC = statement.

In the event that the ProcStep name field is left blank, and Step Name matches an EXEC PROC = statement, the first step within that proc will be measured.

If the step to be measured is not within a PROC, then Step Name specifies the symbol coded in the name field of an EXEC PGM = statement, and ProcStepName must not be specified.

ProcStepName

If ProcStepName is specified, then input must also be supplied in the Step Name field.

ProcStepName specifies the symbol coded in the name field of an EXEC PGM = statement that is part of a PROC.

Panel 4 – Active Jobs

Panel 4 is used to select active jobs from a list. You can enter a Prefix to limit the jobs listed. If you enter a Pattern in the Job name/Pattern field in panel 1, this will be entered as the Prefix in panel 4. This is an input field, you can change the prefix while in panel 4.

Panel 4 is shown here. In this example the prefix entered is “C*”.

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00019
Command ==> _____ Scroll ==> CSR

o 1. Job Information   o 3. Multi Steps      5. Subsystems      7. Schedule
o 2. Options          4. Active Jobs      6. Sysplex        8. Sched Options
-----
Panel 4. Active Jobs

Enter S to select an active job step to be measured.   Prefix . . C*_____

  JobName  Type  JobId  StepName  ASIDX  System  CPU%  SIO
  CATALOG  STC   N/A    CATALOG  0020   X235    0.00  0.00
  CICS22A  STC   STC01159  CICS22A  00AB   X235    2.18  0.00
  CICS22C  STC   STC03379  CICS22C  0190   X235    1.98  0.00
  CICS31A  STC   STC03246  CICS31A  00B5   X235    2.58  0.00
  CICS32A  STC   STC02104  CICS32A  0115   X235    2.58  0.00
  CONSOLE  STC   N/A      CONSOLE  0009   X235    0.00  0.00
  CSQ6MSTR STC   STC00454  CSQ6MSTR 0032   X235    5.95  0.00

```

Enter “S” beside the active job(s) you want to measure. You can select multiple active jobs to be measured simultaneously. The maximum number of jobs that can be selected is defined during the installation of Application Performance Analyzer. This feature is used to measure multiple active jobs at the same time, and is typically used for CICS and IMS multiple address space support.

When multiple jobs are selected, the selected jobs are listed in the lower half of the panel in Selected Jobs List. You add jobs to the Selected Jobs List by entering 'S' beside the active jobs in the upper half of the panel. Enter 'D' beside the active job in the lower half of the panel to remove jobs from the Selected Jobs List. When you return to Panel 1, the first job selected is displayed in the Jobname//Pattern field, and '(Active - Multiple Jobs Selected)' is displayed below the Jobname to indicate that multiple jobs are selected. Multiple jobs can be selected only in NEW requests, and are not valid for Threshold or Trigger requests.

Panel 4 is shown here with multiple CICS regions selected for measurement simultaneously.

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00011
Command ==> _____ Scroll ==> CSR

o 1. Job Information      3. Multi Steps      5. Subsystems      7. Schedule
  2. Options              o 4. Active Jobs    6. Sysplex        8. Sched Options
-----
Panel 4. Active Jobs                                     Input more data or ENTER to submit

Enter S to select an active job step to be measured.      Prefix . . CICS*_____

   JobName  Type  JobId   StepName  Procstep  ASIDX  System    CPU%    SIO
-   CICS31A  STC   STC02977 CICS31A   CICS   01AC   X235      1.08    0.00
-   CICS32A  STC   STC02278 CICS32A   CICS   0167   X235      1.08    0.00
-   CICS32B  STC   STC02122 CICS32B   CICS   0151   X235      0.72    0.00
-   CICS41A  STC   STC02300 CICS41A   CICS   016E   X235      1.44    0.00

Selected Jobs List
Enter D to remove an active job from the list.

   JobName  System
-   CICS32A   X235
-   CICS32B   X235

```

Panel 5 – Subsystems

Use this multi-purpose panel to specify further information about the measurement of CICS regions, IMS regions, specific DB2 stored procedures or user-defined functions, DB2 DDF address spaces and WebSphere (WAS) controllers. Panel 5 has three different appearances depending on the purpose of the measurement.

For a typical CICS, IMS or DDF measurement, Panel 5 displays mutually exclusive input fields that are specific to the CICS transactions and terminals, or IMS transaction, program and userid, or DDF filtering criteria.

- For CICS, you can specify the CICS transaction codes and terminals for which CICS measurement information is to be recorded. Limiting the CICS transactions and terminals you are interested in can have a significant impact on the resources consumed by the measurement process.
- For IMS, when you are measuring one MPP or IFP region, you can specify the IMS transaction, program and user ID for which measurement information is to be recorded.
- For DDF measurements, you can specify the Correlation Id, End User Id and/or Workstation Id for which measurement information is to be recorded.

For a multiple address space measurement, where a dash (-) is entered in the Jobname field in Panel 1, Panel 5 displays mutually exclusive input fields specific to DB2 stored procedures and user-defined functions, or IMS transactions that execute across multiple IMS regions.

- For DB2 multiple address space support, when you are measuring specific DB2 stored procedures or user-defined functions, you can specify the DB2 subsystem name or the DB2 group attach name, a P or F to identify the request, the schema name and the stored procedure or user-defined function name.
- For IMS multiple region support, when you are measuring an IMS transaction that executes across multiple MPP regions, you can specify the IMS subsystem name or IMSplex group name, and the IMS transaction name.

For a WebSphere measurement where the WAS extractor is selected in Panel 2, Panel 5 displays WebSphere filtering criteria. You can specify the request name, application name, and/or origin for which measurement information is to be recorded. You can also use this panel to filter out image activity and/or specific file extensions.

A sample panel 5 for CICS, an IMS region and DDF is shown here:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00025
Command ==> _____ Scroll ==> CSR

o 1. Job Information      3. Multi Steps      5. Subsystems      7. Schedule
  2. Options              4. Active Jobs      6. Sysplex         8. Sched Options
-----
Panel 5. Subsystems Measurement Criteria

Specify up to 16 CICS trancodes for which measurement data is to be
recorded.

  01 *___ 02 ____ 03 ____ 04 ____ 05 ____ 06 ____ 07 ____ 08 ____
  09 ____ 10 ____ 11 ____ 12 ____ 13 ____ 14 ____ 15 ____ 16 ____

Include CICS system transaction in measurement(Y/N): N

Wildcard character '*' can be specified at the end of a partial name.
*' by itself specifies all transactions of terminals.

Specify up to 8 CICS terminal IDs for which measurement data is to be recorded.

  01 *___ 02 ____ 03 ____ 04 ____ 05 ____ 06 ____ 07 ____ 08 ____

Include CICS non-terminal transactions in measurement(Y/N): Y

Enter IMS/TM selection parameters:

  Transaction _____ Program Name _____ User ID _____

Specify filter criteria for DDF observation. Wildcards are accepted.

Correlation Id _____ or - '/' for null (binary zero)
End User Id _____ or - '/' for null (binary zero)
Workstation Id _____ or - '/' for null (binary zero)

```

A sample panel 5 where you can enter information about a specific DB2 stored procedure or an IMS transaction and IMS subsystem or IMSplex group is shown here. This panel is displayed only when a dash (-) is entered in the Job Name/Pattern field in Panel 1.

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00010
Command ==> _____ Scroll ==> CSR

o 1. Job Information      3. Multi Steps      5. Subsystems      7. Schedule
  2. Options              4. Active Jobs      6. Sysplex         8. Sched Options
-----
Panel 5. Subsystems Measurement Criteria

Enter DB2 stored procedure or user-defined function parameters:

DB2 Subsystem _____ or DB2 Group Attach Name _____
Specify P for procedure or F for function _
Schema _____
Name _____

Enter IMS/TM selection parameters:
IMS Subsystem Id _____ or IMSPLEX Group Name _____
Transaction _____

```

A sample panel 5 for WebSphere is shown here:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00019
Command ==> _____ Scroll ==> CSR
o 1. Job Information      3. Multi Steps      5. Subsystems      7. Schedule
o 2. Options              o 4. Active Jobs    6. Sysplex         8. Sched Options
-----
Panel 5. Subsystems Measurement Criteria

Enter any required WAS filter criteria.

Request name:
-----

Application name:
-----

Origin:
-----

Origin format: (use a slash to select one of the following)
_ IP address _ Host name _ Job name

Filter out image activity? (.gif .jpg etc): N (Y/N)

Filter out requests with these extensions:
-----

```

Panel 5 input fields

For a CICS measurement:

CICS Trancode

Specify a CICS transaction name or pattern. This identifies CICS transactions to be included in the measurement. You can also specify a partial name terminated by an asterisk (*) to indicate a wildcard pattern. You can specify up to 16 names/patterns. Specify an asterisk (*) by itself to measure all transactions.

Include CICS System Txns

Specify Y or N to indicate if the measurement is to include data on CICS system transactions. (Normally set to No).

CICS Terminal ID

Specify a CICS terminal ID name or pattern. This identifies CICS terminals to be included in the measurement. You can also specify a partial name terminated by an asterisk (*) to indicate a wildcard pattern. You can specify up to eight names/patterns. Specify an asterisk (*) by itself to measure all terminals.

Include CICS non-terminal transaction

Specify Y or N to indicate if the measurement is to include data on CICS non-terminal transactions.

For a single IMS region measurement:

IMS Transaction

Specify an IMS transaction id or pattern. This identifies IMS transactions to be included in the measurement when measuring an IMS/MPP or IMS/IFP region. You can also specify a partial name terminated by an asterisk (*) to indicate a wildcard pattern.

Any values in Transaction Id, Program Name and User ID are ANDed together to determine if a transaction should be included in the measurement.

IMS Program

Specify an IMS program name or pattern. This identifies IMS programs to be included in the measurement when measuring an IMS/MPP or IMS/IFP region. You can also specify a partial name terminated by an asterisk (*) to indicate a wildcard pattern.

Any values in Transaction Id, Program Name and User ID are ANDed together to determine if a transaction should be included in the measurement.

IMS User ID

Specify a userid or pattern. This identifies that transactions initiated by the userid are to be included in the measurement when measuring an IMS/MPP or IMS/IFP region. You can also specify a partial name terminated by an asterisk (*) to indicate a wildcard pattern. Any values in Transaction Id, Program Name and User ID are ANDed together to determine if a transaction should be included in the measurement.

Note: When limiting the observation to specific IMS transactions, programs or users in an MPP or IFP region, Application Performance Analyzer samples only when the transactions are running. The observation continues to run for the requested duration.

For a DB2 DDF measurement:

Correlation Id

Specify a DB2 correlation id or pattern. This identifies a DB2 correlation id to be included in the measurement when measuring a DDF address space. A correlation id of null (binary zero) may be specified by entering a '/' in the selection field next to the Correlation Id field. You may also specify a wildcard pattern using an asterisk (*) or a percent sign (%). An asterisk is used to indicate one or more characters that can appear in place of the asterisk. It can be used as a prefix or a suffix, or both. Alternatively, a percent sign is used to indicate any single character, and can appear any number of times. Any values in Correlation Id, End User Id, and Workstation Id are ANDed together to determine if an SQL request is included in the measurement.

End User Id

Specify an end user id or pattern. This identifies an end user id to be included in the measurement when measuring a DDF address space. An end user id of null (binary zero) may be specified by entering a '/' in the selection field next to the End User Id field. You may also specify a wildcard pattern using an asterisk (*) or a percent sign (%). An asterisk is used to indicate one or more characters that can appear in place of the asterisk. It can be used as a prefix or a suffix, or both. Alternatively, a percent sign is used to indicate any single character, and can appear any number of times. Any values in Correlation Id, End User Id, and Workstation Id are ANDed together to determine if an SQL request should be included in the measurement.

Workstation Id

Specify a workstation id or pattern. This identifies a workstation id to be included in the measurement when measuring a DDF address space. A workstation id of null (binary zero) may be specified by entering a '/' in the selection field next to the Workstation Id field. You may also specify a wildcard pattern using an asterisk (*) or a percent sign (%). An asterisk is used to indicate one or more characters that can appear in place of the asterisk. It can be used as a prefix or a suffix, or both. Alternatively, a percent sign is used to indicate any single character, and can appear any number of times. Any values in Correlation Id, End User Id, and Workstation Id are ANDed together to determine if an SQL request should be included in the measurement.

For a DB2 stored procedure or user defined function measurement:

DB2 Subsystem

This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in Panel 1. Specify a DB2 subsystem. This identifies the DB2 subsystem that will be used to run the stored procedure or user-defined function. This field is mutually exclusive with the DB2 Group Attach Name field.

DB2 Group Attach Name

DB2 Group Attach Name field is displayed only when you enter a dash (-) in the Job Name/Pattern field in panel 1. If you want to identify the DB2 group that will be used to run the stored procedure or user-defined function, specify a DB2 group attach name. The DB2 Group Attach Name field is mutually exclusive with the DB2 Subsystem field.

Specify procedure or function

This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in Panel 1. Identify this request as a stored procedure or user-defined function. Enter P for stored procedure or F for a user-defined function.

Schema

This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in Panel 1. Specify the schema name for this stored procedure or user-defined function. You can specify a schema name pattern; for example, a schema name prefix followed by an asterisk (*) or an asterisk by itself. Application Performance Analyzer will measure the first DB2 stored procedure or user-defined function executed by the DB2 subsystem that matches that schema name pattern and name concatenation. If a single asterisk is coded in both schema and name, Application Performance Analyzer will measure the first stored procedure or user-defined function executed by the DB2 subsystem.

Name

This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in panel 1. Specify the name of the stored procedure or user-defined function. You can specify a name pattern; for example, a name prefix followed by an asterisk (*) or an asterisk by itself. Application Performance Analyzer will measure the first DB2 stored procedure or user-defined function executed by the DB2 subsystem that matches that schema name and name pattern concatenation. If a single asterisk is coded in both schema and name, Application Performance Analyzer will measure the first stored procedure or user-defined function executed by the DB2 subsystem.

For an IMS multiple region measurement:**IMS Subsystem Id**

This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in panel 1 to indicate an IMS MASS request. Specify an IMS subsystem. This identifies the IMS subsystem in which the IMS transaction you are measuring runs.

IMSPLEX Group Name

This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in panel 1 to indicate an IMS MASS request. Specify the IMSPlex XCF group name. This identifies the IMSPlex where the IMS transaction will run. Either the CSL group name, which is defined by the IMSPLEX parameter in the DFSCGxxx member of the IMS proclib, prefixed by the characters "CSL", or the IMS Shared Queues group name, which is defined by the SQGROUP parameter in the DFSSQxxx member of the IMS proclib, can be specified. These parameters can also be found in the DFSDFxxx member of the IMS proclib. IMS Subsystem ID and IMSPLEX Group Name are mutually exclusive.

Transaction

This field is displayed only when a dash (-) is entered in the Job Name/Pattern field in panel 1 to indicate an IMS MASS request. Specify an IMS transaction code. This identifies the IMS transaction to be included in the measurement. All active MPP regions that are eligible to process the transaction code on the specified IMS subsystem are returned on panel 4.

For a WebSphere measurement:**Request name**

This field is displayed only for WAS filter criteria. It is a string of non-blank characters up to 79 bytes long. A trailing asterisk can be used as a wildcard character. Embedded asterisks are not treated as wildcards. If the field is left blank, no filtering is applied. Otherwise, only WAS requests that match the request name filter will be written to the sample file.

Application name

This field is displayed only for WAS filter criteria. It is a string of non-blank characters up to 79 bytes long. A trailing asterisk can be used as a wildcard. Embedded asterisks are not treated as wildcards. If the field is left blank, no filtering is applied. Otherwise, only WAS requests that invoked an application that matches the filter will be written to the sample file.

Origin

This field is displayed only for WAS filter criteria. It is a string of non-blank characters up to 79 bytes long. It can be an IP address, a host name, or a job name. Only WAS requests that came from the specified origin will be written to the sample file. A trailing asterisk can be used as a wildcard character. If the field is left blank, no filtering is applied.

Origin format

This field is displayed only for WAS filter criteria. It is required if an origin filter is specified. Enter a slash against the type of origin filter:

IP address

The filter value must be a valid IPv4 or IPv6 address. If a wildcard is used, it can only appear after a dot separator (for IPv4) or a colon separator (for IPv6). For example:

```
207.245.47.*
2001:db8:85a3:0:*
```

However, a wildcard cannot be used with an IPv6 filter if it contains two consecutive colons. For example, the following filter value is invalid:

```
2001:db8:85a3::8a2e:*
```

This is because the two consecutive colons and the asterisk wildcard both represent a varying number of missing values.

Host name

The filter value can be from 1 to 79 non-blank characters. The characters are restricted to alpha-numeric, hyphen and underscore. A trailing asterisk can be used as a wildcard. WAS can sometimes show an IP address as a host name. To filter these, you must specify the filter value as an IP address, not a host name.

Job name

The filter value can be from 1 to 8 alpha-national characters. A trailing asterisk can be used as a wildcard.

Filter out image file activity

This field is displayed only for WAS filter criteria. It specifies whether or not requests for image files should be filtered out. Image files are identified by request names that end in any of the following file extensions:

```
.gif .jpg .jpeg .png .ico
```

Filter out requests with these file extensions

This field is displayed only for WAS filter criteria. It can be used to specify a series of file extensions, each separated by a space. Any requests for those file types will be filtered out. For example:

```
.css .pdf .txt
```

Any WAS request whose request name ends in one of the specified file extensions will be filtered out. Each file extension must begin with a period and must be followed by at least one non-blank character. Wildcards cannot be used in this filter.

Panel 6 – Sysplex

This panel is used to select a target Sysplex system from a list. You can also choose ALL systems, in which case the target job will be measured on the first system to run it. You cannot select ALL for active jobs. Selecting ALL is the same as entering an asterisk (*) in the System Name field on panel 1.

A sample panel 6 is shown here.


```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00010
Command ==> _____ Scroll ==> CSR

o 1. Job Information      3. Multi Steps      5. Subsystems      7. Schedule
o 2. Options              4. Active Jobs    6. Sysplex         8. Sched Options
-----
Panel 6. Sysplex

Target System. 'S' to select one option from the list (scrollable):
- ALL All Sysplex members eligible
- SYSA
- SYSB
- SYSE
- XS02
- XS03
- XS05

```

Panel 7 – Schedule

This panel is not applicable when measuring specific DB2 stored procedures or user-defined functions.

This panel is used to generate a schedule for repetitions of future measurements. A maximum of 105 future scheduled measurement entries is allowed.

The panel is shown here before any future schedule data has been entered:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00015
Command ==> _____ Scroll ==> CSR

o 1. Job Information      o 3. Multi Steps    o 5. Subsystems      7. Schedule
o 2. Options              4. Active Jobs      6. Sysplex           8. Sched Options
-----
Panel 7. Schedule
Date/time of first in sequence      Measurement repetitions
Date (yy mm dd) . __ __ __      Repeat . . __ times
Time (hh mm) . . __ __          After . . . __ days ___ minutes

Use this panel to specify a schedule for repetitions of the measurement.
Input the above fields and press ENTER to generate dates and times for
each of the measurements. These dates/times will be shown below in a
scrollable table which you can add to by repeating this input process.

```

Using this panel to create a future schedule is explained in the example below. Note that there are also important fields on panel 8 related to future schedules. If it is not known when the job will run, use panel 8 to specify how many times to repeat the measurement.

Example of creating a Future Schedule

If a user wanted to measure a job every Wednesday night at 8:00 pm, and every Friday night at 11:00 pm, for 10 weeks, starting on Wednesday Dec. 8, 2004, it would be set up like this:

1. Enter the first Wednesday date in the Date (yy mm dd) field: 04 12 08.
2. Enter 10 in the Repeat __ times field.
3. Enter 20:00 in the Time (hh mm) field.
4. Enter 7 in the After __ days field. (To indicate that it repeats each 7 days).

The screen would look like this:

```

File View Navigate Help
-----
R03: Schedule New Measurement                                     Row 00001 of 00015
Command ==> _____ Scroll ==> CSR

o 1. Job Information  o 3. Multi Steps  o 5. Subsystems  7. Schedule
o 2. Options          4. Active Jobs   6. Sysplex      8. Sched Options
-----
Panel 7. Schedule
Date/time of first in sequence      Measurement repetitions
Date (yy mm dd) . 04 12 08          Repeat . . 10 times
Time (hh mm) . . 20 00              After . . . 7 days ___ minutes

Use this panel to specify a schedule for repetitions of the measurement.
Input the above fields and press ENTER to generate dates and times for
each of the measurements. These dates/times will be shown below in a
scrollable table which you can add to by repeating this input process.

```

Then press Enter to generate the schedule, it will appear at the bottom of the panel like this:

```

File View Navigate Help
-----
R03: Schedule New Measurement                                     Row 00001 of 00015
Command ==> _____ Scroll ==> CSR

o 1. Job Information  o 3. Multi Steps  o 5. Subsystems  o 7. Schedule
o 2. Options          4. Active Jobs   6. Sysplex      8. Sched Options
-----
Panel 7. Schedule
Date/time of first in sequence      Measurement repetitions
Date (yy mm dd) . __ __ __          Repeat . . __ times
Time (hh mm) . . __ __              After . . . __ days ___ minutes

Measurement Schedule (/ for line command list, UP/DOWN to scroll)
SeqN  Date/Time  Status
0001  Wed Dec-08-04 20:00  Pending ADD
0002  Wed Dec-15-04 20:00  Pending ADD
0003  Wed Dec-22-04 20:00  Pending ADD
0004  Wed Dec-29-04 20:00  Pending ADD
0005  Wed Jan-05-05 20:00  Pending ADD
0006  Wed Jan-12-05 20:00  Pending ADD
0007  Wed Jan-19-05 20:00  Pending ADD
0008  Wed Jan-26-05 20:00  Pending ADD
0009  Wed Feb-02-05 20:00  Pending ADD
0010  Wed Feb-09-05 20:00  Pending ADD
***** End of Schedule *****

```

Now enter similar data for the Friday night schedule like this:

5. Enter the first Friday date in the Date (yy mm dd) field: 04 12 10.
 6. Enter 10 in the Repeat __ times field.
 7. Enter 23:00 in the Time (hh mm) field.
 8. Enter 7 in the After __ days field. (To indicate that it repeats each 7 days).
- Press Enter and your Friday dates will appear with the Wednesday dates already generated like this:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00015
Command ==> _____ Scroll ==> CSR

o 1. Job Information   o 3. Multi Steps   o 5. Subsystems   o 7. Schedule
o 2. Options           4. Active Jobs   6. Sysplex       8. Sched Options
-----
Panel 7: Schedule
Date/time of first in sequence      Measurement repetitions
Date (yy mm dd) . __ __ __         Repeat . . __ times
Time (hh mm) . . __ __             After . . . __ days __ minutes

Measurement Schedule (/ for line command list, UP/DOWN to scroll)
SeqN  Date/Time      Status
0001  Wed Dec-08-04 20:00 Pending ADD
0002  Fri Dec-10-04 23:00 Pending ADD
0003  Wed Dec-15-04 20:00 Pending ADD
0004  Fri Dec-17-04 23:00 Pending ADD
0005  Wed Dec-22-04 20:00 Pending ADD
0006  Fri Dec-24-04 23:00 Pending ADD
0007  Wed Dec-29-04 20:00 Pending ADD
0008  Fri Dec-31-04 23:00 Pending ADD
0009  Wed Jan-05-05 20:00 Pending ADD
0010  Fri Jan-07-05 23:00 Pending ADD
0011  Wed Jan-12-05 20:00 Pending ADD
0012  Fri Jan-14-05 23:00 Pending ADD
0013  Wed Jan-19-05 20:00 Pending ADD
0014  Fri Jan-21-05 23:00 Pending ADD
0015  Wed Jan-26-05 20:00 Pending ADD
0016  Fri Jan-28-05 23:00 Pending ADD
0017  Wed Feb-02-05 20:00 Pending ADD
0018  Fri Feb-04-05 23:00 Pending ADD
0019  Wed Feb-09-05 20:00 Pending ADD
0020  Fri Feb-11-05 23:00 Pending ADD
***** End of Schedule *****

```

Your schedule dates have now all been generated. Also see panel 8 below for additional data regarding future schedules.

Note: If you are entering a multiple job request (using the % wildcard in the job name field), then you can only set one date and time. No repetitions are allowed.

Panel 7 input fields

First Schedule Date

Specify a starting date for a new sequence of recurring schedule date/time entries.

Schedule Repeat Count

Specify a repeat count. This is the number of measurement recurrences to be generated and added to the schedule. The maximum value that can be entered in this field is 99. Application Performance Analyzer will accept a schedule with up to 105 repeats.

To generate a schedule with more than 99 repeats, you must generate two schedules for the same request. After generating the repeats for the first schedule, remain in Panel 7 and generate another schedule for the remaining repeats.

First Schedule Time

Specify a starting time for a new sequence of recurring schedule date/time entries.

Interval in Days

Specify the interval, in days, between each measurement recurrence to be added to the schedule.

Interval in Minutes

Specify the interval, in minutes, between each measurement recurrence to be added to the schedule.

Panel 8 – Sched Options

This panel is not applicable when measuring specific DB2 stored procedures or user-defined functions.

The available fields on panel 8 vary depending on whether “Y” or “N” is entered in the Measure active job (Y/N) field, and whether or not a future schedule has been entered on panel 7.

No Future Schedule and Active YES

When there is no future schedule, and “Y” is entered in the Measure active job (Y/N) field, then no additional fields will appear on panel 8. In this case, specifying “Y” here is an alternative to selecting an active job from a list in panel 4. If you use this method to specify that a job is active, then the jobname entered in panel 1 must be currently active, otherwise the request will fail.

An example of panel 8 for a single occurrence of an active job (i.e., with no future schedule) is shown here:

```
File  View  Navigate  Help
-----
R03: Schedule New Measurement                               Row 00001 of 00004
Command ==> _____ Scroll ==> PAGE

o 1. Job Information    3. Multi Steps    5. Subsystems    7. Schedule
  2. Options            4. Active Jobs    6. Sysplex      8. Sched Options

-----
Panel 8. Schedule Options

Specify if the job is active and is to be measured immediately (Y) or if
IBM APA for z/OS is to wait for the job to be submitted (N):

Measure active job (Y/N) . . . . Y
```

No Future Schedule and Active NO

When there is no future schedule, and “N” is entered in the Measure active job (Y/N) field, then the field Times to Repeat and Within interval (minutes, days or weeks) will appear.

An example of panel 8 for a single occurrence of an inactive job (i.e., with no future schedule) is shown here:

```
File  View  Navigate  Help
-----
R03: Schedule New Measurement                               Row 00001 of 00011
Command ==> _____ Scroll ==> CSR

o 1. Job Information    3. Multi Steps    5. Subsystems    7. Schedule
  2. Options            4. Active Jobs    6. Sysplex      8. Sched Options

-----
Panel 8. Schedule Options

Specify if the job is active and is to be measured immediately (Y) or if
IBM APA for z/OS is to wait for the job to be submitted (N):

Measure active job (Y/N) . . . . N

  Times to repeat measurement . __      If the job runs more than once.

  Within interval (minutes) . . ____    Maximum 999 minutes.
  or within interval (days) . . ____    Maximum 22 days.
  or within interval (weeks) . . ____    Maximum 3 weeks.
```

Future Schedule and Active YES

When entering a future schedule request, selecting “Y” for active means that the job is expected to be active when the measurement takes place. The fields Number of times to retry and Retry interval (minutes) will appear.

An example of panel 8 for an active job with a future schedule is shown here:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00007
Command ==>                                         Scroll ==> PAGE
o 1. Job Information      3. Multi Steps      5. Subsystems  o7. Schedule
  2. Options              4. Active Jobs      6. Sysplex    o8. Sched Options
-----
Panel 8. Schedule Options                                Input more data or ENTER to submit

Specify if the job to be measured will be active when the scheduling occurs
(e.g. a CICS region) or pending (a batch job).

Job will be active (Y/N) . . . . Y

Number of times to retry . . . --      Indicate retry action if job is not
Retry interval (minutes) . . . --      active at the time of scheduling.

```

Future Schedule and Active NO

When entering a future schedule request, selecting “N” for not active means that the request will wait for the job to start. In this case three additional fields will appear: Expire after (minutes), Times to repeat measurement, and Within interval (minutes).

An example of panel 8 for an inactive job with a future schedule is shown here:

```

File View Navigate Help
-----
R03: Schedule New Measurement                               Row 00001 of 00010
Command ==>                                         Scroll ==> CSR
o 1. Job Information      3. Multi Steps      5. Subsystems  o 7. Schedule
  2. Options              4. Active Jobs      6. Sysplex    8. Sched Options
-----
Panel 8. Schedule Options

Specify if the job to be measured will be active when the scheduling occurs
(e.g. a CICS region) or pending (a batch job).

Job will be active (Y/N) . . . . N

  Expire after (minutes) . . . ----      Number of minutes from schedule time
                                         to wait for job to be submitted.

  Times to repeat measurement . --      If the job runs more than once.
  Within interval (minutes) . . ---

```

Panel 8 input fields

Job Active (Y/N)

Specify Y to indicate the job is active and the measurement is to begin immediately. Specify N to indicate that the job is pending (a batch job) and Application Performance Analyzer is to wait for its execution.

If you have specified a recurring schedule for the measurement, then this field indicates the expected status of the job at the time the measurement is scheduled.

Expire after

This applies to a schedule of recurring measurements for a job that is not expected to be active at scheduling time (a batch job). It specifies the length of the interval during which Application Performance Analyzer is to check for the job before expiring the schedule item. Specify the length of the interval in minutes.

Times to Repeat

This applies to measurement of a job that is not active (pending). Known as the RUNAGAIN count, it specifies the number of times the measurement is to be repeated if the job is rerun. This can be used as an alternative to specifying a schedule on panel 7 if the exact date and time of each run is not known.

Optionally, a time interval can be specified, within which the job must run to be measured again. Use this to ensure that a good measurement is captured in the event that the job is cancelled or abends

and is then rerun. If you have specified a schedule in panel 7, then you must provide a time interval for the repeat measurements.

Within Interval

This applies to measurement of a job that is not active (pending). Specify the interval the Application Performance Analyzer started task is to check for reruns of the job. Use this to ensure that a good measurement is captured in the event that the job is cancelled or abends and is then rerun. If you have specified a schedule in panel 7, then you must provide a time interval for the repeat measurements.

In the case of a single occurrence of a batch job, use this when the exact time the job will be executed is unknown or varies. Measurements that have a future schedule associated with the job will accommodate an interval of up to 999 minutes only. Measurements for a single occurrence of a job (i.e., no future schedule) will accommodate an interval of either 999 minutes, 22 days or 3 weeks.

Times to Retry

This applies to a schedule of recurring measurements for a job that is expected to be active at the time the measurement is scheduled. Indicate the number of times Application Performance Analyzer is to check again for the job in the event that it was not active. The 'Retry Interval' field specifies the interval between retries.

Retry Interval

This applies to a schedule of recurring measurements for a job that is expected to be active at the time the measurement is scheduled. It specifies an action to be taken if the job is not active at the schedule time. Indicate the interval between each check for the job being active. The 'Number of Times to Retry' field specifies how many times the retry is to occur.

Entering a Threshold Monitor request

Overview

Threshold monitor requests are used to initiate an observation on job-steps that exceed a user-defined threshold. You can create the threshold monitor request by using the TNEW command, which specifies the criteria that Application Performance Analyzer uses to initiate the observation. You can set up a single-step threshold monitor request to initiate an observation for a single job-step. You can also set up a multi-step threshold monitor request to initiate an observation for all steps in a job that exceed the criteria. The same criteria are used for all job steps.

Threshold monitor requests can be used to trigger the measurement of another job by entering the Trigger (TR) command on the threshold measurement. In this case, when the threshold criteria are exceeded for a single job-step, Application Performance Analyzer also begins executing the trigger request. In the case of a multi-step threshold request, only the first step that exceeds the threshold criteria initiates the trigger request.

Threshold monitor requests cannot be created for measuring specific DB2 Stored Procedures and IMS multiple address space measurements.

It is important that you are already familiar with the preceding information in this chapter before you use the threshold monitor feature. The threshold monitor request process uses most of the panels that are described in the previous sections, and the information is not repeated here.

Using the TNEW command

The TNEW primary command is used to enter a new Observation Request, which will start only when specified threshold criteria have been satisfied for the target job-step or job-steps.

The criteria are:

- CPU Time
- Elapsed Time
- EXCP Count

Setting Threshold Requirements panels

The Set Threshold Requirements panel group is very similar to the standard Schedule New Measurement panel group. To measure all steps in the job that meet the threshold criteria you must enter an asterisk (*) in the Step No field of Panel 1 – Job Information. Multi-Step and Schedule information is not used for Threshold Monitor requests, so these panels are not available. Panel 3 - Criteria is specific to Threshold Monitor request. After entering the standard data to describe the measurement request, you must enter the Threshold Criteria.

Panel 3 - Criteria

After entering the data to describe the measurement request, you use the Criteria panel to specify the Threshold Criteria which will trigger the measurement to run. The panel 3 Criteria panel is shown here.

In this example, when CPU time exceeds 30 seconds, and EXCP count exceeds 20000, the measurement will be triggered.

```
File View Navigate Help
-----
R03: Set Threshold Requirements                               Row 00001 of 00005
Command ==> ----- Scroll ==> CSR
o 1. Job Information  o 3. Criteria          o 5. Subsystems
  2. Options          4. Active Jobs        6. Sysplex
-----
Panel 3. Threshold Criteria

Enter Threshold Criteria

      CPU Time Exceeds (min:sec) . . . 30
      Elapsed Time Exceeds (min:sec) .
      EXCP Count Exceeds . . . . . 20000

If you enter more than one threshold criteria field, then all the
criteria must be met for the measurement to be triggered.
```

Panel 3 input fields

CPU Time Exceeds

Enter the threshold amount of CPU time, if the target job-step exceeds this amount of CPU time, the measurement will be triggered.

You can specify the value in seconds or in minutes and seconds. To specify the threshold CPU time in minutes and seconds, separate the minutes value from the seconds value using a colon.

Examples:

- 135 specifies 135 seconds
- 2:15 specifies 2 minutes and 15 seconds
- 2: specifies 2 minutes

Elapsed Time Exceeds

Enter the threshold amount of Elapsed time, if the target job-step exceeds this amount of Elapsed time, the measurement will be triggered.

You can specify the value in seconds or in minutes and seconds. To specify the threshold Elapsed time in minutes and seconds, separate the minutes value from the seconds value using a colon.

Examples:

- 135 specifies 135 seconds
- 2:15 specifies 2 minutes and 15 seconds
- 2: specifies 2 minutes

EXCP Count Exceeds

Enter the threshold EXCP count. If the target job-step exceeds this EXCP count, the measurement will be triggered.

Note: : If you enter more than one threshold criteria field, then all the criteria must be met for the measurement to be triggered.

Note: If the target job executes, and the threshold criteria are not met, the threshold measurement request is canceled.

Entering a Trigger request

Overview

The trigger request feature is used to allow the start of one scheduled measurement to trigger an additional measurement called the Trigger measurement. For example, you might want to have the beginning of a batch job-step measurement initiate a measurement of a particular CICS region. You must enter the original scheduled measurement request first, and then the trigger measurement.

A threshold request can be used to trigger another measurement. For example, you might want a job-step that exceeds the threshold criteria to also initiate a measurement of a particular CICS region. In the case of a multi-step threshold request, only the first step that exceeds the threshold criteria initiates the trigger request.

A trigger request cannot be created to measure a specific DB2 Stored Procedure and multiple IMS address spaces.

It is important to be familiar with the preceding information in this chapter before using the Trigger feature. The Trigger request process uses most of the panels described in the previous sections and the information is not repeated here.

Using the TR line command

The original scheduled measurement request is identified by entering the TR line command on it in the R02 Observation Session List panel. This displays the panels for entering the measurement request information for the trigger request.

The Set Trigger Requirements panel group is very similar to the standard Schedule New Measurement panel group. The differences are that Multi-Step and Schedule information is not used for Trigger requests, so these panels are not available. For information on panels used to specify Trigger requests, refer to the preceding sections in this chapter.

Chapter 3. Performance analysis reports

This section describes the Performance Analysis Reports. Some basic concepts are covered, and the base reports (those not pertaining to a data extractor) are described.

For Performance Analysis Reports pertaining to a specific data extractor (CICS, IMS, DB2, etc.), refer to the chapter for the specific data extractor.

For information about ...	See ...
General concepts required for interpreting these reports	“Performance analysis basics” on page 44
Report categories and codes	“Report categories and codes” on page 46
S01 Measurement profile	“S01 - Measurement profile” on page 51
S02 Load module attributes	“S02 - Load module attributes” on page 64
S03 Load module summary	“S03 - Load module summary” on page 65
S04 TCB summary	“S04 - TCB summary” on page 67
S05 Memory usage timeline	“S05 - Memory usage timeline” on page 69
S06 Data space usage timeline	“S06 - Data space usage timeline” on page 70
S07 TCB execution summary	“S07 - TCB execution summary” on page 72
S08 Processor utilization summary	“S08 - Processor utilization summary” on page 73
S09 Measurement analysis	“S09 - Measurement analysis” on page 76
S10 Observation Session Messages	“S10 - Observation Session Messages” on page 77
C01 CPU usage by category	“C01 - CPU usage by category” on page 78
C02 CPU usage by module	“C02 - CPU usage by module” on page 85
C03 CPU usage by code slice	“C03 - CPU usage by code slice” on page 89
C04 CPU usage timeline	“C04 - CPU usage timeline” on page 92
C05 CPU Usage by task/category	“C05 - CPU usage by task/category” on page 95
C06 CPU Usage by task/module	“C06 - CPU usage by task/module” on page 102
C07 CPU usage by procedure	“C07 - CPU usage by procedure” on page 105
C08 CPU usage referred attribution	“C08 - CPU usage referred attribution” on page 109
C09 CPU Usage by PSW/object code	“C09 - CPU usage by PSW/object code” on page 115
C10 CPU Usage by Natural Program	“C10 - CPU Usage by Natural Program” on page 118
W01 WAIT time by task/category	“W01 - WAIT time by task/category” on page 121
W02 WAIT time by module	“W02 - WAIT time by task/module” on page 126
W03 WAIT time referred attribution	“W03 - WAIT time referred attribution” on page 129

For information about ...	See ...
W04 WAIT time by task ENQ/RESERVE	“W04 - WAIT time by task ENQ/RESERVE” on page 133
W05 WAIT time by tape DDNAME	“W05 - WAIT time by tape DDNAME” on page 136
D01 DASD usage by device	“D01 - DASD usage by device” on page 138
D02 DASD usage by DDNAME	“D02 - DASD usage by DDNAME” on page 140
D03 DASD usage by data set	“D03 - DASD usage by data set” on page 143
D04 data set attributes	“D04 - Data set attributes” on page 144
D05 DASD EXCP summary	“D05 - DASD EXCP summary” on page 147
D06 DASD VSAM statistics	“D06 - DASD VSAM statistics” on page 149
D07 DASD activity timeline	“D07 - DASD activity timeline” on page 152
D08 DASD I/O wait time	“D08 - DASD I/O wait time” on page 154
D09 VSAM buffer pool usage	“D09 - VSAM buffer pool usage” on page 158
G01 Coupling facility summary	“G01 - Coupling facility summary” on page 160
G02 Coupling facility mean times	“G02 - Coupling facility mean times” on page 161
G03 Coupling facility total times	“G03 - Coupling facility total times” on page 162
K01 CPU SRB Usage by SRB Type	“K01 - CPU SRB Usage by SRB Type” on page 163
K02 CPU SRB Usage by PSW/ObjCode	“K02 - CPU SRB Usage by PSW/ObjCode” on page 168
V01 Measurement variance summary	“V01 - Measurement variance summary” on page 171
V02 CICS variance summary	“V02 - CICS variance summary” on page 173
V03 DB2 variance summary	“V03 - DB2 variance summary” on page 175
V04 IMS variance summary	“V04 - IMS variance summary” on page 180

Performance analysis basics

Some of the concepts that you need to understand in order to effectively interpret the Application Performance Analyzer performance analysis reports are explained here.

Sampling and system states

During an Application Performance Analyzer observation session, activity in the target address space is sampled at the frequency and for the duration which was specified when the session was requested. Each observation results in data being recorded which describes an observed System State. The essence of the analysis reports is the aggregation of System States and attribution of these aggregates to various System Objects. For example, CPU Executing is a type of System State and a Load Module is a type of System Object; a report might quantify observations of CPU Executing and attribute these quantities to various Load Modules. By mapping observed system states to system objects, the analysis reports provide a meaningful picture of how resources are consumed.

Types of system states

Each observation, or “sample,” interrupts and momentarily “freezes” system activity in the target address space. Information about the state of the interrupted process (or, often, in the case of a multi-CPU system, processes) is recorded. System states that can be observed are:

- CPU Executing
- CPU Waiting
- Queued

It is important to understand that an observation session measures activity in a single address space. When we refer to system states like “CPU Waiting” or “CPU Unavailable” these states are with respect to the target address space only.

CPU Executing

A CPU was executing machine instructions for the task when the observation was made. Information about where (in what program) execution was taking place is captured. Application Performance Analyzer also determines, and records, whether execution was in Linear or Parallel mode. Linear mode refers to a state in which one, and only one, task was executing instructions. Parallel mode refers to a state in which more than one task was executing concurrently. Parallel mode occurs when two or more CPUs were executing instructions for the target address space at the same time.

CPU Waiting

A task was in a wait state. The task was waiting for an event (such as completion of an I/O operation) to occur.

Queued

The “Queued” state refers to a task (TCB) that was observed as dispatchable but was not executing instructions because no CPU was available. A measurement showing a high percentage of queued observations could imply an overall shortage of CPU resources. This would also occur in an address space in which the number of dispatchable tasks exceeds the number of physical CPUs.

Unavailability of memory can also cause the Queued state.

System objects

System Objects are objects to which quantified observations of systems states can be attributed. The following are the basic system objects:

- Load Modules
- TCBs
- DD Names
- DASD Volumes
- SVCs
- MQSeries Queue Names

Quantities expressed as percentages

The performance analysis reports express most quantified data as percentages. In most cases, absolute values (for example, actual number of observations in which execution was in DB2 services) would not, by themselves, be particularly meaningful. This is because the total number of samples chosen for an observation session is somewhat arbitrary. The percentage of activity attributed to a system object, on the other hand, provides a much better measure of the impact of that system object on performance. Furthermore, when expressed as percentages, quantification is likely to remain roughly equal if the sampling frequency and duration parameters are varied.

In order to effectively interpret the performance analysis reports it is important that you understand how these percentages are computed. The formulae vary depending upon what type of system activity is reported.

CPU Time Percentage

The percentage expresses the ratio of attributed CPU to the total CPU time observed. This is computed by dividing the number of attributed “CPU EXECUTING” observations by the total number of “CPU EXECUTING” observations and multiplying that number by 100.

Note that observations of CPU Waiting and CPU Unavailable are excluded from the calculation. The objective is to report the relative demand placed on CPU resources by system objects.

I/O Activity Percentage of Time

The percentage reported for I/O activity expresses the ratio of time attributed I/O operations were active to the total observation session elapsed time. Consider an example in which 10,000 observations were made during a 60 second interval. Suppose during 1,500 of these observations, I/O was found to be active for a file with DDNAME=SYSIN. 15 percent would be reported as the I/O activity percentage of time attributed to SYSIN.

Parallel Activity

Application Performance Analyzer will report information about parallel activity. Examples of parallel activity are:

I/O activity concurrent CPU execution is observed.

Concurrent I/O activity is observed for multiple devices.

Concurrent CPU execution is observed. This is only possible on a system with multiple CPUs (a multiprocessor).

Margin of error

A margin of error value is displayed in various reports. The value is expressed as a percentage and represents a 95 percent confidence interval. What this means is that in 95 percent of cases (19 out of 20 times) a repetition of the same measurement will produce results within +/- the indicated number of percentage points. This value is based entirely on the size of a sample population and reflects only the statistical error that can be expected from the sample size. It does not take into account any effects caused by biased sample collection.

Color coding of graphs

Application Performance Analyzer makes extensive use of bar graphs to illustrate resource usage. The graphs are color coded as follows:

Table 1. Color coding of graphs	
Graph Color	Purpose
Green	CPU active
Yellow	CPU wait
White	Resources (memory, dataspace)
Red	DASD I/O
Blue	Service time

Note: Report titles indicate each report's purpose. Color coding is included for emphasis, but color is not required to interpret information.

Report categories and codes

Application Performance Analyzer reports are each assigned a three-character code consisting of a one-letter prefix followed by a two-digit number. The prefix indicates which category the report belongs to, and the number is a sequence number within that category.

When you are viewing a report, you can enter another report's three-character code on the command line and that report will also open.

The categories and reports are listed here:

<i>Table 2. Report categories and prefixes</i>		
Prefix	Category	Reports
A	Admin/Miscellaneous	A01 Source Program Mapping A02 Request Printed Reports A03 Java Source Mapping A04 Source Mapping Dataset List A05 Source Mapping Common List
S	Statistics/Storage	S01 Measurement Profile S02 Load Module Attributes S03 Load Module Summary S04 TCB Summary S05 Memory Usage Timeline S06 Data Space Usage Timeline S07 TCB Execution Summary S08 Processor Utilization Summary S09 Measurement Analysis S10 Observation Session Messages
C	CPU usage analysis	C01 CPU Usage by Category C02 CPU Usage by Module C03 CPU Usage by Code Slice C04 CPU Usage by Timeline C05 CPU Usage Task/Category C06 CPU Usage Task/Module C07 CPU Usage by Procedure C08 CPU Usage Referred Attribution C09 CPU Usage by PSW/Object Code C10 CPU Usage by Natural Program
D	DASD I/O analysis	D01 DASD Usage by Device D02 DASD Usage by DDName D03 DASD Usage by data set D04 data set Attributes D05 DASD EXCP Summary D06 DASD VSAM Statistics D07 DASD Activity Timeline D08 DASD I/O Wait Time D09 VSAM Buffer Pool Usage
G	Coupling facility	G01 Coupling Facility Summary G02 Coupling Facility Mean Times G03 Coupling Facility Total Times
K	SRB measurement	K01 CPU SRB Usage by SRB Type K02 CPU SRB Usage by PSW/ObjCode

Table 2. Report categories and prefixes (continued)

Prefix	Category	Reports
W	CPU WAIT analysis	W01 Wait Time by Category W02 Wait Time by Module W03 Wait Time Referred Attribution W04 Wait Time by task ENQ/RESERVE W05 Wait Time by Tape DDNAME
I	IMS measurement	I01 IMS Measurement Profile I02 IMS DL/I DL/I Call Timeline I03 IMS Transaction Timeline I04 IMS Txn Activity Timeline I05 IMS CPU Usage by PSB I06 IMS CPU Usage by Transaction I07 IMS CPU Usage by DL/I Call I08 IMS WAIT Time by PSB I09 IMS WAIT Time by Transaction I10 IMS WAIT Time by DL/I Call I11 IMS DL/I Activity by PSB I12 IMS DL/I Activity by Txn I13 IMS DL/I Activity by DL/I Call I14 IMS PSB/PCB Attributes I15 IMS DL/I Call Attributes I16 IMS Transaction Service Times I17 IMS Transaction DL/I Counts I18 IMS CPU/Svc Time by DL/I Call I19 IMS CPU/Svc Time by PSB I20 IMS CPU/Svc Time by Txn I21 IMS CPU/Svc Time by PCB I22 IMS Region Transaction Summary
E	CICS measurement	E01 CICS Session Statistics E02 CICS CPU and Use Counts by Pgm E03 CICS CPU Usage by Txn E04 CICS Mean Service Time by Txn E05 CICS Total Service Time by Txn E06 CICS Service Time by Task ID E07 CICS Wait by Txn E08 CICS mean service time by terminal ID E09 CICS total service time by terminal ID E10 CICS Mean Service Time by user ID E11 CICS Total Service Time by user ID E12 CICS CPU/Service Time by Txn

Table 2. Report categories and prefixes (continued)

Prefix	Category	Reports
X	Multiple address space measurement	X01 CICS Mean Service Time by Txn X02 CICS Total Service Time by Txn X03 CICS Mean Service Time by Term X04 CICS Total Service Time by Term X05 Combined DB2 IMS MQ Timeline X06 IMS MASS Region Summary X07 DB2 Stored Procedures Summary
F	DB2 measurement	F01 DB2 Measurement Profile F02 DB2 SQL Activity Timeline F03 DB2 SQL Activity by DBRM F04 DB2 SQL Activity by Statement F05 DB2 SQL Activity by Plan F06 DB2 SQL Statement Attributes F07 DB2 SQL Wait Time by DBRM F08 DB2 SQL Wait Time by Statement F09 DB2 SQL Wait Time by Plan F10 DB2 SQL CPU/Svc Time by DBRM F11 DB2 SQL CPU/Svc Time by Stmt F12 DB2 SQL CPU/Svc Time by Plan F13 DB2 SQL Threads Analysis F14 DB2 CPU Usage by Plan/Proc F15 DB2 SQL CPU/Svc Time by Rq Loc F16 DB2 SQL CPU/Svc Time by Enclave F17 DB2 SQL CPU/Svc Time by Corrid F18 DB2 SQL CPU/Svc Time by Wkstn F19 DB2 SQL CPU/Svc Time by EndUsr F20 DB2 Class 3 Wait Times
Q	MQSeries measurement	Q01 MQSeries Activity Summary Q02 MQSeries CPU Usage by Queue Q03 MQSeries CPU Usage by Request Q04 MQSeries CPU Usage by Txn Q05 MQSeries Serv Time by Queue Q06 MQSeries Serv Time by Request Q07 MQSeries Serv Time by Txn Q08 MQSeries Wait Time by Queue Q09 MQSeries Wait Time by Request Q10 MQSeries Wait Time by Txn Q11 MQ+ Activity Timeline Q12 MQ+ CPU/SVC Time by Queue Q13 MQ+ CPU/SVC Time by Request Q14 MQ+ CPU/SVC Time by Txn

Table 2. Report categories and prefixes (continued)

Prefix	Category	Reports
J	Java Measurement	<p>J01 Java summary and attributes</p> <p>J02 Java Heap usage timeline</p> <p>J03 Java CPU usage by thread</p> <p>J04 Java CPU usage by package</p> <p>J05 Java CPU usage by class</p> <p>J06 Java CPU usage by method</p> <p>J07 Java CPU usage by call path</p> <p>J09 Java service time by package</p> <p>J10 Java service time by class</p> <p>J11 Java service time by method</p> <p>J12 Java service time by call path</p> <p>J14 Java wait time by package</p> <p>J15 Java wait time by class</p> <p>J16 Java wait time by method</p> <p>J17 Java wait time by call path</p>
V	Variance reports	<p>V01 Measurement Variance Summary</p> <p>V02 CICS Variance Summary</p> <p>V03 DB2 Variance Summary</p> <p>V04 IMS Variance Summary</p>
H	HFS Analysis	<p>H01 HFS Service Time by Path Name</p> <p>H02 HFS Service Time by Device</p> <p>H03 HFS File Activity</p> <p>H04 HFS File Attributes</p> <p>H05 HFS Device Activity</p> <p>H06 HFS Device Attributes</p> <p>H07 HFS Activity Timeline</p> <p>H08 HFS Wait Time by Path Name</p> <p>H09 HFS Wait Time by Device</p> <p>H10 HFS Service Time by Request</p> <p>H11 HFS Wait Time by Request</p>

Table 2. Report categories and prefixes (continued)

Prefix	Category	Reports
B	WebSphere	B01 WAS Summary B02 WAS Activity B03 WAS Activity by Origin B04 WAS Activity by Servant B05 WAS EJB Activity B06 WAS EJB Activity by Origin B07 WAS EJB Activity by Servant B08 WAS Servlet/JSP Activity B09 WAS Servlet/JSP by Origin B10 WAS Servlet/JSP by Servant B11 WAS/CICS Calls B12 WAS/DB2 Calls B13 Async Work Requests B14 Async Work by Work Mgr B15 Async Work by Servant B16 WOLA Inbound Requests B17 WOLA Inbound by Origin B18 WOLA Inbound by Servant B19 WOLA Outbound Requests B20 WOLA Outbound by Register B21 WOLA Outbound by Servant

S01 - Measurement profile

Usage

Use this report to see a general overview of the measurement. This is a good report to examine first when analyzing a measurement. It provides an at-a-glance summary of various aspects of the measurement data and helps you choose which other reports to concentrate on. The first section of this report consists of a series of mini performance graphs illustrating various types of activity that was measured. This is followed by a section that reports measurement values.

Performance graphs

These are histograms quantifying measurement data. To the right of each graph, report codes of reports that show related and more detailed information are displayed. You can display the report by skipping the cursor to one of these fields and by pressing the ENTER key.

Overall CPU activity

This graph is omitted for DDF measurements.

Under heading	This is displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph. This number is sometimes slightly smaller than the total number of samples. Only those samples in which any TCBs existed are included in this count. Non-TCB samples can occur very early in a job step when the system is still initializing the step.
CPU Active	The number of samples the CPU was actively processing one or more TCBs. This value represents the percentage of time CPU activity was occurring in the address space.
WAIT	The number of samples all TCBs were in a WAIT.
Queued	The number of samples no CPU activity was taking place because no resources (CPU or memory) were available to service the address space. At least one TCB was dispatchable and not in a WAIT.

CPU usage distribution

This graph is omitted for DDF measurements.

Under Heading	This is Displayed
CPU Active	The number of observations of CPU active TCBs. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph. This value is different from the “samples” value reported in the “Overall CPU Activity” graph because multiple concurrent CPU active TCBs (multiple CPUs executing concurrently) are counted separately here. This quantification represents the overall consumption of CPU time.
Application	The number of observations of CPU active TCBs while executing in application modules.
System	The number of observations of CPU active TCBs while executing in system modules.
DB2 SQL	The number of observations of CPU active TCBs while servicing SQL requests.
Data Mgmt	The number of observations of CPU active TCBs while servicing data management requests.
Unresolved	The number of observations of CPU active TCBs while executing in addresses that could not be resolved to module names.
IMS DLI Call	The number of observations of CPU active TCBs while servicing IMS DLI requests.

Most CPU active modules

This graph is omitted for DDF measurements.

Under Heading	This is Displayed
CPU Active	The number of observations of CPU active TCBs. This number represents 100% of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph. This value is different from the 'samples' value reported in the 'Overall CPU Activity' graph because multiple concurrent CPU active TCBs (multiple CPUs executing concurrently) are counted separately here. This quantification represents the overall consumption of CPU time.
Module	Five lines appear showing the five most CPU active load modules. The number of CPU active observations for each of these modules and its percentage of the total number of CPU active observations is shown.

Most CPU active CSECTs

This graph is omitted for DDF measurements.

Under Heading	This is Displayed
CPU Active	The number of observations of CPU active TCBs. This number represents 100% of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph. This value is different from the 'samples' value reported in the 'Overall CPU Activity' graph because multiple concurrent CPU active TCBs (multiple CPUs executing concurrently) are counted separately here. This quantification represents the overall consumption of CPU time.
CSECT	Five lines appear showing the five most CPU active CSECTs (control sections) and their corresponding module names. The number of CPU active observations for each of these CSECTs and its percentage of the total number of CPU active observations is shown.

CPU modes

This graph is omitted for DDF measurements.

Under Heading	This is Displayed
CPU Active	The number of observations of CPU active TCBs. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph. This value is different from the "samples" value reported in the "Overall CPU Activity" graph because multiple concurrent CPU active TCBs (multiple CPUs executing concurrently) are counted separately here. This quantification represents the overall consumption of CPU time.
Supv Mode	The number of observations of CPU active TCBs while the system was in supervisor (privileged) mode (usually system routines).
Prob Mode	The number of observations of CPU active TCBs while the system was in problem state. Applications normally execute in problem state.
In SVC	The number of observations of CPU active TCBs while the system was executing in an SVC (supervisor call) routine.
AMODE 24	The number of observations of CPU active TCBs while the system was in 24 bit addressing mode.
AMODE 31	The number of observations of CPU active TCBs while the system was in 31 bit addressing mode.

Under Heading	This is Displayed
AMODE 64	The number of observations of CPU active TCBs while the system was in 64 bit addressing mode.
User Key	The number of observations of CPU active TCBs while the system was in user storage key (key 8).
System Key	The number of observations of CPU active TCBs while the system was in a system storage protection key.

Most active IMS PSBs

This graph is shown only if IMS measurement data was recorded. It shows the most active IMS PSBs. Up to five IMS PSBs are reported.

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
IMS PSB Name	An IMS PSB name is shown and the number of samples in which processing of DLI calls under this PSB was observed. The percentage and the graph represent the proportion of the overall measurement time during which DLI calls were being serviced under this PSB.
Most Active DLI Calls	This graph is shown only if IMS measurement data was recorded. It shows the most active IMS DLI calls. Up to five DLI calls are reported.

Most active DLI calls

This graph is shown only if IMS measurement data was recorded. It shows the most active IMS DLI calls. Up to five DLI calls are reported.

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
DLI Call	A DLI call identified by three fields: a unique sequence number assigned to the DLI call; its DLI function code; and its PCB name. The percentage and the graph represent the proportion of samples in which processing of this DLI call was observed. The percentage and the graph represent the proportion of the overall measurement time during which all executions of this DLI call were being serviced.

Most active DB2 plans

This graph is shown only if DB2 measurement data was recorded. It shows the most active DB2 plan names. Up to five DB2 plans are reported.

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data and is used as the divisor to compute the percentages shown for each Package or DBRM.

Under Heading	This is Displayed
DB2 Package or DBRM Name	The number of samples SQL servicing was occurring against SQL statements defined in the indicated Package or DBRM.

Most active packages/DBRMs

This graph is shown only if DB2 measurement data was recorded. It shows the most active DB2 Packages/DBRMs. Up to 5 DB2 Package names or DBRM names are reported. A DBRM name is shown instead of a Package name in the event the DBRM was bound directly to the Plan instead of to a Package.

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data and is used as the divisor to compute the percentages shown for each Package or DBRM.
DB2 Package or DBRM Name	The number of samples SQL servicing was occurring against SQL statements defined in the indicated Package or DBRM.

Most active SQL statements

This graph is shown only if DB2 measurement data was recorded. It shows the most active DB2 SQL statements. Up to five SQL statements are reported.

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data and is used as the divisor to compute the percentages shown for each SQL statement.
DBRM: Statement SQL Function	The number of samples SQL servicing was occurring for the indicated SQL statement. The DBRM name, the statement number and the type of SQL statement are shown.

Measurement values

This section of the report shows various values relating to the measurement. These appear under the following categories:

- Request parameters
- Measurement environment
- Measurement statistics
- CPU consumption

Request parameters

These values were established when the measurement was requested.

Under Heading	This is Displayed
Request number	The unique 5-digit identifier assigned to the measurement.
Description	A description specified when the measurement was requested.
Sample File DSN	The data set name of the measurement file. A plus sign (+) before the data set name indicates this name was specified on the SAMPDSN keyword of an observation request created through the Application Performance Analyzer batch interface.

Under Heading	This is Displayed
Retention	The date upon which the measurement file is to be deleted by Application Performance Analyzer.
Data extractors	The specified data extractors (DB2, CICS, etc.)
DB2+ Max trace #	Maximum DB2+ trace entries that are specified when the measurement was requested.
IMS+ Max trace #	Maximum IMS+ trace entries that are specified when the measurement was requested.
MQ+ Max trace #	Maximum MQ+ trace entries that are specified when the measurement was requested.
IMS Subsystem Id	The specified IMS subsystem Id. This field displays for IMS multiple address space requests only.
IMS Tran Code	The specified IMS transaction code. This field displays for IMS multiple address space requests and IMS single region requests.
IMS Program Name	The specified IMS program name. This field displays for IMS single region requests only.
IMS User Id	The specified IMS user Id. This field displays for IMS single region requests only.
Specific DB2 Parms	A 'P' is displayed when the request was specified for a DB2 Stored Procedure. An 'F' is displayed when the request was specified for a DB2 user-defined function. This field displays for DB2 multiple address space requests only.
DB2 Subsystem	The DB2 subsystem Id that was specified for the stored procedure or user-defined function. This field displays for DB2 multiple address space requests only.
Schema	The schema name that was specified for the stored procedure or user-defined function. This field displays for DB2 multiple address space requests only.
Name	The name that was specified for the stored procedure or user-defined function. This field displays for DB2 multiple address space requests only.
Time of request	The time of day the request was made.
Requesting user	The TSO user ID of the user that requested the measurement.
Date of request	The date upon which the request was made.
Job name	The name of the job that was specified to be measured.
Step name/number	The step name or step number that was specified to be measured, if applicable.
Step program	The name of the step program that was specified to be measured, if applicable.
Number of samples	The number of samples specified.
Duration	The specified measurement duration.
Active/pending	Indicates whether the measurement request specified an active job (an immediate measurement) or one that was to run later when execution of the job step is detected.
Proc step name	The procedure step name, if specified.

Under Heading	This is Displayed
Delay time	The number of seconds specified for which the start of the measurement was to be delayed from the start of the job step.
CICS Filters	CICS subsystem measurement criteria that is specified when the measurement was requested.
DDF Filters	DB2 DDF subsystem measurement criteria that is specified when the measurement was requested.
IMS MASS	IMS subsystem measurement criteria that is specified when the measurement was requested.
DB2 Stored Procedure	DB2 Stored Procedure subsystem measurement criteria that is specified when the measurement was requested.

Measurement environment

Values relating to the environment in which the measurement took place are reported here.

Under Heading	This is Displayed
Job name	The name of the measured job.
Job number	The job number of the measured job assigned by JES.
Step name	The name of the measured step.
ASID/ASIDX	The ASID (address space ID) and ASIDX (address space ID in hexadecimal) of the measured job.
Job User ID	The user ID which the job ran under.
Region size <16MB	The region size in the 24 bit address range.
Region size >16mb	The region size above the 24 bit address range.
Step program	The name of the measurement step program (specified in the EXEC JCL statement).
Region type	The type of region (Batch, TSO, IMS, CICS, etc.) measured.
Service Class Name	The service class name that is assigned to the measured job.
System ID	The system identifier of the system on which the measurement took place.
SMFID	The SMF ID assigned to the system on which the measurement took place.
O/S Level	The operating system and level.
APA vers.	The version of Application Performance Analyzer that performed the measurement.
IBM APA APAR	The APAR number of Application Performance Analyzer started task that was active when this measurement was performed.
DB2 subsystem name	The DB2 subsystem name if it is connected.
DB2 attach type	The type of DB2 attachment, if DB2 data recorded.
General CPUs	The number of CPUs in the system on which the measurement took place. This does not include specialty CPUs.
Specialty CPUs	The number of specialty CPUs in the system on which the measurement took place.

Under Heading	This is Displayed
CPU rate factor	The factor used to determine CPU performance.
MIPS per CPU	The speed, in machine instructions per second, of one CPU. This is derived using the CPU rate factor.
CPU model	The CPU model number.
SUs per second	The number of service units per CPU second.
HiperDispatch	With HiperDispatch=Y, work can be managed across fewer logical processors. A concept of maintaining a working set of processors that are required to handle the workload is introduced.
Max MT mode	The maximum multi-threading (MT) mode that can be supported by both the hardware and this IPL of z/OS.

Measurement statistics

Under Heading	This is Displayed
Start time	The time at which the measurement was initiated.
End time	The time at which the measurement ended.
Start date	The date upon which the measurement was initiated.
End date	The date upon which the measurement ended.
Total samples	The total number of samples taken during the measurement.
Sampling rate	The overall sampling rate expressed in samples per second.
CPU/WAIT samples	The number of samples in which CPU activity was observed or all TCBs were in wait state. Excluded from this count are samples in which no CPU activity was observed and one or more TCBs were dispatchable.
TCB samples	The number of samples in which TCBs existed. This number might be slightly smaller than the total number of samples. This occurs when some samples were taken at the beginning of a job step before the step initialization had completed.
Overall CPU	The average system CPU utilization percentage during the measurement period. It is obtained from the field CCVUTILP, which is the system CPU utilization as viewed by the System Resource Manager (SRM). Thus, it is the CPU utilization for this z/OS image.
Overall zAAP CPU	The average CPU Utilization percentage for the zAAP processor(s) during the measurement period. It is obtained from field, CCVUTILI, which is the zAAP CPU Utilization as viewed by the System Resource Manager (SRM).
Overall zIIP CPU	The average CPU Utilization percentage for the zIIP processor(s) during the measurement period. It is obtained from field, CCVUTILS, which is the zIIP CPU Utilization as viewed by the System Resource Manager (SRM). When the processor has the zAAP on zIIP feature, zAAP time will also show in this field.
Duration	The duration of the measurement in minutes and seconds.
Report dataspace	The size of the dataspace used to load the sample file and create indexes for reporting. This field is reported in megabytes.
Sample dataspace	The size of the dataspace used to record measurement data while sampling. This is the total uncompressed size reported in megabytes.

Under Heading	This is Displayed
Meas significance	The ratio of the number of CPU/WAIT samples to the number of TCB samples. This is a measure of the quality of the measurement data. A low value indicates that CPU resources were unavailable to service the job step.
CPU queued samples	The number of samples in which no activity was occurring in the address space due to the unavailability of CPU resources.
Pages in	The number of page-in operations that occurred during the measurement interval.
Pages out	The number of page-out operations that occurred during the measurement interval.
EXCPs	The number of EXCPs processed during the measurement interval.

CPU consumption

This section is omitted for DDF measurements.

Under Heading	This is Displayed
CPU active samples	The number of samples in which CPU activity (one or more CPUs) was observed.
CPU active time	The percentage of the measurement interval CPU activity was observed.
CPU wait samples	The number of samples in which all TCBs were in wait state.
CPU wait time	The percentage of the measurement interval all TCBs were in wait state.
CPU time TCB	The number of CPU seconds consumed in TCB mode during the measurement interval.
CPU time SRB	The number of CPU seconds consumed in SRB mode during the measurement interval. This does not include any SRB time consumed by the Application Performance Analyzer measurement task.
Service units	The number of service units based on the CPU TCB and CPU SRB consumption.
Measurement SRB	The number of CPU seconds in SRB mode consumed by the Application Performance Analyzer measurement task in the measured address space.

zAAP CPU consumption

This section is displayed when zAAP time has been recorded. This is also displayed for zAAP on zIIP time, which will be labeled as zAAP time.

Under Heading	This is Displayed
zAAP CPU time	The number of CPU seconds consumed on zAAP processors during the measurement interval.
Task Time on CP	The number of CPU seconds consumed on a standard processor for non-zAAP eligible work.
Normalized Time	The zAAP CPU time displayed as a normalized CPU time.

Under Heading	This is Displayed
zAAP Time on CP	The number of CPU seconds consumed on a standard processor for zAAP eligible work.
Norm. Factor	The normalization factor is used to express zAAP CPU time in the time a regular CP would have used for the same work. Multiply the zAAP CPU time by this number, then divide by 256.
Enclave CPU time	The number of CPU seconds that was accumulated in a WLM enclave. An enclave is defined as a construct that can span multiple dispatchable units (service request blocks and tasks) in multiple address spaces, allowing them to be reported on and managed by WLM as part of a single work request.

DDF CPU consumption

This section is shown for DDF measurements only.

Under Heading	This is Displayed
Task CPU time	The number of seconds of CPU time used by the enclave SRB dispatchable unit for all measured DDF SQL calls.
Enclave CPU time	The number of seconds of CPU time used by all dispatchable units in an enclave for all measured DDF SQL calls.
zIIP time	The number of seconds of zIIP time used by all measured DDF SQL calls.
zIIP on CP time	The number of seconds of CPU time on a standard processor for zIIP-eligible work used by all measured DDF SQL calls.

Client enclave consumption

This section is shown for DB2 parallel queries only.

Under Heading	This is Displayed
Client SRB time	The number of seconds of CPU time used by the enclave SRB dispatchable unit for all measured DB2 parallel queries.
Total TCB time	The sum of CPU time in seconds used by client SRB enclaves and TCB CPU time.

Virtual Storage Map

The Virtual Storage Map shows the virtual storage address ranges for each storage type in the z/OS system at the time of the measurement.

Under Heading	This is Displayed
Start Address	The starting address of the virtual storage range for this storage type.
End Address	The ending address of the virtual storage range for this storage type.
Length	The length of the virtual storage range for this storage type.

Sample reports

A sample report is shown here, it is divided into three segments as it is scrolled down.

File View Navigate Help

S01: Measurement Profile (01392/CICS55A)
Command ==>

Row 00001 of 00135
Scroll ==> CSR

+Overall CPU Activity -----+ +Reports: -----+										C01	C02	C03	C05
Samples	10,000	100.0%											
CPU Active	5,659	56.5%	000000000000										
WAIT	4,316	43.1%	000000000										
Queued	25	0.2%	0							C07	W01	W02	
+CPU Usage Distribution -----+ +Reports: -----+										C01	C05	C08	W01
CPU Active	8,686	100.0%											
Application	262	3.0%	0										
System	7,684	88.4%	000000000000000000										
DB2 SQL	0	0.0%											
Data Mgmt	605	6.9%	0										
Unresolved	135	1.5%	0										
IMS DLI Call	0	0.0%											
+Most CPU Active Modules -----+ +Reports: -----+										C02			
CPU Active	8,686	100.0%											
DFHSIP	2,984	34.3%	000000										
DSNIDM	1,058	12.1%	00										
DSNXGRDS	1,000	11.5%	00										
IDA019R0	378	4.3%	0										
IWMX2RXF	369	4.2%	0										
+Most CPU Active CSECTs -----+ +Reports: -----+										C02			
CPU Active	8,686	100.0%											
DFHTRPX in DFHSIP	2,416	27.8%	00000										
DSNIOST2 in DSNIDM	424	4.8%	0										
IDAX19R1 in IDA019R0	378	4.3%	0										
IWMXDRXF in IWMX2RXF	369	4.2%	0										
DFHERM in DFHERM	289	3.3%	0										

Scrolling down, sample report S01 continued:

File View Navigate Help

S01: Measurement Profile (01392/CICS55A)

Row 00037 of 00135

Command ==>

Scroll ==> CSR

+CPU Modes

+Reports:

Active CPU	8,686	100.0%	
Supv Mode	3,528	40.6%	00000000
Prob Mode	5,158	59.3%	0000000000
In SVC	194	2.2%	0
AMODE 24	0	0.0%	
AMODE 31	3,280	37.7%	00000000
AMODE 64	5,406	62.2%	000000000000
User Key	4,783	55.0%	0000000000
System Key	3,903	44.9%	00000000

S08

+Request parameters

Request number	01392
Description	S01 display
Sample file DSN	BCAZ.CAZ1420.ASG02.R01392.CICS55A.SF
Retention	Retain until deleted by user
Data extractors	CICS,MQ,CICS+,MQ+
DB2+ Max trace #	100K
IMS+ Max trace #	100K
MQ+ Max trace #	100K

Requesting user	ASG02	Nbr of samples	10,000
Time of request	20:41:31	Duration	60 sec
Date of request	Mon Aug-31-2020	Active/pending	Active
Job name	CICS55A	Proc step name	n/a
Step name/number	n/a	Delay time	none
Step program	n/a		

+CICS Filters

Trancodes	RDDR DBDR
Terminal ids	*
System trans	N
Non-term trans	Y

Scrolling down, sample report S01 continued:

S01: Measurement Profile (01392/CICS55A)

Row 00073 of 00135

Command ==>

Scroll ==> CSR

+Measurement environment +

Job name	CICS55A	Region size <16MB	9,192K
Job number	STC08394	Region size >16MB	1,679,360K
Step name	CICS55A	Step program	DFHSIP
Proc step name		Region type	CICS TS 5.5
ASID/ASIDX	108 / 006C	Service Class Name	STCLOM
Job User ID	START2		
System ID	S0W1	IBM APA Version	14.2.4
SMFID	S0W1	IBM APA APAR	PH27212
O/S level	z/OS 02.04.00	DB2 subsystem name	
IMS system id		DB2 Attach type	n/a
General CPUs	3	CPU model	1090
Specialty CPUs	1	CPU rate factor	18,674
MIPS per CPU	17	SUs per second	856.8
HiperDispatch	N	Max MT mode	1

+Measurement statistics +

Start time	20:41:31	Start date	Mon Aug-31-2020
End time	20:42:31	End date	Mon Aug-31-2020
Total samples	10,000	Duration	59.99 sec
Sampling rate	166.69 per sec	Report dataspace	17.24MB
CPU/WAIT samples	9,975	Sample dataspace	67.94MB
TCB samples	10,000	Meas significance	99.75%
CPU queued samples	25		
Pages in	0	Overall CPU	53.41%
Pages out	0	Overall zAAP CPU	0.00%
EXCPs	26	Overall zIIP CPU	1.96%

Scrolling down, sample report S01 continued:

S01: Measurement Profile (01392/CICS55A)

Row 00107 of 00135

Command ==>

Scroll ==> CSR

+CPU consumption +

CPU active samples	5,659	CPU time TCB	30.79 sec
CPU active time	56.59%	CPU time SRB	0.94 sec
CPU WAIT samples	4,316	Service Units	27,186
CPU WAIT time	43.16%	Measurement SRB	15.49 sec

+Virtual Storage Map +

	Start Address	End Address	Length	
HV-Shared	00000200_00000000	- 0001FFFF_FFFFFFFF	510T	0G
HV-Common	000001EF_80000000	- 000001FF_FFFFFFFF	0T	66G
HV-Pvt	00000008_00000000	- 000001EF_7FFFFFFF	1T	926G
Reserved	00000000_80000000	- 00000007_FFFFFFFF	0T	30G
EPvt	19800000	7FFFFFFF	1640M	0K
ECSA	07244000	197FFFFFFF	293M	752K
EMLPA	07241000	07243FFF	0M	12K
EFLPA	0723E000	07240FFF	0M	12K
EPLPA	0346C000	0723DFFF	61M	840K
ESQA	01DBE000	0346BFFF	22M	696K
ENUC RW	01D6F000	01DBDFFF	0M	316K
NUC RO	00FDD000	01D6EFFF	13M	583K
NUC RW	00FD3000	00FDCAAF	0M	38K
SQA	00E50000	00FD2FFF	1M	524K
PLPA	00C8D000	00E4FFFF	1M	780K
MLPA	00C8C000	00C8CFFF	0M	4K
CSA	00900000	00C8BFFF	3M	560K
Pvt	00006000	008FFFFF	8M	1000K
PSA/SYS	00000000	00005FFF	0M	24K

S02 - Load module attributes

This report lists information about each of the load modules for which activity was measured during the observation session. Various attributes of each of the modules are reported.

You can specify SETUP options (use the SETUP command) to exclude the following information from the report:

- ESD (External Symbol Dictionary) information.
- Modules loaded in PLPA.
- Modules loaded in the NUCLEUS.

A sample screen is shown here:

```
File View Navigate Help
-----
S02: Load Module Attributes - 0327/TSTJOB1          Row 00001 of 01699
Command ==> _____ Scroll ==> CSR

SORT by name enter: SN, by load address: SA, by size: SS, by loadlib: SL
Information reported for 153 load modules. (SETUP has excluded 105 modules).

Module Information for ISFMAIN
  Load Address      08B74D90 to 08B75FFF
  Module Size       4,720
  Attributes        REUS,RENT,APFLIB
  Module Location   JPA
  Loadlib DDNAME    -LNKLST-
  Load Library      ISF.SISFLOAD

ESD Information for ISFMAIN
  External  Offset  Length  Start Addr  End Addr
ISFMAIN    0000000  4714   08B74D90   08B75FF9

Module Information for ISFVTBL
  Load Address      08D6E480 to 08EDDFFF
  Module Size       1,506,176
  Attributes        REUS,RENT,APFLIB
  Module Location   JPA
```

You can place your cursor on the SORT field and enter any of the following four sort codes to re-sort the report:

- SN By Name
- SA By Load Address
- SS By Size
- SL By Loadlib

SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```

File View Navigate Help
+-----+-----+
S | Options for Load Module Attributes | 001 of 00957
C |                                     | 11 ==> CSR
  | Enter "/" to select an option
S |   - Omit display of ESD information | ib: SL
I |   - Omit Nucleus modules from report
M |   - Omit PLPA modules from report
  |   - Omit repeating modules from report
  |
E |
+-----+-----+

```

Use these options to trim down your report by omitting information that you are not interested in. You can omit ESD information, Nucleus modules, PLPA Modules, or modules that have been reloaded at a new address but have the same name and size.

S03 - Load module summary

This report lists the load modules for which activity was measured during the observation session. For further details about a particular module, enter the “++” line command.

A sample report is shown here:

```

File View Navigate Help
-----
S03: Load Module Summary (2133/TSTJOB1)          Row 00001 of 00124
Command ==>                                     Scroll ==> PAGE

Module  Locn  Address  Count  Size(bytes)  Attributes  DDName  Load Library
CEEBINIT  JPA  0000B088  1      61,304      RU RN      -VLF-
CEEPLPKA  PLPA  043C3000  1     1,967,824
COFMMTGR  NUC  012D2D10  1         752
COFMSCCHK PLPA  03D0B3D8  1        3,112
CSVEXPR   PLPA  0296C000  1       31,448
CSVGETMD  NUC  010FF180  1       17,544
CSVLLSCH  NUC  010DAE40  1        1,848
CSVLLTCH  NUC  010D82E0  1        8,232
CSVSYNCH  NUC  012F8CA0  1        1,936
CSVXLOAD  NUC  012FD0C0  1        2,448
CTXRSMGR  NUC  0130BF68  1        9,024
IAXGT     NUC  016B7370  1        7,512
IAXPI     NUC  017378D8  1        2,976
IAXPN     NUC  0173E958  1        3,752
IAXPQ     NUC  01744310  1        7,168
IAXPS     NUC  00FFE3F0  1        6,224
IAXVF     NUC  017C4AD0  1       14,320

```

Detail line descriptions

Each line reports values under the following headings:

- Module
- Locn
- Address
- Count
- Size(bytes)
- Attributes
- DDName
- Load Library

Module

This is the module name.

Location

This is the location where the module was loaded — JPA, PLPA, or NUCLEUS. JPA is displayed in green. All other locations are displayed in red.

Address

This is the address where the module was loaded. If it is below the line, it is displayed in yellow, above the line addresses are displayed in green.

Count

The number of unique instances of the load module observed at the indicated address. This value exceeds 1 if the module was loaded, deleted and then loaded again. A high value could indicate the module was loaded (and deleted) excessively and could be causing a performance problem.

Size

This is the size of the module in bytes.

Attributes

This is the attributes of the module – RU=reusable, RN=reentrant, APF=APF-authorized.

DDName

This is the DDName of the load library from which the module was loaded.

Load Library

This is the data set name of the load library from which the module was loaded.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized here:

on objects

Cmd	When Applied To Object	Action
?	Load Module	Display context help information.
++	Load Module	Show additional details.

on headings

Cmd	When Applied To Object	Action
?	Load Module	Display context help information.
SN	Module	Sort report by module name.
SS	Module	Sort report by module size.
SA	Module	Sort report by module load address.
SL	Module	Sort report by module load library

SETUP options

The following SETUP option can be selected with the SETUP primary command:

Combine repeating entries in report

You can choose to combine repeating entries in the report. When selected, entries whose module name or path name, address and size are identical will be combined into one entry. The count field is updated to reflect the true number of such entries sampled.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
Module Information for IGG0191A
  Load Address      00D89000 to 00D8CE7F
  Module Size       16,000
  Attributes        NOREUS,NORENT
  Module Location   PLPA
  Program Group     MVS System
  Subgroup          MVS Services
  Function          Data Management services

ESD Information for IGG0191A
  External  Offset  Length  Start Addr  End Addr
  IGG0191A  000000   2292   00D89000   00D898F3
  IGG0196I  0008F8    932   00D898F8   00D89C9B
  IGG0196A  000CA0   1186   00D89CA0   00D8A141
  IGG0196Q  001148   1984   00D8A148   00D8A907
  IGG0191N  001908   2700   00D8A908   00D8B393
  IGG0191Y  002398    668   00D8B398   00D8B633
  IGG0191B  002638   3254   00D8B638   00D8C2ED
  IGG0196B  0032F0   1040   00D8C2F0   00D8C6FF
  IGG0191I  003700   1352   00D8C700   00D8CC47
  IGG0193I  003C58    564   00D8CC48   00D8CE7B
+-----+
```

S04 - TCB summary

Overview

A list of all TCBs (Tasks) which were active at any time during the observation session is reported. The list is arranged in hierarchical sequence with ATTACHED subtasks indented relative to the parent tasks that performed the ATTACH functions.

A sample TCB Summary report is shown here:

```
File View Navigate Help
-----
S04: TCB Summary (0756/TSTJOB1)                               Row 00001 of 00005
Command ==> _____ Scroll ==> CSR_

TCB_Name                Address  Samples  CPU Active  CPU WAIT  Queued
IEAVAR00-002            8FE0A8      0
> IEAVTSDT-003          8FFE88      0
> IEESB605-004          8FFBF8      0
> IEFIIC-005            8FB7F0      0
> LPPFRAYV4-001         8FB330    3996      75.75%     8.23%    16.01%
```

Detail line descriptions

Each line reports values under the following headings.

- TCB Name
- Address
- Samples
- CPU Active
- CPU WAIT
- Queued

TCB Name

This is the name of the program associated with the task; the one specified to the ATTACH function. An index value is also appended to the name. This is a sequence number that Application Performance Analyzer assigned to each unique TCB that it observed. The value is useful for distinguishing between more than one TCB with the same name (same program ATTACHed).

For CICS measurements that have the CICS data extractor selected, the TCB mode will be displayed for CICS TCBs. This will immediately follow the TCB name.

Address

This is the address of the TCB. Only 6 hexadecimal digits are shown as TCBs always reside below the 16MB line.

Samples

This is the number of samples in which the TCB was observed.

CPU Active

This is the number of samples in which the CPU was active (instruction execution was in progress) in this TCB.

CPU WAIT

This is the number of samples in which the Task was waiting.

Queued

This is the number of samples in which the TCB was observed in Queued status; it was ready to execute but no CPU was available.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	TCB Name	Display context help information.
++	TCB Name	Show additional details.
C01	TCB Name	Display C01 report subset.
C02	TCB Name	Display C02 report subset.
C03	TCB Name	Display C03 report subset.

This report does not have any line commands on headings.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > LPFRAYV4-001          8FB330      3996      75.75%      8.23% 1 |
+-----+

TCB Information for LPFRAYV4-001

Nbr of Samples          3996
Active CPU Samples      3027  =====
WAIT Samples           329    ==
Queued CPU Samples      640    ====

Session CPU Time        17.778 seconds
Accumulated CPU Time    17.778 seconds
Task ATTACHed by        IEFIIC-005
Time to ATTACH           *UNKNOWN*

```

S05 - Memory usage timeline

Overview

This timeline analysis breaks the observation session duration into a number of (approximately) fixed-length, chronological time intervals. Each line represents one of these intervals. By default, 15 intervals are reported, each representing approximately the same number of samples. This illustrates any progressive resource usage trends. The value under the heading Storage quantify the number of Page Frames, which were allocated to the address space during the interval.

A sample Memory Usage Timeline report is shown here:

[illegible]

Detail line descriptions

Each line reports values under the following headings:

- SEQN
- Seconds
- Storage

SEQN

This is the sequence number of the interval. Intervals are numbered 0001, 0002, etc.

Seconds

This is the duration of the interval in seconds.

Storage

This is the amount of central storage allocated to the address space. In other words, Real Storage (or “Page Frames”). This is an effective measurement of the address space's demand on central storage. The value is expressed in units of kilobytes (1024 bytes). Each line shows the maximum value observed during the particular interval. These page frames include paged-in storage for conventional allocations (for example, obtained by GETMAIN) as well as Dataspaces and Hiperspaces.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	SEQN (sampling interval)	Display context help information.
++	SEQN (sampling interval)	Show additional details.
C01	SEQN (sampling interval)	Display C01 report subset.
C02	SEQN (sampling interval)	Display C02 report subset.
C03	SEQN (sampling interval)	Display C03 report subset.

This report does not have any line commands on headings.

SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```
File View Navigate Help
-----
S | Options for Memory Usage Timeline | =====
C |                                  | 001 of 00015
  |                                  | ==> CSR
S | Number of Intervals . . . . . 15 |
  | This is the number of equal time intervals within |
  | the duration of the measurement that are to be   |
  | reported. Each report line will show measurement |
  | information for one interval.                     |
0 | |
0 | |
0 | |
0 | |
+-----+
```

Number of Intervals

Use this option to change the number of equal time intervals that are reported.

S06 - Data space usage timeline

Overview

This timeline analysis breaks the observation session duration into a number of (approximately) fixed-length, chronological time intervals. Each line represents one of these intervals. By default, 15 intervals are reported, each representing approximately the same number of samples. This illustrates any

A sample of the Data Space Usage Timeline report is shown here:

Detail line descriptions

- SEQN
- Seconds
- Storage

This is the amount of virtual storage allocated to the address space for user-key Data Spaces. The value is expressed in units of kilobytes (1024 bytes). Each line shows the maximum value observed during the particular interval.

This report does not have any line commands on headings.

SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```

File View Navigate Help
- +-----+
S | Options for Data Space Usage Timeline | 001 of 00015
C |                                     | ==> CSR
  | Number of Intervals . . . . . 15 |
S | This is the number of equal time intervals within |
  | the duration of the measurement that are to be  |
O | reported. Each report line will show measurement |
O | information for one interval. |
O |                                     |
O |                                     |
+ +-----+

```

Number of Intervals

Use this option to change the number of equal time intervals that are reported.

S07 - TCB execution summary

Overview

A list of all TCBs (Tasks) which were active at any time during the observation session is reported. The list is arranged in hierarchical sequence with ATTACHed subtasks indented relative to the parent tasks that performed the ATTACH functions.

A sample screen is shown here:

```

File View Navigate Help
-----
S07: TCB Execution Summary (0656/TSTJOB1) Row 00001 of 00019
Command ==> ----- Scroll ==> CSR

      --- CPU Time ---
TCB_Name      Measured TCBTotal <-- Measurement Interval --->

IEAVAR00-001      0.0 Sec 2.3 Sec System TCB - Not Measured
> IEAVTSDT-002    0.0 Sec 0.0 Sec System TCB - Not Measured
> IEESB605-003    0.0 Sec 1.2 Sec System TCB - Not Measured
  > IKJEFT01-004   0.0 Sec 0.3 Sec =====
    > IKJEFT02-005 0.0 Sec 0.4 Sec =====
      > IKJEFT09-006 0.0 Sec 0.0 Sec =====
        > ISPF-007  0.9 Sec 32.3 Sec =====
          > ISPTASK-008 0.0 Sec 8.5 Sec =====
            > ISPTASK-009 8.2 Sec 21.0 Sec =====
              > EX-010 0.1 Sec 0.3 Sec =====
                > ALTLIB-015 0.0 Sec 0.0 Sec =
                  > FREE-016 0.0 Sec 0.0 Sec =
                    > CALL-011 0.1 Sec 0.2 Sec =====
                      > PMSEL-12 3.9 Sec 42.3 Sec =====
            > EXEC-013 0.1 Sec 0.8 Sec =
              > CALL-014 0.0 Sec 0.2 Sec =
                > ALLOC-017 0.1 Sec 0.1 Sec =
                  > ALLOC-018 0.1 Sec 0.1 Sec =
                    > ALLOC-019 0.1 Sec 0.1 Sec =

```

Detail line descriptions

Each line represents reports values under the following headings:

- TCB Name

- CPU Time – Measured
- CPU Time – TCBTotal
- Measurement Interval

TCB Name

This is the name of the program associated with the task; the one specified to the ATTACH function. An index value is also appended to the name. This is a sequence number that Application Performance Analyzer assigned to each unique TCB that it observed. The value is useful for distinguishing between more than one TCB with the same name (same program ATTACHed).

For CICS measurements that have the CICS data extractor selected, the TCB mode will be displayed for CICS TCBs. This will immediately follow the TCB name.

CPU Time – Measured

This reports the amount of CPU time used by the Task for the duration of the observation session. This is accurate to within the span of two sample intervals.

CPU Time – TCBTotal

This reports the amount of accumulated CPU time used by the Task since the Task was started up to the time of the end of the observation session. This is accurate to within one sample interval.

Measurement Interval

A graph is plotted here showing the span of time within the observation session interval the Task was active.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	TCB Name	Display context help information.
++	TCB Name	Show additional details.
C01	TCB Name	Display C01 report subset.
C02	TCB Name	Display C02 report subset.
C03	TCB Name	Display C03 report subset.

S08 - Processor utilization summary

Usage

Use this report to see a breakdown of CPU states observed during the measurement.

Quantification

Each detail line reports the number of active CPU samples for an indicated CPU state. This is also expressed as a percentage of the total number of active CPU samples.

The CPU states are not all mutually exclusive. Overlaps in the counts reported in different detail lines will occur.

Under Heading	This is Displayed
Storage key n	The number of active CPU samples in the indicated storage protect key. A value of 8 indicates user (application) key. Other values usually indicate execution is in a system routine.
Problem state	The number of active CPU samples in problem state. This is the usual state for application programs.
Supervisor state	The number of active CPU samples in supervisor state. This mode allows execution of privileged instructions. This typically indicates execution in an operating system routine.
Execution in SVC	The number of active CPU samples while executing in SVC (Supervisor Call) modules.
Execution in real mode	The number of active CPU samples in real mode. There are no normal operating conditions under which this mode can occur. The value should always be zero indicating execution in virtual mode.
Primary-space mode	The number of active CPU samples in which the ASC (Address- Space Control) bits indicate execution in primary-space mode.
Access-register mode	The number of active CPU samples in which the ASC (Address- Space Control) bits indicate execution in Access-register (AR) mode.
Secondary-space mode	The number of active CPU samples in which the ASC (Address-Space Control) bits indicate execution in secondary-space mode.
Home-space mode	The number of active CPU samples in which the ASC (Address- Space Control) bits indicate execution in home-space mode.
Execution on processor n	The number of active CPU samples in which instructions were being executed by the indicated processor or CPU address. Processors in a multi-CPU system are numbered 0,1,2,3 ... etc. The physical core ID and when applicable, the Vertical Priority (Low/Medium/High) will be shown. Also specialty processors such as zIIP will be identified.
In private storage ABOVE	The number of active CPU samples in which instructions were located in private storage above the 16MB boundary.
In private storage BELOW	The number of active CPU samples in which instructions were located in private storage below the 16MB boundary.
In common storage ABOVE	The number of active CPU samples in which instructions were located in common storage above the 16MB boundary.
In common storage BELOW	The number of active CPU samples in which instructions were located in common storage below the 16MB boundary.
Execution in AMODE 24	The number of active CPU samples in which instructions were being executed in AMODE 24.
Execution in AMODE 31	The number of active CPU samples in which instructions were being executed in AMODE 31.
Execution in AMODE 64	The number of active CPU samples in which instructions were being executed in AMODE 64.

Core IDs Quantification

This section is modelled on the Core ID section of the "/D M=CORE" command output. See message IEE174I in "z/OS MVS System Messages" for a full explanation of all of the codes that are used.

Table 3. Core IDs Quantification	
Under Heading	This is Displayed
CORE	The core identifier.
Status	<p>The first character is W when the core is being managed by WLM, otherwise blank.</p> <p>The second character is the status of the core, which can be one of the following:</p> <ul style="list-style-type: none">+ indicates the core is online.- indicates the core is offline./ indicates the core is in a mixed stateN indicates the core is neither online nor able to be configured online. <p>The third character is the type of core which can be:</p> <ul style="list-style-type: none">blank The core is a standard CP.A The core is an IBM Z Application Assist Processor.I The core is an IBM Z Integrated Information Processor.
CPU RANGE	This is the range of CPU addresses that are allocated to the core.
V.Priority	<p>The HIPERDISPATCH vertical-ness of the core:</p> <ul style="list-style-type: none">H The core is classified as a vertical high core.M The core is classified as a vertical medium core.L The core is classified as a vertical low core.

Sample reports

A sample report is shown here.

```

File View Navigate Help
-----
S08: Processor Utilization Summary (01383/TSTJ0B1)          Row 00001 of 00046
Command ==>                                                Scroll ==> CSR

```

Processor states for the CPU usage measurements

Processor State	Nbr of Samples	Percentage		
Storage key 0	13	1.22%		
Storage key 5	2	0.18%		
Storage key 7	1	0.09%		
Storage key 8	1,044	98.49%		
Problem state	1,044	98.49%		
Supervisor state	16	1.50%		
Execution in SVC	16	1.50%		
Execution in real-mode	0	0.00%		
Primary-space mode	1,060	100.00%		
Access-register mode	0	0.00%		
Secondary-space mode	0	0.00%		
Home-space mode	0	0.00%		
Execution on processor 0	373	35.18%	CoreID=0 High	
Execution on processor 2	328	30.94%	CoreID=1 High	
Execution on processor 4	359	33.86%	CoreID=2 High	zIIP
In private storage ABOVE	595	56.13%		
In private storage BELOW	0	0.00%		
In common storage ABOVE	461	43.49%		
In common storage BELOW	4	0.37%		
Execution in AMODE 24	0	0.00%		
Execution in AMODE 31	1,057	99.71%		
Execution in AMODE 64	3	0.28%		

Table of CORE IDs

CORE	Status	CPU Range	V.Priority
0000	+	0000-0001	H
0001	+	0002-0003	H
0002	+I	0004-0005	H
0003	+I	0006-0007	H
0004	+I	0008-0009	H

S09 - Measurement analysis

Usage

This report presents various textual statements, each representing an observation made about some aspect of execution of the measured job. The purpose of each of these observations is to provide a synoptic analysis of an area of resource usage and, in some cases, suggest where some performance improvement opportunities might exist.

It is important that you analyze these observations in the context of how you would expect the measured job to perform. Some of the statements in this report might draw your attention to aspects of resource consumption that is perfectly normal for the job. For example, high CPU consumption might be noted in a certain module in a situation where you would actually expect high CPU usage in that module.

Sample reports

A sample report is shown here.

```

File View Navigate Help
-----
S09: Measurement Analysis (9458/TSTJ0B1) Row 00001 of 00031
Command ==> Scroll ==> CSR

This report presents various textual statements pertaining to specific
aspects of application performance observed during the measurement
session. Each statement identifies areas of activity and resource
consumption or causes of execution delay and suggests areas where
performance improvement opportunities might exist.

+-----+
| 1. Small CPU sample size |
| This measurement recorded a relatively small number of active CPU |
| observations. Some figures shown in CPU usage reports may have a high |
| margin of error. Keep this in mind when analyzing these reports. |
+-----+

+-----+
| 2. System CPU overhead |
| A high percentage of CPU activity was observed in system service |
| routines. This indicates high system overhead. The level of system |
| overhead might be normal for the type of job being measured or it might |
| be an indication of a performance problem. |
| See reports: C01 C02 |
+-----+

```

S10 - Observation Session Messages

Usage

Use this report to display messages that are issued on behalf of the observation session. These include error, warning, informational, and diagnostic messages.

The report consists of three levels: Category, Message ID, and Message Text. The Category and Message ID levels may be expanded or contracted by using the '+' and '-' line commands respectively.

Expanding the category level exposes the Message ID information for each message issued under that category.

Expanding a Message ID level, exposes the message text associated with that message ID. The message text may be displayed in one of four colors:

- Red for Severe and Error level messages
- Yellow for Warning level messages
- Turquoise for Informational level messages
- Blue for Diagnostic level messages

Diagnostic level messages are only issued when the APA started task is configured with DiagLevel of five or higher.

Entering the '+' or '-' line command on the Name title will expand or contract all entries at all levels of the report.

Category Descriptions

The messages are grouped by the following categories:

- REQ - Sampling Request Messages. This category contains all messages issued before sampling starts and while sampling is underway for the request. These messages provide information on the status of the observation session.
- DATW - DataWriter Messages. This category provides status and exception information on the allocation and creation of the observation data set.

- **ESDE - External Symbol Dictionary Extractor Messages.** This category contains all messages issued by the External Symbol Dictionary Extractor. These messages provide status and exception information on the retrieval of External Symbol Dictionary data for observed modules.
- **HVXT - DB2 Host Variable Extractor Messages.** This category contains all messages issued by the DB2 Host Variable Extractor. These messages report status and exception information related to the resolution of DB2 host variable names from the corresponding :H host variable markers found in SQL statements that were observed during sampling. This category of messages will only be present if the DB2V extractor has been selected when the observation request was created.
- **Other - Non-categorized Messages.** This category contains all messages that do not fall under any of the above categories.

SETUP options

Enter the SETUP primary command to select options for this report. The following popup will be displayed:

```
+-----+
| S10 - Report SETUP Window          |
| Options for Observation Session Messages |
|                                     |
| Enter "/" to select an option      |
|   / Display messages with a message level of S'or'E' |
|   / Display messages with a message level of W'      |
|   / Display messages with a message level of I'      |
|   - Display messages with a message level of D'      |
|                                     |
+-----+
```

Display messages with a message level of 'S' or 'E'

Use this option to display severe level and error level messages.

Display messages with a message level of 'W'

Use this option to display warning level messages.

Display messages with a message level of 'I'

Use this option to display informational level messages.

Display messages with a message level of 'D'

Use this option to display diagnostic level messages.

C01 - CPU usage by category

Overview

This report analyzes measured CPU consumption. It attributes CPU consumption to the following general categories:

- **APPLCN** – Application Code
- **SYSTEM** – System/OS Services
- **DB2SQL** – SQL Processing
- **DATAMG** – Data Management (DASD) Requests
- **IMSDLI** – IMS DL/I call processing
- **ADABAS** – Adabas requests

In addition, any execution measured at locations for which no load module name could be determined is attributed to a category:

- **NOSYMB** – No Module Name Found

A sample report is shown below. When the report is first displayed, only the top level of the hierarchy is visible. To expand any of these categories to show the next hierarchical level, you can type the “+” line command on the detail line. You can also enter the “+” line command on the Name heading to expand the entire report to show all detail lines in all hierarchical levels.

File View Navigate Help			
C01: CPU Usage by Category (0638/TSTJOB01)			Row 00001 of 00004
Command ==>			Scroll ==> CSR
Name	Description	Percent of CPU time * 10.00%	±1.8%
		*....1....2....3....4....5....6....7....8	
APPLCN	Application Code	54.36	=====
SYSTEM	System/OS Services	44.30	=====
DATAMG	Data Mgmt Processing	1.03	=
NOSYMB	No Module Name	0.29	

Detail line descriptions

Each line represents a System Object – an object to which measured activity is attributed. These lines are arranged hierarchically. You can expand a line (using the “+” line command) to reveal a breakdown into subordinate objects. Each type of object shown in this report is described here:

Category

Category is the top level in the hierarchy. CPU consumption is categorized as APPLCN, SYSTEM, DB2SQL, DATAMG, IMSDLI, ADABAS or NOSYMB.

DPA Group

Within a category – usually the SYSTEM category – load modules can be further arranged into Descriptive Program Attribution (DPA) groups. These are functional groups like: IMS, DB2, MVS™, SVC, etc.

By entering a '+' on the SYSTEM category line:

File View Navigate Help			
C01: CPU Usage by Category (0638/TSTJOB01)			Row 00001 of 00004
Command ==>			Scroll ==> CSR
Name	Description	Percent of CPU time * 10.00%	±1.8%
		*....1....2....3....4....5....6....7....8	
APPLCN	Application Code	54.36	=====
+SYSTEM	System/OS Services	44.30	=====
DATAMG	Data Mgmt Processing	1.03	=
NOSYMB	No Module Name	0.29	

The list of objects in this category is expanded to the next level of the hierarchy to include DPA groups:

File View Navigate Help			
C01: CPU Usage by Category (0638/TSTJOB01)			Row 00001 of 00009
Command ==>			Scroll ==> CSR
Name	Description	Percent of CPU time * 10.00%	±1.8%
		*....1....2....3....4....5....6....7....8	
APPLCN	Application Code	54.36	=====
SYSTEM	System/OS Services	44.30	=====
→ SVC	SVC Routines	42.14	=====
→ MVS	MVS System	2.06	==
→ NUCLEUS	Nucleus Modules	0.06	
→ IMS	IMS Subsystem	0.03	
DATAMG	Data Mgmt Processing	1.03	==
NOSYMB	No Module Name	0.29	

Note: Using the SETUP primary command, you can specify aggregation of modules into Group or Subgroup. Subgroup offers a more granular, less inclusive categorization than Group.

In this sample screen Subgroup has been selected in SETUP, note that the SVC group has now been replaced with SVC subgroups (a subgroup for each SVC type.)

File View Navigate Help			
C01: CPU Usage by Category (0638/TSTJ0B01)		Row 00001 of 00012	
Command ==>		Scroll ==> CSR	
Name	Description	Percent of CPU time * 10.00%	±1.8%
*....1....2....3....4....5....6....7....8			
APPLCN	Application Code	54.36	=====
SYSTEM	System/OS Services	44.30	=====
→ SVCTYPE1	Type 1 System SVC	18.94	=====
→ SVCTYPE3	Type 3 System SVC	10.38	=====
→ SVCTYPE4	Type 4 System SVC	8.72	=====
→ SVCTYPE2	Type 2 System SVC	4.09	=====
→ MVS	MVS System	2.06	=====
→ NUCLEUS	Nucleus Modules	0.06	=====
→ IMS	IMS Subsystem	0.03	=====
DATAMG	Data Mgmt Processing	1.03	=====
NOSYMB	No Module Name	0.29	=====

Name Column

The symbolic name of the Group/Subgroup appears under this heading.

Description Column

A Group/Subgroup description appears under this heading.

CPU Percent Column

The aggregation of activity measured under the named Group/Subgroup appears under this heading as a percentage of CPU time.

Load Module

A load module line appears under a Group/Subgroup line, under a Category line, or under an SVC line.

For example, to see the load modules under the Group/Subgroup line CICS, enter + on the CICS object:

File View Navigate Help			
C01: CPU Usage by Category (0621/TSTJ0B01)		Row 00001 of 00014	
Command ==>		Scroll ==> CSR	
Name	Description	Percent of CPU time * 10.00%	±3.8%
*....1....2....3....4....5....6....7....8			
SYSTEM	System/OS Services	93.67	=====
→ +ICS	CICS Services	47.43	=====
→ SVCTYPE1	Type 1 System SVC	22.43	=====
→ MVS	MVS System	5.42	=====
→ NUCLEUS	Nucleus Modules	5.27	=====
→ SVCTYPE2	Type 2 System SVC	5.12	=====
→ LEBASE	LE Base Modules	3.61	=====
→ USERSVC	User/Vendor SVC	1.95	=====
→ DB2	DB2 Services	1.95	=====
→ SM	Storage Manager	0.30	=====
→ LECOBOL	LE COBOL component M	0.15	=====
NOSYMB	No Module Name	6.02	=====
APPLCN	Application Code	0.30	=====

The CICS Group has now been expanded to show load modules in the next hierarchical level:

File View Navigate Help			
C01: CPU Usage by Category (0621/TSTJ0B01)		Row 00001 of 00014	
Command ==>		Scroll ==> CSR	
Name	Description	Percent of CPU time * 10.00%	+1.8%
SYSTEM	System/OS Services	93.67	=====
→ CICS	CICS Services	47.43	=====
→ DFHSIP	CICS Services	22.89	=====
→ DFHAPLI	CICS Services	3.46	==
→ DFHPGDM	PG domain - intia	3.46	==
→ DFHFCVS	File access VSAM r	2.86	=
→ DFHZCB	VTAM working set m	2.86	=
→ DFHAIP	CICS Services	2.40	=
→ DFHMNDML	CICS Services	1.35	=
→ DFHMCX	BMS fast path modu	1.35	=
→ DFHZCP	Terminal managemen	1.05	=
→ DFHFCCR	File control file	0.90	=
→ DFHAPSM	AP domain - transa	0.75	=

Name Column

The load module name appears under this heading.

Description Column

If a DPA functional description is found for the module name, it is reported under this heading. Otherwise “Application Program” is displayed.

CPU Percent Column

The measured CPU execution for this Load Module appears under this heading.

CSECT (Control Section)

These lines can appear as subordinate, breakdown items under a load module line. If Application Performance Analyzer was able to find ESD (External Symbol Dictionary) information, during the measurement process, for a load module, these items will appear under the load module and the measured activity will be attributed to them.

Name Column

The CSECT name appears under this heading.

Description Column

This will display “CSECT in xxxxxxxx” where xxxxxxxx is the name of the load module to which the CSECT belongs.

SVC (Supervisor Call)

This line shows attribution of measured activity during execution of an MVS Supervisor Call.

Name Column

“SVC” followed by a 3-digit decimal SVC number (000 to 255) appears under this heading. For example — 'SVC120'.

Description Column

A description of the SVC service, or the name of the macro which invokes the SVC appears under this heading. For example: “GETMAIN/FREEMAIN.”

SQL Statement

This item attributes measured activity to a DB2 SQL statement.

Name Column

A sequence number is assigned by Application Performance Analyzer to each unique SQL statement observed during the measurement. This sequence number is shown in the name field. It is possible for some sequences numbers to be missing (sequence gaps) from the report. This will occur if a sequence number was assigned to SQL statements but no CPU activity was measured for these statements.

Description Column

The name of the program that issued the SQL request followed by the precompiler statement number (enclosed in parentheses) is shown here. This is followed by the SQL function (e.g. SELECT, INSERT, COMMIT).

DL/I Call

This item attributes measured activity to an IMS DL/I call.

Name Column

A sequence number is assigned to each unique DL/I call statement observed during the measurement. This sequence number is shown in the name field.

Description Column

The DL/I function code appears followed by the PCB name followed by the relative PCB number in parentheses. The location of the call, in *csect+offset* format, follows.

Adabas Call

This item attributes measured activity to an Adabas call.

Name Column

A sequence number is assigned to each unique Adabas call statement observed during the measurement. This sequence number is shown in the name field.

Description Column

The name of the program that issued the Adabas request and the offset within the program, followed by the Adabas command code that was issued, is displayed in this field. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.

Unresolved Address

This item attributes measurement activity to a range of addresses for which a corresponding load module name could not be determined.

Name Column

Activity observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format "HHHHHxxx" where HHHHH are the 5 high order hexadecimal digits of the address. For example: '08915xxx' means the range from 08915000 to 08915FFF.

Description Column

"Unresolved Address" appears under this heading.

Subset reports

This report can generate subset reports for any detail line. By entering a report code on a detail line, a pop-up subset report is displayed for this item. The item selected is scaled to 100 percent. The available subset reports are listed below in "Line commands, on objects."

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Display context help information.
++	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Show additional details.
+	Category, Load Module, SVC, SQL command, DLI call, Adabas call.	Expand to reveal next level.

Cmd	When Applied To Object	Action
–	Category, Load Module, SVC, SQL command, DLI call, Adabas call.	Collapse to hide next level.
SV	SV Category, SVC, SQL command, DLI call, Adabas call.	Sort next level by value.
SN	Category, SVC, SQL command, DLI call, Adabas call.	Sort next level by name.
M	Load Module, CSECT.	Display load module information.
P	Load Module, CSECT, SQL command, DLI call, Adabas call.	Display source program mapping.
C01	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Display C01 report subset.
C02	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Display C02 report subset.
C03	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Display C03 report subset.
C08	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Display C08 report subset.
C09	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call.	Display C09 report subset.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

SETUP options

```
File View Navigate Help
+-----+
| C01 - Report SETUP Window (00723/CICS56A) |
| Command ==>                               | Scroll ==> CSR |
| Options for CPU Analysis by Category       |
|
| Enter "/" to select an option
| / Report modules by "Group". Unselect to report
|   by "SubGroup". Group is a higher level (more
|   inclusive) categorization than SubGroup.
|
| / Show the DB2SQL category in which CPU time
|   attributed to SQL processing is shown.
|
| / Show the DATAMG category in which CPU time
|   attributed to data management is shown.
|
| / Show the IMSDLI category in which CPU time
|   attributed to DLI processing is shown.
|
| / Show the ADABAS category in which CPU time
|   attributed to ADABAS processing is shown.
|
| - Filter by CICS transactions and Terminals as
|   specified in panel 5, Subsystems.
|
| Minimum CPU Percentage . . . . . 0.00
|   This is the minimum percentage of CPU activity
|   measured for which an item is to be included in
|   the report.
+-----+
```

The following SETUP options can be selected with the SETUP primary command:

Reporting by Group / SubGroup

This option allows you to aggregate modules into Group or SubGroup. SubGroup offers a more granular, less inclusive categorization than Group. For example, when reporting by Group, all SVCs would be reported under the "SVC" Group. When reporting by SubGroup, SVCs would be reported under SubGroups such as SVCTYPE1, SVCTYPE2, etc.

Show the DB2SQL category

This shows activity attributed to DB2 SQL statements. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category. This is not available for CICS measurements.

Show the DATAMG category

This shows activity attributed to data management functions, which include basic access functions such as READ and WRITE. Processing of OPEN and CLOSE functions is not included in this category. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category.

Show the IMSDLI category

This shows activity attributed to IMS DLI calls. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category.

Show the ADABAS category

When the Adabas extractor is on, this shows activity attributed to Adabas requests. If it is not selected, the activity is included in the appropriate system modules in the SYSTEM category.

Filter by CICS transaction and terminal

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

Minimum CPU percentage

You can set this option to eliminate modules where the CPU percentage is below a certain threshold.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File  View  Navigate  Help
+-----+
+-----+ The following report line was selected +-----+
| > SVCTYPE1  Type 1 System SVC          4.78 00 |
+-----+

Calculation Details
CPU measurements          139
Grouped under             Type 1 System SVC
Total CPU measurements    2,906
Percent in category       4.78%

Processor states for the CPU usage measurements

Processor State           Nbr of Samples  Percentage

Storage key 0             111          79.85%
Storage key 6              5           3.59%
Storage key 8             23          16.54%

Problem state              1           0.71%
Supervisor state          138          99.28%

Execution in SVC           139         100.00%

Execution in real-mode      0           0.00%

Primary-space mode         139         100.00%
Access-register mode        0           0.00%
Secondary-space mode        0           0.00%
Home-space mode            0           0.00%

Execution on processor 0    80          57.55%
Execution on processor 1    59          42.44%

In private storage ABOVE    1           0.71%
In private storage BELOW    0           0.00%
In common storage ABOVE     82          58.99%
In common storage BELOW     56          40.28%

Execution in AMODE 24        0           0.00%
Execution in AMODE 31       139         100.00%
Execution in AMODE 64        0           0.00%

```

C02 - CPU usage by module

Overview

This report analyzes measured CPU consumption. It attributes CPU consumption to load modules.

In addition, any execution measured at locations for which no load module name could be determined is attributed to hexadecimal address ranges.

A sample report as it is initially displayed, with no expansion, is shown here:

```

File View Navigate Help
-----
C02: CPU Usage by Module (0656/TSTJOB01) Row 00001 of 00207
Command ==> ----- Scroll ==> CSR

```

Name	Description	Percent of CPU time * 10.00%	±1.1%
		*....1....2....3....4....5....6....7....8	
ISRSUPC	Application Progr	39.34	=====
C0020	Application Progr	14.57	=====
IGG0193B	QSAM/BSAM Process	3.57	==
IGDDCFSR	Storage Managemen	3.25	==
ISPMMAIN	Application Progr	2.66	=
C0325	Application Progr	2.47	=
ISPSUBS	Application Progr	2.44	=
C0200	Application Progr	2.16	=
IOSVSSCQ	Nucleus Routine	1.99	=
IAXPQ	Nucleus Routine	1.94	=
IAXVF	Nucleus Routine	1.83	=
IAXVP	Nucleus Routine	1.58	=
IEAVESVC	Supervisor Contro	1.56	=
IECVEXCP	Execute channel p	1.48	=
C0399	Application Progr	1.38	=
C0310	Application Progr	0.92	

Detail line descriptions

Each line represents a System Object – an object to which measured activity is attributed. These lines are arranged hierarchically. You can expand a line (using the “+” line command) to reveal a breakdown into subordinate objects. Each type of object shown in this report is described here:

Load Module

Name

Column the load module name appears under this heading.

Description Column

If a DPA functional description is found for the module name, it is reported under this heading. Otherwise “Application Program” is displayed.

CSECT (Control Section)

These lines can appear as subordinate, breakdown items under a load module line. If Application Performance Analyzer was able to find ESD (External Symbol Dictionary) information, during the measurement process, for a load module, these items will appear under the load module and the measured activity will be attributed to them.

A sample report with the second hierarchical level (CSECT) displayed is shown here:

```

File View Navigate Help
-----
C02: CPU Usage by Module (0656/TSTJOB01) Row 00005 of 00220
Command ==> ----- Scroll ==> CSR

```

Name	Description	Percent of CPU time * 2.50%	±1.1%
		*....1....2....3....4....5....6....7....8....9	
ISPMMAIN	Application Progr	2.66	=====
→ ISPMBP	CSECT in ISPMAI	1.26	===
→ ISPMBX	CSECT in ISPMAI	0.52	=
→ ISPMOB	CSECT in ISPMAI	0.37	=
→ ISPMBW	CSECT in ISPMAI	0.32	=
→ ISPMUL	CSECT in ISPMAI	0.07	
→ ISPMRO	CSECT in ISPMAI	0.05	
→ ISPMCO	CSECT in ISPMAI	0.01	
→ ISPMTB	CSECT in ISPMAI	0.01	
→ ISPMUX	CSECT in ISPMAI	0.01	
→ ISPMBY	CSECT in ISPMAI	0.01	
C0325	Application Progr	2.47	=====
→ C0325	CSECT in C03	2.47	=====
ISPSUBS	Application Progr	2.44	=====
C0200	Application Progr	2.16	=====

Name Column

The CSECT name appears under this heading.

Description Column

This will display “CSECT in xxxxxxxx” where xxxxxxxx is the name of the load module to which the CSECT belongs.

Unresolved Address

This item attributes measurement activity to a range of addresses for which a corresponding load module name could not be determined.

Name Column

Activity observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format “HHHHHxxx” where HHHHH are the 5 high order hexadecimal digits of the address. For example: '08915xxx' means the range from 08915000 to 08915FFF.

Description Column

“Unresolved Address” appears under this heading.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Load Module, CSECT, Unresolved Address	Display context help information.
++	Load Module, CSECT, Unresolved Address	Show additional details.
+	Load Module	Expand to reveal next level.
–	Load Module	Collapse to hide next level.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT	Display source program mapping.
C09	Load Module, CSECT, Unresolved Address	Display C09 report subset.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| IDA019L1 Virtual I/O (VIO) 16.53 00000000 |
+-----+

Calculation Details
CPU measurements                215
In load module                  IDA019L1
Total CPU measurements          1,300
Percent in category             16.53%

Processor states for the CPU usage measurements

Processor State                  Nbr of Samples Percentage
Storage key 8                    215          100.00%
Problem state                    215          100.00%
Supervisor state                 0           0.00%
Execution in SVC                 0           0.00%
Execution in real-mode           0           0.00%
Primary-space mode               215          100.00%
Access-register mode             0           0.00%
Secondary-space mode             0           0.00%
Home-space mode                  0           0.00%
Execution on processor 0         118          54.88%
Execution on processor 1         97          45.11%
In private storage ABOVE         0           0.00%
In private storage BELOW         0           0.00%
In common storage ABOVE         215          100.00%
In common storage BELOW         0           0.00%
Execution in AMODE 24            0           0.00%
Execution in AMODE 31           215          100.00%
Execution in AMODE 64            0           0.00%

```

SETUP options

```
File View Navigate Help
+-----+
C02 - Report SETUP Window (00723/CICS56A)
Command ==> Scroll ==> CSR
  Options for CPU Usage by Module

    - Filter by CICS transactions and Terminals as
      specified in panel 5, Subsystems.

Minimum CPU Percentage . . . . . 0.00
  This is the minimum percentage of CPU activity
  measured for which an item is to be included in
  the report.
```

The following SETUP option can be selected with the SETUP primary command:

Filter by CICS transaction and terminal

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

Minimum CPU percentage

You can set this option to eliminate modules where the CPU percentage is below a certain threshold.

C03 - CPU usage by code slice

Overview

This report attributes CPU usage to Code Slices. A code slice is a range of storage addresses containing executable object code. You can use this report to pinpoint the exact locations of hot spots – segments of code where CPU consumption is particularly high. You can use SETUP to adjust the resolution of the report by varying the size of the code slice.

Two types of detail line are shown:

- Code Slice
- Code Address

Initially, only the Code slice lines are visible. You can expand a Code Slice line (using the “+” line command) to reveal its subordinate Code Address lines. Initially, report lines are arranged in descending sequence by CPU activity. The most active items appear at the top. You can also sort by address by entering the “SA” line command either on the Address title field or on one of the first level report line address fields.

A sample report, as it is initially displayed, is shown here:

```
File View Navigate Help
-----
C03: CPU Usage by Code Slice (0656/TSTJOB01) Row 00001 of 01127
Command ==> _____ Scroll ==> CSR

Address  Size  Location  Percent of CPU time * 10.00% ±1.1%
*....1....2....3....4....5....6....7....8..
00D0B1F0   64  ASMFPSRH+0A80  20.90 =====
08A45CC0   64  C0020+1CC0    3.50 ==
00D0D000   64  ASMFRLDN+0080  3.23 ==
00D0F480   64  ASMFRLDN+2500  3.09 ==
08A45300   64  C0020+1300    2.21 =
```

If you wanted to expand, for example, the third line, enter the “+” line command:

```
File View Navigate Help
-----
C03: CPU Usage by Code Slice (0656/TSTJOB01) Row 00001 of 01127
Command ==> _____ Scroll ==> CSR

Address  Size  Location  Percent of CPU time * 10.00% ±1.1%
*....1....2....3....4....5....6....7....8..
00D0B1F0   64  ASMFPSRH+0A80  20.90 =====
08A45CC0   64  C0020+1CC0    3.50 ==
+0D0D000   64  ASMFRLDN+0080  3.23 ==
00D0F480   64  ASMFRLDN+2500  3.09 ==
08A45300   64  C0020+1300    2.21 =
```

The subordinate Code Address lines would then be displayed:

File View Navigate Help			
C03: CPU Usage by Code Slice (0656/TSTJ0B01)			Row 00001 of 01131
Command ==>			Scroll ==> CSR
Address	Size	Location	Percent of CPU time * 10.00% ±1.1%
*....1....2....3....4....5....6....7....8..			
00D0B1F0	64	ASMFPSRH+0A80	20.90 =====
08A45CC0	64	C0020+1CC0	3.50 ==
00D0D000	64	ASMFRDLN+0080	3.23 ==
→ 00D0D000		ASMFRDLN+0080	2.30 =
→ 00D0D026		ASMFRDLN+00A6	0.51
→ 00D0D036		ASMFRDLN+00B6	0.42
00D0F480	64	ASMFRDLN+2500	3.09 ==

Remember, you can also expand an entire report by typing “+” on the first heading, in this report it would be the Address heading.

Detail line descriptions

Code Slice

This line represents a block (or “slice”) of contiguous bytes of object code for which CPU execution is quantified. The number of times CPU execution was observed within this block is expressed as a percentage of the total number of CPU execution observations.

The hexadecimal address of the beginning of the slice is shown under the Address heading. The size of the slice, in bytes, is shown under the Size heading. If possible, the address of the beginning of the slice is expressed in the form CSECT+offset, or Module+offset, under the Location heading.

Source program mapping can be accessed from this line by entering a “p” line command.

Code Address

These lines are displayed as subordinate lines under the appropriate Code Slice line and show individual addresses at which execution was observed. The number of times execution was observed at such an address is expressed as a percentage of the total number of CPU execution observations.

Source program mapping can be accessed from this line by entering a “p” line command.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to view a pop-up menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Code Slice, Code Address	Display context help information.
++	Code Slice, Code Address	Show additional details.
+	Code Slice	Expand to reveal next level.
–	Code Slice	Collapse to hide next level.
SV	Code Slice	Sort next level by value.
SA	Code Slice	Sort next level by address.
M	Code Slice	Display load module information.
P	Code Slice, Code Address	Display source program mapping.
C09	Code Slice, Code Address	Display C09 report subset.

on headings

Cmd	When Applied To Object	Action
?	Address, Size, Percent CPU	Display context help information.
+	Address	Expand to reveal all entries.
+	Percent CPU	Zoom in scale.
–	Address	Collapse to show only first level.
–	Percent CPU	Zoom out scale.
SV	Address	Sort next level by value.
SA	Address	Sort next level by address.

SETUP options

```
File View Navigate Help
+-----+
| C03 - Report SETUP Window (00723/CICS56A) |
| Command ==>                               | Scroll ==> CSR |
| Options for CPU Usage by Code Slice       |
|                                           |
| - Filter by CICS transactions and Terminals as |
|   specified in panel 5, Subsystems.         |
|                                           |
| Code Slice Size (in Bytes) . . . . . 64    |
| A Code Slice is a block of storage containing |
| object code. This report shows the percentage of |
| CPU activity observed in each code slice. Use this |
| setting to vary the code slice size.         |
|                                           |
| Minimum CPU Percentage . . . . . 0.00      |
| This is the minimum percentage of CPU activity |
| measured in a code slice that is to be reported. |
+-----+
```

The following SETUP options can be selected with the SETUP primary command:

Filter by CICS transaction and terminal

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

Code slice size

Use this to adjust the size of the Code Slice to be reported.

Minimum CPU percentage

You can set this option to eliminate Code Slice entries from the report, where the CPU percentage is below a certain threshold.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

File View Navigate Help			
+----- The following report line was selected -----+ 00FF04A0 56 CPUREL 9.84 00000 +-----+ More: +			
Calculation Details			
CPU measurements		128	
Address range		00FF04A0 to 00FF04D7	
Total CPU measurements		1,300	
Percent in category		9.84%	
Processor states for the CPU usage measurements			
Processor State	Nbr of Samples	Percentage	
Storage key 0	128	100.00%	
Problem state	0	0.00%	
Supervisor state	128	100.00%	
Execution in SVC	128	100.00%	
Execution in real-mode	0	0.00%	
Primary-space mode	128	100.00%	
Access-register mode	0	0.00%	
Secondary-space mode	0	0.00%	
Home-space mode	0	0.00%	
Execution on processor 0	74	57.81%	
Execution on processor 1	54	42.18%	
In private storage ABOVE	0	0.00%	
In private storage BELOW	0	0.00%	
In common storage ABOVE	0	0.00%	

C04 - CPU usage timeline

Overview

This timeline analysis breaks the observation session duration into a number of (approximately) fixed-length, chronological time intervals. Each line represents one of these intervals. By default, 15 intervals are reported, each representing approximately the same number of samples. This illustrates any progressive CPU usage trends, such as blocks of intensive consumption or long periods of waits. The percentage value and the graph quantify CPU usage for an interval. The percentage is derived by dividing the number of samples CPU activity was observed by the number of samples in the interval. This, effectively, is the percentage of time the CPU was executing instructions.

A sample CPU Usage Timeline report is shown here:

File View Navigate Help				
C04: CPU Usage Timeline (0656/TSTJOB01)			Row 00001 of 00015	
Command ==>			Scroll ==> CSR	
SEQN	Seconds	Sig	Percent of Interval * 10.00% ±1.1%	
		1....2....3....4....5....6....7....8....9....	
0001	10.324	69%	19.08	=====
0002	9.114	64%	49.55	=====
0003	8.667	70%	70.82	=====
0004	9.153	83%	43.65	=====
0005	9.161	77%	39.36	=====
0006	9.094	70%	35.46	=====
0007	8.791	75%	41.95	=====
0008	7.424	89%	12.18	=====
0009	6.988	76%	63.63	=====
0010	6.741	71%	64.83	=====
0011	6.475	75%	70.12	=====
0012	6.467	73%	68.43	=====
0013	6.465	71%	67.03	=====
0014	6.422	75%	70.42	=====
0015	6.446	72%	64.60	=====

Detail line descriptions

Each line represents reports values under the following headings:

- SEQN
- Seconds
- Sig

SEQN

This is the sequence number of the interval. Intervals are numbered 0001, 0002, etc. You can create a subset of report C01, C02, or C03 from this line by entering the report code as a line command. A pop-up window of the report will be displayed, and the subset of data used for the report will be the samples from this interval.

Seconds

This is the duration of the interval in seconds.

Sig

This quantifies the significance of the measurement for the interval. This is the percentage of samples in the interval the address space was not Queued – either CPU consumption or WAIT state was observed.

Subset reports

This report can generate subset reports for any detail line. By entering a report code on a detail line, a pop-up subset report is displayed for this item. The item selected is scaled to 100 percent. The available subset reports are listed below in “Line commands, on objects.”

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	SEQN (sampling interval)	Display context help information.
++	SEQN (sampling interval)	Show additional details.
C01	SEQN (sampling interval)	Display C01 report subset.

Cmd	When Applied To Object	Action
C02	SEQN (sampling interval)	Display C02 report subset.
C03	SEQN (sampling interval)	Display C03 report subset.
C09	SEQN (sampling interval)	Display C09 report subset.

This report does not have any line commands on headings.

SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```
File View Navigate Help
+-----+
| C04 - Report SETUP Window (00723/CICS56A) |
| Command ===>                               | Scroll ===> CSR |
| Options for CPU Usage Timeline              |
|
| Number of Intervals . . . . . 15           |
| This is the number of equal time intervals |
| within the duration of the measurement    |
| that are to be reported. Each report line |
| will show measurement information for one |
| interval.
|
| - Filter by CICS transactions and Terminals |
|   specified in panel 5, Subsystems.        |
+-----+
```

Number of Intervals

Use this option to change the number of equal time intervals that are reported.

Filter by CICS transaction and terminal

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
| +-----+ The following report line was selected +-----+ |
| | 0001      8.269  52% 22.63 ==== | |
| +-----+ |
| Information about sampled interval |
|
| Interval Number      1 |
| Nbr of Samples      667 |
| Duration             0 minutes, 8.26 seconds |
| Active CPU Samples   151 ===== |
| WAIT Samples        200 ===== |
| Queued CPU Samples   316 ===== |
+-----+
```

C05 - CPU usage by task/category

Overview

This report analyzes measured CPU consumption. It shows, for each Task (TCB), the percentage of the total CPU time measured in that Task. Under each task, this information is shown under the following general categories:

APPLCN

Application Code

SYSTEM

System/OS Services

DATAMG

Data Management (DASD) Requests

DB2SQL

SQL Processing

IMSDLI

IMS DL/I Calls

IMSDLI

IMS DL/I Calls

ADABAS

Adabas requests

In addition, any activity observed at locations for which no load module name could be determined is attributed to a category:

NOSYMB

No Module Name Found

A sample report is shown below. When the report is first displayed, only the top level of the hierarchy (Tasks) is visible. Often there will only be one task, however this example has many. To expand a task to show the next hierarchical level, you can type the “+” line command on the detail line. You can also enter the “+” line command on the Name heading to expand the entire report to show all detail lines in all hierarchical levels.

File View Navigate Help			
C05: CPU Usage by Task/Category (0711/TSTJOB01)			Row 00001 of 00041
Command ==>			Scroll ==> CSR
Name	Description	Percent of CPU time * 10.00%	±3.8%%
		*....1....2....3....4....5....6....7....8.	
DFHKETCB-007	TCB=008DAD90	52.19	=====
DFHKETCB-001	TCB=008DA6B8	32.07	=====
DFHKETCB-012	TCB=008C2068	13.16	=====
DFHKETCB-008	TCB=008DAA68	2.57	=
IEAVAR00-002	TCB=008FE0A8	0.00	
IEAVTSDT-003	TCB=008FFE88	0.00	
DFSPAT00-024	TCB=008BC210	0.00	
DFSPAT00-025	TCB=008B9E88	0.00	
DFHSIP-005	TCB=008F69F8	0.00	
DFSPAT00-026	TCB=008B9CD8	0.00	
DFHKETCB-009	TCB=008C2E88	0.00	
DFSPAT00-027	TCB=008B9A30	0.00	
DFHKETCB-011	TCB=008C2750	0.00	
DFSPAT00-028	TCB=008B9788	0.00	
CSQCSERV-014	TCB=008BDE88	0.00	
DFSPAT00-029	TCB=008B94E0	0.00	
CSQCSERV-016	TCB=008BDA60	0.00	

Detail line descriptions

Each line represents a System Object – an object to which CPU time is attributed. These lines are arranged hierarchically. You can expand a line (using the “+” line command) to reveal a breakdown into subordinate objects. Each type of object shown in this report is described here:

Task

This is the highest level object in the report. Each active Task is reported. The percentage of the total measured CPU time which was measured in this Task is reported. A SETUP option is available which specifies that all Tasks – including inactive tasks – are to be displayed.

Name Column

The name of the program specified in the ATTACH macro that started the task as well as the TCB index number is shown.

Description Column

The TCB address is shown. For CICS measurements that have the CICS data extractor selected, the TCB mode is displayed for CICS TCBs. This immediately follows the TCB address.

Category

Activity within a Task is categorized as APPLCN, SYSTEM, DATAMG, DB2SQL, IMSDLI, ADABAS or NOSYMB.

DPA Group

Within a category – usually the SYSTEM category – load modules can be further arranged into Descriptive Program Attribution (DPA) groups. These are functional groups like: IMS, DB2, MVS, SVC, etc. By entering a “+” on the SYSTEM category line:

File View Navigate Help			
C05: CPU Usage by Task/Category (0711/TSTJOB01)		Row 00001 of 00045	
Command ==>		Scroll ==> CSR	
Name	Description	Percent of CPU time * 10.00%	±3.8%
*....1....2....3....4....5....6....7....8.			
DFHKETCB-007	TCB=008DAD90	52.19	=====
→ +SYSTEM	System/OS Servic	52.19	=====
→ APPLCN	Application Code	0.00	
→ DATAMG	Data Mgmt Proces	0.00	

The list of objects in this category is expanded to the next level of the hierarchy to include DPA groups:

File View Navigate Help			
C05: CPU Usage by Task/Category (0711/TSTJOB01)		Row 00001 of 00048	
Command ==>		Scroll ==> CSR	
Name	Description	Percent of CPU time * 10.00%	±3.8%
*....1....2....3....4....5....6....7....8.			
DFHKETCB-007	TCB=008DAD90	52.19	=====
→ SYSTEM	System/OS Servic	52.19	=====
→ SVC	SVC Routines	51.13	=====
→ CICS	CICS Subsystem	0.60	
→ MVS	MVS System	0.45	
→ APPLCN	Application Code	0.00	
→ DATAMG	Data Mgmt Proces	0.00	

Note: Note Using the SETUP primary command, you can specify aggregation of modules into Group or Subgroup. Subgroup offers a more granular, less inclusive categorization than Group.

In this sample screen Subgroup has been selected in SETUP, note that the SVC group has now been replaced with SVC subgroups (a subgroup for each SVC type.)

File View Navigate Help			
C05: CPU Usage by Task/Category (0711/TSTJ0B01)		Row 00001 of 00014	
Command ==>		Scroll ==> CSR	
Name	Description	Percent of CPU time * 10.00%	±3.8%
*....1....2....3....4....5....6....7....8.			
DFHKETCB-007	TCB=008DAD90	52.19	=====
→ SYSTEM	System/OS Servic	52.19	=====
→ SVCTYPE1	Type 1 System	24.81	=====
→ SVCTYPE2	Type 2 System	14.22	=====
→ SVCTYPE4	Type 4 System	7.11	===
→ SVCTYPE3	Type 3 System	4.99	==
→ CICS	CICS Subsystem	0.60	
→ MVS	MVS System	0.45	
→ APPLCN	Application Code	0.00	
→ DATAMG	Data Mgmt Proces	0.00	

Name Column

The symbolic name of the Group/Subgroup appears under this heading.

Description Column

A Group/Subgroup description appears under this heading.

Load Module

A load module line appears under a Group/Subgroup line, under a Category line, or under an SVC line.

For example, to see the load modules under the Group/Subgroup line MVS, enter “+” on the MVS object:

File View Navigate Help			
C05: CPU Usage by Task/Category (0711/TSTJ0B01)		Row 00001 of 00014	
Command ==>		Scroll ==> CSR	
Name	Description	Percent of CPU time * 10.00%	±3.8%
*....1....2....3....4....5....6....7....8.			
DFHKETCB-007	TCB=008DAD90	52.19	=====
→ SYSTEM	System/OS Servic	52.19	=====
→ SVCTYPE1	Type 1 System	24.81	=====
→ SVCTYPE2	Type 2 System	14.22	=====
→ SVCTYPE4	Type 4 System	7.11	===
→ SVCTYPE3	Type 3 System	4.99	==
→ CICS	CICS Services	0.60	
→ +VS	MVS Services	0.45	
→ APPLCN	Application Code	0.00	
→ DATAMG	Data Mgmt Proces	0.00	

The MVS Group has now been expanded to show load modules in the next hierarchical level:

File View Navigate Help			
C05: CPU Usage by Task/Category (0711/TSTJ0B01)		Row 00001 of 00016	
Command ==>		Scroll ==> CSR	
Name	Description	Percent of CPU time * 10.00%	±3.8%
*....1....2....3....4....5....6....7....8.			
DFHKETCB-007	TCB=008DAD90	52.19	=====
→ SYSTEM	System/OS Servic	52.19	=====
→ SVCTYPE1	Type 1 System	24.81	=====
→ SVCTYPE2	Type 2 System	14.22	=====
→ SVCTYPE4	Type 4 System	7.11	===
→ SVCTYPE3	Type 3 System	4.99	==
→ CICS	CICS Services	0.60	
→ +VS	MVS Services	0.45	
→ IGG0CLA0	Data Managem	0.30	
→ IGVVSM31	Virtual Stor	0.15	

Name Column

The load module name appears under this heading.

Description Column

If a DPA functional description is found for the module name, it is reported under this heading. Otherwise “Application Program” is displayed.

CSECT (Control Section)

These lines can appear as subordinate, breakdown items under a load module line. If Application Performance Analyzer was able to find ESD (External Symbol Dictionary) information, during the measurement process, for a load module, these items will appear under the load module and the measured activity will be attributed to them.

Name Column

The CSECT name appears under this heading.

Description Column

This will display "CSECT in xxxxxxxx" where xxxxxxxx is the name of the load module to which the CSECT belongs.

Source program mapping can be accessed from this line by entering a "p" line command.

SVC (Supervisor Call)

This line shows attribution of measured activity during execution of an MVS Supervisor Call.

Name Column

"SVC" followed by a 3-digit decimal SVC number (000 to 255) appears under this heading. For example, "SVC120."

Description Column

A description of the SVC service, or the name of the macro which invokes the SVC appears under this heading. For example: "GETMAIN/FREEMAIN."

DDNAME

These lines appear under the DATAMG category and indicate the DDNAME of a file to which CPU usage is attributed. The quantification indicates CPU time consumed in data management routines.

Data Management Request

These lines appear under DDNAME lines and show a further breakdown of CPU usage for the DDNAME to the specific I/O request statements.

SQL Statement

This item attributes measured activity to a DB2 SQL statement.

Name Column

A sequence number is assigned to each unique SQL statement observed during the measurement. This sequence number is shown in the name field. It is possible for some sequence numbers to be missing (sequence gaps) from the report. This will occur if a sequence number was assigned to SQL statements but no CPU activity was measured for these statements.

Description Column

The name of the program that issued the SQL request followed by the precompiler statement number (enclosed in parentheses) is shown here. This is followed by the SQL function (e.g. SELECT, INSERT, COMMIT).

DL/I Call

This item attributes measured activity to an IMS DL/I call.

Name Column

A sequence number is assigned to each unique DL/I call statement observed during the measurement. This sequence number is shown in the name field.

Description Column

The DL/I function code appears followed by the PCB name followed by the relative PCB number in parentheses. The location of the call, in *csect+offset* format, follows.

Adabas Call

This item attributes measured activity to an Adabas call.

Name Column

A sequence number is assigned to each unique Adabas call statement observed during the measurement. This sequence number is shown in the name field.

Description Column

The name of the program that issued the Adabas request and the offset within the program, followed by the Adabas command code that was issued, is displayed in this field. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.

Unresolved Address

This item attributes measurement activity to a range of addresses for which a corresponding load module name could not be determined.

Name Column

Activity observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format “HHHHHxxx” where HHHHH are the 5 high order hexadecimal digits of the address. For example: “08915xxx” means the range from 08915000 to 08915FFF.

Description Column

“Unresolved Address” appears under this heading.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Task, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call	Display context help information.
++	Task, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call	Show additional details.
+	Task, Category, Load Module, SVC SQL command, DLI call, Adabas call	Expand to reveal next level.
–	Task, Category, Load Module, SVC SQL command, DLI call, Adabas call	Collapse to hide next level.
SV	Task, Category, SVC, SQL command, DLI call, Adabas call	Sort next level by value.
SN	Task, Category, SVC, SQL command, DLI call, Adabas call	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT, SQL command, DLI call, Adabas call	Display source program mapping.
C09	Category, Load Module, SVC, CSECT, SQL command, Unresolved Address, DLI call, Adabas call	Display C09 report subset.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.

Cmd	When Applied To Object	Action
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

SETUP options

File View Navigate Help

```
+-----+
| C05 - Report SETUP Window (00723/CICS56A)
| Command ==> Scroll ==> CSR
| Options for CPU Analysis by Category
|
| Enter "/" to select an option
| / Report modules by "Group". Unselect to report
|   by "SubGroup". Group is a higher level (more
|   inclusive) categorization than SubGroup.
|
| / Include "inactive" tasks in the report. An
|   inactive task is one for which there were no
|   observations of CPU consumption.
|
| / Show the DB2SQL category in which CPU time
|   attributed to SQL processing is shown.
|
| / Show the DATAMG category in which CPU time
|   attributed to data management is shown.
|
| / Show the IMSDLI category in which CPU time
|   attributed to DLI processing is shown.
|
| / Show the ADABAS category in which CPU time
|   attributed to ADABAS processing is shown.
|
| - Filter by CICS transactions and Terminals as
|   specified in panel 5, Subsystems.
+-----+
```

The following SETUP options can be selected with the SETUP primary command:

Reporting by Group / SubGroup

This option allows you to aggregate modules into Group or SubGroup. SubGroup offers a more granular, less inclusive categorization than Group. For example, when reporting by Group, all SVCs would be reported under the "SVC" Group. When reporting by SubGroup, SVCs would be reported under SubGroups such as SVCTYPE1, SVCTYPE2, etc.

Include inactive tasks

You can choose to include or eliminate inactive tasks from the report. An inactive task is one for which there were no observations of CPU consumption.

Show the DB2SQL category

You can choose to show the DB2SQL category in which CPU time attributed to SQL processing is shown.

This shows activity attributed to data management functions, which include basic access functions such as READ and WRITE. Processing of OPEN and CLOSE functions is not included in this category. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category.

This shows activity attributed to IMS DLI calls. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category.

This shows activity attributed to Adabas requests. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category.

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

```

File  View  Navigate  Help
-----
+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+-----+-----+
| > CAZ00080      Application Pr  4.73 00 |
+-----+-----+-----+-----+-----+-----+-----+-----+

Calculation Details
  CPU measurements                      34
  In load module                       CAZ00080
  Total CPU measurements               718
  Percent in category                  4.73%

Processor states for the CPU usage measurements

Processor State                      Nbr of Samples  Percentage
Storage key 0                        34             100.00%
Problem state                        0              0.00%
Supervisor state                     34             100.00%
Execution in SVC                     0              0.00%
Execution in real-mode                0              0.00%
Primary-space mode                   34             100.00%
Access-register mode                 0              0.00%
Secondary-space mode                  0              0.00%
Home-space mode                       0              0.00%
Execution on processor 0              10             29.41%
Execution on processor 1              24             70.58%
In private storage ABOVE              34             100.00%
In private storage BELOW               0              0.00%
In common storage ABOVE                0              0.00%
In common storage BELOW                0              0.00%
Execution in AMODE 24                  0              0.00%
Execution in AMODE 31                  34             100.00%
Execution in AMODE 64                  0              0.00%

```

C06 - CPU usage by task/module

Overview

This report analyzes measured CPU consumption. It shows, for each Task (TCB), the percentage of the total CPU time measured in that Task. Under each task, a further breakdown of CPU consumption is shown by load modules.

In addition, any execution measured at locations for which no load module name could be determined is attributed to hexadecimal address ranges.

Detail line descriptions

Each line represents a System Object, an object to which measured activity is attributed. These lines are arranged hierarchically. You can expand a line (using the “+” line command) to reveal a breakdown into subordinate objects. Each type of object shown in this report is described here:

Task

This is the highest level object in the report. Each active Task is reported. The percentage of the total measured CPU time which was measured in this Task is reported. A SETUP option is available which specifies that all Tasks - including inactive tasks - are to be displayed.

Name Column

The name of the program specified in the ATTACH macro that started the task as well as the TCB index number is shown.

Description Column

The TCB address is shown. For CICS measurements that have the CICS data extractor selected, the TCB mode is displayed for CICS TCBs. This immediately follows the TCB address.

Load Module

Name Column

The load module name appears under this heading.

Description Column

If a DPA functional description is found for the module name, it is reported under this heading. Otherwise “Application Program” is displayed.

CSECT (Control Section)

These lines can appear as subordinate, breakdown items under a load module line. If Application Performance Analyzer was able to find ESD (External Symbol Dictionary) information, during the measurement process, for a load module, these items will appear under the load module and the measured activity will be attributed to them.

Name Column

The CSECT name appears under this heading.

Description Column

This will display “CSECT in xxxxxxxx” where xxxxxxxx is the name of the load module to which the CSECT belongs.

Unresolved Address

This item attributes measurement activity to a range of addresses for which a corresponding load module name could not be determined.

Name Column

Activity observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format “HHHHHxxx” where HHHHH are the 5 high order hexadecimal digits of the address. For example: “08915xxx” means the range from 08915000 to 08915FFF.

Description Column

“Unresolved Address” appears under this heading.

Sample reports

A sample report is shown below. When the report is first displayed, only the top level of the hierarchy (Tasks) is visible. Often there will only be one task, however this example has many. To expand a task to show the next hierarchical level, you can type the “+” line command on the detail line. You can also enter the “+” line command on the Name heading to expand the entire report to show all detail lines in all hierarchical levels.

```
File View Navigate Help
```

C06: CPU Usage by Task/Module (0711/TSTJOB01) Row 00001 of 00021
 Command ==> Scroll ==> CSR

Name	Description	Percent of CPU time * 10.00%	±2.3%%
		*....1....2....3....4....5....6....7....8.	
PMSEL-012	TCB=008B8318	46.65	=====
ISPTASK-008	TCB=008B8D90	11.87	=====
PMSEL-021	TCB=008B8318	11.18	=====
ISPF-007	TCB=008E1190	10.70	=====
EXEC-017	TCB=008B8A50	5.13	=====
EX-018	TCB=008B8A50	3.21	=====
CALL-014	TCB=008A0B50	2.51	=====
CALL-011	TCB=008A0130	1.92	=====
CALL-020	TCB=008A0130	1.76	=====
EX-010	TCB=008B8B48	1.28	=====
EXEC-013	TCB=008A0E68	1.07	=====
ALTLIB-019	TCB=008A00F0	0.96	=====
ALTLIB-015	TCB=008A00F0	0.90	=====
FREE-016	TCB=008A00F0	0.80	=====
IEAVAR00-001	TCB=008FE0A8	0.00	=====
IEAVTSDT-002	TCB=008FFE88	0.00	=====
IEESB605-003	TCB=008FFBF8	0.00	=====

Here is a sample with the first task fully expanded: Line commands:

```
File View Navigate Help
```

C06: CPU Usage by Task/Module (0694/TSTJOB01) Row 00001 of 01111
 Command ==> Scroll ==> CSR

Name	Description	Percent of CPU time * 10.00%	±2.3%%
		*....1....2....3....4....5....6....7....8.	
PMSEL-012	TCB=008B8318	46.65	=====
→ C0200	Application Prog	9.84	=====
→ C0200	CSECT in C0	9.84	=====
→ C0020	Application Prog	7.86	=====
→ C0020	CSECT in C0	7.86	=====
→ BKNCESUP	Application Prog	2.88	=====
→ BKNCESUP	CSECT in BKNCE	2.35	=====
→ BKNSTFMT	CSECT in BKNCE	0.53	=====
→ IGDDCFSR	Storage manageme	2.30	=====
→ IAXVF	Nucleus Routine	2.08	=====
→ IARVFRMN	Real storage m	2.08	=====
→ C0010	Application Prog	1.65	=====
→ C0010	CSECT in C0	1.65	=====
→ IAXVP	Nucleus Routine	1.33	=====
→ IARVPGTI	Real storage m	1.33	=====
→ IGWLHLS	DFSMS	0.96	=====
→ IGWLHRLS	DFSMS	0.32	=====
→ IGWLHAJB	DFSMS	0.16	=====

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Task, Load Module, CSECT, Unresolved Address	Display context help information.
++	Task, Load Module, CSECT, Unresolved Address	Show additional details.
+	Task, Load Module	Expand to reveal next level.
–	Task, Load Module	Collapse to hide next level.
SV	Task	Sort next level by value.
SN	Task, Category	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT	Display source program mapping.
C09	Load Module, CSECT, Unresolved Address	Display C09 report subset.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent CPU	Zoom out scale.
SV	Name, Description, Percent CPU	Sort next level by value.
SN	Name, Description, Percent CPU	Sort next level by name.

SETUP options

```
File View Navigate Help
+-----+
| C06 - Report SETUP Window (00723/CICS56A) |
| Command ===>                               | Scroll ===> CSR |
| Options for CPU Usage by Task/Category    |
|
| Enter "/" to select an option
| / Include "inactive" tasks in the report. An
|   inactive task is one for which there were no
|   observations of CPU consumption.
|
| - Filter by CICS transactions and Terminals as
|   specified in panel 5, Subsystems.
|
+-----+
```

The following SETUP option can be selected with the SETUP primary command:

Quantification

Each report line quantifies CPU usage as a percentage. Each percentage represents the ratio of CPU consumption observed for the reported item to the total CPU consumption measured in the address space.

Detail line hierarchy

C07 displays detail lines at a single level. Up to four types of detail lines are reported.

```
Level 1  Source Procedure
Level 1  Source Procedure
Level 1  Source Procedure
...
Level 1  APPLCN Category
Level 1  SYSTEM Category
Level 1  NOSYMB Category
```

Detail line descriptions

Source procedure detail line

This identifies a source program procedure and quantifies CPU usage attributed to the procedure. The source procedure detail lines are displayed only when the source program or programs are mapped and loaded. There are two ways to map and load the source program. You can use the A01 panel, or you can open any other Application Performance Analyzer report that supports the 'P' line command and use the 'P' line command to map and load the source before opening the C07 report. When the source is mapped and loaded, the source procedure details lines are displayed and the source can be viewed using the 'P' line command. See [Chapter 12, "Source program mapping,"](#) on page 613 for more details.

Under Heading	This is Displayed
Program	The name of the CSECT in the module containing the source procedure.
Procedure Name	The name of the source procedure.
Percent of CPU Time	The percentage of CPU time consumed during execution in the source procedure.

APPLCN Category detail line

Any execution measured in application programs that could not be associated with a source program procedure is quantified in this detail line. No further breakdown of this category is reported. Use report C01 to see further details.

SYSTEM Category detail line

Any execution measured in system programs that could not be associated with a source program procedure is quantified in this detail line. No further breakdown of this category is reported. Use report C01 to see further details.

NOSYMB Category detail line

Any execution measured at addresses that could not be associated with a load module is quantified in this detail line. No further breakdown of this category is reported. Use report C01 to see further details.

Sample reports

A sample report is shown here:


```

File View Navigate Help
-----
C07: CPU Usage by Procedure (0757/TSTJ0B01) Row 00001 of 00009
Command ==> ----- Scroll ==> CSR
Program Procedure Name Percent of CPU time * 10.00% ±2.5%
*....1....2....3....4....5....6....7....8
LPFRAYV4 B300-PROCESS-ACCTS 32.86 =====
LPFRAYV4 A200-CALCULATE-RTE 16.60 =====
LPFRAYV4 A100-CALCULATE-MTX 11.22 =====
LPFRAYV4 B300-EXIT 0.53
LPFRAYV4 A200-EXIT 0.46
LPFRAYV4 A100-EXIT 0.06

SYSTEM System/OS Services 37.45 =====
APPLCN No Procedure Mapped 0.79

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Program, Category	Display context help information.
++	Program, Category	Show additional details.
M	Program	Display load module information.
P	Program	Display source program mapping.
C09	Program, Category	Display C09 report subset.

on headings

Cmd	When Applied To Object	Action
?	Program, Procedure Name, Percent CPU	Display context help information.
+	Procedure name	Expand field size.
+	Percent CPU	Zoom in scale.
–	Procedure name	Reduce field size.
–	Percent CPU	Zoom out scale.
SV	Program, Procedure Name, Percent CPU	Sort next level by value.
SN	Program, Procedure Name, Percent CPU	Sort next level by name.

SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

File View Navigate Help

```
+-----+
| C07 - Report SETUP Window (00723/CICS56A)
| Command ==>                               Scroll ==> CSR
| Options for CPU Analysis by Procedure
|
| Enter "/" to select an option
| /  Omit procedures for which no CPU activity was
|    measured. Unselect to report all procedure
|    names.
|
| -  Filter by CICS transactions and Terminals as
|    specified in panel 5, Subsystems.
+-----+
```

By default, only those procedures for which CPU activity was measured are displayed. Deselect this option to display all procedure names.

Omit procedures with no CPU activity

By default, only those procedures for which CPU activity was measured are displayed. Deselect this option to display all procedure names.

Filter by CICS transaction and terminal

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

File View Navigate Help		
+----- The following report line was selected -----+ LPFRAYV4 B300-PROCESS-ACCTS 59.95 00000000000000000000000000000000 +-----+ More: +		
Calculation Details		
Data management CPU measurements	4,820	
In load module	LPFRAYV4	
Executing routine	B300-PROCESS-ACCTS	
Total CPU measurements	8,040	
Percent in category	59.95%	
Processor states for the CPU usage measurements		
Processor State	Nbr of Samples	Percentage
Storage key 8	4,820	100.00%
Problem state	4,820	100.00%
Supervisor state	0	0.00%
Execution in SVC	0	0.00%
Execution in real-mode	0	0.00%
Primary-space mode	4,820	100.00%
Access-register mode	0	0.00%
Secondary-space mode	0	0.00%
Home-space mode	0	0.00%
Execution on processor 0	2,818	58.46%
Execution on processor 1	2,002	41.53%
In private storage ABOVE	4,820	100.00%
In private storage BELOW	0	0.00%

C08 - CPU usage referred attribution

Usage

Use this report to see attribution of CPU usage measured in system modules referred back to the points of invocation in application modules. A SETUP option is available to display the system modules at the highest level, with a breakdown of the application programs that invoked them.

Quantification

Each report line quantifies CPU usage as a percentage. Each percentage represents the ratio of CPU consumption observed for the reported item to the total CPU consumption measured in the address space.

Detail line hierarchy

The first level detail line shows an application module to which CPU usage in system modules has been attributed. You can expand each line to reveal additional hierarchical levels of detail (using the “+” line command).

The hierarchy is illustrated here:

Level 1	Application Module
Level 2	CSECT in application module
Level 3	Offset in CSECT
Level 3	Source statement
Level 4	System module

Level 5 CSECT in System module
Level 4 Unresolved address

The optional SETUP shows the system modules that have referred attribution with additional levels to show which application programs invoked them. You can expand each line to reveal additional hierarchical levels of detail (see Expanding Report Lines).

The hierarchy is illustrated here:

Level 1 System module
 Level 2 CSECT in System module
 Level 3 Application Module
 Level 4 CSECT in application module
 Level 5 Offset in CSECT
 Level 5 Source statement
Level 1 Unresolved address

Detail line descriptions

Application module

This identifies an application module to which attribution of CPU usage in system routines has been referred. During the measurement, Application Performance Analyzer determined that execution in system modules was initiated by a system request statement (such as a CALL) with an invocation point in the identified application module.

Under Heading	This is Displayed
Name	Name of application load module in which CPU usage measured in system modules was attributed.
Description	Functional description of the load module if one is available. Otherwise, "Application Program" is shown here.
Percent of CPU Time	The percentage of attributed system module CPU usage referred back to this application module.

CSECT in application module

These lines appear under the application module detail line. Each one reports an external name (CSECT) within the application module in which invocation points for attributed CPU execution reside.

Under Heading	This is Displayed
Name	Name of CSECT in which CPU usage measured in system modules was attributed.
Description	CSECT in loadmodname appears here.
Percent of CPU Time	The percentage of attributed system module CPU usage referred back to this CSECT.

Offset in CSECT

These lines appear under the CSECT detail line. Each one reports a return address offset – the point in the CSECT at which control is returned from the attributed system services CPU usage. This identifies the address of the application statement.

Under Heading	This is Displayed
Name	The hexadecimal offset of the return point in the CSECT of the system execution invocation request.

Under Heading	This is Displayed
Description	“Offset in csectname” appears here.
Percent of CPU Time	The percentage of CPU time measured in this system routine for the indicated invocation/return address.

Source statement

One or more lines showing the source statement appear at the same level as the Offset in CSECT detail line. This appears only when the source program has been mapped and loaded. For more information, see Chapter 12, “Source program mapping,” on page 613.

System Module

This line identifies a system module in which CPU usage was measured and attributed to the reported application module.

Under Heading	This is Displayed
Name	The name of a system module in which CPU usage was measured and referred back to the application module under which this line appears.
Description	Functional description of the system module.
Percent of CPU Time	The percentage of CPU time measured in this system routine for the invocation/return address under which this line appears.

CSECT in System Module

This line identifies a CSECT within a system module in which CPU usage was measured and attributed to the reported application module.

Under Heading	This is Displayed
Name	The name of the CSECT in which CPU usage was measured and referred back to the application module under which this line appears.
Description	Functional description of the CSECT.
Percent of CPU Time	The percentage of CPU time measured in this system CSECT for the invocation/return address under which this line appears.

Unresolved address

This line identifies an unresolved address in which CPU usage was measured and attributed to the reported application module.

Under Heading	This is Displayed
Name	An unresolved address range in which CPU usage was measured and referred back to the application module under which this line appears.
Description	“Unresolved Address”
Percent of CPU Time	The percentage of CPU time measured in this address range.

Sample reports

A sample report is shown here. This has been expanded to the third level, and the source has been mapped and loaded. (It can be expanded further to show details of the modules.)

```

File View Navigate Help
-----
C08: CPU Usage Referred Attribution (3598/TSTJOB01)          Row 00001 of 00027
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00%  ±1.0%%
*....1....2....3....4....5....6....7....8.
SAMPLE1   Application Program    88.37 =====
→ SAMPLE1 CSECT in SAMPLE1    88.37 =====
  → 000854 Attribution Offset 35.06 =====
    > Source statement in: Sample1Mainline
    > Open Input SalesActivityFile

  → 00088A Attribution Offset 24.23 =====
    > Source statement in: Sample1Mainline
    > Open OUTPUT SalesReportFile

  → 000918 Attribution Offset 14.22 =====
    > Source statement in: Sample1Mainline
    > Close SalesActivityFile

  → 000936 Attribution Offset 13.89 =====
    > Source statement in: Sample1Mainline
    > Close SalesReportFile

  → 000814 Attribution Offset  0.73
    > Source statement in: Sample1Mainline
    > Inspect B tallying C for all '**'replacing all '**'

  → 000A72 Attribution Offset  0.20
    > Source statement in: ProcessSalesRecord
    > Read SalesActivityFile

```

A sample report using the SETUP option is shown here. It reports attribution from the system modules and CSECTs to the application programs that called them

```

File View Navigate Help
-----
C08: CPU Usage Referred Attribution (3598/TSTJOB01)          Row 00001 of 00011
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00%  ±5.4%
*....1....2....3....4....5....6....7....8.
IGZCPAC   COBPACK          14.70 =====
→ IGZCIN1 INSPECT library  14.41 =====
  → SAMPLE1 CICS Samples    14.41 =====
    → SAMPLE1 CSECT in SAMPLE1 14.41 =====
      → 0008B4 Attribution Of  5.29 ===
      → 000936 Attribution Of  5.00 ===
      → 000832 Attribution Of  4.11 ==
  → IGZCDSP DISPLAY OS      0.29
    → SAMPLE1 CICS Samples    0.29
      → SAMPLE1 CSECT in SAMPLE1 0.29
        → 000952 Attribution Of  0.29

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Application Module, CSECT, Attribution Offset, System Module, Unresolved Address	Display context help information.
++	Application Module, CSECT, Attribution Offset, System Module, Unresolved Address	Show additional details.

Cmd	When Applied To Object	Action
+	Application Module, CSECT, Attribution Offset	Expand to reveal next level.
-	Application Module, CSECT, Attribution Offset, System Module, Unresolved Address	Collapse to hide next level .
M	Application Module, CSECT, System Module, Unresolved Address	Display load module information.
P	CSECT, Attribution Offset	Display source program mapping.
C09	Application Module, CSECT, Attribution Offset, System Module, Unresolved Address	Display C09 report subset.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale .
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

SETUP options

Enter the SETUP primary command to select options for this report. The following window will be displayed:

```
File View Navigate Help
+-----+
| C08 - Report SETUP Window (00723/CICS56A) |
| Command ==>                               | Scroll ==> CSR |
| Options for CPU Referred Attribution      |
|
| Enter "/" to select an option
|   - Select to report attribution from the System
|     module to the application programs that
|     called it. Unselect to show attribution from
|     the application program to the system module.
|
|   - Filter by CICS transactions and Terminals as
|     specified in panel 5, Subsystems.
|
+-----+
```

Attribution to Application/System

Select to report attribution from the System module to the application programs that called it.
Unselect to show attribution from the application program to the system module.

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
-----
+----- The following report line was selected -----+
| > 0005BE      Attribution Offset  7.23 0000      |
+-----+

Calculation Details
CPU measurements attributed to services      582
In the csect                                LPFRAYV4
Return offset                               0005BE
Total CPU measurements                       8,040
Percent in category                          7.23%

Source Statement in: PROCEDURE-DIVISION
                    write VSAM-record

Processor states for the CPU usage measurements

Processor State                                Nbr of Samples  Percentage

Storage key 0                                303           52.06%
Storage key 8                                279           47.93%

Problem state                                257           44.15%
Supervisor state                             325           55.84%

Execution in SVC                             325           55.84%

Execution in real-mode                         0            0.00%

Primary-space mode                           582          100.00%
Access-register mode                         0            0.00%
Secondary-space mode                         0            0.00%
Home-space mode                             0            0.00%

Execution on processor 0                      302           51.89%
Execution on processor 1                     280           48.10%

In private storage ABOVE                     0            0.00%
In private storage BELOW                    0            0.00%
In common storage ABOVE                     420           72.16%
In common storage BELOW                     162           27.83%

Execution in AMODE 24                        0            0.00%
Execution in AMODE 31                       582          100.00%
Execution in AMODE 64                       0            0.00%

```

File	View	Navigate	Help
			More: -
In private storage ABOVE	1	0.02%	
In private storage BELOW	31	0.92%	
In common storage ABOVE	2,222	66.48%	
In common storage BELOW	1,088	32.55%	
Execution in AMODE 24	192	5.74%	
Execution in AMODE 31	3,150	94.25%	
Execution in AMODE 64	0	0.00%	

C09 - CPU usage by PSW/object code

Use this report to see information about sampled CPU execution at the machine-instruction level. This report is most useful when used in Subset Analysis mode to provide more detailed analysis for a particular quantification. You can display this report by entering the “C09” line command on an eligible CPU usage report detail line. The C09 report will show you information about the executed machine instructions.

Quantification

Each report line quantifies CPU usage as a percentage. Each percentage represents the ratio of CPU consumption observed for the reported item to the total CPU consumption measured in the address space.

Detail line hierarchy

The first level detail line shows a PSW (program status word) address value that Application Performance Analyzer recorded when it made an active CPU observation. Each repeated CPU usage observation at the same PSW address is accumulated and reported as a single detail line.

In addition to the PSW address value, Application Performance Analyzer creates a separate first-level detail line if any of the following values are different:

- Execution in problem or supervisor mode
- Address mode (AMODE) 24, 31 or 64
- Address-space control: primary-space, AR mode, secondary-space or homespace
- PSW key
- SVC number if execution was in a supervisor call
- Object code at the PSW address

You can expand the first level detail line to show the object code at the PSW address. Object code is reported in the form of disassembled machine instructions. Application Performance Analyzer displays a line for each machine instruction from 12 bytes of object code captured during the measurement. The PSW address points to the sixth byte of the 12 bytes, so the first instructions reported are the ones that preceded the sampled instruction. When alternate disassembly are available (depending upon the assumed start address), they are listed under the subheading of "Alternate Disassembly".

Detail line descriptions

PSW address line

One line appears for each unique PSW address. By default, these are sorted in descending sequence by CPU activity.

Under Heading	This is Displayed
Address	The PSW address of the sampled instruction.
Module	The load module name at the sampled address, or 'Unknown' if Application Performance Analyzer was unable to determine the module name.
AM	The address mode (AMODE): 24, 31 or 64.
S/P	The SVC number if execution was in a supervisor call or S or P followed by the storage key. “S” indicates supervisor mode and “P” indicates problem mode. For example, “P8” indicates execution in problem mode in storage key 8.

Under Heading	This is Displayed
AS	The address space control mode. AR indicates access-register mode, SS indicates secondary-space mode and HS indicates home-space mode. Blanks are shown for primary-space mode.
ASID	The ASID (address space ID) in hexadecimal of the address space that acquired the storage at the PSW address. This is shown only if the storage was acquired by an address space other than the measured one – a foreign address space. One example of this is the processing of an SQL request. Execution often occurs in load modules fetched into storage by one of the DB2 address spaces.
Percent of CPU Time	The percentage of CPU time observed at the indicated address.

Machine instruction line

Each line shows one machine instruction in disassembled format. These lines pertain to the PSW address line shown above. When alternate disassembly are available (depending upon the assumed start address), they are listed under the subheading of "Alternate Disassembly".

Sample reports

A sample report is shown here. The first entry has been expanded with the “+” line command.

File View Navigate Help									
C09: CPU Usage by PSW/Object Code (2133/TSTJOB01)							Row 00001 of 00018		
Command ==> _____							Scroll ==> CSR		
Address	Module	AM	S/P	AS	ASID	Percent of CPU Time * 10.00% ±1.6%			
						*....1....2....3....4....5....6....			
17801392	- LPFRAYVS	31	P8			98.2	=====		
→ LPFRAYVS+05D6		47F0	B240			BC	15,576(,R11)		
→ LPFRAYVS+05DA		FA20	9820	A06C		AP	2080(3,R9),108(1,R10)76(,R11)		
178012E4	+ LPFRAYVS	31	P8			0.48			
17801360	+ LPFRAYVS	31	P8			0.25			
17801416	+ LPFRAYVS	31	P8			0.23			
17801302	+ LPFRAYVS	31	P8			0.15			
17801312	+ LPFRAYVS	31	P8			0.15			
178012C4	+ LPFRAYVS	31	P8			0.12			
17801342	+ LPFRAYVS	31	P8			0.10			
178012F0	+ LPFRAYVS	31	P8			0.07			
17801362	+ LPFRAYVS	31	P8			0.05			
178012C6	+ LPFRAYVS	31	P8			0.05			
1780129A	+ LPFRAYVS	31	P8			0.02			
1780137A	+ LPFRAYVS	31	P8			0.02			
178012C0	+ LPFRAYVS	31	P8			0.02			

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Address	Display context help information.
++	Address	Show additional details.

Cmd	When Applied To Object	Action
+	Address	Expand to reveal next level.
-	Address	Collapse to hide next level .
M	Address	Display load module information.

on headings

Cmd	When Applied To Object	Action
?	Address, Percent CPU	Display context help information.
+	Address	Expand to reveal all entries.
+	Percent CPU	Zoom in scale.
–	Address	Collapse to show only first level.
–	Percent CPU	Zoom out scale.
SV	Address	Sort next level by value.
SA	Address	Sort next level by address.

SETUP options

Enter the SETUP primary command to select options for this report. The following window will be displayed:

```
File View Navigate Help
+-----+
| C09 - Report SETUP Window (00723/CICS56A) |
| Command ==>                               | Scroll ==> CSR |
| Options for CPU Analysis by PSW/ObjCode   |
|
| Enter "/" to select an option
|
|   - Filter by CICS transactions and Terminals as
|     specified in panel 5, Subsystems.
|
+-----+
```

Filter by CICS transaction and terminal

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| 18802338 + LPFRAYV4 31 P8 50.44 000000000000000000000000 |
+-----+

Calculation Details
CPU measurements 4,056
PSW address 18802338
Total CPU measurements 8,040
Percent in category 50.44%

PSW Information
PSW Address 18802338
Module Name LPFRAYV4
CSECT Name LPFRAYV4
Module+Offset LPFRAYV4+1748
CSECT+Offset LPFRAYV4+1748
Addressing Mode (AMODE) 31 bit
Address Space Control Primary Space
Problem/Supervisor Mode Problem Mode

Machine Instructions
LPFRAYV4+1744 47F0 B0C2 BC 15,194(,R11)
LPFRAYV4+1748 FA20 A830 9075 AP 2096(3,R10),117(1,R9) <- PSW add

```

C10 - CPU Usage by Natural Program

Use this report to see how CPU time was consumed by execution of Natural programs. The Natural data extractor must be turned on during the measurement in order to produce this report.

Quantification

Each report line quantifies time measured as a percentage of total time, the percentage represents the ratio of the number of CPU active measurements in the indicated Natural object to the total number of CPU active observations.

Detail line hierarchy

An unexpanded report shows a line for each Natural Program. The name field shows the Natural program name. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

Level 1 Natural program
Level 2 Natural statement

Detail line descriptions

Natural Program detail line

This is the first-level detail line.

Under Heading	This is Displayed
Program	The Natural program name for which CPU activity is reported.
Library	The name of the library or folder from which the Natural program was obtained.
Percent of CPU Time	The percentage of CPU time consumed during execution in the indicated Natural program.

Natural statement detail line

This is the second-level detail line.

Under Heading	This is Displayed
Program	The four digit Natural statement number for which CPU activity is reported, this will be “0000” for CPU activity for which a statement number could not be determined.
Library	The description of the line: “stmt #”, followed by the Natural statement number for which CPU activity is reported. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Percent of CPU Time	The percentage of CPU time consumed during execution in the indicated Natural statement.

Sample reports

A sample report is shown here. It has been expanded to the second level.

C10: CPU Usage by Natural Program (0236/TSTJOB01)			Row 00001 of 00022
Command ==>			Scroll ==> CSR
Program	Library	Percent of CPU Time * 10.00% ±1.9%	
*...1...2...3...4...5...6...7...8...9			
NATPGM1	SYSLIB	99.67	=====
→ 0010	stmt # 10	38.42	=====
→ 0020	stmt # 20	27.77	=====
→ 0090	stmt # 90	24.93	=====
→ 0120	stmt # 120	8.53	=====
NATPGM2	SYSLIB	0.16	
→ 2985	stmt # 2985	0.05	
→ 3687	stmt # 3687	0.02	
NATPGM3	SYSLIB	0.08	
→ 0183	stmt # 183	0.05	
→ 0621	stmt # 621	0.02	

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Program, Natural statement	Display context help information.
++	Program, Natural statement	Show additional details.
+	Program	Expand to reveal next level.
-	Program	Collapse to hide next level.
SV	Program	Sort next level by value.
SN	Program	Sort next level by statement number.

on headings

Cmd	When Applied To Object	Action
?	Program, Library, Percent CPU	Display context help information.
+	Program	Expand to reveal all entries.
+	Library	Expand field size.
+	Percent CPU	Zoom in scale.
–	Program	Collapse to show only first level.
-	Library	Reduce field size.
–	Percent CPU	Zoom out scale.
SV	Program, Library, Percent CPU	Sort next level by value.
SN	Program, Library, Percent CPU	Sort next level by statement number.

SETUP options

Enter the SETUP primary command to select options for this report. The following window will be displayed:

```
File View Navigate Help
+-----+
| C10 - Report SETUP Window (08184/CICS56A) |
| Command ==>                               | Scroll ==> CSR |
| Options for CPU Analysis by PSW/ObjCode    |
|
| Enter "/" to select an option
|
|   - Filter by CICS transactions and Terminals as
|     specified in panel 5, Subsystems.
|
+-----+
```

Filter by CICS transaction and terminal

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

File View Navigate Help		
+----- The following report line was selected -----+		
0010	stmt # 10 38.42 =====	
+-----		
Calculation Details		
CPU measurements		1,700
Total CPU measurements		3,949
Percent of total		38.42%
Processor states for the CPU usage measurements		
<u>Processor State</u>	<u>Nbr of Samples</u>	<u>Percentage</u>
Storage key 8	1	0.05%
Storage key 9	1,699	99.94%
Problem state	1,700	100.00%
Supervisor state	0	0.00%
Execution in SVC	0	0.00%
Execution in real-mode	0	0.00%
Primary-space mode	1,700	100.00%
Access-register mode	0	0.00%
Secondary-space mode	0	0.00%
Home-space mode	0	0.00%
Execution on processor 0	1,700	100.00%
In private storage ABOVE	1,700	100.00%
In private storage BELOW	0	0.00%
In common storage ABOVE	0	0.00%
In common storage BELOW	0	0.00%

W01 - WAIT time by task/category

Overview

This report analyzes measured CPU WAIT time. It shows, for each Task (TCB), the percentage of elapsed time the Task was observed to be in a WAIT. Under each task, this information is shown under the following general categories:

APPLCN

Application Code

SYSTEM

System/OS Services

DATAMG

Data Management (DASD) Requests

DB2SQL

SQL Processing

IMSDLI

IMS DL/I calls

ADABAS

Adabas requests

In addition, any WAIT time observed at locations for which no load module name could be determined is attributed to a category:

NOSYMB

No Module Name Found

The Task (TCB) name is the object at the top level of the hierarchy for this report, and is the only object visible when the report is first displayed.

A sample report is shown here, as it would appear when it is first displayed:

File View Navigate Help			
W01: WAIT Time by Category (0651/TSTJOB01)		Row 00001 of 00009	
Command ==>		Scroll ==> CSR	
Name	Description	Percent of CPU time * 10.00%	±2.3%
ISPTASK-008	TCB=008B8D90	99.65	=====
PMSEL-012	TCB=00893528	99.58	=====
ISPF-007	TCB=008E1190	99.18	=====
ISPTASK-009	TCB=008B8738	16.54	=====
EXEC-013	TCB=008A67C0	1.01	=
ALLOC-017	TCB=008A67C0	0.06	
ALLOC-015	TCB=008A67C0	0.05	
ALLOC-016	TCB=008A67C0	0.04	
CALL-014	TCB=008A6390	0.00	

You can expand the entire report to show all detail lines at all hierarchical levels by entering the “+” line command on the Name heading.

Detail line descriptions

Each line represents a System Object – an object to which WAIT time is attributed. These lines are arranged hierarchically. You can expand a line (using the “+” line command) to reveal a breakdown into subordinate objects. Each type of object shown in this report is described here:

Task

This is the highest level object in the report. Each active Task is reported. The percentage of the measurement time interval the task was observed to be WAITing is reported.

Note: A SETUP option is available which specifies that all Tasks – including inactive tasks – are to be displayed.

Name Column

The name of the program specified in the ATTACH macro that started the task as well as the TCB index number is shown.

Description Column

The TCB address is shown. For CICS measurements that have the CICS data extractor selected, the TCB mode is displayed for CICS TCBs. This immediately follows the TCB address.

Category

WAIT time within a Task is categorized as APPLCN, SYSTEM, DATAMG, IMSDLI, DB2SQL, ADABAS or NOSYMB.

DPA Group

Within a category – usually the SYSTEM category – load modules can be further arranged into Descriptive Program Attribution (DPA) groups. These are functional groups like: IMS, DB2, VSAM.

Note: A SETUP option is available from which you can specify aggregation of modules into Group or Subgroup. Subgroup offers a more granular, less inclusive categorization than Group. Application Performance Analyzer uses the module name to locate descriptive information in its DPA tables.

Name Column

The symbolic name of the Group/Subgroup appears under this heading.

Description Column

A Group/Subgroup description appears under this heading.

Load Module

A load module line appears under a Group/Subgroup line, under a Category line, or under an SVC line.

Name Column

The load module name appears under this heading.

Description Column

If a DPA functional description is found for the module name, it is reported under this heading. Otherwise “Application Program” is displayed.

CSECT (Control Section)

These lines can appear as subordinate, breakdown items under a load module line. If Application Performance Analyzer were able to find ESD (External Symbol Dictionary) information, during the measurement process, for a load module, these items will appear under the load module and the measured WAIT time will be attributed to them.

Name Column

The CSECT name appears under this heading.

Description Column This will display “CSECT in xxxxxxxx” where xxxxxxxx is the name of the load module to which the CSECT belongs.

SVC (Supervisor Call)

This line shows attribution of measured WAIT time during execution of an MVS Supervisor Call.

Name Column

“SVC” followed by a 3-digit decimal SVC number (000 to 255) appears under this heading. For example, “SVC120.”

Description Column

A description of the SVC service, or the name of the macro which invokes the SVC appears under this heading. For example, “GETMAIN/FREEMAIN.”

SQL Statement

This item attributes WAIT activity to a DB2 SQL statement.

Name Column

A sequence number is assigned to each unique SQL statement observed during the measurement. This sequence number is shown in the name field. It is possible for some sequences numbers to be missing (sequence gaps) from the report. This will occur if a sequence number was assigned to SQL statements but no WAIT activity was measured for these statements.

Description Column

The name of the program that issued the SQL request followed by the precompiler statement number (enclosed in parentheses) is shown here. This is followed by the SQL function (for example, SELECT, INSERT, COMMIT).

DL/I Call

This item attributes WAIT activity to an IMS DL/I call.

Name Column

A sequence number is assigned to each unique DL/I call statement observed during the measurement. This sequence number is shown in the name field.

Description Column

The DL/I function code appears followed by the PCB name followed by the relative PCB number in parentheses. The location of the call, in *csect+offset* format, follows.

Adabas Call

This item attributes WAIT activity to an Adabas call.

Name Column

A sequence number is assigned to each unique Adabas call statement observed during the measurement. This sequence number is shown in the name field.

Description Column

The name of the program that issued the Adabas request and the offset within the program, followed by the Adabas command code that was issued, is displayed in the field. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.

Unresolved Address

This item attributes measurement WAIT time to a range of addresses for which a corresponding load module name could not be determined.

Name Column

WAIT time observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format “HHHHHxxx” where HHHHH are the 5 high order hexadecimal digits of the address. For example, “08915xxx” means the range from 08915000 to 08915FFF.

Description Column

“Unresolved Address” appears under this heading.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Task, Category, Load Module, SVC, CSECT, Unresolved Address	Display context help information.
++	Task, Category, Load Module, SVC, CSECT, Unresolved Address	Show additional details.
+	Task, Category, Load Module, SVC	Expand to reveal next level.
–	Task, Category, Load Module, SVC	Collapse to hide next level.
SV	Task, Category, SVC	Sort next level by value.
SN	Task, Category, SVC	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent WAIT	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduces field size
–	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

SETUP options

```
File View Navigate Help
+-----+
| W01 - Report SETUP Window (00723/CICS56A) |
| Command ==>                               Scroll ==> CSR |
| Options for WAIT Time by Task/Category |
|
| Enter "/" to select an option |
| / Report modules by "Group". Unselect to report |
|   by "SubGroup". Group is a higher level (more |
|   inclusive) categorization than SubGroup. |
|
| / Include "inactive" tasks in the report. An |
|   inactive task is one for which there were no |
|   observations of CPU consumption. |
|
| / Show the DB2SQL category in which Wait time |
|   attributed to SQL processing is shown. |
|
| / Show the DATAMG category in which Wait time |
|   attributed to data management is shown. |
|
| / Show the IMSDLI category in which Wait time |
|   attributed to DLI processing is shown. |
|
| / Show the ADABAS category in which Wait time |
|   attributed to ADABAS processing is shown. |
|
| - Filter by CICS transactions and Terminals as |
|   specified in panel 5, Subsystems. |
+-----+
```

The following SETUP options can be selected with the SETUP primary command:

Reporting by Group / SubGroup

This option allows you to aggregate modules into Group or SubGroup. SubGroup offers a more granular, less inclusive categorization than Group. For example, when reporting by Group, all SVCs would be reported under the "SVC" Group. When reporting by SubGroup, SVCs would be reported under SubGroups such as SVCTYPE1, SVCTYPE2, etc.

Include inactive tasks

You can choose to include or eliminate inactive tasks from the report. An inactive task is one for which there were no observations of CPU consumption.

Show the DB2SQL category

This shows activity attributed to DB2 SQL statements. If it is not selected, the activity is included in the appropriate system modules in the SYSTEM category. This category is not applicable for CICS measurements.

Show the DATAMG category

This shows activity attributed to data management functions, which include basic access functions such as READ and WRITE. Processing of OPEN and CLOSE functions is not included in this category. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category.

Show the IMSDLI category

This shows activity attributed to IMS DLI calls. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category.

Show the ADABAS category

This shows activity attributed to Adabas requests. If it is not selected, the activity is included in the appropriate system modules in the SYSTEM category.

Filter by CICS transaction and terminal

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
+-----+
File   View   Navigate   Help
+-----+
+----- The following report line was selected -----+
| ISPF-007       TCB=008DFA10      98.66 0000000000000000000000000000 |
+-----+

Calculation Details
Wait measurements          9,866
Task                      ISPF-007
Total measurements        10,000
Percent of total          98.66%
```

W02 - WAIT time by task/module

Overview

This report analyzes measured CPU WAIT time. It shows, for each Task (TCB), the percentage of elapsed time the Task was observed to be in a WAIT. Under each task, a further breakdown of wait time is shown by load modules.

In addition, any wait time measured at locations for which no load module name could be determined is attributed to hexadecimal address ranges.

Detail line descriptions

Each line represents a System Object - an object to which measured activity is attributed. These lines are arranged hierarchically. You can expand a line (using the “+” line command) to reveal a breakdown into subordinate objects. Each type of object shown in this report is described here:

Task

This is the highest level object in the report. Each active Task is reported. The percentage of the total measured CPU time which was measured in this Task is reported. A SETUP option is available that specifies that all Tasks, including inactive tasks, are to be displayed.

Name Column

The name of the program specified in the ATTACH macro that started the task as well as the TCB index number is shown.

Description Column

The TCB address is shown. For CICS measurements that have the CICS data extractor selected, the TCB mode is displayed for CICS TCBs. This immediately follows the TCB address.

Load Module

Name Column

The load module name appears under this heading.

Description Column

If a DPA functional description is found for the module name, it is reported under this heading. Otherwise “Application Program” is displayed.

CSECT (Control Section)

These lines can appear as subordinate, breakdown items under a load module line. If Application Performance Analyzer was able to find ESD (External Symbol Dictionary) information, during the

measurement process, for a load module, these items will appear under the load module and the measured wait time will be attributed to them.

Name Column

The CSECT name appears under this heading.

Description Column

This will display “CSECT in xxxxxxxx” where xxxxxxxx is the name of the load module to which the CSECT belongs.

Unresolved Address

This item attributes wait time to a range of addresses for which a corresponding load module name could not be determined.

Name Column

Activity observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format “HHHHHxxx” where HHHHH are the 5 high order hexadecimal digits of the address. For example: “08915xxx” means the range from 08915000 to 08915FFF.

Description Column

“Unresolved Address” appears under this heading. A sample report is shown here. File

A sample report is shown here.

File View Navigate Help

W02: WAIT Time by Module (0651/TSTJOB01)Row 00001 of 00017

Command ==> Scroll ==> CSR

Name	Description	Percent of Time in WAIT * 10.00%	±0.8%
*....1....2....3....4....5....6....7....8.			
IKJEFT01-004	TCB=008FF6E0	100.00	=====
IKJEFT02-005	TCB=008E1640	100.00	=====
IKJEFT09-006	TCB=008E1328	100.00	=====
EX-010	TCB=008B84DB	100.00	=====
CALL-011	TCB=008B8248	100.00	=====
ISPTASK-008	TCB=008B8D90	99.65	=====
PMSEL-012	TCB=00893528	99.58	=====
ISPF-007	TCB=008E1190	99.18	=====
ISPTASK-009	TCB=008B8738	16.54	=====
EXEC-013	TCB=008A67C0	1.01	=
ALLOC-017	TCB=008A67C0	0.06	
ALLOC-015	TCB=008A67C0	0.05	
ALLOC-016	TCB=008A67C0	0.04	
IEAVAR00-001	TCB=008FE0A8	0.00	
IEAVTSDT-002	TCB=008FFE88	0.00	
IEESB605-003	TCB=008FFBF8	0.00	
CALL-014	TCB=008A6390	0.00	

A sample report with a task fully expanded is shown here.

```

File View Navigate Help
-----
W02: WAIT Time by Module (0651/TSTJ0B01)                               Row 00001 of 00086
Command ==> ----- Scroll ==> CSR
Name      Description      Percent of Time in WAIT * 10.00% ±0.8%
*....1....2....3....4....5....6....7....8.
ISPTASK-009 TCB=008B8738      16.54 =====
→ ISPSUBS      Application Prog 11.21 =====
→ ISPCDI       CSECT in ISPSU  8.86 =====
→ ISPCAT       CSECT in ISPSU  2.21 =
→ ISPCCTI      CSECT in ISPSU  0.09
→ ISPPDP       CSECT in ISPSU  0.04
→ IGG019BB     Data Management 4.57 ===
→ IGG019BB     CSECT in IGG01 4.57 ===
→ IGG0CLHA     Data Management 0.25
→ IGG0CLXA     CSECT in IGG0C 0.25
→ IEAVEWAT     Task management 0.18
→ IGC001       CSECT in IEAVE 0.18
→ IGC018       Supervisor Contr 0.17
→ SVC018       CSECT in IGC01 0.17
→ IGC0013I     Supervisor Contr 0.12
→ ICVDSD03     CSECT in IGC00 0.07
→ ICVCMI03     CSECT in IGC00 0.04

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Task, Load Module, CSECT, Unresolved Address	Display context help information.
++	Task, Load Module, CSECT, Unresolved Address	Show additional details.
+	Task, Load Module	Expand to reveal next level.
–	Task, Load Module	Collapse to hide next level.
SV	Task	Sort next level by value.
SN	Task	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent WAIT	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.

Cmd	When Applied To Object	Action
–	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

SETUP options

File View Navigate Help

```

+-----+
| W02 - Report SETUP Window (00723/CICS56A) |
| Command ==>                               | Scroll ==> CSR |
| Options for WAIT Time by Task/Module      |
|
| Enter "/" to select an option
| / Include "inactive" tasks in the report. An
|   inactive task is one for which there were no
|   observations of CPU consumption.
|
| - Filter by CICS transactions and Terminals as
|   specified in panel 5, Subsystems.
|
+-----+

```

The following SETUP options can be selected with the SETUP primary command:

Include inactive tasks

You can choose to include or eliminate inactive tasks from the report. An inactive task is one for which there were no observations of CPU consumption.

Filter by CICS transaction and terminal

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
| +----- The following report line was selected -----+ |
| | ISPF-007      TCB=008DFA10      98.66 00000000000000000000000000000000 | |
| +-----+ |
| Calculation Details |
| Wait measurements   | 9,866 |
| Task                | ISPF-007 |
| Total measurements  | 10,000 |
| Percent of total    | 98.66% |
+-----+

```

W03 - WAIT time referred attribution

Usage

Use this report to see attribution of WAIT time. WAITs issued in system modules are referred back to the points of invocation in application modules.

Quantification

Each report line quantifies WAIT time as a percentage. Each percentage represents the ratio of time in WAIT to the elapsed time of the measurement.

Detail line hierarchy

The first level detail line shows a task (TCB). For CICS measurements that have the CICS data extractor selected, the TCB mode is displayed for CICS TCBs. This immediately follows the TCB address. The second level detail line shows an application module to which WAIT time in system modules has been attributed. You can expand each line to reveal additional hierarchical levels of detail (using the “+” line command).

The hierarchy is illustrated here:

```
Level 1 Task
  Level 2 Application Module
    Level 3 CSECT in application module
      Level 4 Offset in CSECT
        Level 4 Source statement
          Level 5 System module
            Level 6 CSECT in System module
              Level 5 Unresolved address
```

Detail line descriptions

Application module

This identifies an application module to which attribution of WAIT time in system routines has been referred. During the measurement, Application Performance Analyzer determined that WAIT in system modules was initiated by a system request statement (such as a CALL) with an invocation point in the identified application module.

Under Heading	This is Displayed
Name	Name of application load module in which WAIT time observed in system modules was attributed.
Description	Functional description of the load module if one is available. Otherwise, “Application Program” is shown here.
Percent of Time in WAIT	The percentage of attributed system module WAIT time referred back to this application module.

CSECT in application module

These lines appear under the application module detail line. Each one reports an external name (CSECT) within the application module in which invocation points for attributed WAIT reside.

Under Heading	This is Displayed
Name	Name of CSECT in which WAIT time observed in system modules was attributed.
Description	CSECT in loadmodname appears here.

Under Heading	This is Displayed
Percent of Time in WAIT	The percentage of attributed system module WAIT time referred back to this CSECT.

Offset in CSECT

These lines appear under the CSECT detail line. Each one reports a return address offset – the point in the CSECT at which control is returned from the attributed system services WAIT. This identifies the address of the application statement.

Under Heading	This is Displayed
Name	The hexadecimal offset of the return point in the CSECT of the system execution invocation request.
Description	“Offset in csectname” appears here.
Percent of Time in WAIT	The percentage of WAIT time observed in this system routine for the indicated invocation/return address.

Source statement

One or more lines showing the source statement appear at the same level as the Offset in CSECT detail line. This appears only when the source program has been mapped and loaded. See [Chapter 12, “Source program mapping,”](#) on page 613 for more information.

System module

This line identifies a system module in which WAIT was observed and attributed to the reported application module.

Under Heading	This is Displayed
Name	The name of a system module in which WAIT time was measured and referred back to the application module under which this line appears.
Description	Functional description of the system module.
Percent of Time in WAIT	The percentage of WAIT time observed in this system routine for the invocation/return address under which this line appears.

CSECT in System module

This line identifies a CSECT within a system module in which wait time was measured and attributed to the reported application module.

Under Heading	This is Displayed
Name	The name of the CSECT in which wait time was measured and referred back to the application module under which this line appears.
Description	Functional description of the CSECT.
Percent of Time in WAIT	The percentage of WAIT time measured in this system CSECT for the invocation/return address under which this line appears.

Unresolved address

This line identifies an unresolved address in which WAIT time was observed and attributed to the reported application module.

Under Heading	This is Displayed
Name	An unresolved address range in which WAIT time was measured and referred back to the application module under which this line appears.
Description	“Unresolved Address”
Percent of Time in WAIT	The percentage of WAIT time observed in this address range.

Sample reports

A sample report is show here, it has been expanded four levels.

```

File View Navigate Help
-----
W03: WAIT Referred Attribution by Task (1917/TSTJOB01)      Row 00001 of 00053
Command ==> ----- Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00% ±0.9%%
          *....1....2....3....4....5....6....7....8.
LPFRAYVS-001 TCB=008EA1C0      39.68 =====
→ LPFRAYVS      Regression test3 39.11 =====
→ LPFRAYVS      CSECT in LPFRA 39.11 =====
→ 0005AA        Attribution 35.76 =====
    > Source statement in: PROCEDURE-DIVISION
    >                               write VSAM-record

    → IDA019L1      Virtual I/ 35.76 =====
    → 0004C0        Attribution  2.72 =
    > Source statement in: PROCEDURE-DIVISION
    >                               OPEN OUTPUT VSAM1-FILE

    → IGG0CLHA      Data Manag  2.48 =
    → IDA019L1      Virtual I/  0.23
    → IGC0013I      Supervisor  0.00
    → 00065A        Attribution  0.34
    > Source statement in: PROCEDURE-DIVISION
    >                               close VSAM1-FILE

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Task, Load Module, CSECT, Offset, System Module, Unresolved Address	Display context help information.
++	Task, Load Module, CSECT, Offset, System Module, Unresolved Address	Show additional details.
+	Task, Load Module, Offset	Expand to reveal next level.
–	Task, Load Module, Offset	Collapse to hide next level.
SV	Task	Sort next level by value.
SN	Task	Sort next level by name.
M	Load Module, CSECT, System Module	Display load module information.
P	CSECT, Offset	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent WAIT	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent WAIT	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent WAIT	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```
File View Navigate Help
+-----+
| W03 - Report SETUP Window (00723/CICS56A) |
| Command ==>                               Scroll ==> CSR |
| Options for WAIT Referred Attribution by Task |
|
| Enter "/" to select an option |
| / Include "inactive" tasks in the report. An |
|   inactive task is one for which there were no |
|   observations of CPU consumption. |
|
| - Filter by CICS transactions and Terminals as |
|   specified in panel 5, Subsystems. |
+-----+
```

Include Inactive Tasks

You can include or eliminate inactive tasks from the report. An inactive task is one for which there were no observation of CPU consumption.

Filter by CICS transaction and terminal

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

W04 - WAIT time by task ENQ/RESERVE

Usage

Use this report to view the wait time, QNAME and RNAME resulting from ENQueue or RESERVE requests.

Level 1 shows the MVS TCB (Task Control Block). The Name field identifies the attached subtask load module as well as a sequence number (Task Index). The Task/TCB address is shown in the Description field.

When expanded, level 2 shows a line for each unique ENQueue or RESERVE request. The Name column shows the QNAME and the description column shows the RNAME of the request. The RNAME can be up to 255 bytes. The full RNAME is shown in the detail window.

Quantification

Each report line quantifies wait time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an ENQueue/RESERVE request was in a wait state to the total number of samples.

Detail line hierarchy

An unexpanded report shows a line for each MVS task for which ENQueue or RESERVE activity was sampled. You can expand each line to reveal an additional hierarchical level of detail.

The hierarchy is illustrated here:

Level 1 TCB Task
Level 2 ENQueue/RESERVE

Detail line descriptions

TCB Task detail line

This is the first-level detail line.

Under Heading	This is Displayed
Name	The name of the program specified in the ATTACH macro that started the task as well as the TCB index number.
Description	The TCB address is shown. For CICS measurements that have the CICS data extractor selected, the TCB mode is displayed for CICS TCBs. This immediately follows the TCB address.
Percent of Time in WAIT	The percentage of the measurement interval time during which the task was waiting on an ENQueue/RESERVE.

ENQueue/ RESERVE detail line

This is the second-level detail line.

Under Heading	This is Displayed
Name	The QNAME is shown.
Description	The RNAME is shown. Only 40 characters are shown. If the RNAME is longer, the full name can always be found in the Detail window.
Percent of Time in WAIT	The percentage of the measurement interval time during which the indicated ENQueue/RESERVE was waiting.

Sample reports

A sample report is show here, it has been expanded to the second level.

```

File View Navigate Help
-----
W04: Wait Time by Task ENQ/RESERVE (5331/TSTJOB01)          Row 00001 of 00013
Command ==> ----- Scroll ==> CSR

Name                Description                Percent of Time in WAIT * 5.00% ±0.5%
                *....1....2....3....4....5....6....7
ISPF-007            TCB=008DF5E8                6.95 =====
→ ISPFEDIT          ADS04.ISPF.ISPPROF          2.78 ===
→ SYSZRACF          SYS1.RACFDS                 2.78 ===
→ SPFEDIT           USR01.SIMPLIST.TABLES      1.39 =

ISPTASK-008         TCB=008DF2D0                4.17 ====
→ SYSVTOC           BKNSM2                     1.39 =
→ SPFEDIT           USR01.SIMPLIST.L200708     1.39 =
                        .LOG
→ SYSZRACF          SYS1.RACFDS                 1.39 =

EXEC-016            TCB=008AAE88                2.78 ===
→ SYSZRACF          SYS1.RACFDS                 2.78 ===

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Task, ENQ/RESERVE	Display context help information.
++	Task, ENQ/RESERVE	Show additional details.
+	Task	Expand to reveal next level.
–	Task	Collapse to hide next level.
SV	Task	Sort next level by value.
SN	Task	Sort next level by name.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent WAIT	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent WAIT	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent WAIT	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

SETUP options

Enter the SETUP primary command to select options for this report. The following window will be displayed:

```
File View Navigate Help
+-----+
| W04 - Report SETUP Window (00723/CICS56A) |
| Command ==>                               Scroll ==> CSR |
| Options for Wait Time by Task ENQ/RESERVE |
|                                             |
| Enter "/" to select an option             |
| / Include "inactive" tasks in the report. An |
|   inactive task is one for which there were no |
|   observations of CPU consumption.             |
|                                             |
| - Filter by CICS transactions and Terminals as |
|   specified in panel 5, Subsystems.           |
+-----+
```

Include Inactive Tasks

You can include or eliminate inactive tasks from the report. An inactive task is one for which there were no observation of CPU consumption.

Filter by CICS transaction and terminal

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
| +-----+ The following report line was selected +-----+ |
| | SYSZRACF      SYS1.RACFDS      2.78 = | | |
| +-----+ |
| Calculation Details |
| Wait measurements   | 834 |
| Total measurements  | 30,000 |
| Percent of total    | 2.78% |
|                     |
| QNAME      SYSZRACF |
| RNAME      SYS1.RACFDS |
+-----+
```

W05 - WAIT time by tape DDNAME

Usage

Use this report to view the wait time resulting from requests for tape mounts.

This report displays one line for each unique DDNAME for which tape mount waits occurred. The DDNAME column specifies the DDNAME for the tape and the device column specifies the device number for the tape unit.

Quantification

Each report line quantifies wait time measured as a percentage of total time. The percentage represents the ratio of the number of samples for which a wait for a tape mount was observed and the total number of samples.

Detail line descriptions

DDNAME detail line

Under Heading	This is Displayed
DDNAME	The DDNAME name.
Device	The device number for the tape unit.
Percent of Time in WAIT	The percentage of the measurement interval time during which the indicated DDNAME was waiting for a tape mount.

Sample reports

A sample report is show here.

```
File View Navigate Help
-----
W05: Wait Time by Tape DDNAME (5508/TSTJOB01)          Row 00001 of 00011
Command ==> _____ Scroll ==> PAGE

DDNAME   Device      Percent of Time in WAIT * 10.00%  ±58.8%
          *....1....2....3....4....5....6....7....8....9....*
SYSUT2    590          66.66 =====
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	DDNAME	Display context help information.
++	DDNAME	Show additional details.

on headings

Cmd	When Applied To Object	Action
?	DDNAME, Device, Percent WAIT	Display context help information.
SV	DDNAME, Device, Percent WAIT	Sort next level by value.
SN	DDNAME, Device, Percent WAIT	Sort next level by name.

SETUP options

Enter the SETUP primary command to select options for this report. The following window will be displayed:

File View Navigate Help

```
+-----+
| W05 - Report SETUP Window (00723/CICS56A) |
| Command ==>                               | Scroll ==> CSR |
| Options for Wait Time by Tape DDNAME      |
|
| Enter "/" to select an option
|
| - Filter by CICS transactions and Terminals as
|   specified in panel 5, Subsystems.
|
+-----+
```

Filter by CICS transaction and terminal

This option filters the report based on the CICS filtering parameters that are chosen in Panel 5 of the original request. When this option is selected, this report shows only the activity that is related to the filter criteria. If it is not selected, the report is unfiltered. By default, this option is not selected.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

File View Navigate Help

```
+-----+-----+ The following report line was selected -----+
| SYSUT2    590          66.66                                     |
+-----+-----+
| Calculation Details                                             |
|   Wait measurements                                           2   |
|   Total measurements                                           3   |
|   Percent of total                                           66.66% |
+-----+-----+
```

D01 - DASD usage by device

Note: This report also covers TAPE I/O.

Overview

This report shows how much I/O time was used by each DASD (direct access storage device) or tape device for which activity was measured during the observation session. The quantification is based on the

number of samples activity on the device was observed. This is expressed as a percentage of the total number of samples.

Two types of detail lines are shown:

- Volume
- Cylinder Address (for DASD)

Initially, only the Volume lines are visible. You can expand a Volume line (using the “+” line command) to reveal its subordinate Cylinder Address lines.

A sample report is shown here, it has been fully expanded:

```
File View Navigate Help
-----
D01: DASD Usage Time by Device (0618/TSTJOB01) Row 00001 of 00006
Command ==> Scroll ==> CSR
-----
Volume>Cyl Unit-Dev>DD Percent of Time * 10.00% ±2.2%
          *....1....2....3....4....5....6....7....8..
BKNSM2    0A93-3390      8.90 ====
→ Cyl 00BA      VSAM1    8.85 ====
→ Cyl 0007      VSAM1    0.05
BKNSM1    0A92-3390      1.25 ==
→ Cyl 0086      INFILE    1.25 ==
```

Detail line descriptions

Volume

This shows the VOLSER value for a DASD or TAPE device for which I/O activity was measured.

Cylinder Address

These lines appear when the “+” line command is used to expand a Volume line. Each line shows a particular DASD cylinder and further breaks down the measurement by file into quantification by specific cylinders.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Volume, Cylinder Address	Display context help information.
++	Volume, Cylinder Address	Show additional details.
+	Volume	Expand to reveal next level.
–	Volume	Collapse to hide next level.
SV	Volume	Sort next level by value.
SN	Volume	Sort next level by name.

on headings

Cmd	When Applied To Object	Action
?	Volume>Cyl, Unit-Dev>DD, Percent Time	Display context help information.
+	Volume>Cyl	Expand to reveal all entries.

Cmd	When Applied To Object	Action
+	Unit-Dev>DD	Expand field size.
+	Percent Time	Zoom in scale.
–	Volume>Cyl	Collapse to show only first level.
–	Unit-Dev>DD	Reduce field size.
–	Percent Time	Zoom out scale.
SV	Volume>Cyl	Sort next level by value.
SN	Volume>Cyl	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File  View  Navigate  Help
+-----+
+-----+ The following report line was selected +-----+
| BKNSM2      0A99-3390      45.09 000000000000000000000000 |
+-----+
Calculation Details
Data management CPU measurements      138
Device address                        0A99
Volume serial number                  BKNSM2
I/O unit type                         DASD
Device                               3390
Total CPU measurements                306
Percent of total                      45.09%
+-----+

```

SETUP options

The following SETUP option can be selected with the SETUP primary command:

Minimum percentage of time

You can set this option to eliminate reporting of I/O where the percentage of time is below a certain threshold.

D02 - DASD usage by DDNAME

Note: This report also covers TAPE I/O.

Overview

This report shows how much DASD or TAPE I/O time was measured for each file that was open during the observation session. The quantification is based on the number of samples activity on the file was observed. This is expressed as a percentage of the total number of samples.

Two types of detail line are shown:

- DDNAME
- Cylinder Address (for DASD)

Initially, only the DDNAME lines are visible. You can expand a DDNAME line (using the “+” line command) to reveal its subordinate Cylinder Address lines.

A sample report is shown here, it has been fully expanded:

```

File View Navigate Help
-----
D02: DASD Usage Time by DDNAME (0618/TSTJOB01) Row 00001 of 00006
Command ==> ----- Scroll ==> CSR

DDNAME>Cyl   Volume>Unit   Percent of Time * 10.00% ±2.2%
                *....1....2....3....4....5....6....7....8..
VSAM1-02      BKNSM2      8.90 =====
→ Cyl 00BA    0A93-3390  8.85 =====
→ Cyl 0007    0A93-3390  0.05

INFILE       BKNSM1      1.25 ==
→ Cyl 0086    0A92-3390  1.25 ==

```

Detail line descriptions

DDNAME

This represents a file which was open during the observation session. If the same DDNAME is open (and closed) multiple times during the session, it is suffixed with an instance number to indicate this.

Cylinder Address

These lines appear when the “+” line command is used to expand a DDNAME line. Each line shows a particular DASD cylinder and further breaks down the measurement by file into quantification by specific cylinders.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	DDName, Cylinder Address	Display context help information.
++	DDName, Cylinder Address	Show additional details.
+	DDName	Expand to reveal next level.
–	DDName	Collapse to hide next level.
SV	DDName	Sort next level by value.
SN	DDName	Sort next level by name.

on headings

Cmd	When Applied To Object	Action
?	DDName>Cyl, Unit–Dev>DD, Percent Time	Display context help information.
+	DDName>Cyl	Expand to reveal all entries.
+	Volume>Unit	Expand field size.
+	Percent Time	Zoom in scale.
–	DDName>Cyl	Collapse to show only first level.
–	Volume>Unit	Reduce field size.
–	Percent Time	Zoom out scale.
SV	DDName>Cyl	Sort next level by value.

Cmd	When Applied To Object	Action
SN	DDName>Cyl	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
File View Navigate Help
-----
+----- The following report line was selected -----+ More: +
| VSAM1          BKNSM2          45.09 000000000000000000000000 |
+-----+

Calculation Details
  Data management CPU measurements          138
  I/O unit type                             DASD
  Servicing I/O requests for DD Name        VSAM1
  Total CPU measurements                    306
  Percent of total                          45.09%

VSAM file VSAM1 OPENed at 7:27:14.84 Friday Oct 7 2005

  DDNAME          VSAM1
  Open Intent      KEY,DIR,OUT
  Dataset Name     USER1.DATA.TESTPF.DAT
  Storage Class    BKNSMS
  Device Type      3390
  % Free Bytes in CI 10%
  Volume Serial    BKNSM2
  CI Size          8,192
  Record Size (LRECL) 80
  Number of Extents 1
  SHAREOPTIONS     (1 3)
  Organization     KSDS
  CIs per CA       78
  Free CIs per CA  11
  Free Bytes per CI 819
  % Free CIs in CA 15%
  Strings          1
  DATA Buffers    2
  INDEX Buffers    1

  CI Splits        0
  CA Splits        0
  Logical Records  8
  Deleted Records  1
  Insrted Records  0
  Retrved Records  1
  Updated Records  0
  Bytes Free Space 1,908,736
  Number of EXCPs  13

  Initial          Last
  0                0
  0                0
  7,282            7,282
  1                1
  0                0
  1                1
  0                0
  1,327,104        1,327,104
  7,287            7,287
```

File View Navigate Help				
+-----+ Index Component of VSAM1				
More: -				
Dataset Name	USER1.DATA.TESTPF.IDX			
Storage Class	BKNSMS			
Device Type	3390			
% Free Bytes in CI	0%	Initial	Last	
Volume Serial	BKNSM2	CI Splits	0	0
CI Size	1,024	CA Splits	0	0
Record Size (LRECL)	1,017	Logical Records	1	1
Number of Extents	1	Deleted Records	0	0
SHAREOPTIONS	(1 3)	Insrted Records	0	0
Organization	KSDS	Retrved Records	0	0
CIs per CA	33	Updated Records	0	71
Free CIs per CA	0	Bytes Free Space	32,768	32,768
Free Bytes per CI	0	Number of EXCPs	4	75
% Free CIs in CA	0%			

SETUP options

The following SETUP option can be selected with the SETUP primary command:

Minimum percentage of time

You can set this option to eliminate reporting of I/O where the percentage of time is below a certain threshold.

D03 - DASD usage by data set

Note: This report also covers TAPE I/O.

Overview

This report shows how much DASD or TAPE I/O time was used by each data set for which activity was measured during the observation session. The quantification is based on the number of samples activity on the device was observed. This is expressed as a percentage of the total number of samples.

Two types of detail line are shown:

- Data set
- DDNAME

Initially, only the data set lines are visible. You can expand a data set line (using the “+” line command) to reveal its subordinate DDNAME lines.

A sample report is shown here, it has been fully expanded:

```
File View Navigate Help
-----
D03: DASD Usage Time by Dataset (0618/TSTJOB01)          Row 00001 of 00005
Command ==> ----- Scroll ==> CSR

Dataset Name>DDName   Percent of Time * 10.00% ±2.2%
                        *....1....2....3....4....5....6....7....8..
USER1.DATA.TESTPF     8.90 ====
→ VSAM1-02 BKNSM2     8.90 ====

USER1.TESTPF2.INFILE  1.25 ==
→ INFILE BKNSM1      1.25 ==
```

Detail line descriptions

Data set

This shows the name of a data set that was open at some point during the observation session.

DDNAME

This line shows a DDNAME corresponding to the data set name. There could be multiple entries under a data set if the data set was open more than once (concurrently or serially) with different DDNAMEs. If the same DDNAME is open (and closed) multiple times for the data set, it is suffixed with an instance number to indicate this.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Data set Name, DDName	Display context help information.


```

File View Navigate Help
-----
D04: Dataset Attributes (0618/TSTJOB01) Row 00001 of 00105
Command ==> _____ Scroll ==> CSR

```

SORT by: DDname enter SF, by Dataset Name enter SD.
Dataset information reported for 4 Files.

Non-VSAM file OUTFILE OPENed at 6:45:30.18 Monday Jan 26 2004

DDNAME	OUTFILE
Open Intent	OUTPUT
Dataset Name	USER1.TESTPF2.OUTFILE
Device Type	3390 Number of Extent 3
Volume Serial	BKNSM1 Dataset Organiza PS
Block Size (BLKSIZE)	27,930 RECFM FIXED BLOCKED
Record Size (LRECL)	133 Data Buffers 0

Non-VSAM file INFILE OPENed at 6:45:30.53 Monday Jan 26 2004

DDNAME	INFILE
Open Intent	INPUT
Dataset Name	USER1.TESTPF2.INFILE
Device Type	3390 Number of Extent 1
Volume Serial	BKNSM1 Dataset Organiza PS
Block Size (BLKSIZE)	13,300 RECFM FIXED BLOCKED
Record Size (LRECL)	133

Scrolling down in this example shows some VSAM file information.

```

File View Navigate Help
-----
D04: Dataset Attributes (0618/TSTJOB01) Row 00026 of 00105
Command ==> _____ Scroll ==> CSR

```

VSAM file VSAM1(1) OPENed at 6:45:33.66 Monday Jan 26 2004

DDNAME	VSAM1		
Open Intent	KEY,DIR,OUT,RST		
Dataset Name	USER1.DATA.TESTPF.DAT		
Storage Class	BKNSMS		
Device Type	3390		
% Free Bytes in CI	10%	Initial	Last
Volume Serial	BKNSM2	CI Splits	0
CI Size	8,192	CA Splits	0
Record Size (LRECL)	80	Logical Records	0
Number of Extents	1	Deleted Records	0
SHAREOPTIONS	(1 3)	Insrted Records	0
Organization	KSDS	Retrvd Records	0
CI's per CA	78	Updated Records	0
Free CI's per CA	11	Byter Free Space	1,916,928
Free Bytes per CI	819	Number of EXCPs	2
% Free CI's in CA	15%		
Strings	0		
DATA Buffers	0		
INDEX Buffers	0		

This example shows the index component:

```

File View Navigate Help
-----
D04: Dataset Attributes (2133/TSTJOB01)          Row 00060 of 00116
Command ==>                                     Scroll ==> CSR
Index Component of VSAM1(1)

Dataset Name      USER1.DATA.TESTPF.IDX
Storage Class     BKNSMS
Device Type       3390
% Free Bytes in CI 0%
Volume Serial     BKNSM2  CI Splits      0          0
CI Size          1,024    CA Splits      0          0
Record Size (LRECL) 1,017 Logical Records 0          0
Number of Extents  1      Deleted Records 0          0
SHAREOPTIONS       (1 3)  Insrted Records 0          0
Organization       KSDS   Retrved Records 0          0
CIs per CA         33     Updated Records 0          0
Free CIs per CA    0      Bytes Free Space 33,792      33,792
Free Bytes per CI  0      Number of EXCPs  1          1
% Free CIs in CA   0%

```

When available to Application Performance Analyzer, the following additional DASD statistics are displayed in D04, and in the detail windows of other DASD reports:

- Average Response Time
- Average Pending Time
- Average Disconnect Time
- Average Connect Time
- Average Queued Time
- Total I/Os
- Cache Candidates
- Cache Hits
- Write Candidates
- Write Hits

This example shows some of the additional DASD statistics:

```

File View Navigate Help
-----
D04: Dataset Attributes (4167/AGM01G)          Row 00005 of 00125
Command ==>                                     Scroll ==> CSR
VSAM file BNCSTFL OPENed at 16:19:58.25 Tuesday Aug 25 2009

DDNAME           BNCSTFL
Open Intent       KEY,DIR,SEQ,OUT
Dataset Name      BNET.CICS22C.BNCSTFL.DATA
Storage Class     BKNDATA
Device Type       3390
% Free Bytes in CI 0%
Volume Serial     BKNA91+  CI Splits      0          0
                  BKNA93
CI Size          8,192    CA Splits      0          0
Record Size (LRECL) 516    Logical Records 14         14
Number of Extents  1      Deleted Records 0          0
SHAREOPTIONS       (4 3)  Insrted Records 0          0
Organization       KSDS   Retrved Records 15,858,330  15,918,231
CIs per CA         12     Updated Records 1          1
Free CIs per CA    0      Bytes Free Space 90,112      90,112
Free Bytes per CI  0      Number of EXCPs 7,991,951  8,051,851
% Free CIs in CA   0%
Strings           1      String Waits    0
DATA Buffers      2      String Waits HWM 0
INDEX Buffers     1
Avg Response Time  0.0256 Avg Pending Time 0.0000
Avg Disconnect Time 0.0000 Avg Connect Time 0.0128
Avg Queued Time    0.0000 Total I/Os        59,900
Cache Candidates   59,900 Cache Hits        59,900

```

You can place your cursor on the SORT field and enter any of the following sort codes to re-sort the report:

- SF By DDName
- SD By Data set name

D05 - DASD EXCP summary

Note: This report also covers TAPE I/O.

Usage

Use this report to see a summary of the number of EXCPs for each open data set.

Quantification

Each report line shows EXCP counts for a DDNAME. The EXCP count at the time the file was first observed to be open and the count at the time the file was last observed to be open are reported. The difference between these two values is also reported; this is the number of EXCPs occurring during the measurement interval.

Detail line hierarchy

There is only one detail line level in this report.

Detail line descriptions

EXCP counts

Each detail line shows the following information.

Under Heading	This is Displayed
DDNAME	The DDNAME of the file. If multiple OPENs occurred for the DDNAME, a separate line is reported for each "instance." A sequence number is appended to the DDNAME indicating the instance.
Type	The type of file (VSAM, Non-VSAM, Tape, etc.)
Concat	The concatenation number. A value (+0, +1, +2 ...) appears here to indicate the data set position in a concatenation. A value of 'RMT' indicates this is a remote CICS VSAM dataset.
At Start	The EXCP count for the data set when first observed. For VSAM data sets, the system maintains this count for the life of the file. For non-VSAM, this only reflects EXCPs during the step.
At End	The EXCP count for the data set when last observed. For VSAM data sets, the system maintains this count for the life of the file. For non-VSAM, this only reflects EXCPs during the step.
During Measurement	<p>The number of EXCPs for the measurement duration. This is computed as the difference between the "At Start" count and the "At End" count.</p> <p>Note: The system maintains EXCP counts at the data set level. If a data set had more than one file open concurrently under different DDNAMEs, then overlapping EXCP counts will be reported.</p>

Sample reports

A sample report is shown here:

File View Navigate Help						
D05: DASD EXCP Summary (0647/TSTJOB01)				Row 00001 of 00082		
Command ==>				Scroll ==> CSR		
DDNAME	Type	Concat	At Start	At End	Number of EXCPs During Measurement	
SAMPIN	Non-VSAM		0	30	30	
ISPMLIB	Non-VSAM	+2	22	26	4	
ISP07053	Non-VSAM		19	21	2	
SYS00117	VSAM-DATA		3648	3649	1	
	VSAM_INDEX		41	42	1	
SYS00116	VSAM-DATA		2	3	1	
	VSAM_INDEX		1	2	1	
ISP07078-3	Non-VSAM		35	37	2	
ISP07073	Non-VSAM		4	5	1	
ISP07074	Non-VSAM		20	21	1	
ISP07078-1	Non-VSAM		34	35	1	
ISP07078-2	Non-VSAM		34	35	1	
ISPPROF	Non-VSAM		50	50	0	
ISPPLIB	Non-VSAM	+0	0	0	0	
ISPTLIB	Non-VSAM	+2	0	0	0	
ISPPLIB	Non-VSAM	+2	6	6	0	

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
++	DDName	Show additional details.

on headings

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
SV	DDName	Sort next level by value.
SN	DDName	Sort next level by name.

SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

File View Navigate Help		
+-----+		
D	Options for DASD EXCP Summary	001 of 00107
C		11 ==> CSR
	Enter "/" to select an option	
	- Omit files for which no EXCPs were counted	
D	during the measurement interval. Unselect to	asurement
	include all files.	
S		82
I	+-----+	0

Select this option to omit files from the report for which no I/O activity was observed. Deselect this option to display all files.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
File  View  Navigate  Help
+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+
| INFILE      | Non-VSAM      | 0      | 14      | 14      |
+-----+-----+-----+-----+-----+-----+
Non-VSAM file INFILE OPENed at 6:45:30.53 Monday Jan 26 2004
DDNAME      INFILE
Open Intent  INPUT
Dataset Name USER1.TESTPF2.INFILE
Device Type  3390      Nbr of Extents  1
Volume Serial BKNSM1   Dataset Org    PS
Block Size (BLKSIZE) 13,300 RECFM      FIXED BLOCKED
Record Size (LRECL)  133    Data Buffers  0
```

D06 - DASD VSAM statistics

Usage

Use this report to see file access statistics for each open VSAM data set.

Quantification

Each report line shows a VSAM DDNAME and its associated file access statistics.

Detail line hierarchy

There is only one detail line level in this report.

Detail line descriptions

VSAM statistics

Each detail line shows the following information.

Under Heading	This is Displayed
DDNAME	The DDNAME of the file. If multiple OPENs occurred for the DDNAME, a separate line is reported for each “instance.” A sequence number is appended to the DDNAME indicating the instance.
Retrvd	The number of records retrieved from the file during the measurement interval.
Added	The number of new records added to the file during the measurement interval.
Insrtd	The number of records inserted during the measurement interval. This count is also included in the 'added' record count.
Deletd	The number of records deleted from the file during the measurement interval.

Under Heading	This is Displayed
Updatd	The number of updates to existing records during the measurement interval.
EXCPs	The number of EXCPs during the measurement interval.
FreeSpc	The change, in bytes, to the amount of free space during the measurement interval. This is shown as a plus or minus value to indicate if the free space increased or decreased.
CISplts	The change in the number of CI splits during the measurement interval. This is shown as a plus or minus value to indicate if the number of CI splits increased or decreased.
CASplts	The change in the number of CA splits during the measurement interval. This is shown as a plus or minus value to indicate if the number of CA splits increased or decreased.

Sample reports

A sample report is shown here:

File View Navigate Help								
D06: DASD VSAM Statistics (0650/TSTJOB01)						Row 00001 of 00006		
Command ==>						Scroll ==> CSR		
DDNAME	Logical Records During Interval						+/- During Inte	
	Retrvd	Added	Insrted	Deletd	Updatd	EXCPs	FreeSpc	CISplts C
FILEA	749	+0	0	0	0	0	+0	+0
DFHLCD	0	+0	0	0	0	0	+0	+0
DFHGCd	0	+0	0	0	0	0	+0	+0
DFHTEMP	0	+0	0	0	0	0	+0	+0
DFHINTRA	0	+0	0	0	0	0	+0	+0
DFHLRq	0	+0	0	0	0	0	+0	+0

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
++	DDName	Show additional details.

on headings

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
SV	DDName	Sort next level by value.
SN	DDName	Sort next level by name.

SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```
File View Navigate Help
+-----+
D | Options for DASD VSAM Statistics                                001 of 00006
C |                                                                    11 ==> CSR
  | Enter "/" to select an option
  | - Omit files for which no EXCPs were counted                    - During Inte
D |   during the measurement interval. Unselect to                  Spc CIsplits C
  |   include all files.
+-----+
```

Select this option to omit from the report files for which no activity took place. Deselect this option to display all files.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| VSAM1-02      BKNSM2      8.90 ==+
+-----+
VSAM file FILEA OPENed at 13:04:47.81 Tuesday Mar 2 2004

  DDNAME      FILEA
  Open Intent  KEY,DSN,DIR,SEQ,SKP,OUT,NLW,LSR SHRPOOL=1
  Dataset Name BNET.CICS22A.FILEA.DATA
  Storage Class BKNDATA
  Device Type  3390
  % Free Bytes in CI 0%
  Volume Serial BKNA91  CI Splits      0      0
  CI Size      18,432  CA Splits      0      0
  Record Size (LRECL) 80    Logical Records 44    44
  Number of Extents  1    Deleted Records 0      1
  SHAREOPTIONS  (1 3)    Insrted Records 0      0
  Organization  KSDS    Retrved Records 117,704  118,453
  CIs per CA    3      Updated Records 0      0
  Free CIs per CA 0      Byter Free Space 36,864  36,864
  Free Bytes per CI 0      Number of EXCPs 29    29
  % Free CIs in CA 0%
  Strings      1
  DATA Buffers 1
  INDEX Buffers 1

Index Component of FILEA

  Dataset Name  BNET.CICS22A.FILEA.INDEX
  Storage Class BKNSMS
  Device Type  3390
  % Free Bytes in CI 0%
  Volume Serial BKNA91  CI Splits      0      0
  CI Size      512    CA Splits      0      0
  Record Size (LRECL) 505  Logical Records 1      1
  Number of Extents  1    Deleted Records 0      0
```

File View Navigate Help					

			More: - +		
SHAREOPTIONS	(2 3)	Insrted Records	0	0	
Organization	KSDS	Retrvd Records	0	0	
CIs per CA	49	Updated Records	0	0	
Free CIs per CA	0	Byter Free Space	24,576	24,576	
Free Bytes per CI	0	Number of EXCPs	35	35	
% Free CIs in CA	0%				
Shared Resource Pool Information for LSR Pool 1					
			Initial	Last	
Type (Data/Index)	DATA	Reads	1	1	
Buffer Size	512	Reads Avoided	0	228	
Buffers	8	User Writes	0	0	
Hiperspace Buffers	0	Non-user Writes	0	0	

D07 - DASD activity timeline

Note: This report also covers TAPE I/O.

Usage

Use this report to see, for each file, how I/O activity was distributed over the measurement interval.

Quantification

A graph, in bar chart format, is displayed for each DDNAME. The horizontal axis represents the measurement interval which spans 50 columns. Each column represents an equal 1/50th sub-interval of time. A scale is shown at the bottom of the graph indicating the percentage of time progression in the overall interval.

In each column, a vertical graph shows (roughly) how much I/O activity took place during the sub-interval. If any I/O activity did take place, a vertical bar of 1, 2, 3, 4 or 5 characters, extending upward from the scale, is displayed indicating the percentage of time in the sub-interval I/O was observed.

Detail line descriptions


File I/O activity distribution

A group of lines is shown for each reported file. Some information about the file appears to the left and a bar chart to the right.

Under Heading	This is Displayed
File Information	<p>File Information The following information is shown for each file.</p> <ul style="list-style-type: none"> • The DDNAME • Type of file (VSAM, non-VSAM, Tape, etc.) • Volser • Unit (device type)
nnnn Samples: Duration ...	A graph showing the distribution of I/O activity over the measurement interval.

Sample reports

A sample of the report is shown here:

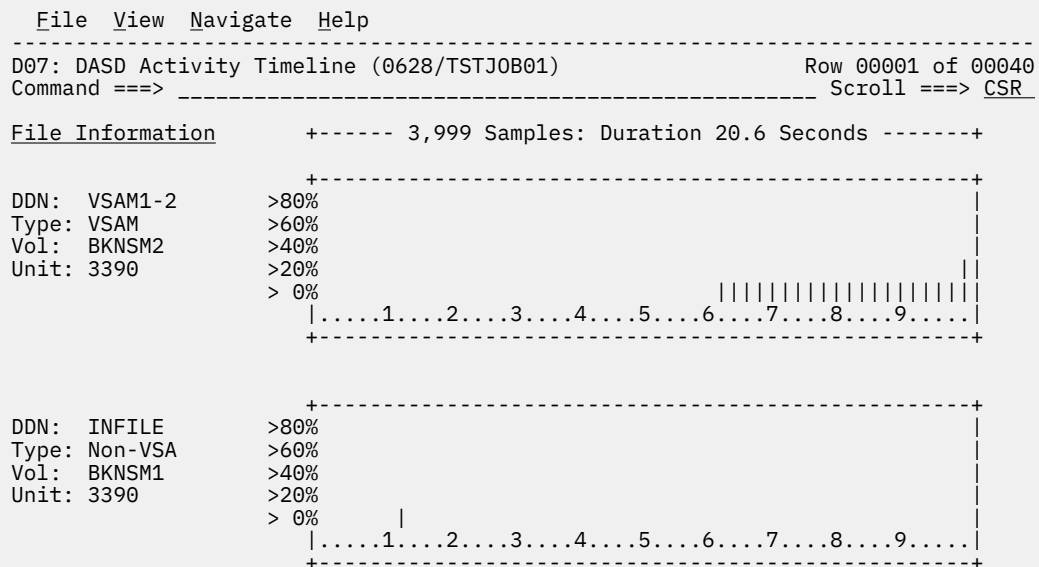

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
++	DDName	Show additional details.

on headings

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
SV	DDName	Sort next level by value.
SN	DDName	Sort next level by name.

SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```

File View Navigate Help
+-----+
D | Options for DASD Activity Timeline | 001 of 00000
C |                                     | 11 ==> CSR
  | Enter "/" to select an option
  | / Omit files for which no I/O was observed
  |   during the measurement interval. Unselect
  |   to include all files.
  |
+-----+

```

Select this option to omit from the report files for which no activity took place. This is the default option. Deselect this option to display all files, which will typically result in the display of numerous empty graphs.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| INFILE      Non-VSAM              0          14          14 |
+-----+
Non-VSAM file INFILE OPENed at 6:45:30.53 Monday Jan 26 2004

DDNAME      INFILE
Open Intent  INPUT
Dataset Name USER1.TESTPF2.INFILE
Device Type  3390      Nbr of Extents  1
Volume Serial BKNSM1   Dataset Org    PS
Block Size (BLKSIZE) 13,300 RECFM      FIXED BLOCKED
Record Size (LRECL)  133    Data Buffers  5

```

D08 - DASD I/O wait time

Usage

Use this report to examine delays resulting from waits during DASD I/O operations. Note: This report is not applicable to CICS.

Quantification

Samples are counted in which the following conditions were observed:

- All TCBs (tasks) are in WAIT state
- One (or more) TCB is waiting for completion of a DASD I/O request

The number of samples satisfying these conditions divided by the total number of samples represents the percentage of time the step was waiting for completion of DASD I/O. These percentages are computed and reported by DDNAME.

Detail line hierarchy

An unexpanded D08 report shows a line for each DDNAME causing a delay in execution while waiting for DASD I/O activity to complete. You can expand each line to reveal additional hierarchical levels of detail (using the “+” line command).

The hierarchy is illustrated here:

```
Level 1 DDNAME
  Level 2 File I/O Request
    Level 3 Supervisor Call (SVC)
      Level 4 Module
        Level 5 CSECT

  Level 2 File I/O Request
    Level 3 Module
      Level 4 CSECT

  Level 2 Supervisor Call (SVC)
    Level 3 Module
      Level 4 CSECT
```

Detail line descriptions

DDNAME

This line identifies the DDNAME of a file for which delays due to wait for I/O completion were observed.

Under Heading	This is Displayed
Description	The volume ID (VOLSER) for the DDNAME. For a multivolume data set, the first volume is displayed.
Percent of Time	The percentage of the measurement interval time the step was waiting for completion of I/O for the indicated DDNAME.

File I/O request

This line identifies the file request macro that caused a wait for I/O completion.

Under Heading	This is Displayed
Name	The DASD I/O macro function (GET, PUT, CHECK, etc.) that caused the wait.
Description	The address of the macro (return address) in CSECT+offset format.
Percent of Time	The percentage of the measurement interval time the step was waiting for completion of I/O for the indicated macro.

Load module

This line identifies the data management load module in which the wait occurred.

Under Heading	This is Displayed
Name	Name of load module in which WAIT request was issued.
Description	Functional description of the load module if one is available.
Percent of Time	The percentage of the measurement interval time the step was waiting for completion of I/O.

CSECT

This line identifies the CSECT in the data management load module in which the wait occurred.

Under Heading	This is Displayed
Name	Name of CSECT in which WAIT request was issued.
Description	Functional description of the CSECT if one is available.
Percent of Time	The percentage of the measurement interval time the step was waiting for completion of I/O.

Supervisor Call (SVC)

This line identifies an SVC (Supervisor Call) that issued the wait.

Under Heading	This is Displayed
Name	Name of SVC (Supervisor Call) in which WAIT request was issued.
Description	Functional description of the SVC.
Percent of Time	The percentage of the measurement interval time the step was waiting for completion of I/O.

Sample reports

A sample of the report as it is first displayed is shown here:

```
File View Navigate Help
-----
D08: DASD I/O Wait Time (0099/TSTJOB01) Row 00001 of 00006
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00% ±3.5%
          *....1....2....3....4....5....6....7....8.
VSOUT1    BKNSM1             7.07 ====
VSOUT2    BKNSM1             5.05 ===
VSOUT3    BKNSM1             3.03 ==
VSINP4    BKNSM1             1.26 =
QSOUT5    BKNSM1             0.25
QSINP6    BKNSM1             0.12
```

Here is a sample of the report which has been fully expanded by entering the “+” line command on the Name heading:

```
File View Navigate Help
-----
D08: DASD I/O Wait Time (0099/TSTJOB01) Row 00001 of 00030
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00% ±3.5%
          *....1....2....3....4....5....6....7....8.
VSOUT1    BKNSM1             7.07 ====
→ PUT      U0053+C8             7.07 ====
→ IDA019L1 Virtual I/O (VI       7.07 ====
→ IDA019R3 CSECT in IDA0     7.07 ====

VSOUT2    BKNSM1             5.05 ===
→ PUT      U0053+194         5.05 ===
→ IDA019L1 Virtual I/O (VI       5.05 ===
→ IDA019R3 CSECT in IDA0     4.80 ==
→ IDA019RZ CSECT in IDA0     0.25

VSOUT3    BKNSM1             3.03 =
→ PUT      U0053+266         3.03 =
→ IDA019L1 Virtual I/O (VI       3.03 =
→ IDA019R3 CSECT in IDA0     3.03 =
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	DDName, File I/O Request, Load Module, CSECT, SVC	Display context help information.
++	DDName, File I/O Request, Load Module, CSECT, SVC	Show additional details.
+	DDName, File I/O Request, Load Module, SVC	Expand to reveal next level.
–	DDName, File I/O Request, Load Module, SVC	Collapse to hide next level.
SV	DDName, File I/O Request	Sort next level by value.
SN	DDName, File I/O Request	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	CSECT	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	DDName	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent of Time	Zoom out scale.
SV	Name, Description, Percent of Time	Sort next level by value.
SN	Name, Description, Percent of Time	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
-----
+----- The following report line was selected -----+
| VSAM1          BKNSM2          4.04 00          |
+-----+

Calculation Details
Data management CPU measurements          124
I/O unit type                            DASD
Servicing I/O requests for DD Name        VSAM1
Total measurements                        3,063
Percent of total                          4.04%

VSAM file VSAM1 OPENEd at 7:27:14.84 Friday Oct 7 2005

DDNAME          VSAM1
Open Intent     KEY,DIR,OUT
Dataset Name    USER1.DATA.TESTPF.DAT
Storage Class   BKNSMS
Device Type     3390
% Free Bytes in CI  10%
Volume Serial   BKNSM2
CI Size         8,192
Record Size (LRECL) 80
Number of Extents 1
SHAREOPTIONS    (1 3)
Organization    KSDS
CIs per CA      78
Free CIs per CA 11
Free Bytes per CI 819
% Free CIs in CA 15%
Strings         1
DATA Buffers    2
INDEX Buffers   1

              Initial      Last
CI Splits      0           0
CA Splits      0           0
Logical Records 8       7,282
Deleted Records 1           1
Insrted Records 0           0
Retrvd Records 1           1
Updated Records 0           0
Bytes Free Space 1,908,736 1,327,104
Number of EXCPs 13        7,287

Index Component of VSAM1

```

File	View	Navigate	Help	
				More: -
Dataset Name	USER1.DATA.TESTPF.IDX			
Storage Class	BKNSMS			
Device Type	3390			
% Free Bytes in CI	0%		Initial	Last
Volume Serial	BKNSM2	CI Splits	0	0
CI Size	1,024	CA Splits	0	0
Record Size (LRECL)	1,017	Logical Records	1	1
Number of Extents	1	Deleted Records	0	0
SHAREOPTIONS	(1 3)	Insrted Records	0	0
Organization	KSDS	Retrvd Records	0	0
CIs per CA	33	Updated Records	0	71
Free CIs per CA	0	Bytes Free Space	32,768	32,768
Free Bytes per CI	0	Number of EXCPs	4	75
% Free CIs in CA	0%			

D09 - VSAM buffer pool usage

Usage

Use this report to see information about activity in VSAM LSR buffer pools.

A buffer pool number can be associated with a VSAM file. This is indicated in the Open Intent field in any reports that show detailed file information. For example, report D04 might show the following:

KEY,DSN,DIR,SEQ,SKP,OUT,NLW,LSR SHRPOOL=1

This indicates the file uses shared buffer pool number 1. Refer to report D09 to examine how effectively the buffer pool was able to reduce the I/O activity for the associated file(s).

For each buffer pool, activity is quantified for each buffer size and type (DATA or INDEX component). The buffer size corresponds to the CI size for the associated file component. VSAM will choose buffers which are at least as large as and closest in size to the CI size.

Quantification

The following values are reported.

Under Heading	This is Displayed
Type	DATA or INDEX. This indicates if the buffers are for VSAM DATA or INDEX components
Buffer Size	The buffer size, in bytes.
Buffers	The number of buffers in virtual storage.
Hiperspace Buffers	The number of buffers in Hiperspace.
Reads	The number of physical reads to the file. This is the number of reads that could not be avoided because no buffer contained a copy of the CI. Three values are shown: "Initial," which is the value at the start of the measurement interval; "Last," which is the value at the end; and "Difference," which is the difference between the other two values. The difference between the two values represents the activity for the duration of the interval.
Reads Avoided	The number of avoided reads (look-asides). This is the number of reads avoided because copies of the referenced CIs were found in the buffer pool. Three values are shown: "Initial," which is the value at the start of the measurement interval; "Last," which is the value at the end; and "Difference," which is the difference between the other two values. The difference between the two values represents the activity for the duration of the interval. High values indicate the buffer pool was effective in causing I/O operations to be avoided.
User Writes	The number of physical writes performed to the file at the request of the user program. Three values are shown: "Initial," which is the value at the start of the measurement interval; "Last," which is the value at the end; and "Difference," which is the difference between the other two values. The difference between the two values represents the activity for the duration of the interval.
Non-user Writes	The number of forced physical writes performed to the file. Three values are shown: "Initial," which is the value at the start of the measurement interval; "Last," which is the value at the end; and "Difference," which is the difference between the other two values. The difference between the two values represents the activity for the duration of the interval.

Sample reports

A sample of the report is shown here:

```

File View Navigate Help
-----
D09: VSAM Buffer Pool Usage (5096/TSTJOB01) Row 00001 of 00022
Command ==> _____ Scroll ==> CSR

```

Shared Resource Pool Information for LSR Pool 1

			<u>Initial</u>	<u>Last</u>	<u>Difference</u>
Type (Data/Index)	INDEX	Reads	1	1	0
Buffer Size	512	Reads Avoided	260279	270299	10020
Buffers	5	User Writes	0	0	0
Hiperspace Buffers	0	Non-user Writes	0	0	0
Type (Data/Index)	DATA	Reads	576	609	33
Buffer Size	8192	Reads Avoided	259704	269691	9987
Buffers	5	User Writes	0	0	0
Hiperspace Buffers	0	Non-user Writes	0	0	0
Type (Data/Index)	INDEX	Reads	0	0	0
Buffer Size	8192	Reads Avoided	0	0	0
Buffers	5	User Writes	0	0	0
Hiperspace Buffers	0	Non-user Writes	0	0	0
Type (Data/Index)	DATA	Reads	0	0	0
Buffer Size	20480	Reads Avoided	0	0	0
Buffers	5	User Writes	0	0	0
Hiperspace Buffers	0	Non-user Writes	0	0	0

G01 - Coupling facility summary

Usage

Use this report to see a summary of the coupling facility data collected during the observation session.

Facility summary

Fields under this heading summarize the storage and usage of the coupling facility by facility name. The facility name is listed in the heading.

Under Heading	This is Displayed
CF Storage	Total coupling facility storage
CF Storage Used	Total used coupling facility storage.
CF Dump Storage	Total coupling facility storage dump space.
CF Storage for Structures	Total coupling facility storage used by structures.
Subchannel Contention Count	Count of times a free subchannel was not available for synchronous immediate operations.
Subchannel Contention Time uSec	Amount of time in microseconds waiting for a free subchannel for synchronous immediate operations (u-sec).
Failed Request Count	Count of the number of summed times – for unsuccessful operations.
Failed Request Time uSec	Summed service time of unsuccessful operations (u-sec).
Number of Processors	Number of processors used by the coupling facility.
Processor Utilization	Processor utilization of coupling facility processors expressed as a percentage of the sampling time.

Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
G01: Coupling Facility Statistics (0003/TSTJOB01)          Row 00001 of 00023
Command ==> _____ Scroll ==> CSR

Facility Summary - CFCC1
CF Storage                      74,496K
CF Storage Used                  9,216K
CF Dump Storage                  2,048K
CF Storage for Structures        7,168K
Subchannel Contention Count      0
Subchannel Contention Time uSec  0
Failed Request Count             0
Failed Request Time uSec         0
Number of Processors             1
Processor Utilization            0%

Facility Summary - CFCCC2
CF Storage                      74,496K
CF Storage Used                  2,048K
CF Dump Storage                  2,048K
CF Storage for Structures        0K
Subchannel Contention Count      0
Subchannel Contention Time uSec  0
Failed Request Count             0
Failed Request Time uSec         0
Number of Processors             1
Processor Utilization            51%

```

G02 - Coupling facility mean times

Usage

Use this report to see an analysis of how time was spent by the Coupling Facility during the observation session. Expand a Coupling Facility report line to see a further breakdown by structure name within the facility name.

Quantification

Each report line quantifies time as arithmetic means for each measured facility. The means are calculated by dividing the total of all time spent servicing the facility by its number of requests. The means are expressed in units of micro-seconds.

Detail line hierarchy

An unexpanded G02 report shows a line for each facility name in the Coupling Facility. You can expand each line to reveal an additional hierarchical level of detail (using the “+” line command).

The hierarchy is illustrated here:

```

Level 1 Facility Name
Level 2 Structure Name

```

Detail line descriptions

Facility detail line

This is the first-level detail line. Each line shows information about a facility name in the coupling facility.

Under Heading	This is Displayed
Name	The facility name.
Requests - Sync	The number of synchronous operations to the coupling facility.

Under Heading	This is Displayed
Requests - Asynch	The number of asynchronous operations to the coupling facility.
Requests - Queued	The number of queued operations to the coupling facility.
Requests - Delay	The number of operations to the coupling facility that were delayed for dump serialization.
uSeconds - Sync	Mean micro-seconds service time per synchronous operation to the coupling facility.
uSeconds - Asynch	Mean micro-seconds service time per asynchronous operation to the coupling facility.
uSeconds - Queued	Mean micro-seconds service time for operations queued for the coupling facility.
uSeconds - Delay	Mean micro-seconds service time for operation delays for dump serialization.

Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
G02: Coupling Facility Mean Service Times (0003/TSTJOB01)      Row 00001 of 00002
Command ==> _____ Scroll ==> CSR

      ---- Number of Requests ----      ----- Mean uSeconds -----
Name   Sync  Asynch  Queued  Delay   Sync  Asynch  Queued  Delay
CFCC1   4112     0      0      0       1     0      0      0
CFCC2     0      0      0      0       0     0      0      0

```

G03 - Coupling facility total times

Usage

Use this report to see an analysis of how time was spent by the Coupling Facility during the observation session. Expand a Coupling Facility report line to see a further breakdown by structure name within the facility name.

Quantification

Each report line quantifies total time for each measured facility. The totals are the sum of all structures within the facility name. The totals are expressed in units of microseconds.

Detail line hierarchy

An unexpanded G03 report shows a line for each facility name in the Coupling Facility. You can expand each line to reveal an additional hierarchical level of detail (using the “+” line command). The hierarchy is illustrated here:

```

Level 1 Facility Name
Level 2 Structure Name

```

Detail line descriptions

Facility detail line

This is the first-level detail line. Each line shows information about a facility name in the coupling facility.

Under Heading	This is Displayed
Name	The facility name.
Requests - Sync	The number of synchronous operations to the coupling facility.
Requests - Asynch	The number of asynchronous operations to the coupling facility.
Requests - Queued	The number of queued operations to the coupling facility.
Requests - Delay	The number of operations to the coupling facility that were delayed for dump serialization.
uSeconds - Sync	Total micro-seconds service time per synchronous operation to the coupling facility.
uSeconds - Async	Total micro-seconds service time per asynchronous operation to the coupling facility.
uSeconds - Queued	Total micro-seconds service time for operations queued for the coupling facility.
uSeconds - Delay	Total micro-seconds service time for operation delays for dump serialization.

Sample reports

A sample report is shown here:

```
File View Navigate Help
-----
G03: Coupling Facility Total Service Times (0003/TSTJ0B01) Row 00001 of 00002
Command ==> ----- Scroll ==> CSR

Name          ---- Number of Requests ----          Total uSeconds -----
              Sync  Asynch  Queued  Delay          Sync  Asynch  Queued  Delay
CFCC1          4112      0      0      0          4352      0      0      0
CFCC2           0       0      0      0           0       0      0      0
```

K01- CPU SRB Usage by SRB Type

Usage

Use this report to see how Service Request Block (SRB) units of work spend CPU time.

Quantification

Each report line shows the normalized percentage of CPU time for zIIP, zAAP, and GPU processors, and the total. The normalization factor is used to express the CPU percentages of zAAP and zIIP as a percentage that a regular GPU uses for the same work. The percentage is multiplied by the normalization factor and then divided by 256.

Detail Line Hierarchy

An unexpanded report shows sampled SRBs that are grouped by SRB type. The SRB types are:

- CLIENT - A CLIENT SRB is a preemptable SRB that runs in an address space but executes work on behalf of some other address spaces, which is called the client address space. All CLIENT SRBs are preemptable, but for the purpose of this report they are classified as CLIENT instead of PREEMPTABLE.

- **ENCLAVE** - An ENCLAVE SRB is an SRB that is scheduled into an enclave so that WLM and ENCLAVE can manage the SRB. All ENCLAVE SRBs are preemptable, but for the purpose of this report they are classified as ENCLAVE instead of PREEMPTABLE.
- **PREEMPTABLE** - PREEMPTABLE SRBs can be preempted by higher priority units of work.
- **FULLXM** - A FULLXM SRB receives a copy of the scheduling program's dispatchable unit access list, and it receives control in the scheduling program's current cross memory environment. FULLXM SRBs might also be MANAGED, but for the purpose of this report they are classified as FULLXM instead of MANAGED.
- **MANAGED** - A managed SRB (Global or Local) is created by IEAMSCHD. MANAGED might also be FULLXM, but type FULLXM instead of MANAGED is used .
- **NON-PREEMPT** - A NON-PREEMPT SRB cannot be preempted by other work units irrespective of their priority.

You can expand each line to reveal an additional hierarchical level of detail by using the + line command. The hierarchy is illustrated here:

```

Level 1 SRB Type
Level 2 SRB EPA instance
Level 3 SRB Execution Module
Level 4 SRB Execution CSECT

```

Detail Line Descriptions

SRB Type detail line

This is the first-level detail line. Each line is for a specific SRB type as detailed in the previous section.

Under Heading	This is Displayed
Name	An abbreviated description of the SRB type.
Description	A full description of the SRB type.
zIIP - Normalized % of CPU Time	The total normalized percentage of CPU time on zIIP processors for this SRB type.
zAAP - Normalized % of CPU Time	The total normalized percentage of CPU time on zAAP processors for this SRB type.
GPU - Normalized % of CPU Time	The total normalized percentage of CPU time on GPU processors for this SRB type.
Total - Normalized % of CPU Time	The total normalized percentage of CPU time on all processors for this SRB type.

SRB EPA instance detail line

This is the second-level detail line that is shown directly under the SRB Type detail line. This line represents each unique SRB EPA and priority.

Under Heading	This is Displayed
Name	The name of load module that contains the SRB EPA. If the load module cannot be resolved, the address of the entry point of the SRB is displayed.
Description	If a DPA functional description is found for the module name, the description is reported under this heading. Otherwise 'Application SRB' is displayed.

Under Heading	This is Displayed
zIIP - Normalized % of CPU Time	The total normalized percentage of CPU time on zIIP processors for this SRB in the load module with the EPA.
zAAP - Normalized % of CPU Time	The total normalized percentage of CPU time on zAAP processors for this SRB in the load module with the EPA.
GPU - Normalized % of CPU Time	The total normalized percentage of CPU time on GPU processors for this SRB in the load module with the EPA.
Total - Normalized % of CPU Time	The total normalized percentage of CPU time on all processors for this SRB in the load module with the EPA.

SRB Execution Module detail line

This is a third-level detail line that is shown directly under the SRB EPA instance detail line. This line represents a unique load module at this level.

Under Heading	This is Displayed
Name	The load module name that contains the SRB EPA. If the address is not resolved, NOSYMB is displayed.
Description	If a DPA functional description is found for the executing module name, the description is reported under this heading. Otherwise, 'Application Program' is displayed if the program is not in the DPA tables. If the address is unresolved, 'No Module Name' is displayed.
zIIP - Normalized % of CPU Time	The total normalized percentage of CPU time on zIIP processors for this SRB in the executing load module.
zAAP - Normalized % of CPU Time	The total normalized percentage of CPU time on zAAP processors for this SRB in the executing load module.
GPU - Normalized % of CPU Time	The total normalized percentage of CPU time on GPU processors for this SRB in the executing load module.
Total - Normalized % of CPU Time	The total normalized percentage of CPU time on all processors for this SRB in the executing load module.

SRB Execution CSECT detail line

This is a fourth-level detail line that is shown directly under the SRB Execution Module detail line. This line represents a csect in a load module. For unresolved addresses, activity for a 4k range of addresses is recorded.

Under Heading	This is Displayed
Name	The executing CSECT in the load module at the third level. The activity observed in a 4096 (4K) byte range of addresses is reported in an Unresolved Address line. This range is expressed in the format 'HHHHHxxx' where HHHHH are the 5 high order hexadecimal digits of the address. For example: '08915xxx' means the range from 08915000 to 08915FFF.
Description	If a DPA functional description is found for the module name, the description is reported under this heading. If the name of the CSECT is not in the DPA tables, 'CSECT in MMMMMMMMM' is displayed where MMMMMMMMM is the name of load module from level 3. For unresolved addresses, 'Unresolved Address' is displayed.
zIIP - Normalized % of CPU Time	The total normalized percentage of CPU time on zIIP processors for this CSECT in the load module at the third level.
zAAP - Normalized % of CPU Time	The total normalized percentage of CPU time on zAAP processors for this CSECT in the load module at the third level.
GPU - Normalized % of CPU Time	The total normalized percentage of CPU time on GPU processors for this CSECT in the load module at the third level.
Total - Normalized % of CPU Time	The total normalized percentage of CPU time on all processors for this CSECT in the load module at the third level.

Sample reports

A sample report that is expanded to level two is shown here.

```

-----
K01: CPU SRB Usage by SRB Type (0072/DBBGDIST)          Row 00001 of 00024
Command ==> ----- Scroll ==> CSR
-----
Name      Description      ----- Normalized % of CPU Time -----
      zIIP  zAAP  GPU  Total
ENCLAVE   Enclave SRBs          41.59 0.00  50.06 91.65
± DSNVGEPL Asmc Global Entry Point List (nonexecutable Csect) 21.89 0.00  26.66 48.55
→DSNVGEPL Asmc Global Entry Point List (nonexecutable Csect)      0.00 0.00   1.75  1.75
→DSNVSRX   Agent Services Manager      19.69 0.00  20.04 39.73
→DSNVSRX   Agent Services Manager       0.00 0.00   1.48  1.48
→DSNVSRX   Agent Services Manager       0.00 0.00   0.02  0.02
→DSNVGEPL Asmc Global Entry Point List (nonexecutable Csect)      0.00 0.00   0.07  0.07
→DSNVSRX   Agent Services Manager       0.00 0.00   0.02  0.02
PREEMPTABLE Preemptable SRBs      0.29 0.00   6.68  6.97
→DSNVGEPL Asmc Global Entry Point List (nonexecutable Csect)      0.00 0.00   2.98  2.98
→DSNVGEPL Asmc Global Entry Point List (nonexecutable Csect)      0.00 0.00   0.56  0.56
→DSNVSRX   Agent Services Manager       0.00 0.00   2.64  2.64
→DSNVSRX   Agent Services Manager      0.29 0.00   0.44  0.73
→DSNVSRX   Agent Services Manager       0.00 0.00   0.02  0.02
→DSNVGEPL Asmc Global Entry Point List (nonexecutable Csect)      0.00 0.00   0.02  0.02
NON-PREEMPT Non-Preemptable SRB      0.00 0.00   0.59  0.59
→BPXINLPA  OS/390 UNIX System Services      0.00 0.00   0.51  0.51
→IEA0TI00  Supervisor Control              0.00 0.00   0.07  0.07

```

Line commands

The following tables summarize the line commands that are available in this report, and the objects and headings to which they apply. You can always enter a “/” on any input field to popup a menu of line commands that are available for that field.

Table 4. on objects		
Cmd	When Applied To:	Action
?	SRB Type, SRB EPA Instance, SRB Execution Module, SRB Execution CSECT	Display context help information.
++	SRB Type, SRB EPA Instance, SRB Execution Module, SRB Execution CSECT	Display additional details.
+	SRB Type, SRB EPA Instance, SRB Execution Module	Expand to reveal next level.
–	SRB Type, SRB EPA Instance, SRB Execution Module	Collapse to hide next level.
SV	SRB Type, SRB EPA Instance, SRB Execution Module	Sort next level by value.
SN	SRB Type, SRB EPA Instance, SRB Execution Module	Sort next level by name
M	SRB EPA Instance, SRB Execution Module, SRB Execution CSECT	Display load module information

Table 5. on headings		
Cmd	When Applied To Heading	Action
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail Window

You can enter “++” or the **Enter** key on any line to display a popup window that contains additional information. A sample detail window for this report is shown here:

```

K01 - DETAIL Window (0072/DBBGDIST)                                Row 00001 of 00111
Command ==>_____ Scroll ==> CSR
+----- The following report line was selected -----+
| ± DSNVGEPL Asmc Global Entry Point List      21.89 0.00 26.66 48.55 |
+-----+

SRB Attributes
SRB EPA                                DSNVGEPL+10010
SRB Type                              Enclave SRBs
Major Prty                            00F6
Minor Prty                            0000

Calculation Details
zIIP/zAAP Normalization Factor        3,245/256

                                     Actual      Normalized      Normalized %
                                     Measurements  Measurements  of Total CPU

Divisor Calculation
(SETUP option: TCB+SRB)
  Total SRB measurements              2,457          4,021          99.25
  Total TCB measurements                30             30             0.74
  Total for Divisor                    2,487          4,051          100.00

SRB measurements(for selected report line)
zIIP measurements                     70             887            21.89
zAAP measurements                      0              0             0.00
GPU measurements                       1,080          1,080          26.66
Total SRB measurements                 1,150          1,967          48.55

Module Information for DSNVGEPL
Load Address                          13F35000 to 13F58FFF
Module Size                           147,456
Module Location                        CSA
Program Group                         DB2 Subsystem
Subgroup                              Agent Services Manager
Function                              Asmc Global Entry Point List (nonexecutable Csect)

```

SETUP Options

A SETUP option is available. With this option, you can specify that calculate CPU percentages as a percentage of both TCB and SRB counts instead of SRB counts only.

K02- CPU SRB Usage by PSW/ObjCode

Usage

Use this report to see information about sampled SRB CPU execution at the machine instruction level.

Quantification

Each report line quantifies SRB CPU usage as a percentage. Each percentage represents the ratio of SRB CPU consumption that is observed for the reported item to the total SRB CPU consumption that is measured in the address space.

Detail Line Hierarchy

The first level detail line displays a PSW (Program Status Word) address value that the Measurement Task records when it actively observes SRB CPU. The SRB CPU usage observation at the same PSW address is accumulated and reported as a single detail line. In addition to the PSW address value, a separate first level detail line is created if any of the following values are different:

- Execution in problem or supervisor mode
- Address mode (AMODE) 24, 31 or 64
- Address-space control: primary-space, AR mode, secondary-space or home-space
- PSW key
- SVC number if execution was in a supervisor call
- Object code at the PSW address

You can expand the first level detail line by using the + line command to display the object code at the PSW address. Object code is reported in the form of disassembled machine instructions. The Measurement Task displays a line for each machine instruction from 12 bytes of object code captured during the measurement. The PSW address points to the 6th byte of the 12 bytes; therefore, the first instructions that are reported precede the sampled instruction.

If alternate disassemblies are available, which depend upon the assumed start address, the disassemblies are listed with a subheading of "Alternate Disassembly".

Detail Line Descriptions

PSW Address Line

Each unique PSW address has one line. By default, the lines are sorted in descending sequence by SRB CPU activity.

Under Heading	This is Displayed
Address	The PSW address of the sampled instruction.
Module	The load module name at the sampled address. If the Measurement Task cannot determine the module name, 'Unknown' is displayed.
AM	The address mode (AMODE): 24, 31 or 64.
S/P	If execution is in a supervisor call, the SVC number is displayed. Or S or P that is followed by the storage key is displayed. S indicates supervisor mode and P indicates problem mode. For example, P8 indicates execution in problem mode in storage key 8.
AS	The address space control mode. AR indicates access-register mode, SS indicates secondary-space mode and HS indicates home-space mode. Blanks are displayed for primary-space mode.

Under Heading	This is Displayed
ASID	If the storage was acquired by an address space other than the measured one or a foreign address space, the ASID (address space id) in the hexadecimal of the address space that acquired the storage at the PSW address is displayed. For example, the processing of an SQL request. Execution occurs in load modules fetched into storage by one of the DB2 address spaces.
Percent of SRB CPU Time	The percentage of SRB CPU time that is observed at the indicated address.

Machine Instruction line

Each line displays one machine instruction in disassembled format. These lines relate to the PSW address lines that are shown above. If alternate disassemblies are available, which depend upon the assumed start address, they are listed under the subheading of "Alternate Disassembly".

Sample reports

A sample report is shown here.

```

-----
K02: CPU SRB Usage by PSW/ObjCode (0072/DBBGDIST)          Row 00001 of 07878
Command ==> ----- Scroll ==> CSR
-----
Address      Module      AM S/P AS ASID      Percent of CPU Time * 10.00% ±2.0%
               *....1....2....3....4....5....6....7..
014FC526     IRARMINT      31 S0              1.50

→IRARMIO1+0392      AD03 0250      STOSM 592(R0),3
→IRARMIO1+0396      18D5          LR    R13,R5
→IRARMIO1+0398      A7F4 0057      BRC   R15,87

012EDAF6     IEAVEPSS      31 S0              1.42

→IEAVEPSS+0AD0      98BC D040      LM    R11,R12,64(R13)
→IEAVEPSS+0AD4      07FE          BCR   R15,R14
→IEAVEPSS+0AD6      0DC0          BASR  R12,R0
→IEAVEPSS+0AD8      A7CA 0918      AHI   R12,2328

```

Line commands

The following tables summarize the line commands that are available in this report, and the objects and headings to which they apply. You can always enter a "/" on any input field to popup a menu of line commands that are available for that field.

Table 6. on objects		
Cmd	When Applied To:	Action
?	Address	Display context help information.
+	Address	Expand to reveal next level.
–	Address	Collapse to hide next level.
M	Address	Display load module information.

Table 7. on headings

Cmd	When Applied To Heading	Action
?	Address, Percent CPU	Display context help information.
+	Address	Expand to reveal all entries.
+	Percent CPU	Zoom in scale.
–	Address	Collapse to show only first level.
–	Percent CPU	Zoom outscale.
SV	Address	Sort next level by value.
SA	Address	Sort next level by address.

Detail Window

You can enter “++” or the **Enter** key on any line to display a popup window that contains additional information. A sample detail window for this report is shown here:

```

+-----+-----+-----+-----+-----+-----+
| K02 - DETAIL Window (0072/DBBGDIST)                               | Row 00001 of 00025 |
+-----+-----+-----+-----+-----+-----+
| +-----+-----+-----+-----+-----+-----+ The following report line was selected +-----+ |
| | 014FC526 | IRARMINT 31 S0 | 1.50 | | | | |
| +-----+-----+-----+-----+-----+-----+ |
|
| Calculation Details |
| CPU measurements | 37 |
| PSW address | 014FC526 |
| Total CPU measurements | 2,457 |
| Percent of total | 1.50% |
|
| PSW Information |
| PSW Address | 014FC526 |
| Module Name | IRARMINT |
| Module Description | System resources manager (SRM) |
| CSECT Name | IRARMIO1 |
| Module+Offset | IRARMINT+136E |
| CSECT+Offset | IRARMIO1+0396 |
| Addressing Mode (AMODE) | 31 bit |
| Address Space Control | Primary Space |
| Problem/Supervisor Mode | Supervisor Mode |
|
| Machine Instructions |
| IRARMIO1+0392 AD03 0250 | STOSM 592(R0),3 |
| IRARMIO1+0396 18D5 | LR R13,R5 <- PSW address |
| IRARMIO1+0398 A7F4 0057 | BRC R15,87 |
+-----+-----+-----+-----+-----+-----+

```

V01 - Measurement variance summary

Usage

Use this report to analyze variances between multiple separate measurements. To gain access to variance reporting, issue the “V” line command from the Observation Session List. The “V” line command selects the base measurement for comparison. Prior to entering the line command you must previously tag at least one measurement by entering the “T” line command in the Observation Session List. Up to 20 measurements can be tagged at one time. This report quantifies variances between tagged measurements and the base measurement.

Measurements analyzed

The first segment of the V01 report lists the measurements analyzed in the report. Each measurement is assigned a two-digit sequential reference number. This segment of the report identifies each of the measurements and their reference number.

The measurement identified by reference number 01 is the "base" measurement, the measurement to which the other measurements are compared. Throughout this report, measurements are identified by their reference numbers.

Variances

A percentage value is displayed under the heading "Variance" in various segments of this report. Its value quantifies the variance between a particular performance figure for the compared measurement and the corresponding value for the base measurement. A plus (+) value indicates a higher value than the base measurement and a minus (-) value indicates a lower value. The value is the percentage by which the compared measurement figure exceeds (+) or is less than (-) the corresponding base measurement value. Any value exceeding 999 percent is reported as "999%." The magnitude of the value is also represented graphically by a string of greater-than or less-than symbols.

CPU time TCB

This report segment compares the TCB CPU times that were recorded by the operating system during the measurement sessions.

CPU time SRB

This report segment compares the SRB CPU times that were recorded by the operating system during the measurement sessions.

EXCP requests

This report segment compares the number of EXCPs that were processed during the measurement sessions.

Service units

This report segment compares the number of service units recorded by the operating system during the measurement sessions.

Percentage of CPU active samples

This report segment compares the percentage of samples during which one or more TCBs was executing CPU instructions.

Percentage of WAIT samples

This report segment compares the percentage of samples during which all TCBs were in WAIT state.

Percentage of queued samples

This report segment compares the percentage of samples during which no CPU activity was taking place but one or more TCBs was suspended and waiting to be dispatched.

Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
V01: Measurement Variance Summary (2312/TSTJOB01)          Row 00001 of 00059
Command ==> _____ Scroll ==> CSR

```

The Following Measurements are Analyzed

Ref	ReqNum	Job Name	Date	Time	Description
01	02312	TSTJOB01	Mar-30-2007	10:54	Test 2
02	02311	TSTJOB01	Mar-30-2007	10:52	Test 1

CPU Time TCB

Ref	CPU Time TCB	Variance
01	11.41 sec	
02	11.73 sec	+ 2 %

CPU Time SRB

Ref	CPU Time SRB	Variance
01	1.52 sec	
02	1.61 sec	+ 5 %

EXCP Requests

Ref	EXCP Requests	Variance
01	7,721	
02	7,710	- 0 %

Service Units

Ref	Service Units	Variance
01	7,721	
02	7,710	+ 3 %

Percentage of CPU Active Samples

Ref	--- Sample Count ---		Percentage	Variance
	CPU Active	Total		
01	2,171	4,136	52.51%	
02	2,452	4,790	51.21%	- 2 %

Percentage of WAIT Samples

Ref	--- Sample Count ---		Percentage	Variance
	TCB WAIT	Total		
01	1,739	4,136	42.06%	
02	1,979	4,790	41.33%	- 1 %

Percentage of Queued Samples

Ref	--- Sample Count ---		Percentage	Variance
	Queued	Total		
01	224	4,136	5.41%	
02	357	4,790	7.45%	+ 37 % >>

V02 - CICS variance summary

Usage

Use this report to analyze variances in CICS data between multiple measurements. To gain access to CICS variance reporting, issue the “V” line command on a CICS measurement from the Observation Session List. The “V” line command selects the base measurement for comparison. Prior to entering the “V” line command you must previously have tagged at least one CICS measurement by entering the “T” line command in the Observation Session List. Up to 20 measurements can be tagged at one time. This report will quantify CICS data variances between tagged measurements and the base measurement.

Measurements analyzed

The first segment of the V02 report lists the measurements analyzed in the report. Each measurement is assigned a two digit sequential reference number. This segment of the report identifies each of the measurements and their reference number.

The measurement identified by reference number 01 is the “base” measurement, which is the one to which the other measurements are compared. Throughout this report, measurements are identified by their reference numbers.

Variances

A percentage value is displayed under the heading "Variance" in various segments of this report. Its value quantifies the variance between a particular performance figure for the compared measurement and the corresponding value for the base measurement. A plus (+) value indicates a higher value than the base measurement and a minus (-) value indicates a lower value. The value is the percentage by which the compared measurement figure exceeds (+) or is less than (-) the corresponding base measurement value. Any value exceeding 999 percent is reported as "999%." The magnitude of the value is also represented graphically by a string of greater-than or less-than symbols.

CICS Transaction Statistics

This report segment displays the starting and ending task number in each measurement, the number of transactions counted and observed, and compares the transaction rate per second between measurements.

Mean Execution Time

This report segment compares the mean execution time of all CICS transactions sampled during the measurement sessions

Mean Suspend Time

This report segment compares the mean suspend time of all CICS transactions sampled during the measurement sessions.

Mean CICS Dispatch Delay Time

This report segment compares the mean CICS dispatch delay time of all CICS transactions sampled during the measurement sessions.

Mean MVS Dispatch Delay Time

This report segment compares the mean MVS dispatch delay time of all CICS transactions sampled during the measurement sessions.

Mean Service Time

This report segment compares the mean service time of all CICS transactions sampled during the measurement sessions.

Sample reports

The following sample report shows the variances between a base CICS measurement and 3 tagged CICS measurements.

V02: CICS Measurement Variance Summary (5592/CICS32A)

Row 00001 of 00064

The Following Measurements are Analyzed

Ref	ReqNum	Job Name	Date	Time	Description
01	05592	CICS32A	Aug-09-2010	12:36	Variance 1 (Base)
02	05593	CICS32A	Aug-09-2010	12:39	Variance 2
03	05594	CICS32A	Aug-09-2010	12:41	Variance 3
04	05595	CICS32A	Aug-09-2010	12:42	Variance 4

CICS Transaction Statistics

Ref	-Task Number- Start End	--Transaction-- Count Obsvd	Rate	Variance
01	10,894 12,640	1,746 1,075	58.20 per sec	
02	15,236 17,408	2,172 1,054	74.89 per sec	+ 28 % >>
03	17,408 19,474	2,066 900	71.24 per sec	+ 22 % >
04	19,580 21,251	1,671 908	57.62 per sec	- 0 %

Mean Execution Time

Ref	Time	Variance
01	0.0225 sec	
02	0.0204 sec	- 9 %
03	0.0216 sec	- 4 %
04	0.0175 sec	- 22 % <

Mean Suspend Time

Ref	Time	Variance
01	1.4997 sec	
02	1.0826 sec	- 27 % <<
03	1.2369 sec	- 17 % <
04	0.5693 sec	- 62 % <<<

V02: CICS Measurement Variance Summary (5592/CICS32A)

Row 00039 of 00064

Mean CICS Dispatch Delay Time

Ref	Time	Variance
01	0.0337 sec	
02	0.4190 sec	+999 % >>>>>>>
03	0.3559 sec	+956 % >>>>>>>
04	0.9112 sec	+999 % >>>>>>>

Mean MVS Dispatch Delay Time

Ref	Time	Variance
01	0.0051 sec	
02	0.0056 sec	+ 9 %
03	0.0058 sec	+ 13 % >
04	0.0055 sec	+ 7 %

Mean Service Time

Ref	Time	Variance
01	1.5610 sec	
02	1.5276 sec	- 2 %
03	1.6202 sec	+ 3 %
04	1.5035 sec	- 3 %

V03 - DB2 variance summary

Usage

Use this report to analyze variances in DB2 data between multiple measurements. To gain access to DB2 variance reporting, issue the “V” line command on a DB2 measurement from the Observation Session List. The “V” line command selects the base measurement for comparison. Prior to entering the “V” line command you must previously have tagged at least one DB2 measurement by entering the “T” line command in the Observation Session List. Up to 20 measurements can be tagged at one time. This report will quantify DB2 data variances between tagged measurements and the base measurement.

Measurements analyzed

The first segment of the V03 report lists the measurements analyzed in the report. Each measurement is assigned a two digit sequential reference number. This segment of the report identifies each of the measurements and their reference number.

The measurement identified by reference number 01 is the “base” measurement, which is the one to which the other measurements are compared. Throughout this report, measurements are identified by their reference numbers.

Variances

A percentage value is displayed under the heading "Variance" in various segments of this report. Its value quantifies the variance between a particular performance figure for the compared measurement and the corresponding value for the base measurement. A plus (+) value indicates a higher value than the base measurement and a minus (-) value indicates a lower value. The value is the percentage by which the compared measurement figure exceeds (+) or is less than (-) the corresponding base measurement value. Any value exceeding 999 percent is reported as "999%." The magnitude of the value is also represented graphically by a string of greater-than or less-than symbols.

SQL calls sampled

This report segment displays the subsystem name and version of the DB2 subsystem being used, and compares the number of calls sampled during the measurement sessions.

SQL observations

This report segment compares the number of samples taken while an SQL call was in-flight.

SQL calls executed

This report segment compares the number of calls executed during the sample based on the REQCT count for the active threads.

Avg SQL call rate

This report segment compares average SQL call rate per second.

SQL calls counted

This report segment compares the number of calls counted by the DB2+ intercept during sampling. This segment is displayed for measurements with the DB2+ extractor active.

SQL throughput

This report segment compares the throughput rate of the samples based on the number of calls made during the time that SQL was active in the sample.

SQL service time

This report segment compares the total service time of the samples while an SQL call was active. This segment is displayed for measurements with the DB2+ extractor active.

SQL call max time

This report segment compares the highest service time for an SQL call. This segment is displayed for measurements with the DB2+ extractor active.

SQL call min time

This report segment compares the lowest service time for an SQL call. This segment is displayed for measurements with the DB2+ extractor active.

SQL CPU time

This report segment compares the total CPU time used to process SQL calls. This segment is displayed for measurements with the DB2+ extractor active.

SQL call max CPU

This report segment compares the highest CPU time for an SQL call. This segment is displayed for measurements with the DB2+ extractor active.

SQL call min CPU

This report segment compares the lowest CPU time for an SQL call. This segment is displayed for measurements with the DB2+ extractor active.

Sample reports

The following sample report shows the variances between a base DB2 measurement and 2 tagged DB2 measurements.

The Following Measurements are Analyzed

<u>Ref</u>	<u>ReqNum</u>	<u>Job Name</u>	<u>Date</u>	<u>Time</u>	<u>Description</u>
01	05592	CICS32A	Aug-09-2010	12:36	Variance 1 (Base)
02	05593	CICS32A	Aug-09-2010	12:39	Variance 2
03	05594	CICS32A	Aug-09-2010	12:41	Variance 3

SQL calls sampled

<u>Ref</u>	<u>Subsys</u>	<u>Version</u>	<u>Calls Sampled</u>	<u>Variance</u>
01	DB9G	9.1.0	1,205	
02	DB9G	9.1.0	635	- 47 % <<
03	DB9G	9.1.0	630	- 47 % <<

SQL observations

<u>Ref</u>	<u>Count</u>	<u>Variance</u>
01	1,338	
02	726	- 45 % <<
03	721	- 46 % <<

SQL calls executed

<u>Ref</u>	<u>Count</u>	<u>Variance</u>
01	5,871	
02	2,997	- 48 % <<
03	2,997	- 48 % <<

Avg SQL call rate

<u>Ref</u>	<u>Rate</u>	<u>Variance</u>
01	195.70 per sec	
02	100.23 per sec	- 48 % <<
03	100.23 per sec	- 48 % <<

Avg SQL call rate

<u>Ref</u>	<u>Rate</u>	<u>Variance</u>
01	195.70 per sec	
02	100.23 per sec	- 48 % <<
03	100.23 per sec	- 48 % <<

SQL calls counted

<u>Ref</u>	<u>Count</u>	<u>Variance</u>
01	2,937	
02	1,500	- 48 % <<
03	1,500	- 48 % <<

SQL throughput

<u>Ref</u>	<u>Rate</u>	<u>Variance</u>
01	1505.38 per sec	
02	1427.14 per sec	- 5 %
03	1427.14 per sec	- 5 %

SQL service time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	3.9691 sec	
02	2.2327 sec	- 43 % <<
03	2.2025 sec	- 44 % <<

SQL call max time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0174 sec	
02	0.0313 sec	+ 79 % >>>>
03	0.0157 sec	- 9 %

SQL call max time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0174 sec	
02	0.0313 sec	+ 79 % >>>>
03	0.0157 sec	- 9 %

SQL call min time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0003 sec	
02	0.0003 sec	
03	0.0003 sec	

SQL CPU time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	1.9055 sec	
02	0.9905 sec	- 48 % <<
03	1.0115 sec	- 46 % <<

SQL call max CPU

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0033 sec	
02	0.0032 sec	- 3 %
03	0.0033 sec	

SQL call min CPU

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0002 sec	
02	0.0003 sec	+ 50 % >>>
03	0.0002 sec	

V04 - IMS variance summary

Usage

Use this report to analyze variances in IMS data between multiple measurements. The IMS+ extractor must be active in the selected measurements to display meaningful variance data. To gain access to IMS variance reporting, issue the "V" line command on an IMS measurement from the Observation Session List. The "V" line command selects the base measurement for comparison. Prior to entering the "V" line command you must previously have tagged at least one IMS measurement by entering the "T" line command in the Observation Session List. Up to 20 measurements can be tagged at one time. This report quantifies IMS data variances between tagged measurements and the base measurement.

Measurements analyzed

The first segment of the V04 report lists the measurements analyzed in the report. Each measurement is assigned a two digit sequential reference number. This segment of the report identifies each of the measurements and their reference number.

The measurement identified by reference number 01 is the "base" measurement, which is the one to which the other measurements are compared. Throughout this report, measurements are identified by their reference numbers.

Variances

A percentage value is displayed under the heading "Variance" in various segments of this report. Its value quantifies the variance between a particular performance figure for the compared measurement and the corresponding value for the base measurement. A plus (+) value indicates a higher value than the base

measurement and a minus (-) value indicates a lower value. The value is the percentage by which the compared measurement figure exceeds (+) or is less than (-) the corresponding base measurement value. Any value exceeding 999 percent is reported as "999%." The magnitude of the value is also represented graphically by a string of greater-than or less-than symbols.

Txn observations

This report segment displays the subsystem name and version of the IMS subsystem being used, and compares the number of transactions sampled during the measurement sessions.

IMS Txns counted

This report segment compares the number of transactions counted during the measurement sessions.

Transaction rate

This report segment compares the transaction rate per second during the measurement sessions.

Txn throughput

This report segment compares the transaction throughput rate per second based on the number of transactions counted by the transaction service time.

IMS Txn svc time

This report segment compares the total service time while IMS transactions were active during the measurement sessions.

IMS Txn max svc

This report segment compares the longest running IMS transaction during the measurement sessions.

IMS Txn min svc

This report segment compares the shortest running IMS transaction during the measurement sessions.

IMS Txn CPU time

This report segment compares the total CPU time used by all IMS transactions during the measurement sessions.

IMS Txn max CPU

This report segment compares the highest CPU time for IMS transactions during the measurement sessions.

IMS Txn min CPU

This report segment compares the lowest CPU time for IMS transactions during the measurement sessions.

DLI observations

This report segment compares the number of samples taken while a DLI call was in-flight.

DLI call count

This report segment compares the number of DLI calls counted during the measurement sessions.

DLI call rate

This report segment compares the DLI call rate per second during the measurement sessions.

DLI call thruput

This report segment compares the DLI call throughput rate per second based on the number of DLI calls counted by the DLI service time.

DLI svc time

This report segment compares the total service time for DLI calls during the measurement sessions.

DLI max svc

This report segment compares the longest running DLI call during the measurement sessions.

DLI min svc

This report segment compares the shortest running DLI call during the measurement sessions.

DLI CPU time

This report segment compares the total CPU time used by all DLI calls during the measurement sessions.

DLI max CPU

This report segment compares the highest CPU time for a DLI call during the measurement sessions.

DLI min CPU

This report segment compares the lowest CPU time for a DLI call during the measurement sessions.

Sample reports

The following sample report shows the variances between a base IMS measurement and 1 tagged IMS measurement.

The Following Measurements are Analyzed

<u>Ref</u>	<u>ReqNum</u>	<u>Job Name</u>	<u>Date</u>	<u>Time</u>	<u>Description</u>
01	05497	IMSAMPP1	Jul-06-2010	14:52	IMS+ (2)
02	05498	IMSAMPP1	Jul-06-2010	14:57	IMS+ (3)

Txn observations

<u>Ref</u>	<u>Subsys</u>	<u>Version</u>	<u>Txns Sampled</u>	<u>Variance</u>
01	IMSA	10.1.0	35	
02	IMSA	10.1.0	17	- 51 % <<<

IMS Txns counted

<u>Ref</u>	<u>Count</u>	<u>Variance</u>
01	27	
02	16	- 40 % <<

Transaction rate

<u>Ref</u>	<u>Rate</u>	<u>Variance</u>
01	0.15 per sec	
02	0.08 per sec	- 46 % <<

Txn throughput

<u>Ref</u>	<u>Rate</u>	<u>Variance</u>
01	90.00 per sec	
02	160.00 per sec	+ 77 % >>>>

IMS Txn svc time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.3463 sec	
02	0.1850 sec	- 46 % <<

IMS Txn max svc

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0294 sec	
02	0.0213 sec	- 27 % <<

IMS Txn min svc

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0019 sec	
02	0.0037 sec	+ 94 % >>>>

IMS Txn CPU time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.2175 sec	
02	0.1246 sec	- 42 % <<

IMS Txn max CPU

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0152 sec	
02	0.0120 sec	- 21 % <

IMS Txn min CPU

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0019 sec	
02	0.0023 sec	+ 21 % >

DLI observations

<u>Ref</u>	<u>Count</u>	<u>Variance</u>
01	8	
02	3	- 62 % <<<

DLI call count

<u>Ref</u>	<u>Count</u>	<u>Variance</u>
01	204	
02	100	- 50 % <<<

DLI call rate

<u>Ref</u>	<u>Rate</u>	<u>Variance</u>
01	1.13 per sec	
02	0.55 per sec	- 51 % <<<

DLI call thruput

<u>Ref</u>	<u>Rate</u>	<u>Variance</u>
01	2040.00 per sec	
02	0.00 per sec	-100 % <<<<

DLI svc time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.1201 sec	
02	0.0744 sec	- 38 % <<

DLI max svc

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0128 sec	
02	0.0100 sec	- 21 % <

DLI min svc

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0000 sec	
02	0.0000 sec	

DLI CPU time

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0484 sec	
02	0.0308 sec	- 36 % <<

DLI max CPU

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0019 sec	
02	0.0023 sec	+ 21 % >

DLI min CPU

<u>Ref</u>	<u>Time</u>	<u>Variance</u>
01	0.0001 sec	
02	0.0001 sec	

Chapter 4. CICS performance analysis reports

This section describes the CICS Performance Analysis Reports.

For information about ...	See ...
The CICS data extractor	“Overview of CICS data extractor” on page 185
E01 CICS session statistics	“E01 - CICS session statistics” on page 187
E02 CICS CPU and use count by program	“E02 - CICS CPU and use count by program” on page 189
E03 CICS CPU usage by transaction	“E03 - CICS CPU usage by transaction” on page 191
E04 CICS mean service time by transaction	“E04 - CICS mean service time by transaction” on page 198
E05 CICS total service time by transaction	“E05 - CICS total service time by Txn” on page 208
E06 CICS service time by task ID	“E06 - CICS service time by task ID” on page 219
E07 CICS wait by transaction	“E07 - CICS wait by Txn” on page 228
E08 CICS mean service time by terminal ID	“E08 - CICS mean service time by terminal ID” on page 230
E09 CICS total service time by terminal ID	“E09 - CICS total service time by terminal ID” on page 238
E10 CICS mean service time by user ID	“E10 - CICS mean service time by user ID” on page 246
E11 CICS total service time by user ID	“E11 - CICS total service time by user ID” on page 253
E12 CICS CPU/service time by transaction	“E12 - CICS CPU/service time by transaction” on page 261

Overview of CICS data extractor

In order to use the CICS Performance Analysis Reports, the CICS data extractor must be turned on when the Observation Request is entered. You must select the CICS data extractor in the Schedule New Measurement panel, and enter the transaction name(s) or patterns you want to observe. For more information on entering an observation request for CICS, see [“Panel 5 – Subsystems” on page 29](#).

There are two distinct types of data that Application Performance Analyzer gathers when the CICS extractor is active: Session statistics, and Transaction measurement data.

Session statistics

This data is a summary of how much CICS related activity occurred in the region during the Observation Session. The activity measured is directly related to services requested by in-flight transactions. The data provides an indication on the load (or stress level) that transactions are placing on the region. In a region that is idle, almost all these numbers would be zero. Data for the majority of these statistics are gathered once at the start of the session and once at the end of the session. The statistics are then calculated by taking the delta of each set of data values.

Transaction measurement data

There is one sample record created for each in-flight transaction during each sampling interval. A transaction is only sampled if it was specified when the Observation Request was created. For some reports the sample records are analyzed to produce CPU usage and Service Time by transaction. These reports describe the load that a transaction is placing on the CICS region.

The sample record consists of transaction state data captured during a sampling interval. This information is used to generate the Session Activity report. This report highlights the state of sampled transactions. State information includes:

1. Whether the transaction was running or suspended (active or not)
2. Module information where it was running
3. Module information where to be resumed if suspended
4. Information on the CICS service executing on behalf of the application (if applicable)

CICS+ Extractor

CICS+ is a CICS measurement option (data extractor) in which the precise number of CICS transactions are counted during the measurement interval. It records the exact service time and CPU time for each transaction. This data is displayed in the E12 report only, and has no effect on the other CICS reports.

Activating the CICS+ option automatically activates the CICS option. The extractor applies to CICS TS 3.1 and above. Your installer may have chosen to limit access to this data extractor.

Overview of CICS Multiple Address Space Support

CICS multiple address space (MASS) support allows you to measure and analyze multiple CICS regions simultaneously. Transaction data from multiple regions is merged to produce a set of 4 CICS reports showing multi-region activity. These reports are X01, X02, X03 and X04.

To enter CICS MASS observations:

1. Start a NEW request.
2. In Panel 1 – Job Information, enter either a Job name/Pattern with an asterisk (*) or a multi-job measurement with a percent (%) for the CICS regions you want to measure.
3. In Panel 4 – Active Jobs, if you entered an asterisk (*) in the Job Name/Pattern field, select the CICS regions from the list of active jobs presented. If you entered a percent (%) in the Job Name/Pattern field, the CICS regions that match the pattern are displayed. It is not necessary to select the CICS regions in this case, unless you want to limit the measurement to specific CICS regions. The maximum number of regions you are permitted to select is determined during the installation of Application Performance Analyzer.
4. In Panel 2 – Options, select the CICS data extractor.
5. Complete any other relevant panels for your request. You can specify further CICS measurement criteria in Panel 5 – Subsystems.

Once the NEW request is complete and submitted, Application Performance Analyzer creates and starts separate observation requests for each CICS region selected for measurement.

When the separate observation requests are completed, you can view the CICS MASS reports by using the tag (T) and report (S or R) commands.

- Tag up to 20 CICS region measurements to be included in the CICS MASS reports.
- Select one of the CICS region measurements for reporting, using the S or R command. This measurement does not have to be tagged.

In addition to the standard reports for the selected observation, Application Performance Analyzer generates the specific CICS MASS reports that show multi-region activity for all selected CICS regions.

Usage

Use this report to see a summary of the CICS measurement data collected during the observation session.

Note: Be aware that a reset of CICS statistics, if done during the measurement interval, can invalidate some of the values reported here.

Detail line descriptions

Environmental Information

Fields under this heading describe characteristics of the CICS environment.

CICS Release

The CICS version and release.

Transaction Statistics

Some CICS processing statistical values are shown under this heading.

First Transaction TaskId

The value of the CICS TaskId at the beginning of the observation session.

Last Transaction TaskId

The value of the CICS TaskId at the end of the observation session.

Number of TaskId Increments

The difference between the first and last CICS TaskId.

Number of Observed Transactions

The number of transactions with unique CICS TaskId values observed. If this value does not correspond to the number of increments, it could be an indication that not all executed transactions were measured. Some transactions could have been excluded as specified in the measurement request or transactions can be missed if a sampling rate is chosen that is slower than the transaction throughput rate.

Transaction Rate

The average number of transactions per second during the measurement interval.

Peak Active Transactions

The maximum number of concurrently active transactions observed during the measurement interval.

Peak Active Txns (Overall)

The maximum number of concurrently active transactions that occurred during the entire execution of the CICS region.

MaxTask

The maximum number of concurrent transactions CICS is configured for.

Mean Transaction Time

The average service time for the transactions observed during the measurement interval.

The service time consists of:

Execution Time

The time a CPU is processing the transaction.

Suspend Time

The time the transaction is suspended by CICS.

CICS Dispatch Delay Time

The time the transaction is delayed by CICS.

MVS Dispatch Delay Time

The time execution is delayed by the MVS dispatcher.

Service Time

The sum of the execution time, the suspend time, and the delay time.

Service Statistics

These are counts of service requests issued by CICS programs during the measurement interval:

- Program Requests
- Terminal Messages
- Storage Getmains
- Storage Freemains
- File I/O Requests
- Temporary Storage Requests
- Transient Data Requests
- Journal Write Requests

Exception or Critical Conditions

These are counts of certain exception or critical conditions that occurred during the measurement interval:

- System Dumps
- System Dumps Suppressed
- Transaction Dumps
- Transaction Dumps Suppressed
- Storage Violations
- Short on Storage occurrences
- Times at MaxTask
- Times at Class MaxTask

Transaction Counts

A list of each transaction code that was measured and the number of executions is shown here.

Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
E01: CICS Session Statistics (0866/CICS23A) Row 00001 of 00045
Command ==> ----- Scroll ==> CSR

Environmental Information
  CICS Release CICS/TS 2.3

Transaction Statistics
  First Transaction TaskId 0002089
  Last Transaction TaskId 0002242
  Number of TaskId Increments 153
  Number of Observed Transactions 153
  Transaction Rate (per sec) 2.18
  Peak Active Txns (Observed) 1
  Peak Active Txns (Overall) 2
  MaxTask 5

Mean Transaction Time (Execution + Suspend + Delay = Service)
  Execution Time 0.0727747
  Suspend Time 0.232708
  CICS Dispatch Delay Time 0.052427
  MVS Dispatch Delay Time 0.018062
  Service Time 0.375944

Service Statistics
  Program Requests 536
  Terminal Messages 305
  Storage Getmains 3,295
  Storage Freemains 3,279
  File I/O Requests 0
  Temporary Storage Requests 0
  Transient Data Requests 0
  Journal Write Requests 0

Exception or Critical Conditions
  System Dumps 0
  System Dumps Suppressed 0
  Transaction Dumps 0
  Transaction Dumps Suppressed 0
  Storage Violations 0
  Short on Storage occurrences 0
  Times at MaxTask 0

```

```

File View Navigate Help
-----
E01: CICS Session Statistics (0866/CICS23A) Row 00040 of 00047
Command ==> ----- Scroll ==> CSR

Transaction Counts

TranId Count
DNC1 151
CESN 2
CQRY 1
CATA 1

```

E02 - CICS CPU and use count by program

Usage

Use this report to get CPU usage and call counts for CICS programs that were executing during the observation session.

Quantification

Each report line displays the number of times a program was called by CICS services. The report will not show any calls that use a direct method such as a BALR.

Each report line also shows the percentage of CPU usage attributable to the program. Each percentage represents the ratio of CPU consumption observed for the reported program to the total CPU consumption for all CICS programs.

A program name of "CICS" is used to quantify CPU consumption not directly attributable to a CICS program.

A CICS program in this report is a program that is defined in the CICS System Definition (CSD) dataset.

Detail line hierarchy

The E02 shows one level, the detail lines cannot be expanded.

Sample reports

A sample is shown here:

```
File View Navigate Help
-----
E02: CICS CPU and Use Counts by Pgm (3090/CICS23A)          Row 00001 of 00016
Command ==> _____ Scroll ==> CSR

Name           Calls           Percent of CPU Time * 10.00% ±1.5%
               *....1....2....3....4....5....6....7....8....9..
CICSDB2        300           36.82 =====
SAMPREAD       501           30.56 =====
DSN5CA0        30           10.05 =====
CSOCTRUE       0            4.09 ==
DFHD2EX1       0            3.79 ==
CICS           0            3.74 ==
DB2DRVR        1            2.44 =
READDRVR       1            2.29 =
MQSAMP1        100           2.12 =
MQDRVR         1            1.54 =
SAMPBGN1       200           1.22 =
CSQ4CVK1       100           1.09 =
IMSDRVR        1            0.19 =
DFHEMTD        1            0.00
DFHEITMT       1            0.00
DFHEMTP        1            0.00
```

Detail line descriptions

CICS program name detail line

This is the only level for the detail line. Each line shows information about a CICS program for which CPU consumption was measured.

Under Heading	This is Displayed
Name	The CICS program name.
Calls	The number of times this program was called by another CICS program. The call must be done by an EXEC CICS API call.
Percent of CPU Time	The percentage of CPU time consumed during execution of the program.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Load Module	Display context help information.
++	Load Module	Show additional details.
M	Load Module	Display load module information.

on headings

Cmd	When Applied To Object	Action
?	Name, Percent CPU	Display context help information.
+	Percent CPU	Zoom in scale.
-	Percent CPU	Zoom out scale.
+	Percent CPU	Zoom in scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.
SC	Name	Sort by call count.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| SAMPREAD          501      30.56 ===== |
+-----+

Call count at start:      3
Call count at end:      504
Difference:              501
Load count:              0
CPU active samples:      1,225
Total CPU active:        4,008

```

E03 - CICS CPU usage by transaction

Usage

Use this report to see how CPU consumption was distributed across the CICS transactions that were executing during the observation session.

Expand a CICS transaction report line to see a further breakdown by program, CICS command and SQL Request.

Quantification

Each report line quantifies CPU usage as a percentage. Each percentage represents the ratio of CPU consumption observed for the reported item (transaction, program, CICS command or SQL request) to the

total CPU consumption measured in the address space. The sum of all the percentages will normally be less than 100 percent because only those CICS transactions being measured are quantified in the report. But the percentage is the portion of the total CICS region CPU consumption.

Similarly, any CICS region CPU overhead not attributable to CICS transactions will not be quantified in the report.

Detail line hierarchy

An unexpanded E03 report shows a line for each CICS transaction for which CPU usage was measured. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```

Level 1 CICS Transaction
  Level 2 CICS Program
    Level 3 CICS Command
    Level 3 CICS Command
    ...
  Level 2 CICS Program
    Level 3 SQL Request
    Level 3 SQL Request
    ...
  Level 2 CICS Program
    Level 3 DL/I Request
    Level 3 DL/I Request
    ...
  Level 2 CICS Program
    Level 3 Module
    Level 3 Module
    Level 3 System Services
    ...
  Level 2 CICS Program
    Level 3 Adabas Request
    Level 3 Adabas Request
    ...
  Level 2 System Services
    Level 3 Module
    Level 3 Module
    Level 3 System Services
    ...
  ...

```

Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (transaction). A sample is shown here:

```

File View Navigate Help
-----
E03: CICS CPU Usage by Transaction (0817/CICS23A)          Row 00001 of 00004
Command ==> _____ Scroll ==> CSR

Name   NTxns/Description          Percent of CPU time * 10.00% ±1.5%
      *...1...2...3...4...5...6...7
DNC1   327                      77.22 =====
FINQ   295                      8.35  ====

```

You can enter the “+” line command on a transaction to expand to the next level. A sample of the report with a transaction expanded to the second level of the hierarchy (CICS program) is shown here:

```

File View Navigate Help
-----
E03: CICS CPU Usage by Transaction (0817/CICS23A)          Row 00001 of 00015
Command ==> _____ Scroll ==> CSR

Name      NTxns/Description                                Percent of CPU time * 10.00%  ±1.5%
          *....1....2....3....4....5....6....7
DNC1      327      77.22 =====
→ PFSAMPC  EXEC SQL      35.01 =====
→ DFHD2EX1 CICS Program  16.38 =====
→ PFSAMPB  EXEC SQL      8.14 =====
→ PFSAMPA  EXEC SQL      3.59 ==
→ PFSAMPA  CICS Program  3.54 ==
→ CICS     System Services 3.11 ==
→ PFSAMPB  CICS Program  3.02 ==
→ PFSAMPA  EXEC CICS     2.05 =
→ PFSAMPC  CICS Program  1.89 =
→ CEECCICS EXEC CICS     0.34
→ PFSAMPB  EXEC CICS     0.09
FINQ      295      8.35 =====

```

You can enter the “+” line command on a program to expand to the next level. In the sample below, a line with description “EXEC SQL” has been expanded, showing the SQL commands:

```

File View Navigate Help
-----
E03: CICS CPU Usage by Transaction (0817/CICS23A)          Row 00001 of 00027
Command ==> _____ Scroll ==> CSR

Name      NTxns/Description                                Percent of CPU time * 10.00%  ±1.5%
          *....1....2....3....4....5....6....7
DNC1      327      77.22 =====
→ PFSAMPC  EXEC SQL      35.01 =====
→ +1BE2    FETCH      13.29 =====
→ +662A    FETCH      6.56 ==
→ +0F52    SELECT      3.36 ==
→ +6E9C    SELECT      2.72 =
→ +1164    SELECT      2.33 =
→ +6C4C    SELECT      1.89 =
→ +6248    SELECT      1.85 =
→ +1588    OPEN        1.55 =
→ +64D0    OPEN        0.89
→ +6752    CLOSE       0.29
→ +2348    CLOSE       0.22

```

Detail line descriptions

CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which CPU consumption was measured.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
Percent of CPU Time	The percentage of CPU time consumed during execution of the transaction.

CICS program or system services detail line

This is a second-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The third-level lines shown under this item can be CICS command lines, SQL requests, DL/I requests or Module lines.

If no CICS application program was dispatched, “CICS” is shown under the Name heading and “System Services” under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, DB2 SQL, or IMS DLI calls, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. “CICS” is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, this displays “EXEC CICS.” If lines grouped under this line are SQL request lines, this displays “EXEC SQL”. If lines grouped under this line are DL/I request lines, this displays “EXEC DLI”. Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and “CICS Program” is displayed if it is not recognized; indicating this is likely an application program. “System Services” is displayed if no application program was in control.
Percent of CPU Time	The percentage of CPU time consumed while executing in the identified program during execution of the transaction under which the line appears.

CICS command detail line

These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This is in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Percent of CPU Time	The percentage of CPU time consumed while executing the CICS command.

SQL Request detail line

These lines appear under a CICS Program detail line. Each one represents an SQL request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL call. This is in +xxxx format. This field is always displayed in red
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Percent of CPU Time	The percentage of CPU time consumed while executing the SQL request.

DL/I Request detail line

These lines appear under a CICS Program detail line. Each one represents an IMS DL/I request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DL/I call. This is in +xxxx format. This field is always displayed in red.
Description	The DL/I function code followed by the PCB name.
Percent of CPU Time	The percentage of CPU time consumed while executing the DL/I request.

Active module detail line

These lines appear under a CICS Program detail line. Each one represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The name of the module that was executing.
Description	A functional description of the module if one is available.
Percent of CPU Time	The percentage of CPU time consumed while executing in the module within the grouping under which the detail line appears.

Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Percent of CPU Time	The percentage of CPU time consumed while executing the Adabas request.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Transaction, Load Module, CSECT, Command, Seqno, DL/I Request	Display context help information.

Cmd	When Applied To Object	Action
++	Transaction, Load Module, CSECT, Command, Seqno, DL/I Request	Show additional details.
+	Transaction, Load Module	Expand to reveal next level.
–	Transaction, Load Module	Collapse to hide next level.
SV	Transaction, Load Module	Sort next level by value.
SN	Transaction, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	CICS Active Module, Command, CSECT, Seqno, DL/I Request	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Sort next level by name.
+	Percent CPU	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce description field size.
–	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here, this one is for a CICS command:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > +2C70      RETURN                      0.72      |
+-----+

Calculation Details
CICS Transaction                DNC1
CPU Measurements Servicing CICS Commands 21
Total Measurements              2906
Percent of total                0.72%

Command Attributes
CICS Command                    EXEC CICS RETURN
Issued in Load Module           PFSAMPA
Return Offset in Module         +2C90
Name of CSECT                   PFSAMPA
Return Offset in CSECT          +2C70

The command execution measurement counts are
Executing (CPU active)          21
Suspended by CICS              0
Delayed
  CICS dispatch delay          0
  MVS delay (WAIT)              0
  MVS delay (Busy)              0

```

A sample detail window for an SQL command is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
| → +84D6      SELECT                      1,84 =      |
+-----+

Calculation Details
CICS Transaction                DNC1
CPU Measurements Servicing DB2 SQL 168
Total Measurements              1980
Percent of total                8.48%
These quantities represent measurements of CPU usage while
processing the indicated SQL requests.

SQL Statement Information
Subsystem name DSN1              Attach type SASS
Plan name     PFSAMPA           Plan BIND time Nov-28-04 14:11:17

DBRM name     PSSAMPC           DBRM token 17859595 06957A24
DBRM date/time Nov-25-04 14:49:42

Package ID    PFSAMPC           Location CABNETDB24
Collectn name PFSAMPX2          Pkg BIND time no data

SQL function  SELECT            Static/dynamic Static
Precmplr stmt# 3155             DBRM section# 20
CSECT/module   PFSAMPC in PFSAMPC Offset of call 000084D6
Sample count   69               SQL req count 172
SQL CPU time   0.28             Service time 0.43

SQL Statement: SELECT *
                INTO : H ,
                : H : H ,
                : H : H
                FROM DEP
                WHERE XRATE = : H

```

SETUP options

The following SETUP option can be selected with the SETUP primary command:

Minimum CPU percentage

You can set this option to eliminate modules where the CPU percentage is below a certain threshold.

E04 - CICS mean service time by transaction

Usage

Use this report to see an analysis of how time was spent by the CICS transactions that were executing during the observation session. Expand a CICS transaction report line to see a further breakdown by program, CICS command, DL/I request and SQL request.

Quantification

Each report line quantifies time as arithmetic means for each measured transaction. The means are calculated by dividing the total of all time spent servicing all occurrences of a transaction by its number of occurrences. The means are expressed in units of seconds. The mean service time is shown and is further broken down into execution time, suspend time, and delay time.

Detail line hierarchy

An unexpanded E04 report shows a line for each measured CICS transaction. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1 CICS Transaction
  Level 2 CICS Program
    Level 3 CICS Command
    Level 3 CICS Command

    ...

  Level 2 CICS Program
    Level 3 SQL Request
    Level 3 SQL Request

    ...

  Level 2 CICS Program
    Level 3 DL/I Request
    Level 3 DL/I Request

    ...

  Level 2 CICS Program
    Level 3 Module
    Level 3 Module
    Level 3 System Services

    ...

  Level 2 CICS Program
    Level 3 Adabas Request
    Level 3 Adabas Request

    ...

  Level 2 System Services
    Level 3 Module
    Level 3 Module
    Level 3 System Services

    ...
```

Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (transaction). A sample is shown here:

File View Navigate Help							
E04: CICS Mean Service Time by Txn (0817/CICS23A)						Row 00001 of 00004	
Command ==> _____						Scroll ==> CSR	
----- Mean Time in Seconds -----							
Name	NTxns	Description	Error	Execution	+ Suspend	+ Delay	= Service
DNC1	327		± 5.5%	0.103	0.013	0.023	0.140
FINQ	295		± 5.8%	0.012	0.000	0.011	0.023

You can enter the “+” line command on a transaction to expand to the next level. A sample of the report with a transaction expanded to the second level of the hierarchy (CICS Program) is shown here:

File View Navigate Help						
E04: CICS Mean Service Time by Txn (0817/CICS23A)					Row 00001 of 00004	
Command ==> _____					Scroll ==> CSR	
----- Mean Time in Seconds -----						
Name	NTxns	Description	Error	Execution	+ Suspend + Delay	= Service
DNC1	327		± 5.5%	0.103	0.013	0.023
→ PFSAMPC		EXEC SQL		0.046	0.000	0.004
→ DFHD2EX1		CICS Program		0.021	0.011	0.002
→ PFSAMPB		EXEC SQL		0.010	0.000	0.002
→ CICS		System Services		0.004	0.000	0.008
→ PFSAMPA		CICS Program		0.004	0.000	0.002
→ PFSAMPA		EXEC SQL		0.004	0.000	0.001
→ PFSAMPB		CICS Program		0.004	0.000	0.000
→ PFSAMPC		CICS Program		0.002	0.000	0.000
→ PFSAMPA		EXEC CICS		0.002	0.000	0.000
→ CEECCICS		EXEC CICS		0.000	0.000	0.000
→ PFSAMPB		EXEC CICS		0.000	0.000	0.000

You can enter the “+” line command on a program to expand to the next level. In the sample below, a line with description “EXEC SQL” has been expanded, showing the SQL commands:

File View Navigate Help						
E04: CICS Mean Service Time by Txn (0817/CICS23A)					Row 00001 of 00041	
Command ==> _____					Scroll ==> CSR	
----- Mean Time in Seconds -----						
Name	NTxns	Description	Error	Execution	+ Suspend + Delay	= Service
DNC1	327		± 5.5%	0.103	0.013	0.023
→ PFSAMPC		EXEC SQL		0.046	0.000	0.004
→ +1BE2		FETCH		0.017	0.000	0.001
→ +662A		FETCH		0.008	0.000	0.000
→ +0F52		SELECT		0.004	0.000	0.000
→ +6E9C		SELECT		0.003	0.000	0.000
→ +1164		SELECT		0.003	0.000	0.000
→ +6C4C		SELECT		0.002	0.000	0.000
→ +6248		SELECT		0.002	0.000	0.000
→ +1588		OPEN		0.002	0.000	0.000
→ +64D0		OPEN		0.001	0.000	0.000
→ +6752		CLOSE		0.000	0.000	0.000
→ +2348		CLOSE		0.000	0.000	0.000

Detail line descriptions

CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.

Under Heading	This is Displayed
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
Error	The margin of error for the mean values calculated by using the number of executions of the transaction as the sample size.
Execution	The mean time, in seconds, a CPU was actively executing for the transaction.
Suspend	The mean time, in seconds, CICS had suspended execution of the transaction.
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The mean service time for the transaction. This includes execution, suspend and delay time.

CICS program or system services detail line

This is a second-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The third-level lines shown under this item can be either CICS command lines, SQL Request lines, DL/I Request lines or Module lines.

If no CICS application program was dispatched, “CICS” is shown under the Name heading and “System Services” under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, DB2 SQL, or IMS DLI calls, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. “CICS” is displayed here if no application program was in control.

Under Heading	This is Displayed
NTxns	If lines grouped under this line are CICS command lines, this displays “EXEC CICS”. If lines grouped under this line are SQL request lines, this displays “EXEC SQL”. If lines grouped under this line are DL/I request lines, this displays “EXEC DLI”. Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and “CICS Program” is displayed if it is not recognized; indicating this is likely an application program. “System Services” is displayed if no application program was in control.
Description	If this is a recognized CICS transaction, a functional description.
Execution	The mean time, in seconds, CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The mean time, in seconds, CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i>.</p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The mean service time for the transaction control was under the CICS program identified in the Name column. This includes execution, suspend and delay time.

CICS command detail line

These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This is in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.

Under Heading	This is Displayed
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The mean time, in seconds, CPU execution was observed while the CICS command was being processed.
Suspend	The mean time, in seconds, CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The mean service time for the transaction the CICS command was being processed. This includes execution, suspend and delay time.

SQL request detail line

These lines appear under a CICS Program detail line. Each one represents an SQL request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function — SELECT, FETCH, UPDATE, etc.
Execution	The mean time, in seconds, CPU execution was observed while the SQL request was being processed.
Suspend	The mean time, in seconds, CICS had suspended execution of the transaction while the SQL request was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The mean service time for the transaction the SQL request was being processed. This includes execution, suspend and delay time.

DL/I request detail line

These lines appear under a CICS Program detail line. Each one represents an IMS DL/I request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DL/I command. This is in +xxxx format. This field is always displayed in red.
Description	The DL/I function code followed by the PCB name.
Execution	The mean time, in seconds, CPU execution was observed while the DL/I request was being processed.
Suspend	The mean time, in seconds, CICS had suspended execution of the transaction while the DL/I request was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The mean service time for the transaction the DL/I request was being processed. This includes execution, suspend and delay time.

Module/system services detail line

These lines appear under a CICS Program detail line. Each one represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The mean time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The mean service time for the transaction the identified module was executing or delayed.

Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The mean time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	<p>The mean time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The mean service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Transaction, Load Module, CSECT, Command, Seqno, DL/I Request	Display context help information.
++	Transaction, Load Module, CSECT, Command, Seqno, DL/I Request	Show additional details.
+	Transaction, Load Module	Expand to reveal next level.
–	Transaction, Load Module	Collapse to hide next level.
SV	Transaction, Load Module	Sort next level by value.
SN	Transaction, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	CICS Active Module, Command, CSECT, Seqno, DL/I Request	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here, this one is for a CICS command:

```

+-----+-----+ The following report line was selected -----+
| > +2C70      RETURN          0.000      0.000      0.000      0.000|
+-----+-----+

```

Calculation Details

CICS Transaction

DNC1

The quantities shown represent the service time for execution of the indicated CICS command while processing this transaction. The quantities are mean times for the command for all executions of the transaction and are calculated as follows:

(1) Times command observed in txn/program	26
(2) Duration of one sample interval	0.006003
(3) (1) × (2) = total time for command	0.156078
(4) Number of executions of transaction	342
(5) (3) ÷ (4) = mean time for the command	0.000456

Command Attributes

CICS Command	EXEC CICS RETURN
Issued in Load Module	PFSAMPA
Return Offset in Module	+2C90
Name of CSECT	PFSAMPA
Return Offset in CSECT	+2C70

The command execution measurement counts are

Executing (CPU active)	21
Suspended by CICS	5
Delayed	
CICS dispatch delay	0
MVS delay (WAIT)	0
MVS delay (Busy)	0

A sample detail window for an SQL command is shown here:

File View Navigate Help			
+----- The following report line was selected -----			
	→ +85D8	SELECT	0.001 0.000 0.000
+-----			
Calculation Details			
CICS Transaction		DNC1	
The quantities shown represent the service time for execution of the indicated DB2 SQL call while processing this transaction. The quantities are mean times for the SQL call for all executions of the transaction and are calculated as follows:			
(1) Times SQL call observed in txn/program		93	
(2) Duration of one sample interval		0.006003	
(3) (1) x (2) = total time for SQL call		0.558279	
(4) Number of execution of transaction		342	
(5) (3) ÷ (4) = mean time for the SQL call		0.001632	
SQL Statement Information			
Subsystem name DSN1		Attach type	SASS
Plan name PFSAMPA		Plan BIND time	Nov-28-04 14:11:17
DBRM name PSSAMPC		DBRM token	17859595 06957A24
DBRM date/time Nov-25-04 14:49:42			
Package ID PFSAMPC		Location	CABNETDB24
Collectn name PFSAMPX2		Pkg BIND time	no data
SQL function SELECT		Static/dynamic	Static
Precmplr stmt# 3179		DBRM section#	21
CSECT/module PFSAMPC in PFSAMPC		Offset of call	000085D8
Sample count 93		SQL req count	172
SQL CPU time 0.28		Service time	0.54
SQL Statement: SELECT *			
INTO : H ,			
: H : H ,			
: H : H			
FROM DEPT			
WHERE XRATE = : H			

E05 - CICS total service time by Txn

Usage

Use this report to see an analysis of how time was spent by the CICS transactions that were measured during the observation session. Expand a CICS transaction report line to see a further breakdown by program and by CICS command.

Quantification

Each report line quantifies total times for each measured transaction. The total times are expressed in units of seconds. The total service time is shown and is further broken down into execution time, suspend time, and delay time.

Detail line hierarchy

An unexpanded E05 report shows a line for each measured CICS transaction. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```

Level 1 CICS Transaction
Level 2 CICS Program
Level 3 CICS Command
Level 3 CICS Command

```

```

...
Level 2 CICS Program
Level 3 SQL Request
Level 3 SQL Request

...
Level 2 CICS Program
Level 3 DL/I Request
Level 3 DL/I Request

...
Level 2 CICS Program
Level 3 Module
Level 3 Module
Level 3 System Services

...
Level 2 CICS Program
Level 3 Adabas Request
Level 3 Adabas Request

...
Level 2 System Services
Level 3 Module
Level 3 Module
Level 3 System Services

...

```

Detail line descriptions

CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
Error	The margin of error based on a sample population of the number of executions of the transaction.
Execution	The total time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction. This includes execution, suspend and delay time.

CICS program or system services detail line

This is a second-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The third-level lines shown under this item can be either CICS command lines, SQL Request lines, DL/I Request lines or Module lines.

If no CICS application program was dispatched, “CICS” is shown under the Name heading and “System Services” under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, DB2 SQL, or IMS DLI calls, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. “CICS” is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, this displays “EXEC CICS”. If lines grouped under this line are SQL request lines, this displays “EXEC SQL”. If lines grouped under this line are DL/I request lines, this displays “EXEC DLI”. Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and “CICS Program” is displayed if it is not recognized; indicating this is likely an application program. “System Services” is displayed if no application program was in control.
Execution	The total time, in seconds, CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction control was under the CICS program identified in the Name column. This includes execution, suspend and delay time.

CICS command detail line

These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This is in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The total time, in seconds, CPU execution was observed while the CICS command was being processed.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while the CICS command was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the CICS command was being processed. This includes execution, suspend and delay time.

SQL request detail line

These lines appear under a CICS Program detail line. Each one represents an SQL request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function — SELECT, FETCH, UPDATE, etc.
Execution	The total time, in seconds, CPU execution was observed while the SQL request was being processed.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while the SQL request was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the SQL request was being processed. This includes execution, suspend and delay time.

DL/I request detail line

These lines appear under a CICS Program detail line. Each one represents an IMS DL/I request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DL/I command. This is in +xxxx format. This field is always displayed in red.
Description	The DL/I function code followed by the PCB name.
Execution	The total time, in seconds, CPU execution was observed while the DL/I request was being processed.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while the DL/I request was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the DL/I request was being processed. This includes execution, suspend and delay time.

Module/system services detail line

These lines appear under a CICS Program detail line. Each one represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The total time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fourth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the identified module was executing or delayed.

Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The total time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	<p>The total time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (transaction). A sample is shown here:

File View Navigate Help						
E05: CICS Total Service Time by Txn (0817/CICS23A)				Row 00001 of 00004		
Command ==> _____				Scroll ==> CSR		
Name		NTxns	Description	Error	----- Mean Time in Seconds -----	
					Execution + Suspend + Delay	= Service
DNC1	327			± 5.5%	33.736	4.419
FINQ	295			± 5.8%	3.649	0.000
					7.649	45.805
					3.379	7.029

You can enter the “+” line command on a transaction to expand to the next level. A sample of the report with a transaction expanded to the second level of the hierarchy (CICS Program) is shown here:

File View Navigate Help						
E05: CICS Total Service Time by Txn (0817/CICS23A)				Row 00001 of 000015		
Command ==> _____				Scroll ==> CSR		
Name		NTxns	Description	Error	----- Total Time in Seconds -----	
					Execution + Suspend + Delay	= Service
DNC1	327			± 5.5%	33.736	4.419
→ PFSAMPC			EXEC SQL		15.298	0.000
→ DFHD2EX1			CICS Program		7.159	3.709
→ PFSAMPB			EXEC SQL		3.559	0.000
→ CICS			System Services		1.359	0.089
→ PFSAMPA			CICS Program		1.549	0.259
→ PFSAMPA			EXEC SQL		1.569	0.000
→ PFSAMPB			CICS Program		1.319	0.179
→ PFSAMPC			CICS Program		0.829	0.139
→ PFSAMPA			EXEC CICS		0.899	0.009
→ CEECCICS			EXEC CICS		0.149	0.019
→ PFSAMPB			EXEC CICS		0.039	0.009
					7.649	45.805
					16.868	
					11.738	
					4.509	
					4.249	
					2.579	
					2.109	
					1.579	
					0.969	
					0.949	
					0.199	
					0.049	

You can enter the “+” line command on a program to expand to the next level. In the sample below, a line with description “EXEC SQL” has been expanded, showing the SQL commands:

File View Navigate Help						
E05: CICS Total Service Time by Txn (0817/CICS23A)				Row 00001 of 00027		
Command ==> _____				Scroll ==> CSR		
Name		NTxns	Description	Error	----- Total Time in Seconds -----	
					Execution + Suspend + Delay	= Service
DNC1	327			± 5.5%	33.736	4.419
→ PFSAMPC			EXEC SQL		15.298	0.000
→ +1BE2			FETCH		5.809	0.000
→ +662A			FETCH		2.869	0.000
→ +0F52			SELECT		1.469	0.000
→ +6E9C			SELECT		1.189	0.000
→ +1164			SELECT		1.019	0.000
→ +6C4C			SELECT		0.829	0.000
→ +6248			SELECT		0.809	0.000
→ +1588			OPEN		0.679	0.000
→ +64D0			OPEN		0.389	0.000
→ +6752			CLOSE		0.129	0.000
→ +2348			CLOSE		0.099	0.000
					7.649	45.805
					16.868	
					6.389	
					2.979	
					1.709	
					1.319	
					1.209	
					0.939	
					0.889	
					0.739	
					0.419	
					0.149	
					0.119	

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Transaction, Load Module, CSECT, Command, Seqno, DL/I Request	Display context help information.
++	Transaction, Load Module, CSECT, Command, Seqno, DL/I Request	Show additional details.
+	Transaction, Load Module	Expand to reveal next level.
–	Transaction, Load Module	Collapse to hide next level.
SV	Transaction, Load Module	Sort next level by value.
SN	Transaction, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	CICS Active Module, Command, CSECT, Seqno, DL/I Request	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here, this one is for a CICS command:

```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| > +2C70      RETURN          0.126      0.030      0.000      0.156|
+-----+

Calculation Details
CICS Transaction                               DNC1
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are total times for all executions of the command within
the transaction and are calculated as follows:

(1) Times command observed in txn/program      26
(2) Duration of one sample interval            0.006003
(3) (1) x (2) = total time for command         0.156078

Command Attributes
CICS Command                                EXEC CICS RETURN
Issued in Load Module                       PFSAMPA
Return Offset in Module                     +2C90
Name of CSECT                               PFSAMPA
Return Offset in CSECT                      +2C70

The command execution measurement counts are
Executing (CPU active)                       21
Suspended by CICS                            5
Delayed
CICS dispatch delay                          0
MVS delay (WAIT)                             0
MVS delay (Busy)                             0

```

A sample detail window for an SQL command is shown here:


```
File View Navigate Help
+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+
|  +-----+-----+-----+-----+-----+-----+
|  |  -> +6E9C      SELECT      1.189      0.000      0.129
|  +-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+

Calculation Details
CICS Transaction                                DNC1
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are total times for all executions of the command within
the transaction and are calculated as follows:

(1) Times SQL call observed in txn/program      132
(2) Duration of one sample interval              0.009999
(3) (1) x (2) = total time for SQL call          1.319868

SQL Statement Information
DBRM name          PSSAMPC
DBRM token          17652081 1C3E933C
Precmplr stmt#      3179
SQL Call Module     PFSAMPC
SQL Call CSECT      PFSAMPC
SQL Call Offset      00006E9C
SQL Function         SELECT
Subsystem name       DSN1
Connection Type      SASS
Package/Plan:
  Location           CABNETDB24
  Collectn name      PFSAMPC6
  Package ID         PFSAMPC
  Plan name          PFSAMPA

SQL Req Count       105

SQL Statement:      SELECT *
                    INTO : H ,
                    : H : H ,
                    : H : H ,
                    FROM DEP
                    WHERE XRATE = : H
```

E06 - CICS service time by task ID

Usage

Use this report to see a chronology of occurrences of CICS transactions. Expand a CICS transaction report line to see a separate line for each execution of the transaction. Expand a task number report line to see a further breakdown by program, CICS command, SQL request and DL/I request.

Quantification

Each report line quantifies total times for each measured transaction. The total times are expressed in units of seconds. The total service time is shown and is further broken down into execution time, suspend time, and delay time.

Detail line hierarchy

An unexpanded E06 report shows a line for each measured CICS transaction. You can expand each line to reveal a line for each occurrence of the transaction.

The hierarchy is illustrated here:

```
Level 1 CICS Transaction
Level 2 CICS Transaction Occurrence
Level 3 CICS Program
Level 4 CICS Command
Level 4 CICS Command
...
```

```

Level 3 CICS Program
  Level 4 SQL Request
  Level 4 SQL Request
  ...
Level 3 CICS Program
  Level 4 DLI Request
  Level 4 DLI Request
  ...
Level 3 CICS Program
  Level 4 Module
  Level 4 Module
  Level 4 System Services
  ...
Level 3 CICS Program
  Level 4 Adabas Request
  Level 4 Adabas Request
  ...
Level 3 System Services
  Level 4 Module
  Level 4 Module
  Level 4 System Services
  ...
Level 2 CICS Transaction Occurrence
  ...

```

Detail line descriptions

CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
Error	The margin of error based on a sample population of the number of executions of the transaction.
Execution	The total time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction. This includes execution, suspend and delay time.

CICS transaction number detail line

This detail line shows information about a single execution of the transaction.

Under Heading	This is Displayed
Name	The 'Task ID' of the transaction. This is a sequence number assigned to the transaction by CICS. CICS increments this value for each transaction execution. It serves as a unique transaction identifier.
Description	The time of day at which the transaction was executed.
Execution	The total time, in seconds, CPU execution was observed while the transaction was being processed.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction.
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>

Under Heading	This is Displayed
Service	The total service time for the transaction. This includes execution, suspend and delay time.

CICS program or system services detail line

This is a third-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The fourth-level lines shown under this item can be either CICS command lines, SQL request lines, DLI request lines or module lines.

If no CICS application program was dispatched, “CICS” is shown under the Name heading and “System Services” under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. “CICS” is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, this displays “EXEC CICS.” If lines grouped under this line are SQL request lines, this displays “EXEC SQL.” If lines grouped under this line are DLI request lines, this displays “EXEC DLI.” Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and “CICS Program” is displayed if it is not recognized; indicating this is likely an application program. “System Services” is displayed if no application program was in control.
Execution	The total time, in seconds, CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction control was under the CICS program identified in the Name column. This includes execution, suspend and delay time.

CICS command detail line

detail line These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This is in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The total time, in seconds, CPU execution was observed while the CICS command was being processed.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the CICS command was being processed. This includes execution, suspend and delay time.

SQL request detail line

These lines appear under a CICS Program detail line. Each one represents an SQL request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.

Under Heading	This is Displayed
Execution	The total time, in seconds, CPU execution was observed while the SQL request was being processed.
Suspend	The total time, in seconds, CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	<p>The mean time, in seconds, execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the SQL request was being processed. This includes execution, suspend and delay time.

DLI request detail line

These lines appear under a CICS Program detail line. Each one represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The total time, in seconds, CPU execution was observed while the DLI request was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the DLI request was being processed. This includes execution, suspend and delay time.

Module/system services detail line

These lines appear under a CICS Program detail line. Each one represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, “CICS” is displayed in the name field and “System Services” in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or “CICS” if a module name could not be determined.
Description	A functional description of the module if one is available. “System Services” is displayed if the module name could not be determined.
Execution	The total time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed. This is a fifth-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>
Service	The total service time for the transaction the identified module was executing or delayed.

Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The total time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	<p>The total time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (transaction). A sample is shown here:

File View Navigate Help						
E06: CICS Service Time by Task Id (0712/CICS23A)				Row 00001 of 00003		
Command ==> _____				Scroll ==> CSR		
Name		Count	Description	Error	Total Time in Seconds	
				Execution	+ Suspend	+ Delay = Service
CKAM		1		±99.9%	0.000	141.069
DNC1		72		±11.9%	0.665	63.709
FINQ		174		± 7.6%	1.576	0.035
					73.506	75.118

By entering “+” on a transaction line, it is expanded into the CICS transaction occurrence detail line:

File View Navigate Help						
E06: CICS Service Time by Task Id (0712/CICS23A)				Row 00001 of 00177		
Command ==> _____				Scroll ==> CSR		
Name		Count	Description	Error	Total Time in Seconds	
				Execution	+ Suspend	+ Delay = Service
CKAM		1		±99.9%	0.000	141.069
DNC1		72		±11.9%	0.665	63.709
FINQ		174		± 7.6%	1.576	0.035
→ 01531			16:34:50.97	0.000	0.000	0.361
→ 01533			16:34:51.87	0.000	0.000	0.513
→ 01534			16:34:53.55	0.000	0.000	0.303
→ 01536			16:34:53.99	0.000	0.000	0.490
→ 01537			16:34:54.92	0.000	0.000	0.256
→ 01539			16:34:55.30	0.035	0.000	0.490
→ 01540			16:34:56.39	0.000	0.000	0.482
→ 01541			16:34:58.06	0.000	0.000	0.397
→ 01542			16:34:58.60	0.000	0.000	0.408
→ 01544			16:34:59.08	0.000	0.000	0.432
→ 01545			16:34:59.99	0.023	0.000	0.280
→ 01547			16:34:00.48	0.011	0.000	0.361
→ 01548			16:34:00.92	0.000	0.000	0.443

Line commands

on objects

Cmd	When Applied To Object	Action
?	Transaction, Task ID, CICS Program	Display context help information.
++	Transaction, Task ID, CICS Program	Show additional details.
+	Transaction, Task ID, CICS Program	Expand to reveal next level.
–	Transaction, Task ID, CICS Program	Collapse to hide next level.
SV	Transaction, Task ID, CICS Program	Sort next level by value.
SN	Transaction, Task ID, CICS Program	Sort next level by name.

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+-----+ The following report line was selected +-----+
| DNC1      342      ± 5.4%  15.547      1.596      3.373      20.518|
+-----+

Calculation Details
CICS Transaction                               DNC1
The quantities shown represent the service time for executions of
this transaction. The service time is the sum of execution time,
suspend time and delay time. The quantities are total times for all
executions of the transaction and are calculated as follows:

(1) Number of times transaction observed      3418
(2) Duration of one sample interval          0.006003
(3) (1) × (2) = total time for transaction    20.518254

The transaction execution measurement counts are
Executing (CPU active)      2590
Suspended by CICS          266
Delayed
  CICS dispatch delay      125
  MVS delay (WAIT)         0
  MVS delay (Busy)         437

Measurement counts for service requests made by this transaction
Program requests           51
Terminal messages          0
Getmain requests           10
Freemain requests          11
File I/O requests          0
File suspends              0
Temporary storage requests 0
Transient data requests    0
Dump system requests       0
Dump transaction requests  0
Journal requests           0
```

E07 - CICS wait by Txn

Usage

Use this report to see where CICS transactions were waiting. Expand a CICS transaction report line to see a further breakdown by resource name.

Quantification

Each report line quantifies accumulated wait as a percentage. Each percentage represents the ratio of wait time observed for the reported item (transaction or resource), to the total number of wait observations measured in the address space. There can be many wait observations recorded for the same CICS sample.

Detail line hierarchy

An unexpanded E07 report shows a line for each CICS transaction which was observed to be in a wait. You can expand each line to reveal additional hierarchical levels of detail (using the “+” line command).

The hierarchy is illustrated here:

```

Level 1 CICS Transaction
Level 2 Wait Resource
Level 2 CICS Dispatch Delay
Level 2 MVS Delay (Wait)
Level 2 MVS Delay (Busy)

```

...

Detail line descriptions

CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction which was observed in a wait.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns/Description	The number of executions of the transaction, and if this is a recognized CICS transaction, a functional description.
Percent wait time	The percentage of wait observations for this transaction of the total number of wait observations for the region.
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed. This is a second-level detail line shown directly under the CICS transaction detail line. This line represents a CICS resource type or a wait type. The complete list of resource types is documented in the <i>CICS Transaction Server for z/OS Problem Determination Guide</i></p> <p>The most common wait types include:</p> <p>CICS The CICS region was busy processing other transactions and could not dispatch this transaction.</p> <p>MVSWait The entire region was in a wait for an MVS service.</p> <p>MVSBusy The MVS system was busy and did not dispatch the CICS region.</p> <p>CICSSusp The transaction has been suspended by CICS while waiting on a resource.</p>

Sample reports

A sample report is shown here, the transaction has been expanded to the second level.

```

File View Navigate Help
-----
E07: CICS Wait by Txn (1623/CICS23A) Row 00001 of 00005
Command ==> Scroll ==> CSR
-----
Name      NTxns/Description      Percent of CPU time * 10.00% ±1.5%
          *....1....2....3....4....5....6....7
DNC1      342                24.80 =====
→ MVSBusy  MVS Delay (Busy)      13.09 =====
→ CICSSusp Suspend              7.51 ===
→ CICSDis  CICS Dispatch Delay   4.14 ==
→ MVSWait  MVS Delay (Wait)       0.04

```

Line commands

on objects

Cmd	When Applied To Object	Action
?	Transaction, Resource/Wait type	Display context help information.
++	Transaction, Resource/Wait type	Show additional details.
+	Transaction	Expand to reveal next level.
–	Transaction	Collapse to hide next level.
SV	Transaction	Sort next level by value.
SN	Transaction	Sort next level by name.

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

E08 - CICS mean service time by terminal ID

Usage

Use this report to see an analysis of how time was spent on CICS terminals that were executing during the observation session. Expand a CICS terminal report line to see a further breakdown by transaction, program, CICS command, DLI request and SQL request.

Quantification

Each report line quantifies time as arithmetic means for all measured transactions on the terminal. The means are calculated by dividing the total of all time spent servicing all occurrences of transactions on the terminal by the number of occurrences. The means are expressed in units of seconds. The mean service time is shown and is further broken down into execution time, suspend time, and delay time.

Detail line hierarchy

An unexpanded E08 report shows a line for each measured CICS terminal, and one line for all non-terminal-attached transactions. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1 CICS Terminal
  Level 2 CICS Transaction
    Level 3 CICS Program
      Level 4 CICS Command
      Level 4 CICS Command

      ...
    Level 3 CICS Program
      Level 4 SQL Request
```

```

Level 4 SQL Request

Level 3 CICS Program
Level 4 DLI Request
Level 4 DLI Request

Level 3 CICS Program
Level 4 Module
Level 4 Module
Level 4 System Services

Level 3 CICS Program
Level 4 Adabas Request
Level 4 Adabas Request

Level 3 System Services
Level 4 Module
Level 4 Module
Level 4 System Services

```

Detail line descriptions

CICS terminal detail line

This is the first-level detail line. Each line shows information about a CICS terminal for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS terminal ID. This will be the terminal ID or N/A if a terminal ID was not available during the sample. A terminal might not be available because the transaction was running while not attached to the terminal, or the transaction was not attached to the terminal during initialization or termination.
NTxns	The number of executions of transactions on this terminal.
Description	This will either be terminal transaction or nonterminal transaction.
Error	The margin of error for the mean values calculated by using the number of executions of transactions for this terminal as a sample size.
Execution	The mean time, in seconds, that a CPU was actively executing transactions on this terminal.
Suspend	The mean time, in seconds, that CICS had suspended execution of transactions on this terminal.
Delay	<p>The mean time, in seconds, execution of the transactions on this terminal was delayed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The mean service time for transactions on this terminal, including execution, suspend, and delay time.

CICS transaction detail line

This is the second-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	A functional description (if the transaction is a recognized CICS transaction).
Error	The margin of error for the mean values calculated by using the number of executions of the transaction as the sample size.
Execution	The mean time, in seconds, a CPU was actively executing for the transaction.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction.
Delay	The mean time, in seconds, execution of the transaction was delayed. Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none">• CICS dispatch delay• MVS dispatch delay• MVS WAIT
Service	The mean service time for the transaction. This includes execution, suspend and delay time.

CICS program or system services detail line

This is a third-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The fourth-level lines shown under this item can be either CICS command lines, SQL Request lines, DLI Request lines, or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
NTxns	The number of executions of the transaction.
Description	If lines grouped under this line are CICS command lines, the description displays "EXEC CICS." If lines grouped under this line are SQL request lines, the description displays "EXEC SQL." If lines grouped under this line are DLI request lines, the description displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if the CICS module name is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.

Under Heading	This is Displayed
Execution	The mean time, in seconds, that CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The mean service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend, and delay time.

CICS command detail line

These lines appear under a CICS program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The mean time, in seconds, that CPU execution was observed while the CICS command was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed while the CICS command was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The mean service time for the transaction the CICS command was being processed. This includes execution, suspend, and delay time.

SQL request detail line

These lines appear under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The mean time, in seconds, that CPU execution was observed while the SQL request was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed while the SQL request was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none">• CICS dispatch delay• MVS dispatch delay
Service	The mean service time for the transaction the SQL request was being processed. This includes execution, suspend and delay time.

DLI request detail line

These lines appear under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The mean time, in seconds, that CPU execution was observed while the DLI request was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed while the DLI request was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none">• CICS dispatch delay• MVS dispatch delay
Service	The mean service time for the transaction the DLI request was being processed. This includes execution, suspend and delay time.

Module/system services detail line

These lines appear under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these

lines are grouped. If Application Performance Analyzer was unable to determine a module name, “CICS” is displayed in the name field and “System Services” is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or “CICS” if a module name could not be determined.
Description	A functional description of the module if one is available. “System Services” is displayed if the module name could not be determined.
Execution	The mean time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.
Delay	The mean time, in seconds, that the identified module was preempted by MVS.
Service	The mean service time for the transaction the identified module was executing or delayed.

Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The mean time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	The mean time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The mean service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

Sample reports

A sample report is shown here, the transaction has been expanded to the second level.

File View Navigate Help							
E08: CICS Mean Service Time by Termid (2669/CICS23A)					Row 00001 of 00005		
Command ==>					Scroll ==> CSR		
----- Mean Time in Seconds -----							
Name	NTxns	Description	Error	Execution	+ Suspend	+ Delay	= Service
ET38	342	Terminal Attached	± 5.4%	0.044	0.008	0.004	0.057
→ DNC1	342		± 5.4%	0.044	0.008	0.004	0.057
→ DFHD2EX1		CICS Program		0.013	0.003	0.000	0.018
→ PFSAMPA		CICS Program		0.001	0.000	0.000	0.001
→ PFSAMPB		CICS Program		0.000	0.000	0.000	0.001
→ CICS		System Services		0.001	0.000	0.000	0.001
→ PFSAMPC		CICS Program		0.000	0.000	0.000	0.001
→ PFSAMPA		EXEC CICS		0.000	0.000	0.000	0.000
→ CEECCICS		EXEC CICS		0.000	0.000	0.000	0.000
→ PFSAMPB		EXEC CICS		0.000	0.000	0.000	0.000
→ PFSAMPC		EXEC CICS		0.000	0.000	0.000	0.000
ET40	325	Terminal Attached	± 5.5%	0.042	0.007	0.005	0.056
→ DNC1	325		± 5.5%	0.042	0.007	0.005	0.056
→ DFHD2EX1		CICS Program		0.012	0.003	0.001	0.016
→ PFSAMPA		CICS Program		0.001	0.000	0.000	0.001
→ PFSAMPB		CICS Program		0.000	0.000	0.000	0.001
→ PFSAMPC		CICS Program		0.000	0.000	0.000	0.001
→ CICS		System Services		0.000	0.000	0.000	0.001
→ PFSAMPA		EXEC CICS		0.000	0.000	0.000	0.000
→ PFSAMPB		EXEC CICS		0.000	0.000	0.000	0.000
→ CEECCICS		EXEC CICS		0.000	0.000	0.000	0.000
→ PFSAMPC		EXEC CICS		0.000	0.000	0.000	0.000
ET33	122	Terminal Attached	± 9.0%	0.043	0.009	0.005	0.057
→ DNC1	122		± 9.0%	0.043	0.009	0.005	0.057
→ DFHD2EX1		CICS Program		0.004	0.001	0.000	0.006
→ PFSAMPC		CICS Program		0.000	0.000	0.000	0.000
→ CICS		System Services		0.000	0.000	0.000	0.000
→ PFSAMPA		CICS Program		0.000	0.000	0.000	0.000
→ PFSAMPB		CICS Program		0.000	0.000	0.000	0.000
→ PFSAMPA		EXEC CICS		0.000	0.000	0.000	0.000
→ PFSAMPB		EXEC CICS		0.000	0.000	0.000	0.000
→ CEECCICS		EXEC CICS		0.000	0.000	0.000	0.000

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Terminal, Transaction, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	Terminal, Transaction, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	Terminal, Transaction, Load Module	Expand to reveal next level.
–	Terminal, Transaction, Load Module	Collapse to hide next level.
SV	Terminal, Transaction, Load Module	Sort next level by value.
SN	Terminal, Transaction, Load Module	Sort next level by name.
M	Load Module	Display load module information.

Cmd	When Applied To Object	Action
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for a CICS command report is shown here:

File View Navigate Help					
+----- The following report line was selected -----+					
	→ +118E	RETURN TRANSID(DNC1)	0.000	0.000	0.000
+-----+					
Calculation Details					
CICS Transaction					
The quantities shown represent the service time for execution of the indicated CICS command while processing transaction DNC1. The quantities are mean times for the command for all executions of the transaction and are calculated as follows:					
(1) Times command observed in txn/program 6					
(2) Duration of one sample interval 0.009999					
(3) (1) × (2) = total time for transaction 0.059994					
(4) Number of executions of transaction 327					
(5) (3) ÷ (4) = mean time for the command 0.000183					
Command Attributes					
CICS Command EXEC CICS RETURN TRANSID(DNC1)					
Issued in Load Module PFSAMPA					
Return offset in Module +11AE					
Name of CSECT PFSAMPA					
Return of Offset in CSECT +118E					
The command execution measurement counts are					
Executing (CPU active) 5					
Suspended by CICS 0					
Delayed					
CICS dispatch delay 0					
MVS delay (WAIT) 0					
MVS delay (Busy) 1					

A sample detail window for an SQL command is shown here:

File View Navigate Help

+----- The following report line was selected -----+

| → +85D8 SELECT 0.001 0.000 0.000 |

+-----+

Calculation Details

The quantities shown represent the service time for execution of the indicated DB2 SQL call while processing transaction DNC1. The quantities are mean times for the SQL call for all executions of the transaction and are calculated as follows:

(1)	Times SQL call observed in txn/program	93
(2)	Duration of one sample interval	0.006003
(3)	(1) x (2) = total time for SQL call	0.558279
(4)	Number of executions of transaction	342
(5)	(3) ÷ (4) = mean time for the SQL call	0.001632

SQL Statement Information

Subsystem name	DSN1	Attach type	SASS
Plan name	PFSAMPA	Plan BIND time	Nov-28-04 14:11:17
DBRM name	PFSAMPC	DBRM token	17859595 06957A24
DBRM date/time	Nov-25-04 14:49:42		
Package ID	PFSAMPC	Location	CABNETDB24
Collectn name	PFSAMPX1	Pkg BIND time	no data
SQL function	SELECT	Static/dynamic	Static
Precmplr stmt#	3179	DBRM section#	21
CSECT/module	PFSAMPC in PFSAMPC	Offset of call	000085D8
Sample count	93	SQL req count	172
SQL CPU time	0.28	Service time	0.54
SQL Statement	SELECT * INTO : H , : H , : H : H , : H FROM DEPT WHERE XRATE = : H		

E09 - CICS total service time by terminal ID

Usage

Use this report to see an analysis of how time was spent on CICS terminals that were executing during the observation session. Expand a CICS terminal report line to see a further breakdown by transaction, program, CICS command, DLI request, and SQL request.

Quantification

Each report line quantifies total times for transactions measured on a terminal. The total times are expressed in units of seconds. The total service time is shown and is further broken down into execution time, suspend time, and delay time.

Detail line hierarchy

An unexpanded E09 report shows one line for each measured CICS terminal, and one line for all nonterminal attached transactions. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```

Level 1 CICS Terminal
  Level 2 CICS Transaction
    Level 3 CICS Program
      Level 4 CICS Command
      Level 4 CICS Command

```

...

```

Level 3 CICS Program
  Level 4 SQL Request
  Level 4 SQL Request

Level 3 CICS Program
  Level 4 DLI Request
  Level 4 DLI Request

Level 3 CICS Program
  Level 4 Module
  Level 4 Module
  Level 4 System Services

Level 3 CICS Program
  Level 4 Adabas Request
  Level 4 Adabas Request

Level 3 System Services
  Level 4 Module
  Level 4 Module
  Level 4 System Services

```

Detail line descriptions

CICS terminal detail line

This is the first-level detail line. Each line shows information about a CICS terminal for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS terminal ID. This will be the terminal ID or N/A if a terminal ID was not available during the sample. A terminal might not be available because the transaction was running while not attached to the terminal, or the transaction was not attached to the terminal during initialization or termination.
NTxns	The number of executions of transactions on this terminal.
Description	This will either be terminal transaction or nonterminal transaction.
Error	The margin of error for the mean values calculated by using the number of executions of transactions for this terminal as a sample size.
Execution	The total time, in seconds, a CPU was actively executing transactions on this terminal.
Suspend	The total time, in seconds, that CICS had suspended execution of transactions on this terminal.
Delay	<p>The total time, in seconds, execution of the transactions on this terminal was delayed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The mean service time for transactions on this terminal, including execution, suspend, and delay time.

CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	A functional description (if the transaction is a recognized CICS transaction).
Error	The margin of error based on a sample population of the number of executions of the transaction.
Execution	The total time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction.
Delay	The total time, in seconds, that execution of the transaction was delayed. Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none">• CICS dispatch delay• MVS dispatch delay• MVS WAIT
Service	The total service time for the transaction. This includes execution, suspend, and delay time.

CICS program or system services detail line

This is a second-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The third-level lines shown under this item can be either CICS command lines, SQL request lines, DLI request lines, or Module lines.

If no CICS application program was dispatched, “CICS” is shown under the Name heading and “System Services” under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. “CICS” is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays “EXEC CICS.” If lines grouped under this line are SQL request lines, the description displays “EXEC SQL.” If lines grouped under this line are DLI request lines, the description displays “EXEC DLI.” Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and “CICS Program” is displayed if the CICS module name is not recognized; indicating this is likely an application program. “System Services” is displayed if no application program was in control.

Under Heading	This is Displayed
Execution	The total time, in seconds, that CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	<p>The total time, in seconds, that execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The total service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend, and delay time.

CICS command detail line

These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The total time, in seconds, that CPU execution was observed while the CICS command was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	<p>The total time, in seconds, that execution of the transaction was delayed while the CICS command was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

SQL request detail line

These lines appear under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The total time, in seconds, that CPU execution was observed while the SQL request was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	<p>The total time, in seconds, that execution of the transaction was delayed while the SQL request was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none">• CICS dispatch delay• MVS dispatch delay
Service	The total service time for the transaction the SQL request was being processed. This includes execution, suspend and delay time.

DLI request detail line

These lines appear under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The total time, in seconds, that CPU execution was observed while the DLI request was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	<p>The total time, in seconds, that execution of the transaction was delayed while the DLI request was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none">• CICS dispatch delay• MVS dispatch delay
Service	The total service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

Module/system services detail line

These lines appear under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these

lines are grouped. If Application Performance Analyzer was unable to determine a module name, “CICS” is displayed in the name field and “System Services” is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or “CICS” if a module name could not be determined.
Description	A functional description of the module if one is available. “System Services” is displayed if the module name could not be determined.
Execution	The total time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.
Delay	The total time, in seconds, that the identified module was preempted by MVS.
Service	The total service time for the transaction the during which the identified module was executing or delayed.

Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The total time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	The total time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

Sample reports

A sample report is shown here, the transaction has been expanded to the second level.

```

File View Navigate Help
-----
E09: CICS Total Service Time by Termid (2669/CICS23A) Row 00001 of 00036
Command ==> ----- Scroll ==> CSR
-----
Name  NTxns Description      Error  Execution  Total Time in Seconds  -----
      + Suspend + Delay = Service
ET38   342 Terminal Attached ± 5.4%  15.207    2.795    1.637    19.640
→ DNC1  342 ± 5.4%  15.207    2.795    1.637    19.640
  → DFHD2EX1 CICS Program  10.912    2.597    0.755    14.265
  → PFSAMPA CICS Program    1.085    0.053    0.215    1.355
  → PFSAMPB CICS Program    0.743    0.071    0.221    1.037
  → CICS System Services  0.851    0.011    0.077    0.941
  → PFSAMPC CICS Program    0.545    0.059    0.305    0.911
  → PFSAMPA EXEC CICS    0.641    0.000    0.041    0.683
  → CEECCICS EXEC CICS    0.179    0.000    0.017    0.197
  → PFSAMPB EXEC CICS    0.179    0.000    0.000    0.179
  → PFSAMPC EXEC CICS    0.065    0.000    0.000    0.065

ET40   325 Terminal Attached ± 5.5%  13.893    2.555    1.775    18.224
→ DNC1  325 ± 5.5%  13.893    2.555    1.775    18.224
  → DFHD2EX1 CICS Program  10.120    2.417    0.803    13.341
  → PFSAMPA CICS Program    0.791    0.017    0.257    1.067
  → PFSAMPB CICS Program    0.737    0.017    0.215    0.971
  → PFSAMPC CICS Program    0.557    0.041    0.317    0.917
  → CICS System Services  0.689    0.059    0.089    0.839
  → PFSAMPA EXEC CICS    0.653    0.000    0.065    0.719
  → PFSAMPB EXEC CICS    0.161    0.000    0.011    0.173
  → CEECCICS EXEC CICS    0.149    0.000    0.005    0.155
  → PFSAMPC EXEC CICS    0.029    0.000    0.005    0.035

ET33   122 Terminal Attached ± 9.0%   5.261    1.109    0.629    7.000
→ DNC1  122 ± 9.0%   5.261    1.109    0.629    7.000
  → DFHD2EX1 CICS Program    3.647    1.043    0.293    4.985
  → PFSAMPC CICS Program    0.251    0.035    0.143    0.431
  → CICS System Services  0.311    0.011    0.077    0.401
  → PFSAMPA CICS Program    0.311    0.011    0.047    0.371
  → PFSAMPB CICS Program    0.281    0.005    0.047    0.335
  → PFSAMPA EXEC CICS    0.287    0.000    0.005    0.293
  → PFSAMPB EXEC CICS    0.101    0.000    0.005    0.107
  → CEECCICS EXEC CICS    0.041    0.000    0.005    0.047

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Transaction, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	Transaction, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	Transaction, Load Module	Expand to reveal next level.
-	Transaction, Load Module	Collapse to hide next level.
SV	Transaction, Load Module	Sort next level by value.
SN	Transaction, Load Module	Sort next level by name.
M	Load Module	Display load module information.

Cmd	When Applied To Object	Action
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for a CICS command report is shown here:

File View Navigate Help			
+----- The following report line was selected -----+			
	→ +118E	RETURN TRANSID(DNC1)	0.049 0.000 0.009
+-----+			
Calculation Details			
CICS Transaction DNC1			
The quantities shown represent the service time for execution of the indicated CICS command while processing this transaction. The quantities are total times for all executions of the command within the transaction and are calculated as follows:			
(1) Times command observed in txn/program 6			
(2) Duration of one sample interval 0.009999			
(3) (1) × (2) = total time for transaction 0.059994			
Command Attributes			
CICS Command EXEC CICS RETURN TRANSID(DNC1)			
Issued in Load Module PFSAMPA			
Return offset in Module +11AE			
Name of CSECT PFSAMPA			
Return of Offset in CSECT +118E			
The command execution measurement counts are			
Executing (CPU active) 5			
Suspended by CICS 0			
Delayed			
CICS dispatch delay 0			
MVS delay (WAIT) 0			
MVS delay (Busy) 1			

A sample detail window for an SQL command is shown here:

```

File View Navigate Help
+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+
|  → +6E9c   SELECT                               1.189    0.000    0.129  |
+-----+-----+-----+-----+-----+-----+

Calculation Details
CICS Transaction          DNC1
The quantities shown represent the service time for execution of the
indicated DB2 SQL call while processing this transaction. The
quantities are total times for all executions of the command within
the transaction and are calculated as follows:

(1) Times SQL call observed in txn/program      132
(2) Duration of one sample interval             0.009999
(3) (1) x (2) = total time for SQL call        1.319868

SQL Statement Information
DBRM name                PFSAMPC
DBRM Token                17652081 1C3E933C
Precmplr stmt#           3179
SQL Call Module           PFSAMPC
SQL Call CSECT            PFSAMPC
SQL Call Offset           00006E9C
SQL Function              SELECT
Subsystem name            DSN1
Connection Type           SASS
Package/Plan:
  Location                CABNETDB21
  Collectn Name           PFSAMPC6
  Package ID              PFSAMPC
  Plan Name               PFSAMPA

SQL Req Count:           105

SQL Statement:
      SELECT *
      INTO : H ,
      : H : H ,
      : H : H
      FROM DEP
      WHERE XRATE = : H

```

E10 - CICS mean service time by user ID

Usage

Use this report to see an analysis of how time was spent by CICS users that were executing during the observation session. Expand a CICS user ID report line to see a further breakdown by transaction, program, CICS command, DLI request and SQL request.

Quantification

Each report line quantifies time as arithmetic means for all measured transactions initiated by the user. The means are calculated by dividing the total of all time spent servicing all occurrences of transactions initiated by the user, by the number of occurrences. The means are expressed in units of seconds. The mean service time is shown and is further broken down into execution time, suspend time, and delay time.

Detail line hierarchy

An unexpanded E10 report shows one line for each measured CICS user. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```

Level 1 CICS User ID
  Level 2 CICS Transaction
    Level 3 CICS Program
      Level 4 CICS Command
      Level 4 CICS Command

      ...
    Level 3 CICS Program
      Level 4 SQL Request
      Level 4 SQL Request

    Level 3 CICS Program
      Level 4 DLI Request
      Level 4 DLI Request

    Level 3 CICS Program
      Level 4 Module
      Level 4 Module
      Level 4 System Services

    Level 3 CICS Program
      Level 4 Adabas Request
      Level 4 Adabas Request

    Level 3 System Services
      Level 4 Module
      Level 4 Module
      Level 4 System Services

```

Detail line descriptions

CICS user detail line

This is the first-level detail line. Each line shows information about a CICS terminal for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS user ID.
NTxns	The number of executions of transactions initiated by this user.
Description	
Error	The margin of error for the mean values calculated by using the number of executions of transactions by this user as a sample size.
Execution	The mean time, in seconds, during which a CPU was actively executing transactions initiated by this user.
Suspend	The mean time, in seconds, during which CICS had suspended execution of transactions initiated by this user.
Delay	<p>The mean time, in seconds, during which execution of the transactions initiated by this user was delayed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The mean service time for transactions initiated by this user. This includes execution, suspend and delay time.

CICS transaction detail line

This is the second-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
Error	The margin of error for the mean values calculated by using the number of executions of the transaction as the sample size.
Execution	The mean time, in seconds, during which a CPU was actively executing for the transaction.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction.
Delay	<p>The mean time, in seconds, during which execution of the transaction was delayed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none">• CICS dispatch delay• MVS dispatch delay• MVS WAIT
Service	The mean service time for the transaction. This includes execution, suspend and delay time.

CICS program or system services detail line

This is a third-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The third-level lines shown under this item can be either CICS command lines, SQL request lines, DLI request lines, or Module lines.

If no CICS application program was dispatched, “CICS” is shown under the Name heading and “System Services” under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. “CICS” is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays “EXEC CICS.” If lines grouped under this line are SQL request lines, the description displays “EXEC SQL.” If lines grouped under this line are DLI request lines, the description displays “EXEC DLI.” Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and “CICS Program” is displayed if the CICS module name is not recognized; indicating this is likely an application program. “System Services” is displayed if no application program was in control.

Under Heading	This is Displayed
Execution	The mean time, in seconds, during which CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	<p>The mean time, in seconds, during which execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The mean service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend and delay time.

CICS command detail line

These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command descriptor is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The mean time, in seconds, during which CPU execution was observed while the CICS command was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	<p>The mean time, in seconds, during which execution of the transaction was delayed while the CICS command was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The mean service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

SQL request detail line

These lines appear under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The mean time, in seconds, during which CPU execution was observed while the SQL request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	<p>The mean time, in seconds, during which execution of the transaction was delayed while the SQL request was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none">• CICS dispatch delay• MVS dispatch delay
Service	The mean service time for the transaction during which the SQL request was being processed. This includes execution, suspend and delay time.

DLI request detail line

These lines appear under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The mean time, in seconds, during which CPU execution was observed while the DLI request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	<p>The mean time, in seconds, during which execution of the transaction was delayed while the DLI request was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none">• CICS dispatch delay• MVS dispatch delay
Service	The mean service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

Module/system services detail line

These lines appear under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these

lines are grouped. If Application Performance Analyzer was unable to determine a module name, “CICS” is displayed in the name field and “System Services” is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or “CICS” if a module name could not be determined.
Description	A functional description of the module if one is available. “System Services” is displayed if the module name could not be determined.
Execution	The mean time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.
Delay	The mean time, in seconds, that the identified module was preempted by MVS.
Service	The mean service time for the transaction during which the identified module was executing or delayed.

Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The mean time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	The mean time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The mean service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

Sample reports

A sample report is shown here, the transaction has been expanded to the second level.

File View Navigate Help							
E10: CICS Mean Service Time by Userid (1873/CICS32A)				Row 00001 of 00032			
Command ==> _____				Scroll ==> CSR			
Name	NTxns	Description	Error	Execution	Mean Time in Seconds + Suspend + Delay	=	Service
AHM01	0		±99.9%	16.731	4.407	28.184	49.323
→ MQS1	0		±99.9%	14.917	0.299	2.338	17.555
→ MQSAMP1		CICS Program		12.848	0.089	0.944	13.882
→ CEECCICS		EXEC CICS		1.888	0.119	0.479	2.488
→ CEEPLPKA		EXEC CICS		0.000	0.000	0.659	0.659
→ CICS		System Services		0.104	0.089	0.239	0.434
→ DFHTFP		CICS Program		0.059	0.000	0.000	0.059
→ MQSAMP1		EXEC CICS		0.014	0.000	0.014	0.029
→ MQDR	0		±99.9%	0.359	0.404	15.966	16.731
→ CSQ4CVK1		CICS Program		0.239	0.254	15.696	16.191
→ MQDRVR		EXEC CICS		0.089	0.044	0.224	0.359
→ MQDRVR		CICS Program		0.014	0.104	0.044	0.164
→ CICS		System Services		0.014	0.000	0.000	0.014
→ TDB2	0		±99.9%	1.379	3.463	8.305	13.147
→ CICS		System Services		0.329	2.413	6.506	9.250
→ CICSDB3		CICS Program		0.989	0.899	1.769	3.658
→ CEECCICS		EXEC CICS		0.014	0.149	0.014	0.179
→ CICSDB3		EXEC CICS		0.044	0.000	0.014	0.059
→ DBDR	0		±99.9%	0.074	0.239	1.574	1.888
→ DB2DRVR		EXEC CICS		0.074	0.239	1.574	1.888
AGM02	0		±99.9%	0.000	29.984	0.000	29.984
→ CKAM	0		±99.9%	0.000	29.984	0.000	29.984
→ DFHMOMON		EXEC CICS		0.000	29.984	0.000	29.984

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	User ID, Transaction, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	User ID, Transaction, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	User ID, Transaction, Load Module	Expand to reveal next level.
–	User ID, Transaction, Load Module	Collapse to hide next level.
SV	User ID, Transaction, Load Module	Sort next level by value.
SN	User ID, Transaction, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for a CICS command report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
|  → +06B8      PROGRAM(CSQ4CVK1)      0.014  0.044  0.104  0.164  |
+-----+
Calculation Details
CICS Transaction           MQDR
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are mean times for the command for all executions of the
transaction and are calculated as follows:

(1) Times command observed in txn/program      11
(2) Duration of one sample interval            0.014992
(3) (1) × (2) = total time for command         0.164912
(4) Number of executions of transaction         0
(5) (3) / (4) = mean time for the command      252.263688

Command Attributes
CICS Command                EXEC CICS LINK PROGRAM(CSQ4CVK1)
Issued in Load Module       MQDRVR
Return offset in Module     +06D8
Name of CSECT               MQDRVR
Return Offset in CSECT      +06B8

The command execution measurement counts are
Executing (CPU active)      1
Suspended by CICS          3
Delayed
  CICS dispatch delay      0
  MVS delay (WAIT)         0
  MVS delay (Busy)         7
+-----+
```

E11 - CICS total service time by user ID

Usage

Use this report to see an analysis of how time was spent by CICS users that were measured during the observation session. Expand a CICS user ID report line to see a further breakdown by transaction, program, CICS command, DLI request and SQL request.

Quantification

Each report line quantifies total times for transactions measured for a CICS user. The total times are expressed in units of seconds. The total service time is shown and is further broken down into execution time, suspend time, and delay time.

Detail line hierarchy

An unexpanded E11 report shows one line for each measured CICS user ID. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1 CICS User ID
  Level 2 CICS Transaction
    Level 3 CICS Program
      Level 4 CICS Command
      Level 4 CICS Command

      ...

    Level 3 CICS Program
      Level 4 SQL Request
      Level 4 SQL Request

      ...

    Level 3 CICS Program
      Level 4 DLI Request
      Level 4 DLI Request

      ...

    Level 3 CICS Program
      Level 4 Module
      Level 4 Module
      Level 4 System Services

      ...

    Level 3 CICS Program
      Level 4 Adabas Request
      Level 4 Adabas Request

      ...

    Level 3 System Services
      Level 4 Module
      Level 4 Module
      Level 4 System Services
```

Detail line descriptions

CICS terminal detail line

This is the first-level detail line. Each line shows information about a CICS user for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS user ID.
NTxns	The number of executions of transactions initiated by this user.
Description	This is either Terminal Txn or Non-Terminal Txn.
Error	The margin of error for the mean values calculated by using the number of executions of transactions by this user as a sample size.
Execution	The total time, in seconds, during which a CPU was actively executing transactions initiated by this user.
Suspend	The total time, in seconds, during which CICS had suspended execution of transactions initiated by this user.

Under Heading	This is Displayed
Delay	The total time, in seconds, during which execution of the transactions initiated by this user was delayed. Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The total service time for transactions initiated by this user. This includes execution, suspend and delay time.

CICS transaction detail line

This is the second-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
Error	The margin of error based on a sample population of the number of executions of the transaction.
Execution	The total time, in seconds, during which a CPU was actively executing for the transaction.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction.
Delay	The total time, in seconds, during which execution of the transaction was delayed. Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The total service time for the transaction. This includes execution, suspend and delay time.

CICS program or system services detail line

This is a second-level detail line shown directly under the CICS transaction detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The third-level lines shown under this item can be either CICS command lines, SQL request lines, DLI request lines, or Module lines.

If no CICS application program was dispatched, “CICS” is shown under the Name heading and “System Services” under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays "EXEC CICS." If lines grouped under this line are SQL request lines, the description displays "EXEC SQL." If lines grouped under this line are DLI request lines, the description displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if the CICS module name is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.
Execution	The total time, in seconds, during which CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	<p>The total time, in seconds, during which execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The total service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend and delay time.

CICS command detail line

These lines appear under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command descriptor. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command description is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The total time, in seconds, during which CPU execution was observed while the CICS command was being processed.

Under Heading	This is Displayed
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	<p>The total time, in seconds, during which execution of the transaction was delayed while the CICS command was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

SQL request detail line

These lines appear under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The total time, in seconds, during which CPU execution was observed while the SQL request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	<p>The total time, in seconds, during which execution of the transaction was delayed while the SQL request was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the SQL request was being processed. This includes execution, suspend and delay time.

DLI request detail line

These lines appear under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The total time, in seconds, during which CPU execution was observed while the DLI request was being processed.

Under Heading	This is Displayed
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	<p>The total time, in seconds, during which execution of the transaction was delayed while the DLI request was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

Module/system services detail line

These lines appear under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The total time, in seconds, for execution of the module within the grouping under which the detail line appears.
Suspend	This field will contain a value of zero.
Delay	The total time, in seconds, that the identified module was preempted by MVS.
Service	The total service time for the transaction during which the identified module was executing or delayed.

Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The total time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.

Under Heading	This is Displayed
Delay	The total time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

Sample reports

A sample report is shown here. The transaction has been expanded to the second level.

File View Navigate Help							
E11: CICS Total Service Time by Userid (1873/CICS32A)				Row 00001 of 00032			
Command ==>				Scroll ==> CSR			
Name	NTxns	Description	Error	Execution	Total Time + Suspend	in Seconds + Delay	= Service
AHM01	0		±99.9%	16.731	4.407	28.184	49.323
→ MQS1	0		±99.9%	14.917	0.299	2.338	17.555
→ MQSAMP1		CICS Program		12.848	0.089	0.944	13.882
→ CEECCICS		EXEC CICS		1.888	0.119	0.479	2.488
→ CEEPLPKA		EXEC CICS		0.000	0.000	0.659	0.659
→ CICS		System Services		0.104	0.089	0.239	0.434
→ DFHTFP		CICS Program		0.059	0.000	0.000	0.059
→ MQSAMP1		EXEC CICS		0.014	0.000	0.014	0.029
→ MQDR	0		±99.9%	0.359	0.404	15.966	16.731
→ CSQ4CVK1		CICS Program		0.239	0.254	15.696	16.191
→ MQDRVR		EXEC CICS		0.089	0.044	0.224	0.359
→ MQDRVR		CICS Program		0.014	0.104	0.044	0.164
→ CICS		System Services		0.014	0.000	0.000	0.014
→ TDB2	0		±99.9%	1.379	3.463	8.305	13.147
→ CICS		System Services		0.329	2.413	6.506	9.250
→ CICSDB3		CICS Program		0.989	0.899	1.769	3.658
→ CEECCICS		EXEC CICS		0.014	0.149	0.014	0.179
→ CICSDB3		EXEC CICS		0.044	0.000	0.014	0.059
→ DBDR	0		±99.9%	0.074	0.239	1.574	1.888
→ DB2DRVR		EXEC CICS		0.074	0.239	1.574	1.888
AGM02	0		±99.9%	0.000	29.984	0.000	29.984
→ CKAM	0		±99.9%	0.000	29.984	0.000	29.984
→ DFHMOMON		EXEC CICS		0.000	29.984	0.000	29.984

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	User ID, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	User ID, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.

Cmd	When Applied To Object	Action
+	User ID, Load Module	Expand to reveal next level.
–	User ID, Load Module	Collapse to hide next level.
SV	User ID, Load Module	Sort next level by value.
SN	User ID, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for a CICS command report is shown here:

```

File View Navigate Help
+-----+
+----- The following report line was selected -----+
|  → +0750  START TRANSID(MQS1)      0.014  0.000  0.000  0.014  |
+-----+
Calculation Details
CICS Transaction           MQDR
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are total times for all executions of the command within
the transaction and are calculated as follows:

(1) Times command observed in txn/program      1
(2) Duration of one sample interval            0.014992
(3) (1) × (2) = total time for command         0.014992

Command Attributes
CICS Command                EXEC  CICS START TRANSID(MQS1)
Issued in Load Module        MQDRVR
Return offset in Module      +0770
Name of CSECT                MQDRVR
Return Offset in CSECT       +0750

The command execution measurement counts are
Executing (CPU active)       1
Suspended by CICS           0
Delayed
  CICS dispatch delay        0
  MVS delay (WAIT)           0
  MVS delay (Busy)           0

```

E12 - CICS CPU/service time by transaction

Usage

Use this report to see an analysis of how much time was used by the CICS transactions that were measured during the observation session. A prerequisite for this report is activation of the CICS+ option during the measurement. This option records exact CPU and service times for CICS transactions. Expand a CICS transaction report line to see a further breakdown by task number.

Quantification

Each report line shows the following for each CICS transaction:

- Number of transactions executed
- Percentage of total CPU used for this transaction
- Total CPU used for this transaction
- Mean CPU used for this transaction
- Total service time for this transaction
- Mean service time for this transaction

Detail line hierarchy

An unexpanded E11 report shows one line for each measured CICS user ID. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1 CICS Transaction
  Level 2 CICS Task Number
    Level 2 CICS Task Number
      ...
```

Detail line descriptions

CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	If this is a recognized CICS transaction, a functional description.
% of CPU	The percent CPU consumed by this transaction, out of the total recorded for this report.
CPU Time: Total	The total task CPU time for all tasks counted for this CICS transaction. Large numbers will be expressed in minutes with an M suffix.
CPU Time: Mean	The mean task CPU time per CICS transaction. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Total	The total service time for all tasks for this CICS transaction. Large numbers will be expressed in minutes with an M suffix.

Under Heading	This is Displayed
Svc Time: Mean	The mean service time per CICS transaction. Large numbers will be expressed in minutes with an M suffix.

CICS task number detail line

This is the second-level detail line shown directly under the CICS transaction detail line. It quantifies the CPU and service time for each individual CICS task run under this transaction id.

Under Heading	This is Displayed
Name	The task number of the CICS transaction.
Description	The start time of the CICS transaction.
CPU Time: Total	The total task CPU time for this task.
CPU Time: Mean	The mean task CPU time for this task. This is the same as the total time since it applies to only 1 task. This shows the CPU time to 5 decimal positions.
Svc Time: Total	The total service time for this task.
Svc Time: Mean	The mean service time for this task. This is the same as the total time since it applies to only 1 task. This shows the CPU time to 5 decimal positions.

Sample reports

A sample report is shown here. The CICS transaction has been expanded to the second level (task number).

File View Navigate Help							
E12: CICS CPU/Service Time by Transaction (1860/CICS32A)				Row 00001 of 00603			
Command ==>				Scroll ==> CSR			
Name	NTxns	Description	% of CPU	--CPU Total	Time-- Mean	--Svc Total	Time-- Mean
TDB2	600		64.5%	4.25	0.00709	83.55	0.13925
→ 08879		16:05:08.21		0.01	0.01550	0.09	0.09333
→ 09180		16:05:20.52		0.01	0.01099	0.05	0.05510
→ 08883		16:05:08.22		0.00	0.00977	0.15	0.15520
→ 08880		16:05:08.21		0.00	0.00965	0.09	0.09113
→ 08901		16:05:08.46		0.00	0.00925	0.13	0.13706
→ 09185		16:05:20.54		0.00	0.00910	0.16	0.16997
→ 09013		16:05:09.75		0.00	0.00844	0.13	0.13625
→ 09283		16:05:21.42		0.00	0.00842	0.21	0.21626

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Transaction, Task	Display context help information.
++	Transaction, Task	Show additional details.

Cmd	When Applied To Object	Action
+	Transaction	Expand to reveal next level.
–	Transaction	Collapse to hide next level.
SV	Transaction	Sort next level by value.
SN	Transaction	Sort next level by name.

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for a CICS command report is shown below. This example shows a CICS task ID:

File View Navigate Help					
+----- The following report line was selected -----+					
	→ 08879	16:05:08.21	0.01	0.01550	0.09 0.0933
+-----+					
CPU and Service Time for CICS Transaction					
Transaction ID			TDB2		
Start Time			16:05:08.21		
Stop Time			16:05:08.30		
Task Number			08879		
Dispatch Time			0.04277		
CPU Time			0.01550		
Suspend Time			0.05055		
Dispatch Wait Time			0.04030		
File Control Requests			370064		
DB2 Requests			3		
IMS Requests			0		
MQ Requests			0		

Chapter 5. IMS performance analysis reports

This section describes the IMS Performance Analysis Reports.

For information about ...	See ...
The IMS data extractor	“Overview of IMS data extractor ” on page 266
The IMS+ extractor	“IMS+ extractor” on page 266
IMS Multiple Address Space Support (MASS)	“Overview of IMS Multiple Address Space Support” on page 266
I01 IMS measurement profile	“I01 - IMS measurement profile” on page 267
I02 IMS DL/I call timeline	“I02 - IMS DL/I call timeline” on page 271
I03 IMS transaction timeline	“I03 - IMS transaction timeline” on page 272
I04 IMS transaction activity timeline	“I04 - IMS transaction activity timeline” on page 274
I05 IMS DL/I CPU usage by PSB	“I05 - IMS DL/I CPU usage by PSB” on page 280
I06 IMS DL/I CPU usage by transaction	“I06 - IMS DL/I CPU usage by transaction” on page 283
I07 IMS DL/I CPU usage by DL/I call	“I07 - IMS DL/I CPU usage by DL/I call” on page 286
I08 IMS DL/I WAIT time by PSB	“I08 - IMS DL/I WAIT time by PSB” on page 289
I09 IMS DL/I WAIT time by transaction	“I09 - IMS DL/I WAIT time by transaction” on page 292
I10 IMS DL/I WAIT time by DL/I call	“I10 - IMS DL/I WAIT time by DL/I call” on page 295
I11 IMS DL/I activity by PSB	“I11 - IMS DL/I activity by PSB” on page 297
I12 IMS DL/I activity by transaction	“I12 - IMS DL/I activity by transaction” on page 301
I13 IMS DL/I activity by DL/I call	“I13 - IMS DL/I activity by DL/I call” on page 304
I14 IMS PSB/PCB attributes	“I14 - IMS PSB/PCB attributes” on page 306
I15 IMS DL/I call attributes	“I15 - IMS DL/I call attributes” on page 308
I16 IMS transaction service times	“I16 - IMS transaction service times” on page 309
I17 IMS transaction DL/I call counts	“I17 - IMS transaction DL/I call counts” on page 311
I18 IMS CPU/Svc time by DL/I calls	“I18 - IMS CPU/Svc time by DL/I calls” on page 313
I19 IMS CPU/Svc time by PSB	“I19 - IMS CPU/Svc time by PSB” on page 315
I20 IMS CPU/Svc time by transaction	“I20 - IMS CPU/Svc time by transaction” on page 317
I21 IMS CPU/Svc time by PCB	“I21 - IMS CPU/Svc time by PCB” on page 319

For information about ...	See ...
122 IMS Region Transaction Summary	“122 - IMS Region Transaction Summary” on page 321

Overview of IMS data extractor

When the IMS data extractor is active all DL/I calls in the target address space are recorded each time a sample is taken. For each DL/I call in flight, all of the call parameters, SSAs etc, are recorded, as well as the module and offset from which the call was made. In a CICS region there can be multiple IMS threads active and so multiple DL/I calls can be recorded each time an IMS sample is taken in a CICS region.

Additionally, several IMS environment parameters are recorded each time a sample is taken. These parameters include, the region type and its status, the PSB, transaction code, IMS version and release, message sequence number and time stamp from the IOPCB. In the case of a CICS region, the scheduling and termination of PSBs is also recorded.

IMS+ extractor

IMS+ is an IMS measurement option (data extractor) in which the precise number of DL/I calls is counted as well as the exact DL/I service time and CPU time by DL/I call. Activating the IMS+ option automatically activates the IMS option. Many of the IMS reports require that the IMS+ extractor be used.

Note: Running measurements with the IMS+ data extractor turned on causes each IMS call to be intercepted to collect additional data. This may have a small impact on the performance of the target address space. Care should be taken when using this feature with other products that also intercept IMS calls as unpredictable results may occur. Your installer may have chosen to limit access to this feature.

Overview of IMS Multiple Address Space Support

IMS multiple address space (MASS) support allows you to measure an IMS transaction that is eligible to run in multiple MPP regions, either within a single IMS subsystem or within an IMSplex. You specify the IMS transaction and the IMS subsystem or IMSplex group name to measure. Application Performance Analyzer determines the MPP regions that are eligible to process the transaction and returns a list of active MPP regions in Panel 4. You select the regions you want to measure. Application Performance Analyzer creates a parent observation for each IMS subsystem and one child observation request for each selected MPP region grouped within the IMS subsystem.

To enter IMS MASS observations:

1. Start a NEW request.
2. In Panel 1 – Job Information, enter a dash (-) in the Job name/Pattern field.
3. In Panel 5 – Subsystems, enter either the IMS subsystem ID or the IMSplex group name, and the IMS transaction code.
4. In Panel 4 – Active Jobs, Application Performance Analyzer returns a list of active MPP regions that are eligible to process the transaction. Select the MPP regions you want to measure. The maximum number of regions you are permitted to select is determined during the installation of Application Performance Analyzer.
5. In Panel 2 – Options, select the IMS+ data extractor.
6. Complete any other relevant fields for your observation request.

Once the NEW request is complete and submitted, Application Performance Analyzer creates and starts separate observation requests for each MPP region selected for measurement. The observations are displayed in the R02 Observation List as child observations under an IMS parent. You can view the IMS reports for each MPP region individually. When any of the selected MPP regions has not processed the IMS transaction during the measurement interval, the measurement has a status of Ended, with 1 Sample and no IMS reports are generated.

The NEW line command can be entered on any of the child observations or the IMS parent. When the NEW command is entered on a child observation, the new request is considered a single region request with a transaction code specification, and is initialized with the same parameter values as the original request. When the NEW line command is entered on the IMS parent of a single IMS subsystem, the new request is considered an IMS MASS request and is initialized with the same parameter values as the original request for a single IMS subsystem. The Panel 4 Active Jobs list is populated with the eligible MPP regions at the time of the new request and the desired regions must be selected from the list.

I01 - IMS measurement profile

Usage

Use this report to see a general overview of the IMS measurement data. This is a good report to examine first when analyzing IMS information. It provides an at-a-glance summary of various aspects of the measurement data and helps you choose which other reports to concentrate on. Information about the IMS environment is shown at the top of this report. This is followed by a series of mini performance graphs illustrating various types of measured activity.

IMS environment

This does not appear if the measurement was for a CICS region.

Under Heading	This is Displayed
DFSRR00 parms	The PARM data that was passed to DFSRR00 (the IMS region controller) in the EXEC statement.
IMS system ID	The system name of the IMS subsystem under which the measured activity took place.
IMS region name	The JOB name/STC name of the IMS dependent region.
IMS version	The IMS version.
IMS region type	The type of dependent region: BMP, MPP, etc.

Performance graphs

These are histograms quantifying measurement data. To the right of some of the graphs, report codes of reports that show related and more detailed information are displayed. You can display the report by skipping the cursor to one of these fields and by pressing the ENTER key.

Most active IMS PSBs

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
IMS PSB Name	An IMS PSB name is shown and the number of samples in which processing of DL/I calls under this PSB was observed. The percentage and the graph represent the proportion of the overall measurement time DL/I calls were being serviced under this PSB.

Most active IMS transactions

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
IMS Transaction Code	An IMS transaction code is shown and the number of samples in which processing of DL/I calls under this transaction was observed. The percentage and the graph represent the proportion of the overall measurement time DL/I calls were being serviced in this transaction.

Most active DL/I calls

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
DL/I Call	A DL/I call identified by three fields: a unique sequence number assigned to the DL/I call, its DL/I function code and its PCB name. The percentage and the graph represent the proportion of samples in which processing this DL/I call was observed. The percentage and the graph represent the proportion the overall measurement time all executions of this DL/I call were being serviced.

Most CPU consumptive DL/I

Under Heading	This is Displayed
Total DL/I CPU Time	The number of seconds of CPU time consumed by all executions of DL/I calls during the measurement. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
DL/I Call	A DL/I call identified by three fields: a unique sequence number assigned to the DL/I call, its DL/I function code and its PCB name. The quantification and the graph show the number of CPU seconds of execution for this DL/I call.

Most frequent transactions

This requires that the IMS+ measurement option is active and the execution of IMS transaction was observed. The graphic information is based on the number of transactions counted.

Under Heading	This is Displayed
Total txns counted	The total number of IMS transactions counted during the measurement. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
IMS transaction	The IMS transaction code and the number of executions of this transaction.

Most frequent DL/I calls

This requires that the IMS+ measurement option was active. The graphic information is based on the number of DL/I calls counted.

Under Heading	This is Displayed
Total DL/I calls counted	The total number of DL/I calls counted during the measurement. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
DL/I call	A DL/I call identified by three fields: a unique sequence number assigned to the call, its DL/I function code and its PCB name. The number of executions of this call is quantified.

Transaction statistics

This requires that the IMS+ measurement option was active and the execution of IMS transaction was observed.

Under Heading	This is Displayed
IMS Txns counted	The number of IMS transactions counted during the measurement interval.
Transaction rate	The average rate, in transactions per second, at which transactions were processed during the measurement interval.
Txn observations	The number of samples transaction execution was observed.
Txn throughput	The theoretical transaction throughput, in transactions per second, based on the number of counted transactions divided by the number of seconds transactions were executing.
IMS Txn svc time	The total service time for all observed transactions.
IMS Txn CPU time	The total CPU time consumed by all observed transactions.
IMS Txn max svc	The maximum service time observed for a single transaction execution.
IMS Txn max CPU	The maximum CPU time observed for a single transaction execution.
IMS Txn min svc	The minimum service time observed for a single transaction execution.
IMS Txn min CPU	The minimum CPU time observed for a single transaction execution.

DLI call statistics

This requires that the IMS+ measurement option was active for the measurement and the execution of DLI calls was observed.

Under Heading	This is Displayed
DLI call count	The number of DLI calls counted during the measurement session.
DLI call rate	The DLI call rate per second during the measurement session.
DLI observations	The numbers of samples taken when a DLI call was in-flight.
DLI call thrupt	The DLI call throughput rate per second based on the number of DLI calls counted divided by the DLI service time.
DLI svc time	The total service time for DLI calls during the measurement session.
DLI CPU time	The total CPU time for DLI calls during the measurement session.

Under Heading	This is Displayed
DLI max svc	The service time of the longest running DLI call during the measurement session.
DLI max CPU	The highest CPU time for a DLI call during the measurement session.
DLI min svc	The service time of the shortest running DLI call during the measurement session.
DLI min CPU	The lowest CPU time for a DLI call during the measurement session.

Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
I01: IMS Measurement Profile (0954/ADSMPP)                      Row 00001 of 00049
Command ==> ----- Scroll ==> CSR

IMS Environment -----
| DFSRRRC00 parms      MSG,002002002000,N000000000,,,,,7,10,,,,,DSN1,,,N,,, |
|-----|
| IMS system id      IMSP          | IMS region name    ADSMPP          |
| IMS version        8.1.0         | IMS region type    MPP              |
|-----|
*-----*

Most Active IMS PSBs -----
Samples              3,000  100.0% ' ' ' ' ' ' ' '
XTEITS20              49    1.6% *
Reports:
I05  I08
I11

Most Active IMS Transactions -----
Samples              3,000  100.0% ' ' ' ' ' ' ' '
TMEITS20              49    1.6% *
Reports:
I04  I06
I09  I12

Most Active IMS DLI Calls -----
Samples              3,000  100.0% ' ' ' ' ' ' ' '
00001 GU  IOPCB        32    1.0% *
00002 ISRT IOPCB        11    0.3% *
Reports:
I07  I10
I13

Most CPU consumptive DLI -----
Total DLI CPU time    0.25  100.0% ' ' ' ' ' ' ' '
00001 GU  IOPCB        0.20  81.3% *****
00002 ISRT IOPCB        0.04  18.6% ***
Reports:
I18  I19
I20  I21

Most Frequent Transactions -----
Total txns counted    104  100.0% ' ' ' ' ' ' ' '
TMEITS20              104  100.0% *****
Reports:
I03  I04
I16  I17

```

Remainder of report after scrolling down is shown here:

```

File View Navigate Help
-----
I01: IMS Measurement Profile (0954/ADSMPP) Row 00031 of 00049
Command ==> ----- Scroll ==> CSR

Most Frequent DL/I Calls ----- Reports:
Total DLI calls counted      620  100.0% ' ' ' ' ' ' ' '      I02  I17
00001 GU  IOPCB              206   33.2% *****      I18
00002 ISRT IOPCB             104   16.7% ***

Transactions Statistics-----
| IMS Txns counted      104          | Transaction rate      3.47 per sec |
| Txn observations      612          | Txn throughput        24.18 per sec |
|-----|-----|
| IMS Txn svc time      4.3456 sec   | IMS Txn CPU time      2.2794 sec   |
| IMS Txn max svc       0.1496 sec   | IMS Txn max CPU       0.0266 sec   |
| IMS Txn min svc       0.0276 sec   | IMS Txn min CPU       0.0206 sec   |
|-----|-----|
DLI Call Statistics-----
| DLI call count        790          | DLI call rate         39.69 per sec |
| DLI observations      1,692        | DLI call thrupt       246.19per sec |
|-----|-----|
| DLI svc time          7.1757 sec   | DLI CPU time          5.7611 sec   |
| DLI max svc           0.2504 sec   | DLI max CPU           0.0453 sec   |
| DLI min svc           0.0276 sec   | DLI min CPU           0.0206 sec   |
|-----|-----|
*-----*

```

I02 - IMS DL/I call timeline

Usage

Use this report to see the chronology of DL/I calls observed during the measurement interval. Each line shows information about one executed DL/I call. The IMS+ feature must have been enabled when the measurement was performed.

The number of DLI calls displayed in this report is limited by the value of the IMSIMaxTraceSize parameter specified during Application Performance Analyzer installation, or by the value on panel 2 of the measurement request (if your installation has configured this field). The report is truncated when the number of DLI calls issued reaches the value specified for IMSIMaxTraceSize.

Quantification

Each report line shows information pertaining to one IMS DL/I call.

Detail line hierarchy

The I02 report shows only one detail line level. It cannot be expanded.

Detail line descriptions

Under Heading	This is Displayed
Call Seq	A sequence number assigned to the DL/I call execution.
Func	The DL/I function code.
PCB Name	The name of the PCB referenced by the DL/I call.
ID	An identifier assigned to each unique DL/I call. This is useful when examining printed reports. You can use this identifier to locate detailed information about the DL/I call in the I15 DL/I Call Attributes report.
Location	The location, in CSECT+offset format, of the return address of the DL/I call.
Stat	The PCB status code returned by IMS upon completion of the DL/I call.
Call Time	The time of day at which the DL/I call occurred.

Under Heading	This is Displayed
Duration	The duration of the DL/I call in seconds.

Sample reports

Below is an IMS DL/I call timeline sample report:

File View Navigate Help							
I02: IMS DL/I Call Timeline (0805/ADSMPP)					Row 00001 of 01128		
Command ==>					Scroll ==> CSR		
CallSeq	Func	PCB Name	Id	Location	Stat	Call Time	Duration
000001	GU	IOPCB	0001	BBSFIN00+038C		20:36:10.29	0.0001
000002	GHU	DBSCA001	0002	BBSAP012+0E0E		20:36:11.20	0.0556
000003	GHU	DBSCN001	0003	BBSAP012+0EE4		20:36:11.26	0.0133
000004	GHU	DBSCA002	0004	BBSAP012+1086		20:36:11.27	0.0003
000005	ISRT	DBSCA002	0005	BBSAP012+1110		20:36:11.27	0.0003
000006	GHU	DBSTL001	0006	BBSAP012+11B0		20:36:11.27	0.0232
000007	ISRT	DBSTL001	0007	BBSAP012+1252		20:36:11.30	0.0003
000008	REPL	DBSCA001	0008	BBSAP012+131E		20:36:11.30	0.0001
000009	REPL	DBSCN001	0009	BBSAP012+13A4		20:36:11.30	0.0023
000010	ISRT	IOPCB	0010	BBSFIN00+0410	QH	20:36:11.46	0.0002
000011	GU	IOPCB	0001	BBSFIN00+038C		20:36:11.46	0.0087
000012	GHU	DBSCA001	0002	BBSAP012+0E0E		20:36:11.47	0.0396
000013	GHU	DBSCN001	0003	BBSAP012+0EE4		20:36:11.51	0.0257
000014	GHU	DBSCA002	0004	BBSAP012+1086		20:36:11.54	0.0002

Line commands

on objects

Cmd	When Applied To Object	Action
?	DL/I call	Display context help information.
++	DL/I call	Show additional details.
M	DL/I call	Display load module information.
P	DL/I call	Display source program mapping.

I03 - IMS transaction timeline

Usage

Use this report to see the chronology of IMS transactions observed during the measurement interval. Each line shows information about one executed IMS transaction and can be expanded to show the sequence of DL/I calls executed by the transaction. The IMS+ feature must have been enabled when the measurement was performed.

The number of transactions and DLI calls displayed in this report is limited by the value of the IMSIMaxTraceSize parameter specified during Application Performance Analyzer installation, or by the value on panel 2 of the measurement request (if your installation has configured this field). The report is truncated when the number of DLI calls issued reaches the value specified for IMSIMaxTraceSize.

Quantification

Each report line shows information pertaining to one IMS transaction.

Detail line hierarchy

The unexpanded I03 report shows a line for each observed IMS transaction. You can expand each line to reveal one additional hierarchical level of detail. The hierarchy is illustrated here:

```
Level 1 IMS Transaction
Level 2 DL/I Call
```

Detail line descriptions

IMS transaction detail line

This is the first-level detail line. Each line shows information about an observed IMS transaction. These lines appear in transaction chronological sequence.

Under Heading	This is Displayed
TranCode	The IMS transaction code.
PSB/PCB	The name of the PSB under which the IMS transaction was scheduled.
Location	The LTERM where the transaction originated.
Txn Time	The time of day at which the IMS transaction was initiated. This is the time at which the transaction program received control upon return from the GU-IOPCB call.
Duration	The duration of the IMS transaction in seconds. The duration is measured from the time of return from the GU-IOPCB to the time of entry to the next GU-IOPCB.

DL/I call detail line

Line This is the second-level detail line. Each line shows information about an observed IMS DL/I Call that was executed in the transaction. These lines appear in DL/I call chronological sequence.

Under Heading	This is Displayed
TranCode	A sequence number assigned to the DL/I call execution.
PSB/PCB	The name of the PCB referred to by the DL/I call.
ID	An identifier assigned to each unique DL/I call. This is useful when examining printed reports. You can use this identifier to locate detailed information about the DL/I call in the I15 DL/I Call Attributes report.
Func	The DLI function code.
Location	The location, in CSECT+offset format, of the return address of the DL/I call.
Stat	The PCB status code returned by IMS upon completion of the DL/I call.
Txn Time	The time of day at which the DL/I call occurred.
Duration	The duration of the DL/I call in seconds.

Sample reports

A sample report is shown below. The first TranCode has been expanded to the second level.

File View Navigate Help							
I03: IMS Transaction Timeline (0805/ADSMPP)					Row 00001 of 00111		
Command ==>					Scroll ==> CSR		
TranCode	PSB/PCB	Id	Func	Location	Stat	Txn Time	Duration
BBSDR000	BBSFIN00					20:36:10.29	1.1639
± 000001	IOPCB	0001	GU	BBSFIN00+038C		20:36:10.29	0.0001
→ 000002	DBSCA001	0002	GHU	BBSAP012+0E0E		20:36:11.20	0.0556
→ 000003	DBSCN001	0003	GHU	BBSAP012+0EE4		20:36:11.26	0.0133
→ 000004	DBSCA002	0004	GHU	BBSAP012+1086		20:36:11.27	0.0003
→ 000005	DBSCA002	0005	ISRT	BBSAP012+1110		20:36:11.27	0.0003
→ 000006	DBSTL001	0006	GHU	BBSAP012+11B0		20:36:11.27	0.0232
→ 000007	DBSTL001	0007	ISRT	BBSAP012+1252		20:36:11.30	0.0003
→ 000008	DBSCA001	0008	REPL	BBSAP012+131E		20:36:11.30	0.0001
→ 000009	DBSCN001	0009	REPL	BBSAP012+13A4		20:36:11.30	0.0023
→ 000010	IOPCB	0010	ISRT	BBSFIN00+0410	QH	20:36:11.46	0.0002
BBSDR000	BBSFIN00			TERMX09		20:36:11.47	0.0760
BBSDR000	BBSFIN00					20:36:11.55	0.0273
BBSDR000	BBSFIN00					20:36:11.58	0.0467

Line commands

on objects

Cmd	When Applied To Object	Action
?	Trancode, DL/I call	Display context help information.
++	Trancode, DL/I call	Show additional details.
+	Trancode	Expand to reveal next level.
–	Trancode	Collapse to hide next level.
M	Trancode, DL/I call	Display load module information.
P	Trancode, DL/I call	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Trancode	Display context help information.
+	Trancode	Expand to reveal all entries.
–	Trancode	Collapse to show only first level.

I04 - IMS transaction activity timeline

Usage

Use this report to see, for each IMS transaction, how execution of that transaction was distributed over the measurement interval.

Quantification

A graph, in bar chart format, is displayed for each observed IMS transaction code. The horizontal axis represents the measurement interval which spans 50 columns. Each column represents an equal 1/50th subinterval of time. A scale is shown at the bottom of the graph indicating the percentage of time progression in the overall interval.

In each column, a vertical graph shows the approximate percentage of time during the subinterval that execution of the IMS transaction took place. A vertical bar of 1, 2, 3, 4 or 5 characters, extending upward from the scale, is displayed indicating the percentage of time in the subinterval execution of the indicated transaction was observed.

Detail line descriptions

IMS transaction activity distribution

A group of lines is shown for each reported transaction. Some information about the transaction appears to the left, and a bar chart appears to the right.

Under Heading	This is Displayed
Txn	The IMS transaction code.
PSB	The name of the PSB and program.
Txns	The number of executions of the transaction that occurred during the measurement interval. This value is available only if the IMS+ measurement option was enabled.

Sample reports

A sample report is shown below.

```

File View Navigate Help
-----
I04: IMS Transaction Activity Timeline (0805/ADSMPP)          Row 00001 of 00018
Command ==> _____ Scroll ==> CSR
-----
IMS Transaction          <----- 2,000 Samples: Duration 59.8 Seconds ----->

Txn: BBSDR000           >80%      *      * * *      * * *
PSB: BBSFIN00           >60%      ** * * * * * * *
Txns: 50                >40%      ** * * * * * * *
                        >20%      ***** * *** * * *
                        > 0%      ***** *
                        *....1....2....3....4....5....6....7....8....9....*

Txn: BBSCR000           >80%              *      * *
PSB: BBSFIN00           >60%      * * * * * * *
Txns: 49                >40%      ** * * * * * * *
                        >20%      **** * * *** * * *
                        > 0%      ***** *
                        *....1....2....3....4....5....6....7....8....9....*

```

Line commands

on objects

Cmd	When Applied To Object	Action
?	Trancode	Display context help information.
++	Trancode	Show additional details.

on headings

Cmd	When Applied To Object	Action
?	IMS Transaction Display	Display context help information.

Cmd	When Applied To Object	Action
SV	IMS Transaction	Sort next level entries by value.
SN	IMS Transaction	Sort next level entries by name.

Detail lines for reports I05 through I13

This section describes the common format of detail lines shared by reports I05 through I13. These reports quantify activity based on the basis of the PSW (Program Status Word) address values observed at the time of the sample. This format is not exclusive to the IMS reports, it is also used in CPU reports such as C01, and Wait reports such as W01.

Detail lines reported for PSW sampling

Various report detail lines quantify activity on the basis of the PSW (Program Status Word) address values observed at the time of the sample. One PSW observation is recorded for each TCB. Depending on the report, the 'activity' might be: CPU usage, WAIT time, Queued time, or overall service time.

The analysis reports classify the PSW address values and aggregate them into 'objects'. The reports show each of these objects in one detail line arranged in a hierarchy. Each successive level in the hierarchy represents a more granular breakdown of the quantifications reported in the higher level items.

These objects are reported with a Name field, a Description, a quantification expressed as a percentage, and a histogram depicting the quantity. Descriptions of these detail lines are presented here.

APPLCN - Application code category

A group of lines is shown for each reported transaction. Some information about the transaction appears to the left, and a bar chart appears to the right.

Under Heading	This is Displayed
Name	"APPLCN"
Description	"Application Code"
Percent of Time	The percentage of activity measured in application code. The classification as application code is done on the basis of load module names and DPA (Descriptive Program Attribution) tables.

SYSTEM - System/OS services category

Under Heading	This is Displayed
Name	"SYSTEM"
Description	"System/OS Services"
Percent of Time	The percentage of activity measured in system services. The classification as SYSTEM is done on the basis of load module names and DPA (Descriptive Program Attribution) tables. These include core operating system services as well as major system applications or subsystems: DB2, IMS, CICS, MQSeries, etc. SVC (Supervisor Call) routines and MVS Nucleus routines are included in this category.

NOSYMB - No module name found

Under Heading	This is Displayed
Name	"NOSYMB"

Under Heading	This is Displayed
Description	"No Module Name"
Percent of Time	The percentage of activity measured at addresses for which associated module names could not be determined. An example of this would be execution of instructions moved into an area of GETMAINED storage.

DPA group

Under Heading	This is Displayed
Name	DPA Group name
Description	Description of the DPA group. For example: MVS, IMS, DB2, SVC, LERUNLIB, etc.
Percent of Time	The percentage of activity measured in modules in the indicated grouping.

DPA subgroup

Under Heading	This is Displayed
Name	DPA Subgroup name.
Description	Description of the DPA subgroup. For example: MVS, IMS, SVCTYPE1, SVCTYPE2, LEBASE, LECOBOL, etc.
Percent of Time	The percentage of activity measured in modules in the indicated grouping.

NOSYMB address range

Under Heading	This is Displayed
Name	Hexadecimal address range.
Description	"Unresolved Address."
Percent of Time	The percentage of activity measured at the indicated address range. These are addresses for which no corresponding module name could be determined. These measurements are aggregated under the NOSYMB category. Each report line represents a 4K (4096 bytes) range of addresses. The address range is displayed under the Name heading in the format HHHHHxxx. HHHHH displays the first five hexadecimal digits of the address and xxx represents the three lower order digits: a range from X'000' to X'FFF' (decimal 0 to 4095).

SVC - Supervisor call

Under Heading	This is Displayed
Name	SVCnnn - where nnn is the supervisor call number in decimal.
Description	Description of the supervisor call function.
Percent of Time	The percentage of activity measured in the indicated supervisor call.

CSECT - Control section

Under Heading	This is Displayed
Name	A CSECT (Control Section) name.
Description	Functional description of the CSECT if one is available. Otherwise "csectname in modulename" appears.
Percent of Time	The percentage of activity measured in the indicated CSECT.

DB2SQL - DB2 SQL processing category

Under Heading	This is Displayed
Name	"DB2SQL"
Description	"SQL Processing."
Percent of Time	The percentage of activity measured while processing SQL requests.

SQL statement

Under Heading	This is Displayed
Name	A unique reference number assigned to the SQL statement.
Description	The name of the program that issued the SQL request as well as the precompiler statement number of the SQL statement in PGMNAME(stmt#) format. This is followed by the SQL function name. For example: SELECT, INSERT, COMMIT, etc.
Percent of Time	The percentage of activity measured while processing the indicated SQL statement.

DATAMG - Data management processing category

Under Heading	This is Displayed
Name	"DATAMG"
Description	"Data Mgmt Processing."
Percent of Time	The percentage of activity measured in routines that were servicing data management (DASD) requests. This includes basic access functions (such as READ and WRITE) to files. Processing of OPEN and CLOSE functions is not included in this category.

DDNAME

Under Heading	This is Displayed
Name	DDNAME of a DASD file.
Description	Access method for the indicated file: VSAM, QSAM, etc.
Percent of Time	The percentage of activity measured in routines that were servicing data management (DASD) requests for the indicated DDNAME. This includes basic access functions (such as READ and WRITE) to files. Processing of OPEN and CLOSE functions is not included in this category.

DASD I/O request

Under Heading	This is Displayed
Name	Type of I/O request.
Description	Program name and offset of the I/O request.
Percent of Time	The percentage of activity measured in routines that were servicing data management (DASD) requests for the indicated request.

IMS PSB

Under Heading	This is Displayed
Name	IMS PSB Name. NONIMS to indicate IMS activity for which no PSB has been scheduled.
Description	The type of IMS dependent region: BMP, MPP, IFP, etc.
Percent of Time	The percentage of activity measured under the indicated IMS PSB.

IMS transaction

Under Heading	This is Displayed
Name	IMS transaction code.
Description	The PSB to which the IMS transaction belongs.
Percent of Time	The percentage of activity measured while executing the indicated IMS transaction.

IMS DL/I call

Under Heading	This is Displayed
Name	A unique reference number assigned to the DL/I call.
Description	The DL/I function code followed by the PCB name followed by the relative PCB number in parentheses. The location of the call in csect+offset format follows this.
Percent of Time	The percentage of activity measured while executing the indicated DL/I call.

IMSDLI - IMS DL/I processing category

Under Heading	This is Displayed
Name	"IMSDLI"
Description	"IMS DL/I Calls."
Percent of Time	The percentage of activity measured in the processing of IMS DL/I calls.

I05 - IMS DL/I CPU usage by PSB

Usage

Use this report to see the distribution of CPU usage in an IMS-dependent region. This report aggregates CPU usage by IMS PSB and is meaningful when measuring a region in which multiple IMS PSBs are scheduled (for example, an MPP region). Both IMS and non-IMS CPU usage is reported. IMS CPU usage measured during the execution of DL/I calls is reported under detail lines, which identify each of the DL/I calls. Non-DL/I call CPU usage is reported as application code or system routines.

This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) as well as IMS batch DL/I regions.

Note:

You should not use this report to analyze CICS measurements.

Quantification

Each report line quantifies CPU usage as a percentage of the overall CPU usage observed for the measurement interval. Each quantity is expressed as a percentage representing the ratio of the number of CPU active observations for the object on the report detail line to the total number of CPU active observations in the measurement.

Detail line hierarchy

An unexpanded I05 report shows a line for each IMS PSB in which CPU usage was observed. The name field reports the PSB name. I05 reports CPU usage for which there was no IMS PSB on a separate line named NONIMS. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```
Level 1 PSB Name or 'NONIMS'
  Level 2 IMSDLI - DL/I call execution
    Level 3 DL/I call identification
      Level 4 Category
        Level 5 Load module
          Level 6 CSECT
      Level 4 SVC total
        Level 5 SVCnnn
          Level 6 Load module
            Level 7 CSECT
  Level 2 APPLCN - application code
    Level 3 Load module
      Level 4 CSECT
  Level 2 SYSTEM - system routines
    Level 3 Category
      Level 4 Load module
        Level 5 CSECT
    Level 3 SVC total
      Level 4 SVCnnn
        Level 5 Load module
          Level 6 CSECT

  Level 2 NOSYMB - no load module name
    Level 3 hexadecimal addresses
```

Detail line descriptions

PSB detail line

This is the first-level detail line. It aggregates activity by IMS PSB.

Under Heading	This is Displayed
Name	IMS PSB Name. NONIMS to indicate IMS activity for which no PSB has been scheduled.
Description	The type of IMS dependent region: BMP, MPP, IFP, etc.
Percent of Time	The percentage of activity measured under the indicated IMS PSB.

Other detail lines

Other detail lines are subcategories and show objects based on observed PSW addresses. See [“Detail lines for reports I05 through I13”](#) on page 276.

Sample reports

A sample report is shown below. The report is expanded to the second level.

```

File View Navigate Help
-----
I05: IMS CPU Usage by PSB (0805/ADSMPP) Row 00001 of 00008
Command ==> Scroll ==> CSR
-----
Name      Description      Percent of CPU time * 10.00% ±10.1%
          *...1...2...3...4...5...6...7...8.
BBSFIN00  PSB in MPP region    98.98 =====
→ SYSTEM  System/OS Services   57.57 =====
→ IMSDLI  IMS DL/I Calls       30.30 =====
→ APPLCN  Application Code     10.10 =====
→ NOSYMB  No Module Name       1.01 =
NONIMS    Not IMS Execution    1.01 =
→ SYSTEM  System/OS Services   1.01 =

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information
++	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details
+	PSB, DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level
-	PSB, DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level
SV	PSB, DL/I call, Category, SVC, SQL command	Sort next level by value
SN	PSB, DL/I call, Category, SVC, SQL command	Sort next level by name
M	Load Module, CSECT	Display load module information

Cmd	When Applied To Object	Action
P	Load Module, DL/I call, CSECT, SQL command	Display source program mapping
C01	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C01 report subset
C02	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C02 report subset
C03	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C03 report subset
C08	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C08 report subset
C09	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C09 report subset

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries
+	Description	Expand field size
+	Percent CPU	Zoom in scale
-	Name	Collapse to show only first level
-	Description	Reduce field size
-	Percent CPU	Zoom out scale
SV	Name	Sort next level by value
SN	Name	Sort next level by name

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

FileViewNavigateHelp

More: +

+----- The following report line was selected -----+

| BBSFIN00 PSB in MPP region 98.98 00000000000000000000000000000000 |

+-----+

Calculation Details

IMS DL/I call CPU measurements 98

PSB BBSFIN00

Total CPU measurements 99

Percent of total 98.98%

IMS PSB Information

PSB Name BBSFIN00 IMS system IMSP

No.of PCBs 27 LIST=NO PCBs 12

Txn count 99 DL/I calls 1010

Sample count 611

PCBNum Name Type DBD/LTRM PROCOPT LIST

1 IOPCB TP YES

2 ALT1 TP YES

3 ALT2 TP YES

4 DBSCN001 DB DBSCN000 A YES

5 DBSCN002 DB DBSCN000 A YES

6 DBSCN003 DB DBSCN000 A YES

7 DBSCI001 DB DBSCI000 A YES

8 DBSCI002 DB DBSCI000 A YES

9 DBSCI003 DB DBSCI000 A YES

10 DBSCA001 DB DBSCA000 A YES

11 DBSCA002 DB DBSCA000 A YES

12 DBSCA003 DB DBSCA000 A YES

13 DBSTL001 DB DBSTL000 A YES

14 DBSTL002 DB DBSTL000 A YES

15 DBSTL003 DB DBSTL000 A YES

16 DBSCNA01 DB DBSCN000 A NO

17 DBSCNA02 DB DBSCN000 A NO

18 DBSCNA03 DB DBSCN000 A NO

19 DBSCIA01 DB DBSCI000 A NO

I06 - IMS DL/I CPU usage by transaction

Usage

Use this report to see the distribution of CPU usage in an IMS-dependent region. This report aggregates CPU usage by IMS transaction and is meaningful when measuring a region in which multiple IMS transactions are scheduled (for example, an MPP region). Both IMS and non-IMS CPU usage is reported. IMS CPU usage measured during the execution of DL/I calls is reported under detail lines, which identify each of the DL/I calls. Non-DL/I call CPU usage is reported as application code or system routines.

This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) as well as IMS batch DL/I regions.

Note:

You should not use this report to analyze CICS measurements.

Quantification

Each report line quantifies CPU usage as a percentage of the overall CPU usage observed for the measurement interval. Each quantity is expressed as a percentage representing the ratio of the number of CPU active observations for the object on the report detail line to the total number of CPU active observations in the measurement.

Detail line hierarchy

An unexpanded I06 report shows a line for each IMS transaction in which CPU usage was observed. The name field reports the transaction code. I06 reports CPU usage for which no IMS transaction was

active under a line identifying the PSB name. If no IMS PSB was active the CPU usage is reported under a line named “NONIMS.” You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```

Level 1 Trancode, PSB Name or 'NONIMS'
  Level 2 IMSDLI - DL/I call execution
    Level 3 DL/I call identification
      Level 4 Category
        Level 5 Load module
          Level 6 CSECT
      Level 4 SVC total
        Level 5 SVCnnn
          Level 6 Load module
            Level 7 CSECT
  Level 2 APPLCN - application code
    Level 3 Load module
      Level 4 CSECT
  Level 2 SYSTEM - system routines
    Level 3 Category
      Level 4 Load module
        Level 5 CSECT
    Level 3 SVC total
      Level 4 SVCnnn
        Level 5 Load module
          Level 6 CSECT

Level 2 NOSYMB - no load module name
  Level 3 hexadecimal addresses

```

Detail line descriptions

Transaction detail line

This is the first-level detail line. It aggregates activity by IMS transaction. A PSB line is reported for any activity under IMS that is not under an IMS transaction.

Under Heading	This is Displayed
Name	IMS transaction code.
Description	The PSB to which the IMS transaction belongs.
Percent of Time	The percentage of activity measured while executing the indicated IMS transaction.

Other detail lines

Other detail lines are subcategories and show objects based on observed PSW addresses. See [“Detail lines for reports I05 through I13” on page 276.](#)

Sample reports

A sample report is shown below. The report is expanded to the second level.

```

File View Navigate Help
-----
IO6: IMS CPU Usage by Txn (0805/ADSMPP)                      Row 00001 of 00013
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00%  ±10.1%
                        *....1....2....3....4....5....6....7....8.
BBSDR000  Txn in PSB BBSFIN00      55.55 =====
→ SYSTEM   System/OS Services        29.29 =====
→ IMSDLI   IMS DL/I Calls           19.19 =====
→ APPLCN   Application Code          6.06 ===
→ NOSYMB   No Module Name           1.01 =

BBSCR000  Txn in PSB BBSFIN00      43.43 =====
→ SYSTEM   System/OS Services        28.28 =====
→ IMSDLI   IMS DL/I Calls           11.11 =====
→ APPLCN   Application Code          4.04 ==

NONIMS     Not IMS Execution         1.01 =
→ SYSTEM   System/OS Services        1.01 =

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	TranCode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	Trancode, PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	Trancode, PSB, DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level.
-	Trancode, PSB, DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level.
SV	Trancode, PSB, DL/I call, Category, SVC, SQL command	Sort next level by value.
SN	Trancode, PSB, DL/I call, Category, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT, DL/I call, SQL command	Display source program mapping.
C01	Trancode, PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C01 report subset.
C02	Trancode, PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C02 report subset.
C03	Trancode, PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C03 report subset

Note:

You should not use this report to analyze CICS measurements.

Quantification

Each report line quantifies CPU usage as a percentage of the total CPU usage observed for all DL/I call processing. CPU usage observed outside of DL/I call processing is excluded from the calculation. Each quantity is expressed as a percentage representing the ratio of the number of CPU active observations for the object described by the report detail line to the total number of CPU active observations in DL/I call processing.

Detail line hierarchy

An unexpanded I07 report shows a line for each IMS DL/I call in which CPU usage was observed. The name field shows a sequence number assigned to each unique DL/I call. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```

Level 1 DL/I call identification
  Level 2 Category
    Level 3 Load module
      Level 4 CSECT
    Level 2 SVC total
      Level 3 SVCnnn
        Level 4 Load module
          Level 5 CSECT

```

Detail line descriptions

See [“Detail lines for reports I05 through I13” on page 276.](#)

Sample reports

A sample report is shown below. The report is expanded to the second level.

```

File View Navigate Help
-----
I07: IMS CPU Usage by DL/I Call (0805/ADSMPP) Row 00001 of 00039
Command ==> Scroll ==> CSR
-----
Name      Description      Percent of DLI CPU time * 10.00% ±18.5%
          *....1....2....3....4....5....6....7....8.
00001     GU-IOPCB(1) BBSFIN00+0 46.66 =====
→ IMS     IMS Subsystem      33.33 =====
→ MVS     MVS System          10.00 =====
→ NOSYMB  No Module Name       3.33 ==

00006     GHU-DBSTL001(13) BBSAP  6.66 ===
→ IMS     IMS Subsystem      3.33 ==
→ SVC     SVC Routines      3.33 ==

00018     REPL-DBSCN001(4) BBSAP  6.66 ===
→ IMS     IMS Subsystem      6.66 ===

00002     DBSCA001(10) BBSAP    6.66 ===
→ SVC     SVC Routines      6.66 ===

00009     DBSCN001(4) BBSAP    6.66 ===
→ IMS     IMS Subsystem      6.66 ===

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level.
-	DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level.
SV	DL/I call, Category, SVC, SQL command	Sort next level by value.
SN	DL/I call, Category, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	CSECT, DL/I call, SQL command	Display source program mapping.
C01	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C01 report subset.
C02	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C02 report subset.
C03	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C03 report subset
C08	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C08 report subset.
C09	Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C09 report subset.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| 00001      GU-IOPCB(1) BBSFIN00+0 46.66 000000000000000000000000 |
+-----+

Calculation Details
IMS DL/I call CPU measurements          14
Total CPU measurements                  30
Percent of total                        46.66%

DL/I Call Information
Function code      GU                      PSB Name      BBSFIN00
PCB Name          IOPCB                  IMS Id-Region  IMSP-ADSMPP
PCB Number        1                      Call type     CBLTDLI
CSECT/module      BBSFIN00 in BBSFIN00   Offset of call 0000038C
Sample count      10                     Call count    60
DLI CPU time      0.14                   Service time   0.19

```

I08 - IMS DL/I WAIT time by PSB

Usage

Use this report to identify any delays caused by wait conditions in IMS regions. This report shows wait time by IMS PSB and is meaningful when measuring a region in which multiple IMS PSBs are scheduled (for example, a MPP region). Only wait time observed when an IMS PSB is active is reported. Wait time is identified both within the processing of DL/I calls and outside of DL/I call processing.

This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) and IMS batch DL/I regions.

Note:

You should not use this report to analyze CICS measurements.

Quantification

Each report line quantifies wait time as a percentage of the overall time IMS PSBs were active. Each quantity is expressed as a percentage representing the ratio of the number of samples in which the active IMS program was waiting to the total number of samples IMS programs were active. Any time when no IMS programs were active is excluded. This ensures that quantifications are not distorted by inactive intervals such as those that occur between scheduled transactions.

Detail line hierarchy

An unexpanded I08 report shows a line for each IMS PSB that was observed. The name field reports the PSB name. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```

Level 1 PSB Name or 'NONIMS'
  Level 2 IMSDLI - DL/I call execution
    Level 3 DL/I call identification
      Level 4 Category
        Level 5 Load module
          Level 6 CSECT
            Level 4 SVC total
              Level 5 SVCnnn
                Level 6 Load module
                  Level 7 CSECT
  Level 2 APPLCN - application code
    Level 3 Load module
      Level 4 CSECT
  Level 2 SYSTEM - system routines
    Level 3 Category
      Level 4 Load module
        Level 5 CSECT

```

Level 3 SVC total
Level 4 SVCnnn
Level 5 Load module
Level 6 CSECT

Level 2 NOSYMB - no load module name
Level 3 hexadecimal addresses

Detail line descriptions

PSB detail line

This is the first-level detail line. It aggregates activity by IMS transaction.

Under Heading	This is Displayed
Name	IMS PSB Name. NONIMS to indicate IMS activity for which no PSB has been scheduled.
Description	The type of IMS dependent region: BMP, MPP, IFP, etc.
Percent of Time	The percentage of activity measured under the indicated IMS PSB.

Other detail lines

Other detail lines are subcategories and show objects based on observed PSW addresses. See [“Detail lines for reports I05 through I13” on page 276.](#)

Sample reports

A sample report is shown below. The report is expanded to the third level.

```

File View Navigate Help
-----
I08: IMS WAIT Time by PSB (0805/ADSMPP) Row 00001 of 00020
Command ==> Scroll ==> CSR
Name Description Percent of Time * 10.00% ±3.5
*....1....2....3....4....5....6....7....8
=====
BBSFIN00 PSB in MPP region 82.42 =====
→ IMSDLI IMS DL/I Calls 73.24 =====
→ 00012 GHU-DBSCN001(4) BB 35.15 =====
→ 00003 GHU-DBSCN001(4) BB 33.37 =====
→ 00011 GHU-DBSCA001(10) B 1.91 ==
→ 00002 GHU-DBSCA001(10) B 1.78 ==
→ 00015 GHU-DBSTL001(13) B 0.25
→ 00018 REPL-DBSCN001(4) B 0.25
→ 00001 GU-IOPCB(1) BBSFIN 0.25
→ 00006 GHU-DBSTL001(13) B 0.12
→ 00007 ISRT-DBSTL001(13) 0.12
→ SYSTEM System/OS Services 5.60 ====
→ SVC SVC Routines 5.35 ====
→ LERUNLIB Language Environme 0.25
→ APPLCN Application Code 3.56 ==
→ BKN00SUP Application Progra 1.65 =
→ BKN00102 Application Progra 1.14 =
→ BKN00101 Application Progra 0.38
→ BKN00103 Application Progra 0.25
→ BKN00111 Application Progra 1.12 =
  
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	PSB, DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level.
-	PSB, DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level.
SV	PSB, DL/I call, Category, SVC, SQL command	Sort next level by value.
SN	PSB, DL/I call, Category, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT, DL/I call, SQL command	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```
File View Navigate Help
```

```
+-----+ More: +  
+----- The following report line was selected -----+  
| BBSFIN00 PSB in MPP region      82.42 000000000000000000000000 |  
+-----+
```

Calculation Details

IMS DL/I call wait time measurements	647
PSB	BBSFIN00
Total measurements	785
Percent of total	82.42%

IMS PSB Information

PSB Name	BBSFIN00	IMS system	IMSP
No.of PCBs	27	LIST=NO PCBs	12
Txn count	99	DL/I calls	1010
Sample count	611		

PCBNum	Name	Type	DBD/LTRM	PROCOPT	LIST
1	IOPCB	TP			YES
2	ALT1	TP			YES
3	ALT2	TP			YES
4	DBSCN001	DB	DBSCN000	A	YES
5	DBSCN002	DB	DBSCN000	A	YES
6	DBSCN003	DB	DBSCN000	A	YES
7	DBSCI001	DB	DBSCI000	A	YES
8	DBSCI002	DB	DBSCI000	A	YES
9	DBSCI003	DB	DBSCI000	A	YES
10	DBSCA001	DB	DBSCA000	A	YES
11	DBSCA002	DB	DBSCA000	A	YES
12	DBSCA003	DB	DBSCA000	A	YES
13	DBSTL001	DB	DBSTL000	A	YES
14	DBSTL002	DB	DBSTL000	A	YES
15	DBSTL003	DB	DBSTL000	A	YES
16	DBSCNA01	DB	DBSCN000	A	NO
17	DBSCNA02	DB	DBSCN000	A	NO
18	DBSCNA03	DB	DBSCN000	A	NO
19	DBSCIA01	DB	DBSCI000	A	NO

I09 - IMS DL/I WAIT time by transaction

Usage

Use this report to identify any delays caused by wait conditions in IMS regions. This report shows wait time by IMS transaction and is meaningful when measuring a region in which multiple IMS transactions are scheduled (for example, a MPP region). Only wait time observed when an IMS PSB is active is reported. Wait time is identified both within the processing of DL/I calls and outside of DL/I call processing.

Quantification

Each report line quantifies wait time as a percentage of the overall time IMS PSBs were active. Each quantity is expressed as a percentage, which represents the ratio of the number of samples in which the active IMS program was waiting compared to the total number of samples IMS programs were active. Any time during when no IMS programs were active are excluded. This ensures that quantifications are not distorted by inactive intervals such as those that occur between scheduled transactions.

Detail line hierarchy

An unexpanded I09 report shows a line for each IMS transaction observed. The name field reports the transaction code. In the event that no IMS transaction was active but a PSB was active, the PSB will be identified in the report line. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

Level 1 Trancode, PSB Name or 'NONIMS'
Level 2 IMSDLI - DL/I call execution
Level 3 DL/I call identification

```

      Level 4 Category
      Level 5 Load module
      Level 6 CSECT
      Level 4 SVC total
      Level 5 SVCnnn
      Level 6 Load module
      Level 7 CSECT
Level 2 APPLCN - application code
  Level 3 Load module
    Level 4 CSECT
Level 2 SYSTEM - system routines
  Level 3 Category
    Level 4 Load module
      Level 5 CSECT
  Level 3 SVC total
    Level 4 SVCnnn
      Level 5 Load module
        Level 6 CSECT

Level 2 NOSYMB - no load module name
  Level 3 hexadecimal addresses

```

Detail line descriptions

Transaction detail line

This is the first-level detail line. It aggregates activity by IMS transaction. For any activity under IMS which is not under an IMS transaction a PSB line is reported.

Under Heading	This is Displayed
Name	IMS transaction code.
Description	The PSB to which the IMS transaction belongs.
Percent of Time	The percentage of activity measured while executing the indicated IMS transaction.

Other detail lines

Other detail lines are subcategories and show objects based on observed PSW addresses. See [“Detail lines for reports I05 through I13” on page 276](#).

Sample reports

A sample report is shown below. The report is expanded to the third level.

```

File View Navigate Help
-----
I09: IMS WAIT Time by TXn (0805/ADSMPP) Row 00001 of 00026
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of Time * 10.00% ±3.5
*....1....2....3....4....5....6....7....8
=====
BBSDR000  Txn in PSB BBSFIN00  42.80 =====
→ IMSDLI   IMS DL/I Calls      35.54 =====
→ 00003   GHU-DBSCN001(4) BB  33.37 =====
→ 00002   GHU-DBSCA001(10) B   1.78 ==
→ 00006   GHU-DBSTL001(13) B   0.12
→ 00001   GU-IOPCB(1) BBSFIN   0.25
→ 00007   ISRT-DBSTL001(13)    0.12
→ SYSTEM  System/OS Services    3.69 ===
→ SVC     SVC Routines          3.43 ===
→ LERUNLIB Language Environme    0.25
→ APPLCN  Application Code       3.56 ===
→ BKN00SUP Application Progra    1.65 =
→ BKN00102 Application Progra    1.14 =
→ BKN00101 Application Progra    0.38
→ BKN00103 Application Progra    0.25
→ BKN00111 Application Progra    1.12 =

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Trancode, PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command	Expand to reveal next level.
-	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Collapse to hide next level.
SV	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Sort next level by value.
SN	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT, DL/I call, SQL command	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.

Cmd	When Applied To Object	Action
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

File View Navigate Help			
+----- The following report line was selected -----+			
	BBSDR000	Txn in PSB BBSFIN00	42.80 00000000000000000000
+-----+			
Calculation Details			
IMS DL/I call wait time measurements	336		
IMS transaction	BBSDR000		
Total measurements	785		
Percent of total	42.80%		
IMS Transaction Information			
IMS Trancode	BBSDR000	IMS system	IMSP
PSB name	BBSFIN00	Txn count	50
Total time	10.1332	Total CPU time	0.4327

I10 - IMS DL/I WAIT time by DL/I call

Usage

Use this report to identify delays caused by wait conditions in specific DL/I calls. This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) as well as IMS batch DL/I regions.

Note:

You should not use this report to analyze CICS measurements.

Quantification

Each report line quantifies wait time as a percentage of the total time observed for all DL/I call processing. Time observed outside of DL/I call processing is excluded from the calculation. Each quantity is expressed as a percentage representing the ratio of the number of wait samples for the object described by the report detail line to the total number of samples in DL/I call processing.

Detail line hierarchy

An unexpanded I10 report shows a line for each IMS DL/I call. The name field shows a sequence number assigned to each unique DL/I call. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```

Level 1 DL/I call identification
Level 2 Category
Level 3 Load module
Level 4 CSECT
Level 2 SVC total
Level 3 SVCnnn
Level 4 Load Module
Level 5 CSECT

```

Detail line descriptions

See “Detail lines for reports I05 through I13” on page 276.

Sample reports

A sample report is shown below. The report is expanded to the third level.

```

File View Navigate Help
-----
I10: IMS WAIT Time by DL/I Call (0805/ADSMPP) Row 00001 of 00037
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of Time * 10.00% ±4.0
*....1....2....3....4....5....6....7....8
00012     GHU-DBSCN001(4) BBSAP0  45.17 =====
→ IMS     IMS Subsystem      45.17 =====
→ DFSREP00 IMS Dispatcher Int  45.17 =====

00003     GHU-DBSCN001(4) BBSAP0  42.88 =====
→ IMS     IMS Subsystem      42.88 =====
→ DFSREP00 IMS Dispatcher Int  42.71 =====
→ DBFDEDB0 IMS Module        0.16

00011     GHU-DBSCA001(10) BBSAP  2.45 ==
→ IMS     IMS Subsystem      2.45 ==
→ DBFDEDB0 IMS Module      2.45 ==

00002     GHU-DBSCA001(10) BBSAP  2.29 ==
→ IMS     IMS Subsystem      2.29 ==
→ DBFDEDB0 IMS Module      2.29 ==

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level.
-	DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level.
SV	DL/I call, Category, SVC, SQL command	Sort next level by value.
SN	DL/I call, Category, SVC, SQL command	Sort next level by name.

Cmd	When Applied To Object	Action
M	Load Module, CSECT	Display load module information.
P	DL/I call, CSECT, SQL command	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```
File View Navigate Help
+----- The following report line was selected -----+
| 00012      GHU-DBSCN001(4) BBSAP0 45.17 000000000000000000000000 |
+-----+

Calculation Details
IMS DL/I call wait time measurements      276
Total measurements                        611
Percent of total                          45.17%

DL/I Call Information
Function code      GHU                      PSB Name      BBSFIN00
PCB Name          DBSCN001                  IMS Id-Region  IMSP-ADSMPP
PCB Number        4                        Call type     CBLTDLI
CSECT/module      BBSAP011 in BBSAP011     Offset of call 00000E68
Sample count      277                      Call count     49
DLI CPU time      0.02                     Service time    8.21

SSA/FSA          01 SBSCNTL (CNTLNUM =...)
```

I11 - IMS DL/I activity by PSB

Usage

Use this report to see how time is consumed in IMS-dependent regions. All time is reported regardless of whether the time is CPU usage or wait. This report shows activity by IMS PSB and is meaningful when measuring a region in which multiple IMS PSBs are scheduled (for example, a MPP region). Only time observed while an IMS PSB was active is reported. Time is identified both within the processing of DL/I calls and outside of DL/I call processing but only when an IMS PSB is active.

This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) as well as IMS batch DL/I regions.

Note:

You should not use this report to analyze CICS measurements.

Quantification

Each report line quantifies time as a percentage of the overall time IMS PSBs were active. Each quantity is expressed as a percentage representing the ratio of the number of samples in which the active IMS program was observed compared to the total number of samples IMS programs were active. Any time when no IMS programs were active is excluded. This ensures that quantifications are not distorted by inactive intervals such as those that occur between scheduled transaction.

Detail line hierarchy

An unexpanded I11 report shows a line for each IMS PSB in which activity was observed. The name field reports the PSB name. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```
Level 1 Trancode, PSB Name or 'NONIMS'
  Level 2 IMSDLI - DL/I call execution
    Level 3 DL/I call identification
      Level 4 Category
        Level 5 Load module
          Level 6 CSECT
            Level 4 SVC total
              Level 5 SVCnnn
                Level 6 Load module
                  Level 7 CSECT
  Level 2 APPLCN - application code
    Level 3 Load module
      Level 4 CSECT
  Level 2 SYSTEM - system routines
    Level 3 Category
      Level 4 Load module
        Level 5 CSECT
    Level 3 SVC total
      Level 4 SVCnnn
        Level 5 Load module
          Level 6 CSECT

  Level 2 NOSYMB - no load module name
    Level 3 hexadecimal addresses
```

Detail line descriptions

PSB detail line

This is the first-level detail line. It aggregates activity by IMS transaction.

Under Heading	This is Displayed
Name	IMS PSB Name. NONIMS to indicate IMS activity for which no PSB has been scheduled.
Description	The type of IMS dependent region: BMP, MPP, IFP, etc.
Percent of Time	The percentage of activity measured under the indicated IMS PSB.

Other detail lines

Other detail lines are subcategories and show objects based on observed PSW addresses. See [“Detail lines for reports I05 through I13” on page 276](#).

Sample reports

A sample report is shown below. The report is expanded to the third level.

```

File View Navigate Help
-----
I11: IMS DL/I Activity by PSB (0805/ADSMPP)                      Row 00001 of 00034
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of Time * 10.00% ±3.5
*....1....2....3....4....5....6....7....8
BBSFIN00  PSB in MPP region      100.00 =====
→ IMSDLI  IMS DL/I Calls          77.83 =====
→ 00012   GHU-DBSCN001(4) BB    35.28 =====
→ 00003   GHU-DBSCN001(4) BB    33.50 =====
→ 00001   GU-IOPCB(1) BBSFIN    2.29 ==
→ 00002   GHU-DBSCA001(10) B    2.16 ==
→ 00011   GHU-DBSCA001(10) B    1.91 ==
→ 00018   REPL-DBSCN001(4) B    0.50
→ 00006   GHU-DBSTL001(13) B    0.38
→ 00015   GHU-DBSTL001(13) B    0.38
→ 00009   REPL-DBSCN001(4) B    0.38
→ 00007   ISRT-DBSTL001(13)      0.38
→ 00004   GHU-DBSCA002(11) B    0.12
→ 00017   REPL-DBSCA001(10)      0.12
→ 00013   GHU-DBSCA002(11) B    0.12
→ 00008   REPL-DBSCA001(10)      0.12
→ 00010   ISRT-IOPCB(1) BBSF     0.12
→ SYSTEM  System/OS Services        16.94 =====
→ SVC     SVC Routines          15.28 =====
→ LERUNLIB Language Environme    1.14 ==
→ IMS     MVS System              0.50
→ APPLCN  Application Code        5.09 ==
→ BKN00SUP Application Progra    2.03 ==
→ BKNCS102 Application Progra    1.27 ==
→ BKNCS101 Application Progra    0.38

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	PSB, DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level.
-	PSB, DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level.
SV	PSB, DL/I call, Category, SVC, SQL command	Sort next level by value.
SN	PSB, DL/I call, Category, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	DL/I call, CSECT, SQL command	Display source program mapping.

Cmd	When Applied To Object	Action
C01	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C01 report subset.
C02	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C02 report subset.
C03	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C03 report subset.
C08	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C08 report subset.
C09	PSB, DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C09 report subset.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```
File View Navigate Help
-----+-----
+----- The following report line was selected -----+
| > 00012      GHU-DBSCN001(4) BB 35.28 000000000000000000 |
+-----+-----

Calculation Details
IMS DL/I call activity measurements      277
Total measurements                      785
Percent of total                        35.28%

DL/I Call Information
Function code      GHU                      PSB Name      BBSFIN00
PCB Name          DBSCN001                  IMS Id-Region  IMSP-ADSMPP
PCB Number        4                        Call type     CBLTDLI
CSECT/module      BBSAP011 in BBSAP011      Offset of call 00000E68
Sample count      277                      Call count     49
DLI CPU time      0.02                     Service time    8.21

SSA/FSA          01 SBSCNTL (CNTLNUM =...)
```

I12 - IMS DL/I activity by transaction

Usage

Use this report to see how time is consumed in IMS-dependent regions. All time is reported regardless of whether the time is CPU usage or wait. This report shows activity by IMS transaction and is meaningful when measuring a region in which multiple IMS transactions are scheduled (for example, a MPP region). Only time observed while an IMS PSB was active is reported. Time is identified both within the processing of DL/I calls and outside of DL/I call processing but only when an IMS PSB is active.

This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) as well as IMS batch DL/I regions.

Note:

You should not use this report to analyze CICS measurements.

Quantification

Each report line quantifies time as a percentage of the overall time IMS PSBs were active. Each quantity is expressed as a percentage representing the ratio of the number of samples in which the active IMS program was observed compared to the total number of samples IMS programs were active. Any time when no IMS programs were active is excluded. This ensures that quantifications are not distorted by inactive intervals such as those that occur between scheduled transaction.

Detail line hierarchy

An unexpanded I12 report shows a line for each IMS transaction observed. The name field reports the transaction code. In the event that no IMS transaction was active but a PSB was active, the PSB will be identified in the report line. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```
Level 1 Trancode, PSB Name or 'NONIMS'
  Level 2 IMSDLI - DL/I call execution
    Level 3 DL/I call identification
      Level 4 Category
        Level 5 Load module
          Level 6 CSECT
      Level 4 SVC total
        Level 5 SVCnnn
          Level 6 Load module
            Level 7 CSECT
  Level 2 APPLCN - application code
    Level 3 Load module
      Level 4 CSECT
  Level 2 SYSTEM - system routines
    Level 3 Category
      Level 4 Load module
        Level 5 CSECT
    Level 3 SVC total
      Level 4 SVCnnn
        Level 5 Load module
          Level 6 CSECT

Level 2 NOSYMB - no load module name
  Level 3 hexadecimal addresses
```

Detail line descriptions

Transaction detail line

This is the first-level detail line. It aggregates activity by IMS transaction. A PSB line is reported for any activity under IMS that is not under an IMS transaction.

Under Heading	This is Displayed
Name	IMS transaction code
Description	The PSB to which the IMS transaction belongs.
Percent of Time	The percentage of activity measured while executing the indicated IMS transaction.

Other detail lines

Other detail lines are subcategories and show objects based on observed PSW addresses. See [“Detail lines for reports I05 through I13” on page 276.](#)

Sample reports

A sample report is shown below. The report is expanded to the third level.

```

File View Navigate Help
-----
I12: IMS DL/I Activity by Txn (0805/ADSMPP) Row 00001 of 00046
Command ==> _____ Scroll ==> CSR
-----
Name      Description      Percent of Time * 10.00% ±3.5
*....1...2...3...4...5...6...7...8
BBSDR000  Txn in PSB BBSFIN00  52.48 =====
→ IMSDLI  IMS DL/I Calls      38.47 =====
→ 00003   GHU-DBSCN001(4) BB  33.50 =====
→ 00002   GHU-DBSCA001(10) B  2.16 ==
→ 00001   GU-IOPCB(1) BBSFIN  1.27 ==
→ 00006   GHU-DBSTL001(13) B  0.38
→ 00009   REPL-DBSCN001(4) B  0.38
→ 00007   ISRT-DBSTL001(13)  0.38
→ 00004   GHU-DBSCA002(11) B  0.12
→ 00008   REPL-DBSCA001(10)  0.12
→ 00010   ISRT-IOPCB(1) BBSF  0.12
→ SYSTEM  System/OS Services  9.29 =====
→ SVC     SVC Routines       8.53 =====
→ LERUNLIB Language Environme 0.50
→ MVS     MVS System         0.25
→ APPLCN  Application Code    4.58 ==
→ BKN00SUP Application Progra  2.03 ==
→ BKNCS102 Application Progra 1.14 ==

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Expand to reveal next level.

Cmd	When Applied To Object	Action
-	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Collapse to hide next level.
SV	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Sort next level by value.
SN	Trancode, PSB, Category, DL/I call, Load Module, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	Load Module, CSECT, DL/I call, SQL command	Display source program mapping.
C01	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C01 report subset.
C02	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C02 report subset.
C03	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C03 report subset
C08	Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C08 report subset.
C09	Trancode, PSB, Category, DL/I call, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C09 report subset.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File  View  Navigate  Help
+-----+
+-----+ The following report line was selected +-----+
| BBSDR000  Txn in PSB BBSFIN00      52.48 0000000000000000000000000000 |
+-----+
+-----+

Calculation Details
  IMS DL/I call activity measurements      412
  IMS transaction                          BBSDR000
  Total measurements                       785
  Percent of total                         52.48%

IMS Transaction Information
  IMS Trancode      BBSDR000      IMS system      IMSP
  PSB name          BBSFIN00      Txn count       50
  Total time        10.1332       Total CPU time 0.4327
+-----+

```

I13 - IMS DL/I activity by DL/I call

Usage

Use this report to see how time is consumed in IMS-dependent regions by specific DL/I calls. All time is reported regardless of whether the time is CPU usage or wait.

This report is intended for measurements of IMS-dependent regions (MPP, BMP, FPP) as well as IMS batch DL/I regions.

Note:

You should not use this report to analyze CICS measurements.

Quantification

Each report line quantifies time as a percentage of the total time observed for all DL/I call processing. Time observed outside of DL/I call processing is excluded from the calculation. Each quantity is expressed as a percentage representing the ratio of the number of samples for the object described by the report detail line to the total number of samples in DL/I call processing.

Detail line hierarchy

An unexpanded I13 report shows a line for each IMS DL/I call. The name field shows a sequence number assigned to each unique DL/I call. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```

Level 1 DL/I call identification
Level 2 Category
Level 3 Load module
Level 4 CSECT
Level 2 SVC total
Level 3 SCVnnn
Level 4 Load module
Level 5 CSECT

```

Detail line descriptions

See “Detail lines for reports I05 through I13” on page 276.

Sample reports

A sample report is shown below. The report is expanded to the third level.

```

File View Navigate Help
-----
I13: DL/I Activity by DL/I Call (0805/ADSMPP) Row 00001 of 00089
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of DLI Time * 10.00% ±4.0
*....1....2....3....4....5....6....7....8
00012     GHU-DBSCN001(4) BBSAP0 45.33 =====
→ IMS     IMS Subsystem          45.33 =====
→ DFSREP00 IMS Dispatcher Int    45.17 =====
→ DFSLMGR0 IMS Global Lock Ma 0.16

00003     GHU-DBSCN001(4) BBSAP0 43.04 =====
→ IMS     IMS Subsystem          42.88 =====
→ DFSREP00 IMS Dispatcher Int    42.71 =====
→ DBFDEDB0 IMS Module              0.16
→ SVC     SVC Routines           0.16
→ SVC138  PGSER                  0.16

00001     GU-IOPCB(1) BBSFIN00+0 2.94 ==
→ IMS     IMS Subsystem          2.29 ==
→ DFSREP00 IMS Dispatcher Int    0.65
→ DBFSYNCO IMS Module              0.49
→ DFSQGU00 IMS Module              0.32

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display context help information.
++	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Show additional details.
+	DL/I call, Category, Load Module, SVC, SQL command	Expand to reveal next level.
-	DL/I call, Category, Load Module, SVC, SQL command	Collapse to hide next level.
SV	DL/I call, Category, Load Module, SVC, SQL command	Sort next level by value.
SN	DL/I call, Category, Load Module, SVC, SQL command	Sort next level by name.
M	Load Module, CSECT	Display load module information.
P	DL/I call, CSECT, SQL command	Display source program mapping.
C01	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C01 report subset.
C02	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C02 report subset.
C03	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C03 report subset
C08	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C08 report subset.

Cmd	When Applied To Object	Action
C09	DL/I call, Category, Load Module, SVC, CSECT, SQL command, Unresolved Address	Display C09 report subset.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size.
+	Percent CPU	Zoom in scale.
-	Name	Collapse to show only first level.
-	Description	Reduce field size.
-	Percent CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

File View Navigate Help			
+----- The following report line was selected -----+			
00012	GHU-DBSCN001(4)	BBSAP0 45.33	000000000000000000000000
+-----+			
Calculation Details			
IMS DL/I call activity measurements	277		
Total measurements	611		
Percent of total	45.33%		
DL/I Call Information			
Function code	GHU	PSB Name	BBSFIN00
PCB Name	DBSCN001	IMS Id-Region	IMSP-ADSMPP
PCB Number	4	Call type	CBLTDLI
CSECT/module	BBSAP011 in BBSAP011	Offset of call	00000E68
Sample count	277	Call count	49
DLI CPU time	0.02	Service time	8.21
SSA/FSA	01 SBSCNTL (CNTLNUM =...)		

I14 - IMS PSB/PCB attributes

Usage

This report is intended primarily for use when analyzing measurements using printed reports. Use I14 to look up detailed information about PSBs (and their PCBs) referred to by detail lines in other reports. When analyzing data in interactive mode, you can look up this information by pressing the ENTER key (or entering the “++” line command) on any detail line that refers to the PSB.

Detail line descriptions

PSB information

The following information is reported for each PSB:

Under Heading	This is Displayed
PSB Name	The name of the PSB.
IMS System	The system ID of the IMS subsystem. This information might not be available for a CICS measurement.
No. of PCBs	The number of PCBs in the PSB. This information is available only if the IMS+ measurement option was enabled.
LIST=NO PCBs	The number of PCBs in the PSB defined with the LIST=NO option. These PCBs are not visible to the application in the PSB list passed by IMS. They are accessed by symbolic name using the AIB interface. This information is available only if the IMS+ measurement option was enabled.
Txn Count	The number of IMS transactions under this PSB counted during the measurement. This information is available only if the IMS+ measurement option was enabled.
DL/I calls	The number of DL/I calls executed under this PSB during the measurement. This information is available only if the IMS+ measurement option was enabled.
Sample count	The number of times execution under this PSB was sampled.

PCB information

The PCBs are listed if the IMS+ measurement option was enabled.

Under Heading	This is Displayed
PSBNum	The relative PCB number.
Name	The symbolic name of the PCB defined in the label field of the PCB macro.
Type	TP or DB indicates a data communications or data base PCB.
DBD/LTRM	The data base name for a data base PCB. The PCB LTERM parameter value for a data communications PCB.
PROCOPT	The processing options for a data base PCB.
LIST	Indicates whether the PCB was defined as LIST=YES or LIST=NO.

Sample reports

A sample report is shown below.

```

File View Navigate Help
-----
I14: IMS PSB/PCB Attributes (0805/ADSMPP)                      Row 00001 of 00036
Command ==> _____ Scroll ==> CSR

```

IMS PSB Information for PSBName BBSFIN00

PSB Name	BBSFIN00	IMS system	IMSP
No.of PCBs	27	LIST=NO PCBs	12
Txn count	99	DL/I calls	1010
Sample count	611		

PCBNum	Name	Type	DBD/LTRM	PROCOPT	LIST
1	IOPCB	TP			YES
2	ALT1	TP			YES
3	ALT2	TP			YES
4	DBSCN001	DB	DBSCN000	A	YES
5	DBSCN002	DB	DBSCN000	A	YES
6	DBSCN003	DB	DBSCN000	A	YES
7	DBSCI001	DB	DBSCI000	A	YES
8	DBSCI002	DB	DBSCI000	A	YES
9	DBSCI003	DB	DBSCI000	A	YES
10	DBSCA001	DB	DBSCA000	A	YES
11	DBSCA002	DB	DBSCA000	A	YES
12	DBSCA003	DB	DBSCA000	A	YES
13	DBSTL001	DB	DBSTL000	A	YES
14	DBSTL002	DB	DBSTL000	A	YES
15	DBSTL003	DB	DBSTL000	A	YES
16	DBSCNA01	DB	DBSCN000	A	NO
17	DBSCNA02	DB	DBSCN000	A	NO
18	DBSCNA03	DB	DBSCN000	A	NO

I15 - IMS DL/I call attributes

Usage

This report is intended primarily for use when analyzing measurements using printed reports. Use I15 to look up detailed information about DL/I calls referred to by detail lines in other reports. When analyzing data in interactive mode, you can look up this information by pressing the ENTER key (or entering the “++” line command) on any detail line that refers to the DL/I call.

Detail line descriptions

DL/I call information

The following information is reported for each DL/I call:

Under Heading	This is Displayed
DL/I Call ID	A unique reference number assigned to the call.
Function Code	The DL/I function code.
PSB Name	The name of the PSB under which all occurrences of this DL/I call executed.
PCB Name	The name of the PCB referenced by the DL/I call.
IMS ID-Region	The ID of the IMS subsystem and the name of the IMS-dependent region.
PCB Number	The relative PCB number in its PSB.
Call Type	The language interface used by the call: <ASMTDLI, CBLTDLI, etc.> was sampled.
CSECT/Module	The CSECT name and load module of the DL/I call.

Under Heading	This is Displayed
Offset of call	The offset in the CSECT of the call.
Sample count	The number of times activity in this DL/I call was sampled.
Call count	The number of occurrences of this DL/I call observed. This information is available only if the IMS+ measurement option was enabled.
DL/I CPU time	The number of seconds of CPU time consumed by all occurrences of the DL/I call. This information is available only if the IMS+ measurement option was enabled.
Service time	The number of seconds of service time for all occurrences of the DL/I call. This information is available only if the IMS+ measurement option was enabled.

Sample reports

A sample report is shown below.

```

File View Navigate Help
-----
I15: IMS DL/I Call Attributes (0805/ADSMPP)                      Row 00001 of 0192
Command ==> _____ Scroll ==> CSR

DL/I Call Id 00001

Function code  GU          PSB Name      BBSFIN00
PCB Name       IOPCB       IMS Id-Region  IMSP-ADSMPP
PCB Number     1          Call type     CBLTDLI
CSECT/module   BBSFIN00 in BBSFIN00 Offset of call 0000038C
Sample count    9          Call count    60
DL/I CPU time  0.14        Service time  0.19

DL/I Call Id 00002

Function code  GHU          PSB Name      BBSFIN00
PCB Name       DBSCA001     IMS Id-Region  IMSP-ADSMPP
PCB Number     10          Call type     CBLTDLI
CSECT/module   BBSAP012 in BBSAP012 Offset of call 00000E0E
Sample count   16          Call count    50
DLI CPU time   0.04        Service time  0.66

SSA/FSA        01 SBSABAS (ACCTNUM =...)

```

I16 - IMS transaction service times

Usage

Use this report to see information about IMS transaction service times. This report is meaningful only when measuring an IMS-dependent region in which transactions are executed. The IMS+ feature must have been enabled when the measurement was performed.

Quantification

Use this report to see information about IMS transaction service times. This report is meaningful only when measuring an IMS-dependent region in which transactions are executed. The IMS+ feature must have been enabled when the measurement was performed.

Detail line hierarchy

The I16 report shows one detail line level. It cannot be expanded.

Detail line descriptions

The following information is reported for each DL/I call:

Under Heading	This is Displayed
TranCode	The IMS transaction code.
PSB/PGM	The name of the PSB and program.
Counts: Txns	The number of executions of the transaction that occurred during the measurement interval.
Counts: Fetch	The number of times the program was fetched by IMS. In general, the program is fetched when the transaction is scheduled. The number of fetches of the program is also affected by the limit count value for the transaction. A high fetch count could mean that a performance improvement might be realized by raising the limit count or pre-loading the program.
Counts: Sched	The number of times the program was scheduled for successive executions of the transaction. This is the count of sets of consecutive transaction executions that occurred before QC status was returned to the GU-IOPCB call.
Total Time	The total execution time of the transaction during the measurement interval.
Avg/Txn	The average execution time for the transaction based on the measurement interval.
CPU Time	The total CPU time consumed by all executions of the transaction during the measurement interval.

Sample reports

A sample report is shown below.

```
File View Navigate Help
-----
I16: IMS Transaction Service Times (0805/ADSMPP)          Row 00001 of 0002
Command ===> ----- Scroll ===> CSR

TranCode   PSB/PGM   ----- Counts ----- Times (secs) -----
Txns  Fetch  Sched  Total Time  Avg/Txn  CPU Time
BBSDR000   BBSFIN00   50     20     20      10.133    0.202    0.432
BBSCR000   BBSFIN00   49     20     20       9.438    0.192    0.407
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Trancode	Display context help information.
++	Trancode	Show additional details.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| BBSDR000  BBSFIN00  50  20  20  10.133  0.202  0.432 |
+-----+

IMS Transaction Information
IMS Trancode  BBSDR000      IMS system  IMSP
PSB name      BBSFIN00      Txn count  50
Total time    10.1332       Total CPU time 0.4327
+-----+
```

I17 - IMS transaction DL/I call counts

Usage

Use this report to see information about the number of DL/I calls issued by each of the measured IMS transactions. This report is meaningful only when measuring an IMS-dependent region in which transactions are executed. The IMS+ feature must have been enabled when the measurement was performed.

Quantification

Each report line shows information pertaining to one IMS transaction.

Detail line hierarchy

An unexpanded I17 report shows a line for each IMS transaction code for which transaction execution was observed. You can expand each line to reveal one additional hierarchical level of detail. The hierarchy is illustrated here:

```
Level 1 IMS Transaction
Level 2 DL/I Call
```

Detail line descriptions

IMS transaction detail line

This is the first-level detail line. Each line shows information about one IMS transaction code.

Under Heading	This is Displayed
Tran/PCB	The IMS transaction code.
PSB/DBD	The name of the PSB and program.
PCBNum	No data is reported in the transaction detail line.
Func	No data is reported in the transaction detail line.
DL/I Call Count: Total	The total number of DL/I calls counted for all executions of the transaction during the measurement interval.
DL/I Call Count: Minimum	The minimum number of DL/I calls observed in a single execution of the transaction during the measurement interval.

Under Heading	This is Displayed
DL/I Call Count: Maximum	The maximum number of DL/I calls observed in a single execution of the transaction during the measurement interval.
DL/I Call Count: Average	The average number of DL/I calls per transaction for all executions of the transaction during the measurement interval.

DL/I call detail line

This is the second-level detail line. Each line shows information about a DL/I call for which execution was observed under the transaction.

Under Heading	This is Displayed
Tran/PCB	The name of the PCB referenced by the indicated DL/I call.
PSB/DBD	The DBD name for the DL/I call for database calls.
PCBNum	The relative PCB number of the PCB referenced by the DL/I call.
Func	The DL/I function code.
DL/I Call Count: Total	The total number of occurrences of the indicated DL/I call counted for all executions of the transaction during the measurement interval.
DL/I Call Count: Minimum	The minimum number of occurrences of the indicated DL/I call observed in a single execution of the transaction during the measurement interval.
DL/I Call Count: Maximum	The maximum number of occurrences of the indicated DL/I call observed in a single execution of the transaction during the measurement interval.
DL/I Call Count: Average	The average number of occurrences of the indicated DL/I call per transaction during the measurement interval.

Sample reports

A sample report is shown below.

```

File View Navigate Help
-----
I17: IMS Transaction DL/I Call Counts (0805/ADSMPP)          Row 00001 of 0002
Command ==> _____ Scroll ==> CSR

TranPCB    PSB/DBD    PCBNum    Func      ----- DL/I Call Counts -----
          Total    Minimum    Maximum    Average
BBSR000    BBSFIN00      490        10         10      10.00
BBSR000    BBSFIN00      500        10         10      10.00

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Trancode, PCB	Display context help information.
+	Trancode	Show additional details.

Cmd	When Applied To Object	Action
-	Trancode	Collapse to hide next level.
++	Trancode, PCB	Show additional details.

on headings

Cmd	When Applied To Object	Action
?	Tran/PCB	Display context help information.
+	Tran/PCB	Expand to reveal all entries.
-	Tran/PCB	Collapse to show only first level.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| BBSCR000  BBSFIN00          490      10      10      10.00 |
+-----+
IMS Transaction Information
IMS Trancode  BBSCR000          IMS system      IMSP
PSB name      BBSFIN00          Txn count     49
Total time    9.4387            Total CPU time 0.4074
+-----+

```

I18 - IMS CPU/Svc time by DL/I calls

Usage

Use this report to see information about exact CPU times and service times for DL/I calls. The IMS+ feature must have been enabled when the measurement was performed.

Quantification

Each report line shows information pertaining to one DL/I call.

Detail line hierarchy

The I18 report shows one detail line level. It cannot be expanded.

Detail line descriptions

Under Heading	This is Displayed
Call	A unique reference number assigned to the DL/I call.
Func	The DL/I function code.
PCB Name	The name of the PCB referenced by the DL/I call.
Location	The location of the DL/I call in CSECT+offset format.
Count	The number of executions of the DL/I call counted.

Under Heading	This is Displayed
Svc time/Prcnt	The total service time for all executions of this DL/I call and the percentage of the total DL/I call service time.
CPU time/Prcnt	The total CPU time consumed by all executions of this DL/I call and the percentage of the total DL/I call CPU time.

Sample reports

A sample report is shown below.

File View Navigate Help								
I18: IMS CPU/Service Time by DL/I Call (0805/ADSMPP)						Row 00001 of 0018		
Command ==>						Scroll ==> CSR		
---- DL/I Processing Time ----								
Call	Func	PCB Name	Location	Count	Svc Time/Prcnt		CPU Time/Prcnt	
0012	GHU	DBSCN001	BBSAP011+0E68	49	8.210	44.4%	0.028	4.8%
0003	GHU	DBSCN001	BBSAP012+0EE4	50	7.823	42.3%	0.031	5.4%
0002	GHU	DBSCA001	BBSAP012+0E0E	50	0.664	3.5%	0.048	8.3%
0011	GHU	DBSCA001	BBSAP011+0D92	49	0.590	3.1%	0.047	8.2%
0001	GU	IOPCB	BBSFIN00+038C	119	0.557	3.0%	0.148	25.8%
0015	GHU	DBSTL001	BBSAP011+111E	49	0.134	0.7%	0.045	7.8%
0006	GHU	DBSTL001	BBSAP012+11B0	50	0.114	0.6%	0.043	7.5%
0018	REPL	DBSCN001	BBSAP011+12EA	49	0.107	0.5%	0.036	6.2%
0009	REPL	DBSCN001	BBSAP012+13A4	50	0.075	0.4%	0.035	6.1%
0007	ISRT	DBSTL001	BBSAP012+1252	50	0.072	0.3%	0.027	4.7%
0010	ISRT	IOPCB	BBSFIN00+0410	99	0.034	0.1%	0.010	1.7%
0016	ISRT	DBSTL001	BBSAP011+11C0	49	0.016	0.0%	0.015	2.6%
0013	GHU	DBSCA002	BBSAP011+0FF4	49	0.015	0.0%	0.011	1.9%
0004	GHU	DBSCA002	BBSAP012+1086	50	0.014	0.0%	0.010	1.7%
0005	ISRT	DBSCA002	BBSAP012+1110	50	0.011	0.0%	0.011	1.9%
0014	ISRT	DBSCA002	BBSAP011+107E	49	0.011	0.0%	0.011	1.9%

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	DL/I Call	Display context help information.
++	DL/I Call	Show additional details.

on headings

Cmd	When Applied To Object	Action
?	Call	Display context help information.
SV	Call	Sort next level by value.
SN	Call	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 0012  GHU DBSCN001  BBSAP011+0E68  49  8.210  44.4%  0.028  4.8%|
+-----+

DL/I Call Information
Function code  GHU                      PSB Name      BBSFIN00
PCB Name      DBSCN001                  IMS Id-Region IMSP-ADSMPP
PCB Number    4                        Call type     CBLTDLI
CSECT/module  BBSAP011 in BBSAP011    Offset of call 00000E68
Sample count  277                      Call count     49
DLI CPU time  0.02                     Service time   8.21

SSA/FSA      01 SBSCNTL (CNTLNUM =...)
```

I19 - IMS CPU/Svc time by PSB

Usage

Use this report to see information about exact CPU times and service times for DL/I calls by PSB. The IMS+ feature must have been enabled when the measurement was performed.

Quantification

Each report line shows information pertaining to one PSB.

Detail line hierarchy

The I19 report shows one detail line level. It cannot be expanded.

Detail line descriptions

Under Heading	This is Displayed
PSB Name	The IMS PSB name.
Txn Count	The number of transaction executions counted under the indicated PSB.
DL/I Count	The number of DL/I calls counted under the indicated PSB.
Svc time/Prcnt	The total service time for all executions of DL/I calls under the indicated PSB and the percentage of the total DL/I call service time.
CPU time/Prcnt	The total CPU time consumed by all executions of DL/I calls under the indicated PSB and the percentage of the total DL/I call CPU time.

Sample reports

A sample report is shown below.

```

File View Navigate Help
-----
I19: IMS CPU/Service Time by PSB (0805/ADSMPP) Row 00001 of 0001
Command ==> ----- Scroll ==> CSR

PSB Name      Txn   DL/I      ---- DL/I Processing Time ----
Count        Count  Count    Svc Time/Prcnt  CPU Time/Prcnt
BBSFIN00     101   1010     18.466  100.0%    0.573 100.0%

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	PSB Name	Display context help information.
++	PSB Name	Show additional details.

on headings

Cmd	When Applied To Object	Action
?	PSB Name	Display context help information.
SV	PSB Name	Sort next level by value.
SN	PSB Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| BBSFIN00      99      1010      18.466      100.0%      0.573      100.0% |
+-----+

IMS PSB Information
PSB Name      BBSFIN00      IMS system      IMSP
No.of PCBs    27      LIST=N0 PCBs      12
Txn count     99      DL/I calls      1010
Sample count  611

PCBNum  Name      Type  DBD/LTRM  PROCOPT  LIST
1      IOPCB      TP      DBSCN000  A      YES
2      ALT1      TP      DBSCN000  A      YES
3      ALT2      TP      DBSCN000  A      YES
4      DBSCN001  DB      DBSCN000  A      YES
5      DBSCN002  DB      DBSCN000  A      YES
6      DBSCN003  DB      DBSCN000  A      YES
7      DBSCI001  DB      DBSCI000  A      YES
8      DBSCI002  DB      DBSCI000  A      YES
9      DBSCI003  DB      DBSCI000  A      YES
10     DBSCA001  DB      DBSCA000  A      YES
11     DBSCA002  DB      DBSCA000  A      YES
12     DBSCA003  DB      DBSCA000  A      YES
13     DBSTL001  DB      DBSTL000  A      YES
14     DBSTL002  DB      DBSTL000  A      YES
15     DBSTL003  DB      DBSTL000  A      YES
16     DBSCNA01  DB      DBSCN000  A      NO
17     DBSCNA02  DB      DBSCN000  A      NO
18     DBSCNA03  DB      DBSCN000  A      NO
19     DBSCIA01  DB      DBSCI000  A      NO
20     DBSCIA02  DB      DBSCI000  A      NO
21     DBSCIA03  DB      DBSCI000  A      NO
22     DBSCAA01  DB      DBSCA000  A      NO
23     DBSCAA02  DB      DBSCA000  A      NO
24     DBSCAA03  DB      DBSCA000  A      NO
25     DBSTLA01  DB      DBSTL000  A      NO
```

I20 - IMS CPU/Svc time by transaction

Usage

Use this report to see information about exact CPU times and service times for DL/I calls by IMS transaction. The IMS+ feature must have been enabled when the measurement was performed.

Quantification

Each report line shows information pertaining to one IMS transaction code.

Detail line hierarchy

The I20 report shows one detail line level. It cannot be expanded.

Detail line descriptions

Under Heading	This is Displayed
TranCode	The IMS transaction code.
Txn Count	The number of executions of the transaction that occurred during the measurement interval.
Txn Total Time: Service	The total service time for all execution in the indicated transaction. This includes DL/I call execution and all other program execution.

Under Heading	This is Displayed
Txn Total Time: CPU	The total DL/I CPU time consumed by all execution in the indicated transaction. This includes DL/I call execution and all other program execution.
Svc time/% of Txn	The total service time for all executions of DL/I calls in the indicated transaction. The percentage indicates how much of the service time was in DL/I call processing. This total does not include GU-IOPCB wait times (not attributed to transaction service time) and may differ from other reports.
CPU time/% of Txn	The total CPU time for all executions of DL/I calls in the indicated transaction. The percentage indicates how much of the CPU time was in DL/I call processing.

Sample reports

A sample report is shown below.

```

File View Navigate Help
-----
I20: IMS CPU/Service Time by Transaction (0805/ADSMPP)      Row 00001 of 0002
Command ==> ----- Scroll ==> CSR

TranCode   Txn   -- Txn Total Time ----   ----- DL/I Processing Time -----
           Count  Service      CPU Time   Svc time %of Txn  CPU Time %of Txn
-----
BBSDR000   50    10.133      0.432      8.995   88.7%    0.372   86.1%
BBSR000    49     9.438      0.407      9.316   98.7%    0.356   87.4%
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	TranCode	Display context help information.
++	TranCode	Show additional details.

on headings

Cmd	When Applied To Object	Action
?	TranCode	Display context help information.
SV	TranCode	Sort next level by value.
SN	TranCode	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

File View Navigate Help

```
+----- The following report line was selected -----+
| BBSDR000    50    10.133    0.432    8.995    88.7%    0.372    86.1% |
+-----+
```

IMS Transaction Information

IMS Trancode BBSDR000

PSB name BBSFIN00

Total time 10.1332

IMS system

Txn count

Total CPU time

IMSP

50

0.4327

I21 - IMS CPU/Svc time by PCB

Usage

Use this report to see information about exact CPU times and service times for DL/I calls by individual PCB. The IMS+ feature must have been enabled when the measurement was performed.

Quantification

Each report line shows information pertaining to one DL/I call.

Detail line hierarchy

The I21 report shows one detail line level. It cannot be expanded.

Detail line descriptions

Under Heading	This is Displayed
PSB Name	The PSB name.
PCB Name	The name of the PCB.
PCBNum	The relative PCB number.
Count	The total number of executions of DL/I calls that referenced the indicated PCB.
Svc time/Percent	The total service time for all executions of DL/I calls in the indicated PCB and the percentage of the total DL/I service time.
CPU time/Percent	The total CPU time consumed by all executions of DL/I calls in the indicated PCB and the percentage of the total DL/I CPU time.

Sample reports

A sample report is shown below.

```

File View Navigate Help
-----
I21: IMS CPU/Service Time by PCB (0805/ADSMPP) Row 00001 of 0002
Command ==> _____ Scroll ==> CSR
-----
PSB Name PCB Name PCBNum Count ----- DL/I Call Counts -----
Svc time/Percent CPU Time/Percent
BBSFIN00 DBSCN001 4 198 16.216 87.8% 0.131 22.8%
BBSFIN00 DBSCA001 10 198 1.268 6.8% 0.106 18.4%
BBSFIN00 IOPCB 1 218 0.591 3.2% 0.158 27.5%
BBSFIN00 DBSTL001 13 198 0.337 1.8% 0.132 23.0%
BBSFIN00 DBSCA002 11 198 0.053 0.2% 0.044 7.6%

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	PCB	Display context help information.
++	PCB	Show additional details.

on headings

Cmd	When Applied To Object	Action
?	PSB Name	Display context help information.
SV	PSB Name	Sort next level by value.
SN	PSB Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

+----- The following report line was selected -----+
| BBSFIN00 DBSCN001 4 198 16.216 87.8% 0.131 22.8% |
+-----+

```

IMS PSB Information

```

PSB Name      BBSFIN00          IMS system      IMSP
No. of PCBs   27                LIST=NO PCBs   12
Txn count     99                DL/I calls     1010
Sample count  611

```

PCBNum	Name	Type	DBD/LTRM	PROCOPT	LIST
1	IOPCB	TP			YES
2	ALT1	TP			YES
3	ALT2	TP			YES
4	DBSCN001	DB	DBSCN000	A	YES
5	DBSCN002	DB	DBSCN000	A	YES
6	DBSCN003	DB	DBSCN000	A	YES
7	DBSCI001	DB	DBSCI000	A	YES
8	DBSCI002	DB	DBSCI000	A	YES
9	DBSCI003	DB	DBSCI000	A	YES
10	DBSCA001	DB	DBSCA000	A	YES
11	DBSCA002	DB	DBSCA000	A	YES
12	DBSCA003	DB	DBSCA000	A	YES
13	DBSTL001	DB	DBSTL000	A	YES
14	DBSTL002	DB	DBSTL000	A	YES
15	DBSTL003	DB	DBSTL000	A	YES
16	DBSCNA01	DB	DBSCN000	A	NO
17	DBSCNA02	DB	DBSCN000	A	NO
18	DBSCNA03	DB	DBSCN000	A	NO
19	DBSCIA01	DB	DBSCI000	A	NO
20	DBSCIA02	DB	DBSCI000	A	NO
21	DBSCIA03	DB	DBSCI000	A	NO
22	DBSCAA01	DB	DBSCA000	A	NO
23	DBSCAA02	DB	DBSCA000	A	NO
24	DBSCAA03	DB	DBSCA000	A	NO
25	DBSTLA01	DB	DBSTL000	A	NO

I22 - IMS Region Transaction Summary

Usage

Use this report to view a summary of the transactions that executed in the measured IMS Dependent Region. Each detail line summarizes a transaction code with the count of that transaction and the averages for Service time (duration), CPU time, and DL/I calls. The IMS+ feature must be enabled before the measurement. If the DB2+ feature is active, the average SQL calls is reported. If the MQ+ feature is active, the average MQ calls is also reported. The total line sums the transaction counts and reports the average values across all transactions for the other columns.

By default, the detail lines are sorted in ascending transaction code (Name) sequence (SN). You can also request that the data be sorted by transaction count. Enter the SV line command on TranCode heading field to sort by transaction count. The lines are sorted in ascending transaction counts. Entering either SN or SV a second time sorts the lines in the reverse order.

Quantification

Each report line shows the following information for each transaction code.

- The transaction code.
- The PSB name.
- The number of times that transaction code executed.
- The average service time (duration) per transaction.
- The average CPU time per transaction.

- The average DL/I calls per transaction.
- The average SQL calls per transaction.
- The average MQ calls per transaction.

The CPU time applies only to the region that is being measured. Any execution in other address spaces is not reported.

Detail line hierarchy

The I22 report shows only one detail line level. It cannot be expanded.

Detail line descriptions

Under Heading	This is Displayed
TranCode	The IMS transaction code.
PSB Name	The name of the PSB.
Txn count	The number of executions of the transaction that occurred during the measurement interval.
Svc/Trn	The average service time of the transaction.
CPU/Trn	The average CPU time consumed by the transaction.
DLI/Trn	The average number of DLI calls for the transaction.
SQL/Trn	The average number of SQL calls for the transaction.
MQ/Trn	The average number of MQ calls for the transaction.

Sample reports

A sample report is shown here.

```

-----
I22: IMS Region Transaction Summary (0798/IMSDMPP1)          Row 00001 of 00013
Command ==> ----- Scroll ==> CSR
IMS region name IMSDMPP1

TranCode  PSB Name  Txn count  Svc/Trn  CPU/Trn  DLI/Trn  SQL/Trn  MQ/Trn
IMSQATR1  IMSQAPG1    7    0.5325   0.1990   11.85    1.00    3.42
IMSQATR2  IMSQAPG2    6    0.5361   0.1957   12.00    1.00    3.50
IMSQATR3  IMSQAPG3    6    0.5647   0.2028   12.00    1.00    4.00
IMSQATR4  IMSQAPG1    6    0.5369   0.1979   12.00    1.00    4.00
IMSQATR5  IMSQAPG2    6    0.4952   0.1953   12.00    1.00    4.00
IMSQATR6  IMSQAPG3    6    0.4535   0.1934   12.00    1.00    4.00
IMSQATR7  IMSQAPG1    6    0.4673   0.1917   12.00    1.00    4.00
IMSQATR8  IMSQAPG2    6    0.4855   0.1916   12.00    1.00    4.00
IMSQATR9  IMSQAPG3    6    0.5171   0.1915   12.00    1.00    4.00
IVTCV     DFSIVP3   11    0.3169   0.0063    8.00    0.00    0.00
IVTN0     DFSIVP1   15    0.0067   0.0042    7.00    0.00    0.00
IVTNV     DFSIVP2   16    0.0077   0.0040    7.00    0.00    0.00
Total
2.19

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized here. You can always enter a “/” on any input field to open a menu of line commands available for that field.

on objects

Cmd	When Applied To Object	Action
?	Transaction Code	Display context help information.
++	Transaction Code	Show additional details.

on headings

Cmd	When Applied To Heading	Action
?	TranCode	Display context help information.
SV	TranCode	Sort next level by value (Txn count).
SN	TranCode	Sort next level by name.

Detail window

You can enter “++” or press the Enter key on any line to display a window that contains additional information.

A sample detail window for this report is shown here:

```
+-----+
| I22 - DETAIL Window (0798/IMSDMPP1)                                     |
| Command ==> _____ Scroll ==> CSR                               |
|-----+----- The following report line was selected -----+-----+
| IMSQATR2  IMSQAPG2      6   0.5361   0.1957   12.00    1.00    3.50 |
|-----+-----+
|
| IMS Transaction Information
|   IMS Trancode   IMSQATR2           IMS system      IMSD
|   PSB name      IMSQAPG2           Txn count        6
|   Total time    3.2171             Total CPU time   1.1745
|   Total DLI call count 72
|   Total SQL call count 6
|   Total MQ call count 21
|
+-----+
```


Chapter 6. DB2 performance analysis reports

This section describes the DB2 Performance Analysis Reports.

For information about ...	See ...
The DB2 data extractor	“Overview of DB2 data extractor” on page 326
The DB2+ data extractor	“The DB2+ data extractor” on page 326
Displaying SQL Statement Text	“Displaying SQL Statement Text” on page 327
SQL statement sequence numbers	“SQL statement sequence numbers” on page 328
DB2 Multiple Address Space Support	“Overview of DB2 Multiple Address Space Support” on page 328
F01 DB2 session statistics	“F01 - DB2 measurement” on page 328
F02 DB2 SQL activity timeline	“F02 - DB2 SQL activity timeline” on page 332
F03 DB2 SQL activity by DBRM	“F03 - DB2 SQL activity by DBRM” on page 336
F04 SQL execution summary	“F04 - DB2 SQL activity by statement” on page 339
F05 DB2 SQL activity by plan	“F05 - DB2 SQL activity by plan” on page 343
F06 SQL statement attributes	“F06 - DB2 SQL statement attributes” on page 346
F07 DB2 SQL wait time by DBRM	“F07 - DB2 SQL wait time by DBRM” on page 348
F08 DB2 SQL wait time by statement	“F08 - DB2 SQL wait time by statement” on page 351
F09 DB2 SQL wait time by plan	“F09 - DB2 SQL wait time by plan” on page 354
F10 DB2 SQL CPU/Svc time by DBRM	“F10 - DB2 SQL CPU/Svc time by DBRM” on page 356
F11 DB2 SQL CPU/Svc Time by Stmt	“F11 - DB2 SQL CPU/Svc time by stmt” on page 359
F12 DB2 SQL CPU/Svc Time by Plan	“F12 - DB2 SQL CPU/Svc time by plan” on page 363
F13 DB2 SQL threads analysis	“F13 - DB2 SQL threads analysis” on page 366
F14 DB2 CPU by plan/stored proc	“F14 - DB2 CPU by plan/stored proc” on page 367
F15 DB2 SQL CPU/Svc Time by Rq Loc	“F15 - DB2 SQL CPU/Svc Time by Rq Loc” on page 371
F16 - DB2 SQL CPU/Svc Time by Enclave	“F16 - DB2 SQL CPU/Svc Time by Enclave” on page 374
F17 - DB2 SQL CPU/Svc Time by Corrid	“F17 - DB2 SQL CPU/Svc Time by Corrid” on page 377
F18 - DB2 SQL CPU/Svc Time by Wkstn	“F18 - DB2 SQL CPU/Svc Time by Wkstn” on page 380
F19 - DB2 SQL CPU/Svc Time by EndUsr	“F19 - DB2 SQL CPU/Svc Time by EndUsr” on page 384
F20 - DB2 Class 3 Wait Times	“F20 - DB2 Class 3 Wait Times” on page 387

For information about ...	See ...
DB2 EXPLAIN report	“DB2 EXPLAIN report” on page 389
DB2SQL Category in report C01	“DB2SQL category in C01 report” on page 392

Overview of DB2 data extractor

In order to use the DB2 Performance Analysis Reports, the DB2 data extractor must be turned on when the Observation Request is entered. You must select the DB2 data extractor in the Schedule New Measurement panel.

The DB2 extractor collects measurement data directly related to SQL activity. During each sampling interval, Application Performance Analyzer interrogates DB2 to determine if the application or transaction is currently performing a DB2 request. If it is, a DB2 measurement record is created that describes the request. If the request was to process an SQL statement then details of the SQL statement are also recorded. These DB2 records later are analyzed to produce the DB2 reports.

The DB2+ data extractor

There is a second DB2 data extractor called DB2+. You will see this if your installation has it enabled, and your TSO ID has authority to use it.

Turning on the DB2+ data extractor allows Application Performance Analyzer to collect the data required to report exact SQL request counts, SQL CPU time, SQL Service Time, and to collect DB2 accounting data from SMF. The DB2+ data extractor needs to be selected to produce report F10, F11, F12, F15, F16, F17, F18, F19, and F20. Also some fields in the F01 report require DB2+.

Turning on DB2+ will insure that the SQL text reported on SQL statements is accurate. Without DB2+ turned on, it is possible for the SQL text to be incorrect. This is true for both static and dynamic SQL.

Note: Running Application Performance Analyzer measurements with the DB2+ data extractor turned on causes each DB2 call to be intercepted to collect additional data. This might have a small impact on the performance of the target address space. Care should be taken when using this feature with other products that also intercept DB2 calls as unpredictable results might occur. Your installer might have chosen to limit access to this feature.

Measuring DDF activity

If you measure a DB2 DDF address space with the DB2+ extractor turned on, Application Performance Analyzer captures the remote SQL activity detected in the address space. The data is reported in the following reports: F02, F10, F11, F12, F15, F16, F17, F18 and F19. The only other report available for a DDF measurement is S01 Measurement Profile.

For DDF measurements only, Application Performance Analyzer records the enclave CPU time, zIIP time, and zIIP on CP time for each observed SQL call.

There are some limitations when reporting on a DDF address space:

1. The SQL calls observed will not correlate one-for-one with those issued by the application at the requester site. Some calls will not be observed because they are not sent to the DDF address space.
2. Multiple SQL calls can be issued by DB2 when processing a particular SQL call. For example, an OPEN call could result in FETCH and CLOSE calls being issued by the DDF address space. These calls will have the same statement number as the OPEN call.
3. When a CALL statement results in invoking a stored procedure in the same DB2 subsystem, the stored procedure calls can also be observed in the DDF address space.
4. Some dynamic SQL statements can be shown as static. This is because the DDF address space is treating them as though they are static.
5. The SQL function of remote SQL calls display as the actual SQL function, however because they are remote:

- The SQL text might not be accurate.
 - Issuing an EXPLAIN request against a SQL statement with a type of Remote SQL can result in an error at the server rather than being caught in the TSO session of the user.
6. Some SQL calls have a statement type of Remote SQL instead of the expected SQL type. For example, INSERT and DELETE calls are observed as Remote SQL. As a consequence:
 7. A CALL statement might not always have SQL text available.
 8. A DESCRIBE statement does not have any SQL text available.

Note:

1. If you want to select a DDF address space from a list when setting up the measurement, enter **DIST* in the Job Name pattern field, unless your organization has changed the DDF address space naming standard. In that case, contact your DB2 system administrator to obtain the name of the DDF address space in your organization.
2. If you want to limit the scope of a DDF measurement, you may filter the measurement for specific Correlation Id, End User Id and/or Workstation Id in Panel 5 of the NEW dialog.
3. The Number of Samples specified for a DDF measurement is not used because each DDF call is intercepted rather than sampled. The number of samples will always be converted to approximately one per second.

Displaying SQL Statement Text

When SQL statement text is displayed in a DB2 report, a limit of up to 4,000 characters, or up to 15,000 characters is displayed, depending on the circumstances. SQL statements exceeding the limit are truncated.

For non-DDF observations, the SQL text for dynamic SQL can be up to 15,000 characters long. If the DB2V option is selected, then static SQL text can also be up to 15,000 characters long. Otherwise, static SQL text is limited to 4,000 characters.

For DDF observations, the SQL text for dynamic SQL can be up to 15,000 characters long. Static SQL statements are limited to 4,000 characters.

When the execution of a SQL statement is unsuccessful, DB2 sets a negative SQLCODE. In this situation, Application Performance Analyzer displays the negative SQLCODE in the DB2 reports, rather than the SQL statement text. Report F11 SQL CPU/Service Time by Statement provides a SETUP option to limit the display of SQL statements to only those that ended successfully or to only those that ended unsuccessfully.

SQL statement text formatting

SQL statement text is displayed unformatted in the main body of the DB2 reports. Complex SQL statements may be difficult to interpret, therefore for readability purposes the SQL statement text in the report detail windows is displayed formatted. To view the formatted SQL text in the detail window, use the '+' line command or press the Enter key as a shortcut. If statement formatting fails for any reason, it is displayed unformatted in the detail window with an accompanying warning message.

When a formatted static SQL statement is displayed, all tokens are separated by a single space, with two possible exceptions:

- Between a host variable marker and a host variable name, for example :H
- Between escaped qualified references, for example. "#SALES"."\$TARGETS"

When a formatted dynamic SQL statement is displayed:

- All tokens except escaped identifiers and string literals are displayed in upper case.
- All excess whitespace characters (including line breaks and tabs) are removed.
- All comments are removed.
- All tokens are separated by a single space.

If the unformatted SQL statement text is truncated and leaves a trailing string literal or escaped identifier with no terminating delimiter, the formatted SQL statement text will display with a matching closing delimiter appended, to prevent a parsing error.

SQL statement text with DBCS identifiers (for example, Japanese or Korean) is always displayed unformatted.

SQL statement sequence numbers

A sequence number is assigned by Application Performance Analyzer to each unique SQL statement observed during the measurement. In most DB2 reports, this sequence number is preceded by either “S” or “D” indicating if the SQL statement is static or dynamic. Application Performance Analyzer will stop sampling when 99,999 unique SQL statements are observed. When this maximum is reached the observation request is cancelled with the reason ‘Maximum SQL statements exceeded’.

Overview of DB2 Multiple Address Space Support

DB2 multiple address space (MASS) support allows you to create a request to measure a specific DB2 stored procedure or user-defined function, regardless of which WLM region it executes in.

You can also measure DB2 activity in stored procedures and user-defined functions that are invoked from any job you are measuring, by selecting the Collateral DB2 data extractor (CDB2). In this case, the measured job does not have to be a stored procedure or user-defined function.

To enter a DB2 MASS observation that measures a specific DB2 stored procedure or user-defined function:

1. Start a NEW request.
2. In Panel 1 – Job Information, enter a dash (-) in the Job name/Pattern field.
3. In Panel 5 – Subsystems, enter the DB2 subsystem name, the schema name, and the stored procedure name or the user-defined function name. You must also indicate whether you are measuring a stored procedure or a user-defined function.
4. In Panel 2 – Options, select the DB2 data extractor.
5. Complete any other relevant fields for your observation request.

Once the NEW request is complete and submitted, Application Performance Analyzer creates and starts an observation request for the DB2 stored procedure or user-defined function. It will execute for the duration specified on the NEW request.

To enter an observation that measures a DB2 batch job that invokes a DB2 stored procedure or user-defined function:

1. Start a NEW request.
2. In Panel 1 – Job Information, enter the batch job name in the Job name/Pattern field.
3. In Panel 2 – Options, select the DB2+ and CDB2 data extractors.
4. Complete any other relevant fields for your observation request.

Once the NEW request is complete and submitted, Application Performance Analyzer creates and starts an observation request for the DB2 batch job. Because the collateral DB2 extractor is on, when the DB2 batch job calls the stored procedure or user-defined function, Application Performance Analyzer generates a separate measurement. This measurement is displayed in the R02 Observation List as child observations under the parent.

F01 - DB2 measurement

Usage

Use this report to see a general overview of the DB2 measurement data. This is a good report to examine first when analyzing DB2 information. It provides an at-a-glance summary of various aspects of the measurement data and helps you choose which other reports to concentrate on. The first section of this report consists of a series of mini performance graphs illustrating various types of activity that was measured. This is followed by a section that reports measurement values.

Performance graphs

These are histograms quantifying measurement data. To the right of some of the graphs, report codes of reports that show related and more detailed information are displayed. You can display the report by skipping the cursor to one of these fields and by pressing the ENTER key.

Most Active DB2 Plans

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
DB2 Plan Name	A DB2 plan name is shown and the number of samples in which processing of SQL requests under this plan was observed. The percentage and the graph represent the proportion of the overall measurement time SQL requests were being serviced under this DB2 plan.

Most active package/DBRMs

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
Package or DBRM Name	A package or DBRM name is shown and the number of samples in which processing of SQL requests in this Package/DBRM was observed. The percentage and the graph represent the proportion of the overall measurement time SQL requests were being serviced in this Package/DBRM.

Most active SQL statements

Under Heading	This is Displayed
Samples	The number of samples done during the measurement upon which this graph is based. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
SQL Statement	The DBRM name, precompiler statement number, SQL function and the number of samples in which processing of this SQL request was observed. The percentage and the graph represent the proportion of the overall measurement time this SQL request was being serviced.

Most CPU consumptive SQL

This requires that the DB2+ measurement option was active.

Under Heading	This is Displayed
Total SQL CPU Time	The number of seconds of CPU time consumed by all executions of SQL requests during the measurement. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
SQL Statement	The DBRM name, precompiler statement number, SQL function and the number of CPU seconds of execution for this statement.

Most frequent SQL statements

This requires that the DB2+ measurement option was active. The graphic information is based on the number of SQL requests counted.

Under Heading	This is Displayed
Total SQL Calls Counted	The total number of SQL requests counted during the measurement. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
SQL Statement	The DBRM name, precompiler statement number, SQL function and the number of SQL requests counted for this statement.

Single SQL call service time

This requires that the DB2+ measurement option was active.

Under Heading	This is Displayed
Total SQL Service Time	The number of seconds of service time for all executions of SQL requests during the measurement. This number represents 100 percent of the data upon which the graph is based and is used as the divisor to compute the percentages shown in other lines in the graph.
SQL statement identification	The DBRM name, precompiler statement number, SQL function and the number of seconds of service time for this statement.

DB2 measurement statistics

A grid of values is shown for the overall DB2 measurement and then a separate grid for each DB2 subsystem. If only one subsystem was observed then only one grid appears.

Under Heading	This is Displayed
DB2 Subsystem Name	The name of the DB2 subsystem.
DB2 Version	The version of DB2 for the subsystem.
DB2 Catalog Level	The catalog level for the DB2 subsystem (applicable for only DB2 v12 and later versions, not applicable for v11 and earlier versions).
DB2 Code Func Lvl	The code level for the DB2 subsystem. It relates directly to the maintenance level of the DB2 subsystem (applicable for only DB2 v12 and later versions, not applicable for v11 and earlier versions).

Under Heading	This is Displayed
DB2 Curr Func Lvl	The currently activated function level for the DB2 subsystem (applicable for only DB2 v12 and later versions, not applicable for v11 and earlier versions).
SQL Calls Sampled	The number of unique SQL requests in which samples were taken.
SQL observations	The number of samples in which SQL activity was observed.
SQL Calls Executed	The number of SQL requests executed determined on the basis of lower and upper REQCT values for each of the DB2 threads.
Avg SQL call rate	This is the average number of SQL calls per second for the measurement interval. This is based on the SQL calls counted value if it was measured (DB2+ option active). Otherwise it is based on the SQL calls executed value.
SQL Calls Counted	The number of SQL requests counted by the DB2+ measurement feature. This value is available only if the DB2+ measurement option was selected for the measurement. This is an exact SQL request count for the measurement interval.
SQL throughput	A theoretical SQL request throughput rate based on the number of SQL requests for the portion of the measurement interval SQL processing was occurring. (Time other non-SQL application activity was taking place is excluded.) This is based on the SQL calls counted value if it was measured (DB2+ option active). Otherwise it is based on the SQL calls executed value.
SQL service time	The total service time for SQL processing. This value is available only if the DB2+ measurement option was selected for the measurement.
SQL CPU time	The total CPU time in the measured region for SQL processing. This value is available only if the DB2+ measurement option was selected for the measurement.
SQL max time	The maximum service time for a single SQL call. This value is available only if the DB2+ measurement option was selected for the measurement.
SQL max CPU	The maximum CPU time for a single SQL call. This value is available only if the DB2+ measurement option was selected for the measurement.
SQL min time	The minimum service time for a single SQL call. This value is available only if the DB2+ measurement option was selected for the measurement.
SQL min CPU	The minimum CPU time for a single SQL call. This value is available only if the DB2+ measurement option was selected for the measurement.

Sample reports

A sample report is shown here, it is a scrollable report, and is shown here split into two screen images.

```
File View Navigate Help
-----
F01: DB2 Measurement Profile (1354/CICS23A) Row 00001 of 00060
Command ==> _____ Scroll ==> CSR

Most Active DB2 Plans ----- Reports:
Samples          10,000    100.0% | | | | | | | | | | F07
PFSAMPA           1,710     17.1% ***

Most Active Package/DBRMs ----- Reports:
Samples          10,000    100.0% | | | | | | | | | | F03
PFSAMPB           1,173     11.7% **
PFSAMPB           302        3.0% *
PFSAMPA           235        2.3% *

Most Active SQL Statements ----- Reports:
Samples          10,000    100.0% | | | | | | | | | | F04
PFSAMPC:01466 FETCH         452      4.5% *
PFSAMPA:00816 SELECT        273      2.7% *
PFSAMPC:03054 FETCH        215      2.1% *
PFSAMPB:00678 SELECT        195      1.9% *
PFSAMPB:00816 UPDATE        148      1.4% *

Most CPU consumptive SQL ----- Reports:
Total SQL CPU time       6.24    100.0% | | | | | | | | | | F10 F11
PFSAMPC:01466 FETCH       1.62    25.9% ***** F12
PFSAMPA:00816 SELECT       0.88    14.2% **
PFSAMPC:03054 FETCH       0.75    12.1% **
PFSAMPB:00678 SELECT       0.68    11.0% **
PFSAMPC:01316 SELECT       0.44     7.1% *
```

+DB2 measurement statistics +-----+			
DB2 subsystem name	DBC	DB2 version	12.1
DB2 Catalog Level	12.1.503	DB2 Code Func Lvl	12.1.506
DB2 Curr Func Lvl	12.1.501		

SQL calls sampled	1,521	SQL observations	1,890
SQL calls executed	5,517	Avg SQL call rate	91.95 per sec
SQL calls counted	4,492	SQL throughput	510.83 per sec

SQL service time	11.0362 sec	SQL CPU time	6.2409 sec
SQL call max time	0.1678 sec	SQL call max CPU	0.0598 sec
SQL call min time	0.0001 sec	SQL call min CPU	0.0001 sec
+-----+			

F02 - DB2 SQL activity timeline

Usage

Use this report to see information about the chronology of SQL requests that were sampled over the duration of the measurement and to identify any calls with excessive service times. Each line shows information about one SQL call. By default, the detail lines are sorted chronologically by DB2 thread. You can also request that the data be sorted in descending sequence by SQL call duration. Enter the “SD” line command on the “Threads” heading field to sort in this sequence. This will bring to the top of the report any SQL calls that might have had excessive service times.

When the DB2+ feature is active for a measurement, the number of SQL calls displayed in this report is limited by the value of the DB2IMaxTraceSize parameter specified during Application Performance Analyzer installation, or by the value on panel 2 of the measurement request (if your installation has configured this field). The report is truncated when the number of SQL calls issued reaches the value specified for DB2IMaxTraceSize.

Quantification

When the DB2+ feature is not active, each report line shows the time at which the first sample for the identified SQL call took place. The duration of the interval execution of the SQL call was observed is also reported. This is derived from the number of samples and the sampling interval. This gives an indication of the service time for the particular SQL call.

When the DB2+ feature is active each report line shows the time at which the identified SQL call started. The service time or duration of execution of the SQL call is also reported. This is measured directly by the DB2+ feature.

Detail line hierarchy

An unexpanded F02 report shows a line for each SQL call that was measured by the DB2+ feature or that was sampled one or more times. You can expand each line to reveal one additional hierarchical level of detail (using the “+” line command).

The hierarchy is illustrated here:

```
Level 1 SQL Call
  Level 2 SQL Statement Text
    ...
```

Detail line descriptions

SQL Call execution detail line

This is the first-level detail line. Each line shows information about one SQL call.

Under Heading	This is Displayed
Thread	A sequence number identifying the DB2 thread. Application Performance Analyzer assigns a unique sequence number to each DB2 thread that was observed.
REQCT	The REQCT value for the SQL call.
Program	The name of the DBRM in which the SQL call was defined.
Stmt#	The precompiler statement number of the SQL statement.
SQL Function	The SQL function performed by the reported statement: SELECT, INSERT, UPDATE, etc.

Under Heading	This is Displayed
Samps	The number of samples recorded for the interval described by this report line. This can be zero if the identified SQL call was measured by the DB2+ feature but not sampled.
Call Time	When the DB2+ feature is not active this is the time at which the first sample in the sequence of samples reported by this line occurred. When the DB2+ feature is active each report line shows the time at which the identified SQL call started. The time is shown in minutes, seconds and hundredths of seconds.
Interval	When the DB2+ feature is not active, this is the duration of the interval, in seconds, during which samples were recorded for the indicated SQL call. This can provide a good indication of the service time for the SQL call. When the DB2+ feature is active, this is measured directly by the DB2+ feature.
CPU Time	The CPU time, in seconds, for the reported SQL call as measured by the DB2+ feature. If an SQL call was not measured by the DB2+ feature but was sampled, the CPU time will be reported as Not Available (N/A). This might occur at the beginning of a measurement before the DB2+ feature completes initialization, depending on the sampling rate and system activity.

SQL statement text detail line

This is second-level detail line shown directly under the SQL statement detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (Thread). A sample is shown here:

File View Navigate Help									
F02: DB2 SQL Activity Timeline (1264/CICS23A)						Row 00001 of 01596			
Command ==>						Scroll ==> CSR			
Thread	REQCT	Program	Stmt#	SQL Function	Samps	Call Time	Interval	CPU Time	
52577	08557	PFSAMPA	816	SELECT	1	08:24:45.96	0.00	0.002	
52577	08564	PFSAMPA	816	SELECT	1	08:24:46.25	0.00	0.001	
52577	08566	PFSAMPB	678	SELECT	1	08:24:46.27	0.00	0.002	
52577	08567	PFSAMPC	1316	SELECT	2	08:24:46.27	0.01	0.001	
52577	08569	PFSAMPC	1443	OPEN	1	08:24:46.28	0.00	0.002	
52577	08570	PFSAMPC	1466	FETCH	2	08:24:46.29	0.01	0.003	
52577	08571	PFSAMPC	1466	FETCH	2	08:24:46.30	0.01	0.002	
52577	08586	PFSAMPC	3155	SELECT	3	08:24:46.32	0.01	0.006	
52577	08587	PFSAMPC	3179	SELECT	1	08:24:46.33	0.00	0.005	
52577	08588	PFSAMPB	816	UPDATE	1	08:24:46.34	0.00	0.002	
52577	08592	PFSAMPA	816	SELECT	1	08:24:46.50	0.00	0.001	
52577	08598	PFSAMPA	816	SELECT	1	08:24:46.68	0.00	0.001	
52577	08599	PFSAMPB	408	SET HOST VAR	1	08:24:46.69	0.00	0.002	
52577	08601	PFSAMPC	1316	SELECT	5	08:24:46.69	0.03	0.003	
52577	08604	PFSAMPC	1466	FETCH	1	08:24:46.73	0.00	0.001	
52577	08605	PFSAMPC	1466	FETCH	3	08:24:46.74	0.01	0.001	
52577	08607	PFSAMPC	2989	SELECT	1	08:24:46.76	0.00	0.002	

You can enter a “+” line command to expand to the next level, which is the SQL text. The report is shown here where a thread has been expanded:

File View Navigate Help								
F02: DB2 SQL Activity Timeline (1264/CICS23A)							Row 00001 of 01599	
Command ==>							Scroll ==> CSR	
Thread	REQCT	Program	Stmt#	SQL Function	Samps	Call Time	Interval	CPU Time
52577	08557	PFSAMPA	816	SELECT	1	08:24:45.96	0.00	0.002
52577	08564	PFSAMPA	816	SELECT	1	08:24:46.25	0.00	0.001
52577	08566	PFSAMPB	678	SELECT	1	08:24:46.27	0.00	0.002
52577	08567	PFSAMPC	1316	SELECT	2	08:24:46.27	0.01	0.001
52577	08569	PFSAMPC	1443	OPEN	1	08:24:46.28	0.00	0.002
52577	08570	PFSAMPC	1466	FETCH	2	08:24:46.29	0.01	0.003
52577	08571	PFSAMPC	1466	FETCH	2	08:24:46.30	0.01	0.002
52577	08586	PFSAMPC	3155	SELECT	3	08:24:46.32	0.01	0.006
> SELECT * INTO : H , : H , : H , : H , : H : H FROM								
> DEPT WHERE XRATE = : H								
52577	08587	PFSAMPC	3179	SELECT	1	08:24:46.33	0.00	0.005
52577	08588	PFSAMPB	816	UPDATE	1	08:24:46.34	0.00	0.002
52577	08592	PFSAMPA	816	SELECT	1	08:24:46.50	0.00	0.001
52577	08598	PFSAMPA	816	SELECT	1	08:24:46.68	0.00	0.001
52577	08599	PFSAMPB	408	SET HOST VAR	1	08:24:46.69	0.00	0.002
52577	08601	PFSAMPC	1316	SELECT	5	08:24:46.69	0.03	0.003

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Thread	Display context help information.
++	Thread	Show additional details.
+	Thread	Expand to reveal next level.
–	Thread	Collapse to hide next level.

on headings

Cmd	When Applied To Object	Action
?	Thread	Display context help information.
+	Thread	Expand to reveal all entries.
–	Thread	Collapse to hide next level.
ST	Thread	Sort chronologically by DB2 thread.
SD	Thread	Sort descending by SQL call duration.
SC	Thread	Sort descending by SQL CPU Time

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. For example, entering “++” on an SQL line will cause this detail window to appear:

File View Navigate Help			
SQL Call Information			
Sample count	1	DB2 Authid	USER1
SQL CPU time	0.002	Service time	0.00
SQL Statement Information			
Subsystem name	DSN1	Attach type	SASS
Plan name	PFSAMPC	Plan bind time	no data
DBRM name	PFSAMPA	DBRM token	17D8B8DF 05CC86F8
DBRM date/time	May-08-06 15:48:14		
Package ID	PFSAMPA	Location	CABNETDB24
Collectn name	PFSAMPX1	Pkg BIND time	no data
SQL function	SELECT	Static/dynamic	Static
Precmplr stmt#	678	DBRM section#	4
CSECT/module	PFSAMPA in PFSAMPA	Offset of call	00002764
Sample count	147	SQL req count	333
SQL CPU time	0.60	Service time	0.84
SQL Statement:			
SELECT * INTO : H , : H : H , : H : H FROM DEP WHERE XRATE = : H			
DB2 Thread Information			
Thread sequence number	00001		
Attachment type	CICS		
First REQCT value observed	05256		
Time of first REQCT	14:06:47.24		
Last REQCT value observed	10613		
Time of last REQCT	14:07:46.74		
Total REQCT increments	5,358		
Duration first to last	59.49		
SQL rate for thread, per second	90.06		
Number of samples for thread	1,417		
Number of REQCT values sampled	1,292		

F03 - DB2 SQL activity by DBRM

Usage

Use this report to see how time was consumed by SQL request processing. The percentage of time is reported by each module that issued SQL requests. Expand a module line to see a further breakdown of time consumption by individual SQL request issued by the module.

Note: This report shows all SQL calls that were sampled, but when the DB2+ feature is active it will not show SQL calls that were measured by the DB2+ feature but not sampled.

Quantification

Each report line quantifies service time for all SQL requests issued by a module (DBRM). This is further broken down by SQL request. Each quantity is expressed as a percentage of the overall measurement interval.

Detail line hierarchy

An unexpanded F03 report shows a line for each module that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the “+” line command).

The hierarchy is illustrated here:

```
Level 1 Module (DBRM)
  Level 2 SQL Request
    Level 3 SQL Statement Text
  Level 2 SQL Request
    Level 3 SQL Statement Text
    ...
```

Detail line descriptions

SQL DBRM (Module) detail line

This is the first-level detail line. Each line shows information about a DBRM (Module) for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Name	The DBRM name. The DBRM name is often the same name as the corresponding module in which SQL requests were issued.
Percent of Time	The percentage of the measurement interval duration SQL Requests for the indicated DBRM Name were being processed.

SQL request detail line

This is the second-level detail line shown directly under the DBRM/Module detail line. It quantifies the aggregated service time for a specific SQL request.

Under Heading	This is Displayed
Name	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either “S” or “D” precedes the sequence number indicating if the SQL statement is static or dynamic.
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request.
SQL Function	The SQL function. The is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Percent of Time	The percentage of the measurement interval duration the indicated SQL Request was being processed.

Note: It is normal for the counts for the second-level items to add up to a higher value than the first level line. The reason for this is that the program level line shows the percentage of time DB2 processing is active. For a sample, DB2 is counted as being active only once, regardless of the number of SQL statements being processed (concurrently). So its percentage can be lower than the sum of the individual SQL request statement percentages because of overlaps.

SQL statement text detail line

This is third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (DBRM Name). A sample is shown here:

```

File View Navigate Help
-----
F03: SQL Activity by Module (0659/CICS23A) Row 00001 of 00003
Command ==> _____ Scroll ==> CSR
Name Stmt# SQL Function Percent of Time * 10.00% ±1.1%
*....1....2....3....4....5....6....7.
PFSAMPC 17.22 =====
PFSAMPB 6.31 ===
PFSAMPA 2.00 =

```

You can enter the “+” line command on a DBRM Name to expand to the next level, which is SQL commands. Then you can expand the SQL commands to show the SQL. A sample is shown here with the first DBRM expanded, and then one of the SQL commands expanded:

```

File View Navigate Help
-----
F03: SQL Activity by Module (0659/CICS23A) Row 00001 of 00019
Command ==> _____ Scroll ==> CSR
Name Stmt# SQL Function Percent of Time * 10.00% ±1.1%
*....1....2....3....4....5....6....7.
PFSAMPC 17.22 =====
→ S00012 01466 FETCH 9.13 =====
→ S00008 01316 SELECT 1.82 =
→ S00017 03054 FETCH 1.81 =
→ S00010 01347 SELECT 1.48 =
→ S00011 01443 OPEN 0.80
→ S00018 03155 SELECT 0.66
> SELECT * INTO : H , : H , : H , : H , : H : H FROM DEP
> T WHERE XRATE = : H
→ S00015 02989 SELECT 0.48
→ S00019 03179 SELECT 0.43
→ S00014 01562 CLOSE 0.26
→ S00016 03046 OPEN 0.25
→ S00020 03065 CLOSE 0.05
→ S00009 01316 SELECT 0.01

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Module, Seqno	Display context help information.
++	Module, Seqno	Show additional details.
+	Module, Seqno	Expand to reveal next level.
–	Module, Seqno	Collapse to hide next level.
SV	Module	Sort next level by value.
M	Module, Seqno	Display load module information.
SS	Module	Sort next level by Seqno.
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data.

on headings

Cmd	When Applied To Object	Action
?	Name, Percent Time	Display context help information.
+	Name, Percent Time	Expand to reveal all entries.
–	Name, Percent Time	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level entries by name

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. For example, entering “++” on an SQL line will cause this detail window to appear:

```
File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| > S00012      3179 SELECT                      0.84 |
+-----+
Calculation Details
DB2 SQL activity measurements      84
SQL request                        SELECT
In program                         PFSAMPC
Precompiler statement number       3179
Total measurements                 10,000
Percent of total                   0.84

SQL Statement Information
Subsystem name DSN1                Attach type SASS
Plan name     PFSAMPA              Plan bind time May-11-05 13:57:39

DBRM name     PFSAMPC              DBRM token      179FD30A 1B977868
DBRM date/time May-11-05 13:56:56

Package ID    PFSAMPC              Location      CABNETDB24
Collectn name PFSAMPX1             Pkg BIND time May-11-05 13:57:36

SQL function   SELECT              Static/dynamic Static
Precmplr stmt# 3179                DBRM section#  21
CSECT/module   PFSAMPC in PFSAMPC  Offset of call 00008610
Sample count   84                  SQL req count  172
SQL CPU time   0.28                Service time   0.45

SQL Statement: SELECT *
                INTO : H ,
                : H : H ,
                : H : H
                FROM VDEP
                WHERE DEPTNO = : H
```

SETUP options

The following SETUP option can be selected with the SETUP primary command:

Minimum percentage of time

You can set this option to eliminate reporting of SQL activity where the percentage of time is below a certain threshold.

F04 - DB2 SQL activity by statement

Usage

Use this report to see how time was consumed by SQL request processing. The percentage of time is reported by each SQL request.

Note: This report shows all SQL calls that were sampled, but when the DB2+ feature is active it will not show SQL calls that were measured by the DB2+ feature but not sampled.

Quantification

Each report line quantifies service time for all executions of an SQL request. Each quantity is expressed as a percentage of the overall measurement interval.

Detail line hierarchy

An unexpanded F04 report shows a line for each SQL request. You can expand each line to reveal one additional hierarchical level of detail (using the “+” line command).

The hierarchy is illustrated here:

```
Level 1 SQL Request
Level 2 SQL Statement Text
...
```

Detail line descriptions

SQL request detail line

This is the first-level detail line. It quantifies the aggregated service time for a specific SQL request.

Under Heading	This is Displayed
Seqno	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either “S” or “D” precedes the sequence number indicating if the SQL statement is static or dynamic.
Program	The DBRM name for the program that issued the SQL request.
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request.
SQL Function	The SQL function. The is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Percent of Time	The percentage of the measurement interval duration the indicated SQL Request was being processed.

SQL statement text detail line

This is second-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

A sample report is shown here:

File View Navigate Help						
F04: SQL Activity by Statement (0659/CICS23A)				Row 00001 of 00020		
Command ==>				Scroll ==> CSR		
Seqno	Program	Stmt#	SQL Function	Percent of Total Time * 10.00%	±1.1%	
				*....1....2....3....4....5....6....7...		
S00012	PFSAMPC	01466	FETCH	9.13	=====	
S00013	PFSAMPB	00816	UPDATE	3.28	==	
S00001	PFSAMPA	00816	SELECT	2.00	=	
S00008	PFSAMPC	01316	SELECT	1.82	=	
S00017	PFSAMPC	03054	FETCH	1.81	=	
S00004	PFSAMPB	00678	SELECT	1.67	=	
S00010	PFSAMPC	01347	SELECT	1.48	=	
S00002	PFSAMPB	00408	SET HOST VA	1.26	=	
S00011	PFSAMPC	01433	OPEN	0.80		
S00018	PFSAMPC	03155	SELECT	0.66		
S00015	PFSAMPC	02989	SELECT	0.48		
S00019	PFSAMPC	03179	SELECT	0.43		
S00014	PFSAMPC	01562	CLOSE	0.26		
S00016	PFSAMPC	03046	OPEN	0.25		
S00020	PFSAMPC	03065	CLOSE	0.05		
S00007	PFSAMPB	01385	SELECT	0.03		
S00005	PFSAMPB	00947	SELECT	0.02		
S00003	PFSAMPB	00408	SET HOST VA	0.01		
S00006	PFSAMPB	01163	SELECT	0.01		
S00009	PFSAMPC	01316	SELECT	0.01		

Each line can be expanded to display the SQL statement by entering the “+” line command on the Sequence Number. For example, “+” was entered on the third line in this report to display the SQL.

File View Navigate Help						
F04: SQL Activity by Statement (0659/CICS23A)				Row 00001 of 00022		
Command ==>				Scroll ==> CSR		
Seqno	Program	Stmt#	SQL Function	Percent of Total Time * 10.00%	±1.1%	
				*....1....2....3....4....5....6....7...		
S00012	PFSAMPC	01466	FETCH	9.13	=====	
S00013	PFSAMPB	00816	UPDATE	3.28	==	
S00001	PFSAMPA	00816	SELECT	2.00	=	
			> SELECT * INTO : H FROM DEPTA WHERE XRATE = : H			
S00008	PFSAMPC	01316	SELECT	1.82	=	
S00017	PFSAMPC	03054	FETCH	1.81	=	
S00004	PFSAMPB	00678	SELECT	1.67	=	
S00010	PFSAMPC	01347	SELECT	1.48	=	
S00002	PFSAMPB	00408	SET HOST VA	1.26	=	
S00011	PFSAMPC	01433	OPEN	0.80		
S00018	PFSAMPC	03155	SELECT	0.66		
S00015	PFSAMPC	02989	SELECT	0.48		
S00019	PFSAMPC	03179	SELECT	0.43		
S00014	PFSAMPC	01562	CLOSE	0.26		
S00016	PFSAMPC	03046	OPEN	0.25		
S00020	PFSAMPC	03065	CLOSE	0.05		
S00007	PFSAMPB	01385	SELECT	0.03		

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details.
+	Seqno	Expand to reveal next level.

Cmd	When Applied To Object	Action
–	Seqno	Collapse to hide next level.
M	Seqno	Display load module information.
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data

on headings

Cmd	When Applied To Object	Action
?	Seqno, Percent of Time	Display context help information.
+	Seqno	Expand to reveal all entries.
+	Percent of Time	Zoom in scale.
–	Seqno	Collapse to show only first level.
–	Percent of Time	Zoom out scale
SV	Seqno	Sort next level by value.
SS	Seqno	Sort next level by Seqno.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on an SQL line will cause this detail window to pop up:

File View Navigate Help			
+----- The following report line was selected -----+			
> S00012	3179 SELECT	0.84	
+-----+			
Calculation Details			
DB2 SQL activity measurements	84		
SQL request	SELECT		
In program	PFSAMPC		
Precompiler statement number	3179		
Total measurements	10,000		
Percent of total	0.84		
SQL Statement Information			
Subsystem name	DSN1	Attach type	SASS
Plan name	PFSAMPA	Plan bind time	May-11-05 13:57:39
DBRM name	PFSAMPC	DBRM token	179FD30A 1B977868
DBRM date/time	May-11-05 13:56:56		
Package ID	PFSAMPC	Location	CABNETDB24
Collectn name	PFSAMPX1	Pkg BIND time	May-11-05 13:57:36
SQL function	SELECT	Static/dynamic	Static
Precmplr stmt#	3179	DBRM section#	21
CSECT/module	PFSAMPC in PFSAMPC	Offset of call	00008610
Sample count	84	SQL req count	172
SQL CPU time	0.28	Service time	0.45
SQL Statement: SELECT *			
INTO : H ,			
: H : H ,			
: H : H			
FROM VDEP			
WHERE DEPTNO = : H			

SETUP options

The following SETUP option can be selected with the SETUP primary command:

Minimum percentage of time

You can set this option to eliminate reporting of SQL activity where the percentage of time is below a certain threshold.

F05 - DB2 SQL activity by plan

Usage

Use this report to see how time was consumed by SQL request processing. The percentage of time is reported by each DB2 plan under which measured SQL activity was recorded. Expand a plan line to see a further breakdown of time consumption by individual SQL request.

Note: This report shows all SQL calls that were sampled, but when the DB2+ feature is active it will not show SQL calls that were measured by the DB2+ feature but not sampled.

Quantification

Each report line quantifies service time for all SQL requests issued under a DB2 Plan. This is further broken down by SQL request. Each quantity is expressed as a percentage of the overall measurement interval.

Detail line hierarchy

An unexpanded F05 report shows a line for each module that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the “+” line command).

The hierarchy is illustrated here:

```
Level 1 DB2 Plan
  Level 2 SQL Request
    Level 3 SQL Statement Text
  Level 2 SQL Request
    Level 3 SQL Statement Text
    . . .
```

Detail line descriptions

DB2 plan detail line

This is the first-level detail line. Each line shows information about a DB2 Plan for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Seqno	A sequence number assigned to the DB2 plan.
Plan/Pgm	The DB2 plan name.
Percent of Time	The percentage of the measurement interval duration the indicated DB2 plan was being processed.

SQL request detail line

This is the second-level detail line shown directly under the DB2 Plan detail line. It quantifies the aggregated service time for a specific SQL request.

Under Heading	This is Displayed
Seqno	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either “S” or “D” precedes the sequence number indicating if the SQL statement is static or dynamic.
Plan/Pgm	The DBRM name for the program that issued the SQL request.
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request.
SQL Function	SQL Function The SQL function. The is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Percent of Time	The percentage of the measurement interval duration the indicated SQL Request was being processed.

SQL statement text detail line

This is third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

A sample report is shown here with a plan expanded to the second level (statement) and a statement expanded to show the SQL text.

```

File View Navigate Help
-----
F05:  SQL Activity by Plan (1336/CICS23A)                      Row 00001 of 00017
Command ==> ----- Scroll ==> CSR

Seqno      Plan/Pgm  Stmt#  SQL Function      Percent of Time * 10.00%  ±1.1%
          *....1....2....3....4....5....6....7.
P0001      PFSAMPA                20.60 =====
→ S00003    PFSAMPC      1466  FETCH          5.79 ===
→ S00001    PFSAMPA      816  SELECT         3.10 ==
      > SELECT NEXTLIM INTO : H FROM MRATE WHERE CURATE = : H

→ S00005    PFSAMPC      3054  FETCH          2.29 =
→ S00012    PFSAMPB       678  SELECT         1.94 =
→ S00011    PFSAMPC      1316  SELECT         1.47 =
→ S00010    PFSAMPB       816  UPDATE         1.40 =
→ S00007    PFSAMPC      3179  SELECT         1.09 =
→ S00002    PFSAMPC      1347  SELECT         0.89
→ S00009    PFSAMPC      3155  SELECT         0.79
→ S00008    PFSAMPC      2989  SELECT         0.68
→ S00013    PFSAMPC      1433  OPEN           0.60
→ S00004    PFSAMPC      3046  OPEN           0.30
→ S00014    PFSAMPC      1562  CLOSE          0.14
→ S00006    PFSAMPC      3065  CLOSE          0.12

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Plan Seqno, SQL Seqno	Display context help information.
++	Plan Seqno, SQL Seqno	Show additional details.
+	Plan Seqno, SQL Seqno	Expand to reveal next level.
–	Plan Seqno, SQL Seqno	Collapse to hide next level.
M	SQL Seqno	Display load module information.
P	SQL Seqno	Display source program mapping.
EX	SQL Seqno	Display DB2 EXPLAIN data

on headings

Cmd	When Applied To Object	Action
?	Seqno, Percent of Time	Display context help information.
+	Seqno	Expand to reveal all entries.
+	Percent of Time	Zoom in scale.
–	Seqno	Collapse to show only first level.
–	Percent of Time	Zoom out scale.
SV	Seqno	Sort next level by value.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. For example, entering “++” on an SQL line will cause this detail window to pop up:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > S00012      3179 SELECT                        0.84 |
+-----+

Calculation Details
DB2 SQL activity measurements      84
SQL request                        SELECT
In program                         PFSAMPC
Precompiler statement number      3179
Total measurements                10,000
Percent of total                  0.84

SQL Statement Information
Subsystem name DSN1                Attach type SASS
Plan name     PFSAMPA              Plan bind time May-11-05 13:57:39

DBRM name     PFSAMPC              DBRM token     179FD30A 1B977868
DBRM date/time May-11-05 13:56:56

Package ID    PFSAMPC              Location      CABNETDB24
Collectn name PFSAMPX1             Pkg BIND time May-11-05 13:57:36

SQL function   SELECT              Static/dynamic Static
Precmplr stmt# 3179                DBRM section#  21
CSECT/module   PFSAMPC in PFSAMPC  Offset of call 00008610
Sample count   84                  SQL req count  172
SQL CPU time   0.28                Service time   0.45

SQL Statement: SELECT *
                INTO : H ,
                : H : H ,
                : H : H
                FROM VDEP
                WHERE DEPTNO = : H
```

SETUP options

The following SETUP option can be selected with the SETUP primary command:

Minimum percentage of time

You can set this option to eliminate reporting of SQL activity where the percentage of time is below a certain threshold.

F06 - DB2 SQL statement attributes

Usage

Use this report to see detailed information about each of the measured SQL statements. This is useful as a reference report when working with printed copies of other DB2 reports that do not show full SQL statement details. (When browsing online, the pop-up detail windows show this information.) The following information is shown for each SQL statement for which activity was observed.

Under Heading	This is Displayed
SQL Statement ID	A unique sequence number assigned by Application Performance Analyzer to the SQL statement. This is shown in other DB2 reports that display SQL statement information.

Under Heading	This is Displayed
Subsystem name	The name of the DB2 subsystem under which the SQL statement was executed.
Attachment type	The type of DB2 attachment for the thread under which the SQL statement was executed.
Plan name	The name of the DB2 plan under which the SQL statement was executed.
Plan Bind Time	The date and time of the BIND of the plan.
DBRM Name	The name of the DBRM under which the SQL statement was executed.
DBRM Token	The DBRM consistency token. This is an 8 byte hexadecimal value that identifies the DBRM.
DBRM Date/Time	The date and time of the DBRM. This is the time at which the precompiler created the DBRM.
Package ID	The package ID. This is omitted if there was no package bound for the DBRM.
Location	The location name associated with the package. This is omitted if there was no package bound for the DBRM.
Collection Name	The collection name for the package. This is omitted if there was no package bound for the DBRM.
Package Bind Time	The date and time of the BIND of the package. This is omitted if there was no package bound for the DBRM.
SQL Function	The SQL function: SELECT, UPDATE, FETCH, etc.
Precmplr Stmt#	The statement number assigned by the precompiler to the SQL statement.
Static/Dynamic	This indicates if the SQL request was Static or Dynamic.
DBRM Section#	The section number assigned by the precompiler to the SQL statement. Groups of related statements (such as OPEN, FETCH, CLOSE) are correlated using the section number.
PREPARE Stmt#	The statement number of the corresponding PREPARE statement. This field only applies to dynamic SQL statement that operate on SQL text processed by a corresponding PREPARE statement. In order for this information to appear, it is required that execution of the corresponding PREPARE was sampled.
CSECT/Module	The name of the load module and CSECT in which the SQL call was issued.
Offset of Call	The offset of the SQL call return address in the CSECT or module.
SQL Req Count	The number of SQL calls counted for the indicated statement. This information is available only if the DB2+ measurement option was active. It indicates the number of calls counted at the indicated SQL statement number for the duration of the measurement. Counting begins when the first SQL call is sampled.
Sample Count	The number of Samples in which execution of the indicate statement was measured.
Total CPU Time	The total CPU time consumed by processing of the indicated statement in the measured region. This information is available only if the DB2+ measurement option was active. It indicates the accumulated CPU time used by the indicated SQL statement number for the duration of the measurement. Accumulation begins when the first SQL call is sampled.

Under Heading	This is Displayed
Total Service Time	The total service time for processing of the indicated statement. This information is available only if the DB2+ measurement option was active. It indicates the accumulated service time used by the indicated SQL statement number for the duration of the measurement. Accumulation begins when the first SQL call is sampled.
SQL Statement	The SQL statement text.

Sample reports

A sample report is shown here:

File View Navigate Help			
F06: DB2 SQL Statement Attributes (1623/CICS23A)			Row 00001 of 00324
Command ==> _____			Scroll ==> CSR
SQL Statement Id 00001			
Subsystem name	DSN1	Attach type	SASS
Plan name	PFSAMPA	Plan BIND time	Nov-28-04 14:11:17
DBRM name	PSSAMPA	DBRM token	17859595 050DCBBC
DBRM date/time	Nov-25-04 14:50:15		
Package ID	PFSAMPA	Location	CABNETDB24
Collectn name	PFSAMPX1	Pkg BIND time	no data
SQL function	SELECT	Static/dynamic	Static
Precmplr stmt#	816	DBRM section#	1
CSECT/module	PFSAMPA in PFSAMPA	Offset of call	000007FA
Sample count	324	SQL req count	342
SQL CPU time	0.91	Service time	1.72
SQL Statement: SELECT NEXTLIM INTO : H FROM MRATE WHERE CURATE = : H			
SQL Statement Id 00002			
Subsystem name	DSN1	Attach type	SASS
Plan name	PFSAMPA	Plan BIND time	Nov-28-04 14:11:17
DBRM name	PFSAMPC	DBRM token	17859595 06957A24
DBRM date/time	Nov-25-04 14:49:42		
Package ID	PFSAMPC	Location	CABNETDB24
Collectn name	PFSAMPX1	Pkg BIND time	no data
SQL function	SELECT	Static/dynamic	Static
Precmplr stmt#	1316	DBRM section#	6

F07 - DB2 SQL wait time by DBRM

Usage

Use this report to see information about WAIT time that occurred during the processing of SQL requests. The percentage of time is reported for each module (DBRM) that issued SQL requests and is expressed as the percentage of the total measurement interval.

In addition, a SETUP option lets you choose to see the WAIT time expressed as a percentage of SQL service time. The two quantification options help answer these questions about SQL processing wait time:

- For how much of the overall measurement interval was the address space in a WAIT during SQL processing?

- For how much of the SQL processing time was the address space in a WAIT?

You can further expand each module line to see a further breakdown and quantification by individual SQL statements.

Note: This report shows all SQL calls that were sampled, but when the DB2+ feature is active it will not show SQL calls that were measured by the DB2+ feature but not sampled.

Quantification

Each report line quantifies wait time for all SQL requests issued by a module (DBRM). This is further broken down by SQL request.

Depending on a report SETUP option, the quantities are expressed as a percentage of the overall measurement interval or as a percentage of the overall service time for the DBRM.

Keep in mind that quantification applies only to the region being measured. DB2 executes in multiple address spaces and a WAIT in the measured address space could indicate the region was suspended while part of the SQL processing was being serviced by another region.

Detail line hierarchy

An unexpanded F07 report shows a line for each module that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the “+” line command).

The hierarchy is illustrated here:

```
Level 1 Module (DBRM)
  Level 2 SQL Request
    Level 3 SQL Statement Text
  Level 2 SQL Request
    Level 3 SQL Statement Text
    ...
```

Detail line descriptions

SQL DBRM (Module) detail line

This is the first-level detail line. Each line shows information about a DBRM (Module) for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Name	The DBRM name.
Percent	Either Percent of Total Time or Percent of DBRM SQL Time depending on SETUP option. This is the percentage of time that SQL processing for the indicated DBRM was observed to be in WAIT state.

SQL request detail line

This is the second-level detail line shown directly under the DBRM/Module detail line. It quantifies the wait time for a specific SQL request.

Under Heading	This is Displayed
Name	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either “S” or “D” precedes the sequence number indicating if the SQL statement is static or dynamic.
Stmt#	The precompiler statement number of the SQL statement.

Under Heading	This is Displayed
SQL Function	The SQL function.
Percent	The percentage of the total time or of the DBRM time (depending on SETUP option) for which SQL processing for the indicated statement was in WAIT state.

SQL statement text detail line

This is third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

This shows the report with one DBRM expanded to the second level (SQL statement):

```

File View Navigate Help
-----
F07:  SQL WAIT Time by DBRM (0611/CICS23A)                      Row 00001 of 00009
Command ==> _____ Scroll ==> CSR

Name      Stmt#  SQL Function  Percent of Total Time * 10.00%  ±2.5%
                        *....1....2....3....4....5....6....7.
PFSAMPD                                25.49 =====
→ S00001    435  FETCH              12.05 =====
→ S00003    541  UPDATE              7.50 ===
→ S00004    465  FETCH              3.95 ==
→ S00002    455  FETCH              1.91 =
→ S00005    485  FETCH              0.06
→ S00008    462  OPEN               0.00
→ S00006    481  CLOSE              0.00
→ S00007    451  CLOSE              0.00

```

You can use the + command to expand an SQL statement and show the SQL text as shown here:

```

File View Navigate Help
-----
F07:  SQL WAIT Time by DBRM (0611/CICS23A)                      Row 00001 of 00009
Command ==> _____ Scroll ==> CSR

Name      Stmt#  SQL Function  Percent of Total Time * 10.00%  ±2.5%
                        *....1....2....3....4....5....6....7.
PFSAMPD                                25.49 =====
→ S00001    435  FETCH              12.05 =====
→ S00003    541  UPDATE              7.50 ===
→ S00004    465  FETCH              3.95 ==
→ S00002    455  FETCH              1.91 =
> DECLARE RATE2 CURSOR FOR SELECT * FROM CUSTAMTS
→ S00005    485  FETCH              0.06
→ S00008    462  OPEN               0.00
→ S00006    481  CLOSE              0.00
→ S00007    451  CLOSE              0.00

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	DBRM, Seqno	Display context help information.
++	DBRM, Seqno	Show additional details.

Cmd	When Applied To Object	Action
+	DBRM, Seqno	Expand to reveal next level.
–	DBRM, Seqno	Collapse to hide next level.
M	DBRM, Seqno	Display load module information.
P	Seqno	Display source program mapping.
SV	DBRM	Sort next level by value.
SS	DBRM	Sort lines by program and statement number.
EX	Seqno	Display DB2 EXPLAIN data

on headings

Cmd	When Applied To Object	Action
?	Name, Percent of Total Time	Display context help information.
+	Name	Expand to reveal all entries.
+	Percent of Total Time	Zoom in scale.
–	Name	Collapse to show only first level.
–	Percent of Total Time	Zoom out scale.
SV	Seqno	Sort next level by value.
SN	Name	Sort next level entries by name

SETUP options

Enter the SETUP primary command to select options for this report. The following option is available:

```
File View Navigate Help
+-----+
| Options for DB2 SQL wait time by DBRM |
| Enter "/" to select an option         |
|   - Quantify wait time as a percentage of total |
|     measurement interval. Unselect to quantify |
|     as a percentage of the SQL service time for |
|     the DBRM.                             |
+-----+
```

F08 - DB2 SQL wait time by statement

Usage

Use this report to see information about WAIT time that occurred during the processing of SQL requests. The percentage of time is reported for each SQL statement sampled during the measurement.

In addition, a SETUP option lets you choose to see the WAIT time expressed as a percentage of SQL service time. The two quantification options help answer these questions about SQL processing wait time:

- For how much of the overall measurement interval was the address space in a WAIT during SQL processing?

- For how much of the SQL processing time was the address space in a WAIT?

Note: This report shows all SQL calls that were sampled, but when the DB2+ feature is active it will not show SQL calls that were measured by the DB2+ feature but not sampled.

Quantification

Each report line quantifies wait time for an SQL request observed during the measurement.

Depending on a report SETUP option, the quantities are expressed as a percentage of the overall measurement interval or as a percentage of the overall service time for the SQL statement.

Keep in mind that quantification applies only to the region being measured. DB2 executes in multiple address spaces and a WAIT in the measured address space could indicate the region was suspended while part of the SQL processing was being serviced by another region.

Detail line hierarchy

An unexpanded F08 report shows a line for each observed SQL statement. You can expand each line to reveal one additional hierarchical level of detail (using the “+” line command).

The hierarchy is illustrated here:

```
Level 1 SQL Request
  Level 2 SQL Statement Text
Level 1 SQL Request
  Level 2 SQL Statement Text
  ...
```

Detail line descriptions

SQL request detail line

This is the first-level detail line. It quantifies the wait time for a specific SQL request.

Under Heading	This is Displayed
Seqno	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either “S” or “D” precedes the sequence number indicating if the SQL statement is static or dynamic.
Program	The DBRM name for the program that issued the SQL request.
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request.
SQL Function	The SQL function. The is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Percent of Total Time	The percentage of the total time or of the SQL statement service time (depending on SETUP option) for which processing for the indicated statement was in WAIT state.

SQL statement text detail line

This is second-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

This shows the report with one of the SQL statements expanded to show the next level, which is SQL text.

```

File View Navigate Help
-----
F08: SQL WAIT Time by Statement (0611/CICS23A) Row 00001 of 00010
Command ==> _____ Scroll ==> CSR

Seqno  Program  Stmt#  SQL Function  Percent of Total Time * 10.00%  ±2.5%
          *.....1.....2.....3.....4.....5.....6.....7...
S00001  PFTESTD    435    FETCH        12.05 =====
S00003  PFTESTD    541    UPDATE        7.50 ===
S00004  PFTESTD    465    FETCH        3.95 ==
S00002  PFTESTD    455    FETCH        1.91 =
          > DECLARE RATE2 CURSOR FOR SELECT * FROM CUSTAMTS

S00005  PFTESTD    485    FETCH        0.06
S00007  PFTESTD    451    CLOSE        0.00
S00008  PFTESTD    462    OPEN         0.00
S00006  PFTESTD    481    CLOSE        0.00

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details.
+	Seqno	Expand to reveal next level.
–	Seqno	Collapse to hide next level.
M	Seqno	Display load module information.
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data

on headings

Cmd	When Applied To Object	Action
?	Seqno, Percent of Total Time	Display context help information.
+	Seqno	Expand to reveal all entries.
+	Percent of Total Time	Zoom in scale.
–	Seqno	Collapse to show only first level.
–	Percent of Total Time	Zoom out scale.
SV	Seqno	Sort next level by value.
SS	Seqno	Sort next level by program and statement number.

SETUP options

Enter the SETUP primary command to select options for this report. The following option is available:

```

File View Navigate Help
+-----+
| Options for DB2 SQL wait time by statement |
+-----+
| Enter "/" to select an option              |
| - Quantify wait time as a percentage of total |
|   measurement interval. Unselect to quantify |
|   as a percentage of the SQL service time for |
|   the SQL statement.                        |
+-----+

```

F09 - DB2 SQL wait time by plan

Usage

Use this report to see information about WAIT time that occurred during the processing of SQL requests. The percentage of time is reported for each observed DB2 Plan under which SQL requests were issued. It is expressed as the percentage of the total measurement interval.

In addition, a SETUP option lets you choose to see the WAIT time expressed as a percentage of SQL service time. The two quantification options help answer these questions about SQL processing wait time:

1. For how much of the overall measurement interval was the address space in a WAIT during SQL processing?
2. For how much of the SQL processing time was the address space in a WAIT?

You can further expand each DB2 Plan line to see a further breakdown and quantification by individual SQL statements. The SQL statements can be expanded to show the SQL text.

Note: This report shows all SQL calls that were sampled, but when the DB2+ feature is active it will not show SQL calls that were measured by the DB2+ feature but not sampled.

Quantification

Each report line quantifies wait time for all SQL requests issued under a DB2 Plan. This is further broken down by SQL request.

Depending on a report SETUP option, the quantities are expressed as a percentage of the overall measurement interval or as a percentage of the overall service time under the Plan.

Keep in mind that quantification applies only to the region being measured. DB2 executes in multiple address spaces and a WAIT in the measured address space could indicate the region was suspended while part of the SQL processing was being serviced by another region.

Detail line hierarchy

An unexpanded F09 report shows a line for each module that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the “+” line command).

The hierarchy is illustrated here:

```

Level 1 DB2 Plan
Level 2 SQL Request
Level 3 SQL Statement Text
Level 2 SQL Request
Level 3 SQL Statement Text
...

```

Detail line descriptions

DB2 plan detail line

This is the first-level detail line. Each line shows information about a DB2 Plan under whose execution SQL request measurement data was recorded.

Under Heading	This is Displayed
Seqno	A sequence number assigned, by Application Performance Analyzer, to the DB2 plan.
Plan/Pgm	The name of a DB2 plan.
Percent of Total Time	The percentage of the total time or of the SQL processing time for the PLAN (depending on SETUP option) for which SQL processing under the plan was in WAIT state.

SQL request detail line

This is the second-level detail line shown directly under the Plan detail line. It quantifies the wait time for a specific SQL request.

Under Heading	This is Displayed
Seqno	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either “S” or “D” precedes the sequence number indicating if the SQL statement is static or dynamic.
Plan/Pgm	The name of a DB2 plan.
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request.
SQL Function	The SQL function. The is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Percent of Total Time	The percentage of the total time or of the SQL processing time for the PLAN (depending on SETUP option) for which processing for the indicated statement was in WAIT state.

SQL statement text detail line

This is third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

In this sample, the P0001 plan line has been expanded to the second level (SQL statement), and one of the statements has been expanded to the third level to show the SQL text.

```
File View Navigate Help
-----
F09: SQL WAIT Time by Plan (0611/CICS23A) Row 00001 of 00010
Command ==> ----- Scroll ==> CSR

Seqno    Plan/Pgm  Stmt#  SQL Function  Percent of Total Time * 10.00%  ±2.5%
          *....1....2....3....4....5....6....7...
P0001    PFPLN022      25.49 =====
→ S00001 PFTESTD      435  FETCH      12.05 =====
→ S00003 PFTESTD      541  UPDATE      7.50 =====
→ S00004 PFTESTD      465  FETCH      3.95 ==
→ S00002 PFTESTD      455  FETCH      1.91 =
      > DECLARE RATE2 CURSOR FOR SELECT * FROM CUSTAMTS
→ S00005 PFTESTD      485  FETCH      0.06
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Plan Seqno, Seqno	Display context help information.
++	Plan Seqno, Seqno	Show additional details.
+	Plan Seqno, Seqno	Expand to reveal next level.
–	Plan Seqno, Seqno	Collapse to hide next level.
M	Seqno	Display load module information.
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data

on headings

Cmd	When Applied To Object	Action
?	Seqno,Percent of Time	Display context help information.
+	Seqno	Expand to reveal all entries.
+	Percent of Time	Zoom in scale.
–	Seqno	Collapse to show only first level.
–	Percent of Time	Zoom out scale.
SV	Seqno	Sort next level by value.

SETUP options

Enter the SETUP primary command to select options for this report. The following option is available:

```
File View Navigate Help
+-----+
| Options for DB2 SQL wait time by plan |
| Enter "/" to select an option         |
|   - Quantify wait time as a percentage of total |
|     measurement interval. Unselect to quantify |
|     as a percentage of the SQL service time for |
|     the plan.                             |
+-----+
```

F10 - DB2 SQL CPU/Svc time by DBRM

Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. This option records exact SQL call counts, total SQL service time and total SQL processing CPU time by embedded SQL statement. When measuring a distributed data facility (DDF) address space, SQL Enclave and SQL zIIP

CPU times are also recorded. This report shows quantification by DBRM. You can further expand each DBRM line to see a further breakdown and quantification by individual embedded SQL statement.

Quantification

Each report line shows the following for each DBRM and, when expanded, for each SQL statement observed in the DBRM.

- Number of SQL calls.
- Total CPU time for the SQL call processing.
- Mean SQL call CPU time, or percent of total used.
- Total service time for the SQL call processing.
- Mean SQL call service time, or percent of total used.

A setup option is available to display the percent used in place of the mean fields. Keep in mind that measured CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. For DDF only, this is reflected in the enclave CPU times shown in the detail windows of this report.

Detail line descriptions

SQL DBRM (Module) detail line

This is the first-level detail line. Each line shows information about a DBRM (Module) for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Name	The DBRM name.
Nbr of Calls	The number of SQL calls counted for this DBRM.
CPU Time: Total	The total CPU time for all SQL calls counted for this DBRM. Large numbers will be expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time per SQL call. Large numbers will be expressed in minutes with an M suffix.
CPU time: Pct	The percent of total CPU time this DBRM used.
Svc Time: Total	The total service time for all SQL calls for this DBRM. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time per SQL call. Large numbers will be expressed in minutes with an M suffix.
Svc time: Pct	The percent of total service time this DBRM used.

SQL request detail line

This is the second-level detail line shown directly under the DBRM/Module detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Name	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.

Under Heading	This is Displayed
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. The is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Nbr of Calls	The number of SQL calls counted for this SQL statement.
CPU Time: Total	The total CPU time for all SQL calls counted for this statement. Large numbers will be expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time per SQL call. Large numbers will be expressed in minutes with an M suffix.
CPU Time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time per SQL call. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Pct	The percent of total service time this statement used.

SQL statement text detail line

This is third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

This sample shows the report expanded to the second level (SQL statement), and one of the statements has been expanded to the third level to show the SQL text.

File View Navigate Help							
F10: SQL CPU/Service Time by DBRM (1286/CICS23A)				Row 00001 of 00014			
Command ===> _____				Scroll ===> CSR			
Name	Stmt#	SQL Function	Nbr of SQL Calls	--CPU Time--		--Svc Time--	
				Total	Mean	Total	Mean
PFSAMPC			1,204	3.08	0.00256	5.57	0.00462
± S00003	1466	FETCH	516	2.27	0.00441	3.86	0.00749
→ S00006	1316	SELECT	172	0.39	0.00227	1.01	0.00588
→ S00005	1347	SELECT	172	0.25	0.00150	0.40	0.00232
		> SELECT CUSACCT INTO : H FROM ACTINFO WHERE SPCRATE =					
		> : H AND INDX01 = '01'					
→ S00008	1443	OPEN	172	0.11	0.00064	0.21	0.00122
→ S00007	1562	CLOSE	172	0.04	0.00026	0.07	0.00045
PFSAMPB			514	1.04	0.00203	1.70	0.00331
→ S00002	672	SELECT	342	0.69	0.00204	1.13	0.00332
→ S00004	810	UPDATE	172	0.34	0.00201	0.56	0.00331
PFSAMPA			342	0.84	0.00246	1.74	0.00511
→ S00002	815	SELECT	342	0.84	0.00246	1.74	0.00511

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	DBRM, Seqno	Display context help information.
++	DBRM, Seqno	Show additional details.
+	DBRM, Seqno	Expand to reveal next level.
–	DBRM, Seqno	Collapse to hide next level.
M	DBRM, Seqno	Display load module information.
P	Seqno	Display source program mapping.
SV	DBRM	Sort next level entries by value.
SS	DBRM	Sort lines by program and statement number.
EX	Seqno	Display DB2 EXPLAIN data
SD	DBRM	Sort next level entries by service time

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level entries by name
SD	Name	Sort next level entries by service time

SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```
File View Navigate Help
+-----+
| Options for DB2 SQL CPU/Svc Time by DBRM |
| Enter "/" to select an option             |
|   _ Display Percent used in place of Mean fields |
+-----+
```

Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each DBRM (Module) and SQL statement, rather than the mean time.

F11 - DB2 SQL CPU/Svc time by stmt

Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. This option records exact SQL call counts, total SQL service time and total SQL processing CPU time by embedded SQL statement. When measuring a distributed data facility (DDF) address space, SQL Enclave and SQL zIIP CPU times are also recorded.

Quantification

Each report line shows the following for each SQL statement:

- Number of SQL calls.
- Total CPU time for the SQL call processing.
- Mean SQL call CPU time, or percent of total used.
- Total service time for the SQL call processing.
- Mean service time per SQL call, or percent of total used.

A setup option is available to display the percent used in place of the mean fields. Keep in mind that measured CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. For DDF only, this is reflected in the enclave CPU times shown in the detail windows of this report.

Detail line hierarchy

An unexpanded F11 report shows a line for each measured SQL request. You can expand each line to reveal one additional hierarchical level of detail (using the “+” line command).

The hierarchy is illustrated here:

```
Level 1 SQL Request
  Level 2 SQL Statement Text
Level 2 SQL Request
  Level 3 SQL Statement Text
...
```

Detail line descriptions

SQL request detail line

This is the first-level detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Seqno	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either “S” or “D” precedes the sequence number indicating if the SQL statement is static or dynamic.
Name	The DBRM name.
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. The is the name of the SQL function: SELECT, FETCH, UPDATE, etc.
Nbr of Calls	The number of SQL calls counted for this SQL statement.

Under Heading	This is Displayed
CPU Time: Total	The total CPU time for all SQL calls counted for this statement. Large numbers will be expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time per SQL call. Large numbers will be expressed in minutes with an M suffix.
CPU time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time per SQL call. Large numbers will be expressed in minutes with an M suffix.
Svc time: Pct	The percent of total service time this statement used.

SQL statement text detail line

This is second-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

This sample shows the report with one of the lines expanded to the second level to show SQL text.

File View Navigate Help								
F11: SQL CPU/Service Time by Statement (1300/CICS23A)					Row 00001 of 00017			
Command ==> _____					Scroll ==> CSR			
Seqno	Name	Stmt#	SQL Function	Nbr of SQL Calls	--CPU Time--		--Svc Time--	
					Total	Mean	Total	Mean
S00007	PFSAMPC	1466	FETCH	344	1.48	0.00432	2.35	0.00685
S00001	PFSAMPA	816	SELECT	342	0.88	0.00258	1.70	0.00497
		> SELECT NEXTLIM INTO : H FROM MRATE WHERE CURATE = : H						
S00009	PFSAMPC	3054	FETCH	1,720	0.74	0.00043	1.15	0.00066
S00003	PFSAMPB	678	SELECT	342	0.47	0.00137	0.75	0.00221
S00004	PFSAMPC	1316	SELECT	172	0.42	0.00249	0.76	0.00446
S00010	PFSAMPB	816	UPDATE	172	0.39	0.00231	0.75	0.00441
S00002	PFSAMPB	408	SET HOST VAR	342	0.38	0.00112	0.72	0.00211
S00005	PFSAMPC	1347	SELECT	172	0.27	0.00161	0.48	0.00282
S00014	PFSAMPC	3155	SELECT	172	0.27	0.00160	0.41	0.00243
S00012	PFSAMPC	3179	SELECT	172	0.27	0.00158	0.47	0.00277
S00011	PFSAMPC	2989	SELECT	172	0.22	0.00130	0.38	0.00221
S00008	PFSAMPC	3046	OPEN	172	0.20	0.00121	0.29	0.00170
S00006	PFSAMPC	1443	OPEN	172	0.11	0.00067	0.31	0.00181
S00013	PFSAMPC	1562	CLOSE	172	0.04	0.00028	0.08	0.00048
S00015	PFSAMPC	3065	CLOSE	172	0.03	0.00021	0.05	0.00034

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details.

Cmd	When Applied To Object	Action
+	Seqno	Expand to reveal next level.
–	Seqno	Collapse to hide next level.
M	Seqno	Display load module information.
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data

on headings

Cmd	When Applied To Object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal all entries.
–	Seqno	Collapse to show only first level.
SV	Seqno	Sort next level by value.
SS	Seqno	Sort lines by program and stmt number
SD	Seqno	Sort next level entries by service time

SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```

+-----+
| Options for DB2 SQL CPU/Svc Time by Stmt |
| Enter "/" to select an option            |
| / Show SQL statements with a positive SQLCODE |
| (these are successful calls).              |
|                                           |
| / Show SQL statements with a negative SQLCODE |
| (these are failed calls).                 |
|                                           |
| / Show SQL statements by statement number and |
| ignore differences in SQL text.             |
|                                           |
| /Display Percent used in place of Mean fields |
+-----+

```

Show SQL statements with positive SQLCODE

This shows SQL statements that end successfully with a zero or positive SQLCODE. When selected, successful SQL statements are included in the report.

Show SQL statements with negative SQLCODE

This shows SQL statements that are unsuccessful; that is, with a negative SQLCODE. When selected, unsuccessful SQL statements are included in the report.

Show SQL statements by statement number

This displays dynamic SQL statements consolidated by statement number and ignores differences in the SQL text. When selected, only one line is displayed per statement number regardless of the contents of the SQL text. The detail window for each statement number displays the SQL information for the first call from this statement.

Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each SQL statement, rather than the mean time.

F12 - DB2 SQL CPU/Svc time by plan

Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. This option records exact SQL call counts, total SQL service time and total SQL processing CPU time by embedded SQL statement. When measuring a distributed data facility (DDF) address space, SQL Enclave and SQL zIIP CPU times are also recorded. This report shows quantification by DB2 Plan. You can further expand each DB2 Plan line to see a further breakdown and quantification by individual embedded SQL statement.

Quantification

Each report line shows the following for each DB2 Plan and, when expanded, for each SQL statement observed under the Plan.

- Number of SQL calls.
- Total CPU time for the SQL call processing.
- Mean SQL call CPU time, or percent of total used.
- Total service time for the SQL call processing.
- Mean SQL call service time, or percent of total used.

A setup option is available to display the percent used in place of the mean fields. Keep in mind that measured CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. For DDF only, this is reflected in the enclave CPU times shown in the detail windows of this report.

Detail line hierarchy

An unexpanded F12 report shows a line for each DB2 Plan under which SQL request were issued. You can expand each line to reveal two additional hierarchical levels of detail (using the “+” line command).

The hierarchy is illustrated here:

```
Level 1 DB2 Plan
  Level 2 SQL Request
    Level 3 SQL Statement Text
  Level 2 SQL Request
    Level 3 SQL Statement Text
    ...
```

Detail line descriptions

DB2 Plan detail line

This is the first-level detail line. Each line shows information about a DB2 Plan under which SQL request measurement data was recorded.

Under Heading	This is Displayed
Seqno	A sequence number assigned, by Application Performance Analyzer, to the DB2 plan.
Plan/Pgm	The DB2 Plan name.
Nbr of Calls	The number of SQL calls counted for this DB2 Plan.
CPU Time: Total	The total CPU time for all SQL calls counted for this statement. Large numbers will be expressed in minutes with an M suffix.

Under Heading	This is Displayed
CPU Time: Mean	The mean CPU time per SQL call. Large numbers will be expressed in minutes with an M suffix.
CPU time: Pct	The percent of total CPU time this plan used.
Svc Time: Total	The total service time for all SQL calls for this statement. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time per SQL call. Large numbers will be expressed in minutes with an M suffix.
SVC time: Pct	The percent of total service time this plan used.

SQL request detail line

This is the second-level detail line shown directly under the DB2 Plan detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Seqno	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Plan/Pgm	The DBRM name.
Stmt#	The precompiler statement number of the SQL statement. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function.
Nbr of Calls	The number of SQL calls counted for this statement.
CPU Time: Total	The total CPU time for all SQL calls counted for this statement. Large numbers will be expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time per SQL call. Large numbers will be expressed in minutes with an M suffix.
CPU time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement. Large numbers will be expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time per SQL call. Large numbers will be expressed in minutes with an M suffix.
SVC time: Pct	The percent of total service time this statement used.

SQL statement text detail line

This is third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

This sample shows the report with the plan expanded to the second level and one of the SQL statement lines expanded to the third level to show SQL text.

File View Navigate Help								
F12: SQL CPU/Service Time by Plan (1300/CICS23A)						Row 00001 of 00018		
Command ==> _____						Scroll ==> CSR		
Seqno	Plan/PGM	Stmt#	SQL Function	Nbr of SQL Calls	--CPU Time--		--Svc Time--	
					Total	Mean	Total	Mean
P0001	PFSAMPA			4,810	6.25	0.00130	10.73	0.00223
→ S00007	PFSAMPC	1466	FETCH	344	1.48	0.00432	2.35	0.00685
→ S00001	PFSAMPA	816	SELECT	342	0.88	0.00258	1.70	0.00497
			> SELECT NEXTLIM INTO : H FROM MRATE WHERE CURATE = : H					
→ S00009	PFSAMPC	3054	FETCH	1,720	0.74	0.00043	1.15	0.00066
→ S00003	PFSAMPB	678	SELECT	342	0.47	0.00137	0.75	0.00221
→ S00004	PFSAMPC	1316	SELECT	172	0.42	0.00249	0.76	0.00446
→ S00010	PFSAMPB	816	UPDATE	172	0.39	0.00231	0.75	0.00441
→ S00002	PFSAMPB	408	SET HOST V	342	0.38	0.00112	0.72	0.00211
→ S00005	PFSAMPC	1347	SELECT	172	0.27	0.00161	0.48	0.00282
→ S00014	PFSAMPC	3155	SELECT	172	0.27	0.00160	0.41	0.00243
→ S00012	PFSAMPC	3179	SELECT	172	0.27	0.00158	0.47	0.00277
→ S00011	PFSAMPC	2989	SELECT	172	0.22	0.00130	0.38	0.00221
→ S00008	PFSAMPC	3046	OPEN	172	0.20	0.00121	0.29	0.00170
→ S00006	PFSAMPC	1443	OPEN	172	0.11	0.00067	0.31	0.00181
→ S00013	PFSAMPC	1562	CLOSE	172	0.04	0.00028	0.08	0.00048
→ S00015	PFSAMPC	3065	CLOSE	172	0.03	0.00021	0.05	0.00034

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Plan Seqno, Seqno	Display context help information.
++	Plan Seqno, Seqno	Show additional details.
+	Plan Seqno, Seqno	Expand to reveal next level.
–	Plan Seqno, Seqno	Collapse to hide next level.
SV	Plan Seqno	Sort next level entries by value.
SS	Plan Seqno	Sort lines by program and statement number.
M	Seqno	Display load module information.
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data
SD	Plan Seqno	Sort next level entries by service time

on headings

Cmd	When Applied To Object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal all entries.
–	Seqno	Collapse to show only first level.
SV	Seqno	Sort next level by value.

Cmd	When Applied To Object	Action
SD	Seqno	Sort next level entries by service time

SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```
File  View  Navigate  Help
+-----+
| Options for DB2 SQL CPU/Svc Time by Plan |
| Enter "/" to select an option           |
| _ Display Percent used in place of Mean fields |
+-----+
```

Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each DB2 plan and SQL statement, rather than the mean time.

F13 - DB2 SQL threads analysis

Usage

Use this report to see information about DB2 threads observed during the sampling of SQL call activity.

Quantification

Each report line represents a range of REQCT values for one DB2 thread. A new line is reported each time a reset of the REQCT value occurs for the thread (when the value reaches 32767 and is reset to 1).

Detail line hierarchy

Report F13 shows only one level. The detail lines cannot be expanded.

Detail line descriptions

Thread detail line

Under Heading	This is Displayed
SeqNum	A unique sequence number assigned to the DB2 thread.
Thread Addr	An address of the DB2 'ACE' control block.
Attach	The type of attachment to DB2 for the thread. This can be: CAF, SSRF, CICS, IMS or CIB.
REQCT Range	This is the range of REQCT values observed. The lower value is the first REQCT value observed during any measurement sample. Lower values might have occurred during the measurement which were not sampled. The higher value is the last REQCT value observed during a measurement sample. Higher values might have occurred during the measurement which were not sampled. In the case where the range is a continuation after a REQCT reset, a lower value of 1 will be reported. In the case where the range is followed by another detail line after a REQCT reset, an upper value of 32768 will be reported.

Under Heading	This is Displayed
SQL Calls Executed	The number of SQL calls executed. This number is derived from the REQCT values.
SQL Calls Sampled	This is the number of unique REQCT values within the reported range for which samples occurred. This number will often be significantly lower than the Calls Executed number because the rate of SQL call processing is typically much higher than the measurement sampling rate. Hence, not all SQL calls are sampled.

Sample reports

A sample report is shown here:

File View Navigate Help					
F13: DB2 Threads Analysis (3398/CICS23A)				Row 00001 of 00020	
Command ==> _____				Scroll ==> CSR	
SeqNum	Thread Addr	Attach	REQCT Range	--- SQL Calls --- Executed	Sampled
000035	167CCAD0	CAF	00003-04003	4,001	844
			Thread Totals	4,001	844
000036	167CCCA8	CAF	00003-04002	4,000	866
			Thread Totals	4,000	866
000037	172B61F8	CAF	00003-04001	3,999	908
			Thread Totals	3,999	908

F14 - DB2 CPU by plan/stored proc

Usage

Use this report to see how CPU resource was consumed by each stored procedure measured during the sampling interval. The percentage of time is reported for each DB2 plan under which measured stored procedure activity was recorded. Expand a plan line to see a further breakdown of time consumption by category.

Quantification

Each report line quantifies CPU usage as a percentage. Each percentage represents the ratio of CPU consumption observed for the reported item to the total CPU consumption measured in the address space.

Detail line hierarchy

An unexpanded F14 report shows a line for each plan that was measured in the stored procedure address space. You can expand each line to reveal additional hierarchical levels of detail (using the “+” line command).

Only the DB2SQL Category hierarchy is shown here. Activity for the Stored Procedure which is not related to SQL processing will be shown in the SYSTEM, APPLCN, or NOSYMB categories. For information about these other categories, see [“C01 - CPU usage by category” on page 78](#). The hierarchy is illustrated here:

Level 1 DB2 Plan
Level 2 DB2SQL Category
Level 3 DB2 DBRM
Level 4 DB2 Load Module

Detail line descriptions

DB2 Plan detail line

This is the first-level detail line. Each line shows information about a DB2 Plan for which stored procedure measurement data was recorded.

Under Heading	This is Displayed
Seqno	A sequence number assigned to the DB2 plan.
Description	The plan name.
Percent of Time	The percentage of the measurement interval duration stored procedure requests under the indicated DB2 Plan were being processed.

Category detail line

This is a second-level detail line. This line shows one of five categories to which CPU time has been attributed:

APPLCN

Application Code

SYSTEM

System/OS Services

DB2SQL

SQL Processing

DATAMG

Data Management (DASD) Requests

NOSYMB

No Module Name Found, any execution measured at locations for which no load module name could be determined is attributed to this category.

As F14 is used for analyzing CPU consumption in DB2 Store Procedures, the category DB2SQL is the one where you should see the majority of the activity. This category and the detail lines under it are described here. For detailed information on the other categories, see [“C01 - CPU usage by category”](#) on page 78.

Under Heading	This is Displayed
Seqno	The category name “DB2SQL.”
Description	The category description “SQL Processing.”
Percent of Time	The percentage of the measurement interval duration SQL requests under the indicated DB2 Plan were being processed.

DB2 DBRM detail line

This is a third-level detail line shown directly under the DB2 Plan detail line. It quantifies the percentage CPU time for a specific SQL request.

Under Heading	This is Displayed
Seqno	A sequence number assigned, by Application Performance Analyzer, to the SQL statement.

Under Heading	This is Displayed
Description	The DBRM name, DBRM statement number and SQL function.
Percent of Time	The percentage of the measurement interval duration the indicated SQL Request was being processed.

DB2 load module detail line

This is a fourth-level detail line showing activity for DB2 load modules used in the SQL request processing.

Under Heading	This is Displayed
Seqno	The DB2 Load Module name.
Description	If a DPA functional description is found for the module name, it is reported under this heading.
Percent of Time	The percentage of the measurement interval duration the indicated SQL Request being processed was in this module.

Sample reports

A sample report is shown here, it has been expanded to the second level.

```

File View Navigate Help
-----
F14: DB2 CPU by Plan/Stored Proc (0888/CICS23A)          Row 00001 of 00019
Command ==> ----- Scroll ==> CSR

Seqno      Description      Percent of CPU time * 10.00% ±2.3%
          *...1...2...3...4...5...6...7...8.
P0001      DB2MAIN              39.68 =====
→ DB2SQL    SQL Processing          38.41 =====
→ SYSTEM    System/OS Services       1.16 =
→ APPLCN     Application Code         0.05
→ NOSYMB     No Module Name          0.05
→ DATAMG     Data Mgmt Processin     0.00

P0002      TRSAMP              35.29 =====
→ DB2SQL    SQL Processing          34.07 =====
→ SYSTEM    System/OS Services       1.11 =
→ NOSYMB     No Module Name          0.11
→ APPLCN     Application Code         0.00
→ DATAMG     Data Mgmt Processin     0.00

P0003      WLSAMP1M              24.79 =====
→ DB2SQL    SQL Processing          24.45 =====
→ SYSTEM    System/OS Services       0.33
→ APPLCN     Application Code         0.00
→ DATAMG     Data Mgmt Processin     0.00

```

Line commands

on objects

Cmd	When Applied To Object	Action
?	Plan Seqno, Category, Seqno, Load Module	Display context help information.
++	Plan Seqno, Category, Seqno, Load Module	Show additional details.
+	Plan Seqno, Category, Seqno, Load Module	Expand to reveal next level.
–	Plan Seqno, Category, Seqno, Load Module	Collapse to hide next level.
SV	Plan Seqno, Category, Seqno	Sort next level entries by value.

Cmd	When Applied To Object	Action
SN	Plan Seqno, Category, Seqno	Sort next level entries by name.
M	Load Module	Display load module information.
P	Load Module, Seqno	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Seqno, Description, Percent of CPU	Display context help information.
+	Seqno	Expand to reveal all entries.
+	Description	Expand description field size
+	Percent of CPU	Zoom in scale.
–	Seqno	Collapse to show only first level.
–	Description	Reduce description field size.
–	Percent of CPU	Zoom out scale.
SV	Seqno	Sort next level by value.
SN	Seqno	Sort next level by name.

SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:

```

File View Navigate Help
- +-----+
E | Options for DB2 CPU by Plan/Stored Proc          | =====
C |                                                    | 001 of 00001
S | Enter "/" to select an option                    | ==> CSR
P | / Report modules by "Group". Unselect to report  |
  | by "SubGroup". Group is a higher level (more   |
  | inclusive) categorization than SubGroup.        |
  | / Show the DB2SQL category in which CPU time    |
  | attributed to SQL processing is shown.          |
- +-----+

```

Reporting by Group / SubGroup

This option allows you to aggregate modules into Group or SubGroup. SubGroup offers a more granular, less inclusive categorization than Group. For example, when reporting by Group, all SVCs would be reported under the "SVC" Group. When reporting by SubGroup, SVCs would be reported under SubGroups such as SVCTYPE1 and SVCTYPE2.

Show the DB2SQL category

This shows activity attributed to DB2 SQL statements. If it is not selected, the activity will instead be included in the appropriate system modules in the SYSTEM category. This is not available for CICS measurements.

F15 - DB2 SQL CPU/Svc Time by Rq Loc

Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. Also this report is only created when measuring a Distributed Data Facility (DDF) address space. Exact SQL call counts, total SQL service time, total SQL processing CPU time, SQL Enclave, and SQL zIIP times by SQL statement are recorded. This report shows quantification by Requester Location. You can further expand each line to see a more detailed breakdown and quantification by individual SQL statement.

Note: This report is for DDF measurements only.

Quantification

Each report line shows the following for each Requester Location and, when expanded, for each SQL statement observed for the Requester Location.

- Number of SQL calls
- Total CPU time for the SQL call processing
- Mean SQL call CPU time, or percent of total used
- Total service time for the SQL call processing
- Mean SQL call service time, or percent of total used

A setup option is available to display the percent used in place of the mean fields. Remember that measured CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. This is reflected in the enclave CPU times shown in the detail windows of this report.

Detail line hierarchy

An unexpanded F15 report shows a line for each module that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the “+” line command). The hierarchy is illustrated here:

```
Level 1 Requester Location
Level 2 SQL Request
Level 3 SQL Statement Text
Level 2 SQL Request
Level 3 SQL Statement Text
```

Detail line descriptions

Requester Location detail line

This is the first-level detail line. Each line shows information about a Requester Location for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Name	The Requester Location name.
Nbr of Calls	The number of SQL calls counted for this Requester Location.
CPU Time: Total	The total CPU time for all SQL calls counted for this Requester Location.
CPU Time: Mean	The mean CPU time per SQL call.
CPU time: Pct	The percent of total CPU time this requestor location used.
Svc Time: Total	The total service time for all SQL calls for this Requester Location.

Under Heading	This is Displayed
Svc Time: Mean	The mean service time per SQL call.
Svc time: Pct	The percent of total service time this requestor location used.

SQL request detail line

This is the second-level detail line shown directly under the Requester Location detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Name	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Plan/Pgm	The DBRM name.
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. This is the name of the SQL function, SELECT, FETCH, UPDATE, etc. Nbr of Calls The number of SQL calls counted for this SQL statement.
Nbr of Calls	The number of SQL calls counted for this SQL statement.
CPU Time: Total	The total CPU time for all SQL calls counted for this statement.
CPU Time: Mean	The mean CPU time per SQL call.
CPU time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement.
Svc Time: Mean	The mean service time per SQL call.
Svc time: Pct	The percent of total service time this statement used.

SQL statement text detail line

This is the third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

This sample shows the report with one location expanded to the third level (SQL text).

```

File View Navigate Help
-----
F15: DB2 SQL CPU/Svc Time by Rq Loc (6783/CICS23A) Row 00001 of 01067
Command ==> ----- Scroll ==> CSR

Name      Plan/Pgm  Stmt#  SQL Functn  Nbr of  --CPU Time--  --Svc Time--
          Plan/Pgm  Stmt#  SQL Functn  SQL Calls Total   Mean   Total   Mean
CABNETDB24
- D00156 DDF2425A  279  FETCH          1      1.66   0.00562  4.11   0.01394
    > Select count(*) from SYSIBM.SYSPACKSTMT
    > (PREPARE of SQL was done at Stmt# 269 Seqno D00154)
- D00258 DDF2425A  279  FETCH          1      0.12   0.12491  0.14   0.14127
    > Select count(*) from SYSIBM.SYSVLTREE
    > (PREPARE of SQL was done at Stmt# 269 Seqno D00256)

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Location, Seqno	Display context help information.
++	Location, Seqno	Show additional details.
+	Location, Seqno	Expand to reveal next level.
–	Location, Seqno	Collapse to hide next level.
P	Seqno	Display source program mapping.
SV	Location	Sort next level entries by value.
SS	Location	Sort lines by program and statement number.
EX	Seqno	Display DB2 EXPLAIN data.
SD	Location	Sort next level entries by service time

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level entries by name
SD	Name	Sort next level entries by service time

SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```

File View Navigate Help
+-----+
| Options for DB2 SQL CPU/Svc Time by Rq Loc |
| Enter "/" to select an option              |
|   _ Display Percent used in place of Mean fields |
+-----+

```

Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each Requestor Location and SQL statement, rather than the mean time.

F16 - DB2 SQL CPU/Svc Time by Enclave

Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. Also, this report is only created when measuring a Distributed Data Facility (DDF) address space. Exact SQL call counts, total SQL service time, total SQL task CPU time, SQL Enclave, and SQL zIIP times by SQL statement are recorded. This report shows quantification by Enclave token. You can further expand each line to see a further breakdown and quantification by individual SQL statement.

Note: This report is for DDF measurements only.

Quantification

Each report line shows the following for each Enclave token and, when expanded, for each SQL statement observed for the Enclave token.

- Number of SQL calls
- Total task CPU time for the SQL call processing
- Mean SQL call task CPU time, or percent of total used
- Total service time for the SQL call processing
- Mean SQL call service time, or percent of total used

A setup option is available to display the percent used in place of the mean fields. Keep in mind that the task CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. This is reflected in the enclave CPU times shown in the detail windows of this report.

Detail line hierarchy

An unexpanded F16 report shows a line for each Enclave token that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the + line command). The hierarchy is illustrated here:

```

Level 1 Enclave token
  Level 2 SQL Request
    Level 3 SQL Statement Text
  Level 2 SQL Request
    Level 3 SQL Statement Text

```

Detail line descriptions

Enclave token detail line

This is the first-level detail line. Each line shows information about an Enclave token for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Token	The Enclave token name.
Nbr of SQL Calls	The number of SQL calls counted for this Enclave token.
CPU Time: Total	The total task CPU time for all SQL calls counted for this Enclave token.
CPU Time: Mean	The mean CPU time per SQL call.
CPU time: Pct	The percent of total CPU time this Enclave token used.
Svc Time: Total	The total service time for all SQL calls for this Enclave token.
Svc Time: Mean	The mean service time per SQL call.
SVC time: Pct	The percent of total service time this Enclave token used.

SQL request detail line

This is the second-level detail line shown directly under the Enclave token detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Token	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either “S” or “D” precedes the sequence number indicating if the SQL statement is static or dynamic.
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. This is the name of the SQL function (SELECT, FETCH, UPDATE, etc.)
Nbr of Calls	The number of SQL calls counted for this SQL statement.
CPU Time: Total	The total task CPU time for all SQL calls counted for this statement.
CPU Time: Mean	The mean task CPU time per SQL call.
CPU Time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this statement used.

SQL statement text detail line

This is the third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

This sample shows the report with one Enclave token expanded to the third level (SQL text).

```

File View Navigate Help
-----
F16: DB2 SQL CPU/Svc Time by Enclave (1641/DB2ADIST) Row 00001 of 01410
Command ==> ----- Scroll ==> PAGE

Token      Stmt#  SQL Function      Nbr of  --CPU Time--      --Svc Time--
              SQL Calls  Total    Mean              Total    Mean
00000020-0000017E      1      0.04    0.04177      0.05    0.05652
± D00026      0 EXECUTE IMME      1      0.04    0.04177      0.05    0.05652
> EXPLAIN PLAN SET QUERYNO=1 FOR SELECT
> COALESCE(FIELD_ONE_KEY, DEP2_COL1_KEY) AS COL1_KEY
> ,COALESCE(DEP2_COL2_KEY, DEP3_COL2_KEY) AS COL2_KEY
> ,DEP3_COL3_KEY,DEP3_COL4 ,DEP3_COL5 ,DEP2_COL3
> ,DEP2_COL4 ,FIELD_TWO ,FIELD_THREE ,FIELD_FOUR
> ,FIELD_FIVE ,FIELD_SIX ,FIELD_SEVEN
> ,CHAR(FIELD_EIGHT,ISO) ,CHAR(FIELD_NINE,ISO)
> ,FIELD_TEN ,TIMEZONE () FROM MAIN FULL OUTER JOIN DEP2
> ON DEP2_COL1_KEY = FIELD_ONE_KEY LEFT JOIN DEP3 ON
> DEP3_COL1_KEY = DEP2_COL1_KEY AND DEP3_COL2_KEY =
> DEP2_COL2_KEY ORDER BY COL1_KEY ,COL2_KEY
> ,DEP3_COL3_KEY

00000024-00000198      1      0.04    0.04154      0.04    0.04668
→ D00026      0 EXECUTE IMME      1      0.04    0.04154      0.04    0.04668
> EXPLAIN PLAN SET QUERYNO=1 FOR SELECT
> COALESCE(FIELD_ONE_KEY, DEP2_COL1_KEY) AS COL1_KEY
> ,COALESCE(DEP2_COL2_KEY, DEP3_COL2_KEY) AS COL2_KEY
> ,DEP3_COL3_KEY,DEP3_COL4 ,DEP3_COL5 ,DEP2_COL3
> ,DEP2_COL4 ,FIELD_TWO ,FIELD_THREE ,FIELD_FOUR
> ,FIELD_FIVE ,FIELD_SIX ,FIELD_SEVEN
> ,CHAR(FIELD_EIGHT,ISO) ,CHAR(FIELD_NINE,ISO)
> ,FIELD_TEN ,TIMEZONE () FROM MAIN FULL OUTER JOIN DEP2
> ON DEP2_COL1_KEY = FIELD_ONE_KEY LEFT JOIN DEP3 ON
> DEP3_COL1_KEY = DEP2_COL1_KEY AND DEP3_COL2_KEY =
> DEP2_COL2_KEY ORDER BY COL1_KEY ,COL2_KEY
> ,DEP3_COL3_KEY

00000020-000001A8      1      0.04    0.04167      0.04    0.04925
→ D00026      0 EXECUTE IMME      1      0.04    0.04167      0.04    0.04925
> EXPLAIN PLAN SET QUERYNO=1 FOR SELECT
> COALESCE(FIELD_ONE_KEY, DEP2_COL1_KEY) AS COL1_KEY
> ,COALESCE(DEP2_COL2_KEY, DEP3_COL2_KEY) AS
COL2_KEY

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Token, Seqno	Display context help information.
++	Token, Seqno	Show additional details.
+	Token, Seqno	Expand to reveal next level.
-	Token, Seqno	Collapse to hide next level.
SV	Token	Sort next level entries by value.
SS	Token	Sort lines by program and statement number.
SD	Token	Sort next level entries by service time
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data.

on headings

Cmd	When Applied To Object	Action
?	Token	Display context help information.
+	Token	Expand to reveal all entries.
–	Token	Collapse to show only first level.
SV	Token	Sort next level by value.
SN	Token	Sort next level by name.
SD	Token	Sort next level by service time.

SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```
File View Navigate Help
+-----+
| Options for DB2 SQL CPU/Svc Time by Enclave |
| Enter "/" to select an option                |
|   _ Display Percent used in place of Mean fields |
+-----+
```

Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each Enclave token and SQL statement, rather than the mean time.

F17 - DB2 SQL CPU/Svc Time by Corrid

Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. Also this report is only created when measuring a Distributed Data Facility (DDF) address space. Exact SQL call counts, total SQL service time, total SQL task CPU time, SQL Enclave, and SQL zIIP times by SQL statement are recorded. This report shows quantification by Correlation ID. You can further expand each line to see a further breakdown and quantification by individual SQL statement.

Note: This report is for DDF measurements only.

Quantification

Each report line shows the following for each Correlation ID and, when expanded, for each SQL statement observed for the Correlation ID.

- Number of SQL calls
- Total task CPU time for the SQL call processing
- Mean SQL call task CPU time, or percent of total used
- Total service time for the SQL call processing
- Mean SQL call service time, or percent of total used

A setup option is available to display the percent used in place of the mean fields. Keep in mind that the task CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. This is reflected in the enclave CPU times shown in the detail windows of this report.

Detail line hierarchy

An unexpanded F17 report shows a line for each Correlation ID that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the + line command). The hierarchy is illustrated here:

```
Level 1 Correlation ID
Level 2 SQL Request
Level 3 SQL Statement Text
Level 2 SQL Request
Level 3 SQL Statement Text
```

Detail line descriptions

Correlation ID detail line

This is the first-level detail line. Each line shows information about a Correlation ID for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Corrid	The Correlation ID name.
Nbr of SQL Calls	The number of SQL calls counted for this Correlation ID.
CPU Time: Total	The total task CPU time for all SQL calls counted for this Correlation ID.
CPU Time: Mean	The mean CPU time per SQL call.
CPU Time: Pct	The percent of total CPU time this Correlation ID used.
Svc Time: Total	The total service time for all SQL calls for this Correlation ID.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this Correlation ID used.

SQL request detail line

This is the second-level detail line shown directly under the Correlation ID detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Corrid	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. This is the name of the SQL function (SELECT, FETCH, UPDATE, etc.)
Nbr of Calls	The number of SQL calls counted for this SQL statement.
CPU Time: Total	The total task CPU time for all SQL calls counted for this statement.
CPU Time: Mean	The mean task CPU time per SQL call.

Under Heading	This is Displayed
CPU Time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this statement used.

SQL statement text detail line

This is the third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

This sample shows the report with one Correlation ID expanded to the third level (SQL text).

File View Navigate Help							
F17: DB2 SQL CPU/Svc Time by Corrid (1641/DB2ADIST)				Row 00001 of 00314			
Command ==>				Scroll ==> PAGE			
Corrid	Stmt#	SQL Function	Nbr of SQL Calls	--CPU Time-- Total Mean	--Svc Time-- Total Mean		
db2bp.exe			160	0.63	0.00394	25.92	0.16200
± D00026	0	EXECUTE IMME	4	0.16	0.04137	0.20	0.05004
		> EXPLAIN PLAN SET QUERYNO=1 FOR SELECT > COALESCE(FIELD_ONE_KEY, DEP2_COL1_KEY) AS COL1_KEY > ,COALESCE(DEP2_COL2_KEY, DEP3_COL2_KEY) AS COL2_KEY > ,DEP3_COL3_KEY ,DEP3_COL4 ,DEP3_COL5 ,DEP2_COL3 > ,DEP2_COL4 ,FIELD_TWO ,FIELD_THREE ,FIELD_FOUR > ,FIELD_FIVE ,FIELD_SIX ,FIELD_SEVEN > ,CHAR(FIELD_EIGHT,ISO) ,CHAR(FIELD_NINE,ISO) > ,FIELD_TEN ,TIMEZONE () FROM MAIN FULL OUTER JOIN DEP2 > ON DEP2_COL1_KEY = FIELD_ONE_KEY LEFT JOIN DEP3 ON > DEP3_COL1_KEY = DEP2_COL1_KEY AND DEP3_COL2_KEY = > DEP2_COL2_KEY ORDER BY COL1_KEY ,COL2_KEY > ,DEP3_COL3_KEY					
± D00007	0	FETCH	4	0.07	0.01895	0.07	0.01983
		> (SELECT T1.FIELD_ONE_KEY AS > UNION_COLUMN_01 ,T1.FIELD_TWO AS > UNION_COLUMN_02 FROM AIF04.MAIN T1 WHERE NOT EXISTS > (SELECT * FROM AIF04.DEP1 T2 WHERE T1.FIELD_ONE_KEY = > T2.DEP1_COL1_KEY1) UNION SELECT T3.FIELD_ONE_KEY > AS UNION_COLUMN_01 ,T3.FIELD_TWO > AS UNION_COLUMN_02 FROM AIF04.MAIN T3 WHERE NOT EXISTS > (SELECT * FROM AIF04.DEP2 T4 WHERE T3.FIELD_ONE_KEY = > T4.DEP2_COL1_KEY)) UNION ALL (SELECT > T2.FIELD_ONE_KEY AS UNION_COLUMN_01 > ,T2.FIELD_TWO AS UNION_COLUMN_02 FROM > AIF04.MAIN T2 WHERE NOT EXISTS (SELECT * FROM > AIF04.DEP1 T1 WHERE T2.FIELD_ONE_KEY = > T1.DEP1_COL1_KEY1) UNION SELECT T4.FIELD_ONE_KEY > AS UNION_COLUMN_01 ,T4.FIELD_TWO > AS UNION_COLUMN_02 FROM AIF04.MAIN T4 WHERE NOT EXISTS > (SELECT * FROM AIF04.DEP2 T3 WHERE T4.FIELD_ONE_KEY = > T3.DEP2_COL1_KEY)) > (PREPARE of SQL was done at Stmt# 0 Seqno D0005)					

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Corrid, Seqno	Display context help information.
++	Corrid, Seqno	Show additional details.
+	Corrid, Seqno	Expand to reveal next level.
–	Corrid, Seqno	Collapse to hide next level.
SV	Corrid	Sort next level entries by value.
SS	Corrid	Sort lines by program and statement number.
SD	Corrid	Sort next level entries by service time
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data.

on headings

Cmd	When Applied To Object	Action
?	Corrid	Display context help information.
+	Corrid	Expand to reveal all entries.
–	Corrid	Collapse to show only first level.
SV	Corrid	Sort next level by value.
SN	Corrid	Sort next level by name.
SD	Corrid	Sort next level by service time.

SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```
File View Navigate Help
+-----+
| Options for DB2 SQL CPU/Svc Time by Corrid |
| Enter "/" to select an option              |
|   _ Display Percent used in place of Mean fields |
+-----+
```

Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each Correlation ID and SQL statement, rather than the mean time.

F18 - DB2 SQL CPU/Svc Time by Wkstn

Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. Also this report is only created when measuring a Distributed Data Facility (DDF) address space. Exact SQL call counts, total SQL service time, total SQL task CPU time, SQL Enclave, and SQL zIIP times by SQL statement are recorded. This report shows quantification by Workstation ID. You can further expand each line to see a further breakdown and quantification by individual SQL statement.

Note: This report is for DDF measurements only.

Quantification

Each report line shows the following for each Workstation ID and, when expanded, for each SQL statement observed for the Workstation ID.

- Number of SQL calls
- Total task CPU time for the SQL call processing
- Mean SQL call task CPU time, or percent of total used
- Total service time for the SQL call processing
- Mean SQL call service time, or percent of total used

A setup option is available to display the percent used in place of the mean fields. Keep in mind that the task CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. This is reflected in the enclave CPU times shown in the detail windows of this report.

Detail line hierarchy

An unexpanded F18 report shows a line for each Workstation ID that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the + line command). The hierarchy is illustrated here:

```
Level 1 Workstation ID
Level 2 SQL Request
Level 3 SQL Statement Text
Level 2 SQL Request
Level 3 SQL Statement Text
```

Detail line descriptions

Workstation ID detail line

This is the first-level detail line. Each line shows information about a Workstation ID for which SQL request measurement data was recorded.

Under Heading	This is Displayed
Wkstn	The Workstation ID name.
Nbr of SQL Calls	The number of SQL calls counted for this Workstation ID.
CPU Time: Total	The total task CPU time for all SQL calls counted for this Workstation ID.
CPU Time: Mean	The mean CPU time per SQL call.
CPU Time: Pct	The percent of total CPU time this Workstation ID used.
Svc Time: Total	The total service time for all SQL calls for this Workstation ID.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this Workstation ID used.

SQL request detail line

This is the second-level detail line shown directly under the Workstation ID detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Wkstn	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either "S" or "D" precedes the sequence number indicating if the SQL statement is static or dynamic.
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. This is the name of the SQL function (SELECT, FETCH, UPDATE, etc.)
Nbr of Calls	The number of SQL calls counted for this SQL statement.
CPU Time: Total	The total task CPU time for all SQL calls counted for this statement.
CPU Time: Mean	The mean task CPU time per SQL call.
CPU Time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this statement used.

SQL statement text detail line

This is the third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

This sample shows the report with one Workstation id expanded to the third level (SQL text)

File View Navigate Help							
F18: DB2 SQL CPU/Svc Time by Wkstn (1641/DB2ADIST)				Row 00001 of 00337			
Command ==>				Scroll ==> CSR			
Wkstn	Stmt#	SQL Function	Nbr of SQL Calls	--CPU Time--		--Svc Time--	
				Total	Mean	Total	Mean
D12A3H26			105	0.57	0.00548	0.61	0.00586
± D00016	0	EXECUTE IMME	3	0.11	0.03885	0.13	0.04345
	>	EXPLAIN PLAN SET QUERYNO=1 FOR SELECT					
	>	COALESCE(FIELD_ONE_KEY, DEP2_COL1_KEY) AS COL1_KEY					
	>	,COALESCE(DEP2_COL2_KEY, DEP3_COL2_KEY) AS COL2_KEY					
	>	,DEP3_COL3_KEY,DEP3_COL4,DEP3_COL5,DEP2_COL3					
	>	,DEP2_COL4,FIELD_TWO,FIELD_THREE,FIELD_FOUR					
	>	,FIELD_FIVE,FIELD_SIX,FIELD_SEVEN					
	>	,CHAR(FIELD_EIGHT,ISO),CHAR(FIELD_NINE,ISO)					
	>	,FIELD_TEN,TIMEZONE () FROM MAIN FULL OUTER JOIN DEP2					
	>	ON DEP2_COL1_KEY = FIELD_ONE_KEY LEFT JOIN DEP3 ON					
	>	DEP3_COL1_KEY = DEP2_COL1_KEY AND DEP3_COL2_KEY =					
	>	DEP2_COL2_KEY ORDER BY COL1_KEY,COL2_KEY					
	>	,DEP3_COL3_KEY					
→ D00020	0	FETCH	12	0.08	0.00744	0.09	0.00763
	>	SELECT * FROM PLAN_TABLE ORDER BY QUERYNO, QBLOCKNO,					
	>	PLANNO					
	>	(PREPARE of SQL was done at Stmt# 0 Seqno D00017)					
→ D00019	0	OPEN	3	0.08	0.02768	0.08	0.02891
	>	SELECT * FROM PLAN_TABLE ORDER BY QUERYNO, QBLOCKNO,					
	>	PLANNO					
	>	(PREPARE of SQL was done at Stmt# 0 Seqno D00017)					
→ D00034	0	FETCH	3	0.05	0.01741	0.05	0.01809
	>	(SELECT T1.FIELD_ONE_KEY AS					
	>	UNION_COLUMN_01,T1.FIELD_TWO AS					
	>	UNION_COLUMN_02 FROM AIF04.MAIN T1 WHERE NOT EXISTS					
	>	(SELECT * FROM AIF04.DEP1 T2 WHERE T1.FIELD_ONE_KEY =					
	>	T2.DEP1_COL1_KEY1) UNION SELECT T3.FIELD_ONE_KEY					
	>	AS UNION_COLUMN_01,T3.FIELD_TWO					
	>	AS UNION_COLUMN_02 FROM AIF04.MAIN T3 WHERE NOT EXISTS					
	>	(SELECT * FROM AIF04.DEP2 T4 WHERE T3.FIELD_ONE_KEY =					
	>	T4.DEP2_COL1_KEY)) UNION ALL (SELECT					

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Wkstn, Seqno	Display context help information.
++	Wkstn, Seqno	Show additional details.
+	Wkstn, Seqno	Expand to reveal next level.
–	Wkstn, Seqno	Collapse to hide next level.
SV	Wkstn	Sort next level entries by value.
SS	Wkstn	Sort lines by program and statement number.
SD	Wkstn	Sort next level entries by service time
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data.

on headings

Cmd	When Applied To Object	Action
?	Wkstn	Display context help information.
+	Wkstn	Expand to reveal all entries.
–	Wkstn	Collapse to show only first level.
SV	Wkstn	Sort next level by value.
SN	Wkstn	Sort next level by name.
SD	Wkstn	Sort next level by service time.

SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```
File View Navigate Help
+-----+
| Options for DB2 SQL CPU/Svc Time by Wkstn |
| Enter "/" to select an option             |
|   _ Display Percent used in place of Mean fields |
+-----+
```

Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each Workstation ID and SQL statement, rather than the mean time.

F19 - DB2 SQL CPU/Svc Time by EndUsr

Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. Also this report is only created when measuring a Distributed Data Facility (DDF) address space. Exact SQL call counts, total SQL service time, total SQL task CPU time, SQL Enclave, and SQL zIIP times by SQL statement are recorded. This report shows quantification by End User ID. You can further expand each line to see a further breakdown and quantification by individual SQL statement.

Note: This report is for DDF measurements only.

Quantification

Each report line shows the following for each End User ID and, when expanded, for each SQL statement observed for the End User ID.

- Number of SQL calls
- Total task CPU time for the SQL call processing
- Mean SQL call task CPU time, or percent of total used
- Total service time for the SQL call processing
- Mean SQL call service time, or percent of total used

A setup option is available to display the percent used in place of the mean fields. Keep in mind that the task CPU time applies only to the region being measured. DB2 executes in multiple address spaces and CPU could also be consumed in other DB2 regions not reflected in this report. This is reflected in the enclave CPU times shown in the detail windows of this report.

Detail line hierarchy

An unexpanded F19 report shows a line for each End User ID that issued SQL requests. You can expand each line to reveal two additional hierarchical levels of detail (using the + line command). The hierarchy is illustrated here:

```
Level 1 End User ID
Level 2 SQL Request
Level 3 SQL Statement Text
Level 2 SQL Request
Level 3 SQL Statement Text
```

Detail line descriptions

End User ID detail line

This is the first-level detail line. Each line shows information about an End User ID for which SQL request measurement data was recorded.

Under Heading	This is Displayed
EndUsr	The End User ID name.
Nbr of SQL Calls	The number of SQL calls counted for this End User ID.
CPU Time: Total	The total task CPU time for all SQL calls counted for this End User ID.
CPU Time: Mean	The mean CPU time per SQL call.
CPU Time: Pct	The percent of total CPU time this End User ID used.
Svc Time: Total	The total service time for all SQL calls for this End User ID.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this End User ID used.

SQL request detail line

This is the second-level detail line shown directly under the End User ID detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
EndUsr	A sequence number. This is assigned by Application Performance Analyzer to uniquely identify the SQL request. Either “S” or “D” precedes the sequence number indicating if the SQL statement is static or dynamic.
Stmt#	The precompiler statement number. This is the statement number assigned by the precompiler to the SQL request. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
SQL Function	The SQL function. This is the name of the SQL function (SELECT, FETCH, UPDATE, etc.)
Nbr of Calls	The number of SQL calls counted for this SQL statement.
CPU Time: Total	The total task CPU time for all SQL calls counted for this statement.
CPU Time: Mean	The mean task CPU time per SQL call.

Under Heading	This is Displayed
CPU Time: Pct	The percent of total CPU time this statement used.
Svc Time: Total	The total service time for all SQL calls for this statement.
Svc Time: Mean	The mean service time per SQL call.
Svc Time: Pct	The percent of total service time this statement used.

SQL statement text detail line

This is the third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

This sample shows the report with one End User ID expanded to the third level (SQL text).

File View Navigate Help							
F19: DB2 SQL CPU/Svc Time by EndUsr (1641/DB2ADIST)				Row 00001 of 00336			
Command ==>				Scroll ==> CSR			
EndUsr	Stmt#	SQL Function	Nbr of SQL Calls	--CPU Time-- Total Mean	--Svc Time-- Total Mean		
USR01			121	0.67	0.00555	16.74	0.13837
± D00016	0	EXECUTE IMME	3	0.11	0.03885	0.13	0.04345
	>	EXPLAIN PLAN SET QUERYNO=1 FOR SELECT					
	>	COALESCE(FIELD_ONE_KEY, DEP2_COL1_KEY) AS COL1_KEY					
	>	,COALESCE(DEP2_COL2_KEY, DEP3_COL2_KEY) AS COL2_KEY					
	>	,DEP3_COL3_KEY,DEP3_COL4 ,DEP3_COL5 ,DEP2_COL3					
	>	,DEP2_COL4 ,FIELD_TWO ,FIELD_THREE ,FIELD_FOUR					
	>	,FIELD_FIVE ,FIELD_SIX ,FIELD_SEVEN					
	>	,CHAR(FIELD_EIGHT,ISO) ,CHAR(FIELD_NINE,ISO)					
	>	,FIELD_TEN ,TIMEZONE () FROM MAIN FULL OUTER JOIN DEP2					
	>	ON DEP2_COL1_KEY = FIELD_ONE_KEY LEFT JOIN DEP3 ON					
	>	DEP3_COL1_KEY = DEP2_COL1_KEY AND DEP3_COL2_KEY =					
	>	DEP2_COL2_KEY ORDER BY COL1_KEY ,COL2_KEY					
	>	,DEP3_COL3_KEY					
→ D00020	0	FETCH	12	0.08	0.00744	0.09	0.00763
	>	SELECT * FROM PLAN_TABLE ORDER BY QUERYNO, QBLOCKNO,					
	>	PLANNO					
	>	(PREPARE of SQL was done at Stmt# 0 Seqno D00017)					
→ D00019	0	OPEN	3	0.08	0.02768	0.08	0.02891
	>	SELECT * FROM PLAN_TABLE ORDER BY QUERYNO, QBLOCKNO,					
	>	PLANNO					
	>	(PREPARE of SQL was done at Stmt# 0 Seqno D00017)					
→ D00034	0	FETCH	3	0.05	0.01741	0.05	0.01809
	>	(SELECT T1.FIELD_ONE_KEY AS					
	>	UNION_COLUMN_01 ,T1.FIELD_TWO AS					
	>	UNION_COLUMN_02 FROM AIF04.MAIN T1 WHERE NOT EXISTS					
	>	(SELECT * FROM AIF04.DEP1 T2 WHERE T1.FIELD_ONE_KEY =					
	>	T2.DEP1_COL1_KEY1) UNION SELECT T3.FIELD_ONE_KEY					
	>	AS UNION_COLUMN_01 ,T3.FIELD_TWO					
	>	AS UNION_COLUMN_02 FROM AIF04.MAIN T3 WHERE NOT EXISTS					
	>	(SELECT * FROM AIF04.DEP2 T4 WHERE T3.FIELD_ONE_KEY =					
	>	T4.DEP2_COL1_KEY)) UNION ALL (SELECT					

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	EndUsr, Seqno	Display context help information.
++	EndUsr, Seqno	Show additional details.
+	EndUsr, Seqno	Expand to reveal next level.
–	EndUsr, Seqno	Collapse to hide next level.
SV	EndUsr	Sort next level entries by value.
SS	EndUsr	Sort lines by program and statement number.
SD	EndUsr	Sort next level entries by service time
P	Seqno	Display source program mapping.
EX	Seqno	Display DB2 EXPLAIN data.

on headings

Cmd	When Applied To Object	Action
?	EndUsr	Display context help information.
+	EndUsr	Expand to reveal all entries.
–	EndUsr	Collapse to show only first level.
SV	EndUsr	Sort next level by value.
SN	EndUsr	Sort next level by name.
SD	EndUsr	Sort next level by service time.

SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```
File View Navigate Help
+-----+
| Options for DB2 SQL CPU/Svc Time by Endusr |
| Enter "/" to select an option              |
|   _ Display Percent used in place of Mean fields |
+-----+
```

Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by each End User ID and SQL statement, rather than the mean time.

F20 - DB2 Class 3 Wait Times

Usage

A prerequisite for this report is activation of the DB2+ option during the measurement. This report shows quantification of DB2 Class 3 wait times in micro seconds. The wait times are extracted from DB2 SMF records created during the measurement and are accumulated by plan name. This report is only produced

when the DB2 SMF configuration option is enabled during installation, and Application Performance Analyzer is able to collect the DB2 accounting trace data from SMF.

Detail Line descriptions

Plan Name

This is the name of the DB2 plan for which the following Class 3 wait times are accumulated.

Database I/O

This is the accumulated I/O elapsed wait time for database I/O.

Read I/O other

This is the accumulated wait time for read I/O that was done under a thread other than the one being measured.

Write I/O other

This is the accumulated wait time for write I/O that was done under a thread other than the one being measured.

IRLM Lock/Latch

This is the accumulated wait time due to local contention for locks.

DB2 Latch

This is the accumulated wait time due to latch contention.

Page Latch

This is the accumulated wait time due to page latch contention.

Log Write I/O

This is the accumulated wait time for a log write I/O.

Log Read

This is the accumulated wait time for archive reads, active reads, and active log prefetch reads.

ARC LOG QUIESCE

This is the accumulated wait time due to processing of ARCHIVE LOG MODE(QUIESCE) commands.

Phase 1 Write

This is the accumulated wait time for commit phase 1 database write I/O completion.

TCP/IP LOB/XML

This is the accumulated wait time for TCP/IP LOB and XML materialization.

Glbl Contention

This is the accumulated wait time due to global contention for parent L-locks.

Group Messages

This is the accumulated wait time due to sending of messages to other DB2 members in the data sharing group.

CF Requests

This is the accumulated wait time for IXLCACHE and IXLFCOMP asynch requests.

Drain Lock

This is the accumulated wait time for a drain lock.

Claim Release

This is the accumulated wait time for a drain when waiting for claims to be released.

Task Switch: COMMIT

This is the accumulated wait time due to synchronous execution unit switching for DB2 commit, abort, or deallocation processing.

Task Switch: OPEN/CLOSE

This is the accumulated wait time due to synchronous execution unit switching to the DB2 Open/Close data set service or the HSM recall service.

Task Switch: SYSLGRNG

This is the accumulated wait time due to synchronous execution unit switching to the DB2 SYSLGRNG recording service. This service is also sometimes used for level-id checking for down level detection.

Task Switch: Data Manager

This is the Accumulated wait time due to synchronous execution unit switching to the DB2 Dataspace Manager Services, which include; Define data set, Extend data set, Delete data set, Reset data set, and VSAM catalog access.

Task Switch: Other

This is the accumulated wait time due to synchronous execution unit switching to other DB2 service tasks.

Sample reports

A sample report is shown here.

F20: DB2 Class 3 Wait Times (7507/CICS32A)				Row 00001 of 00015	
Command ==>				Scroll ==> CSR	
Plan Name		PFSAMPC			
Database I/O	0.105690	Glbl Contention	0.000000		
Read I/O other	0.122218	Group Messages	0.000000		
Write I/O other	0.000000	CF Requests	0.000000		
IRLM Lock/Latch	1.147968	Drain Lock	0.000000		
DB2 Latch	0.021755	Claim Release	0.000000		
Page Latch	0.000000	Task Switch:			
Log Write I/O	0.000000	COMMIT	0.111894		
Log Read	0.000000	OPEN/CLOSE	0.260264		
ARC LOG QUIESCE	0.000000	SYSLGRNG	0.005714		
Phase 1 Write	0.000000	Data Manager	0.099253		
TCP/IP LOB/XML	0.000000	Other	0.000000		

DB2 EXPLAIN report

The DB2 EXPLAIN report is available through the Application Performance Analyzer ISPF interface only, and is displayed by typing the command “EX” on a SQL statement. It is available in most DB2 reports. There are two sources of information for this report: static EXPLAIN data and dynamic EXPLAIN data.

Usage

Use this report to see the DB2 EXPLAIN information for a particular SQL statement. Each report line represents a row in the result PLAN_TABLE. You can obtain this report by issuing an “EX” line command against the SQL statement you want explained.

Static EXPLAIN

Static EXPLAIN data is requested when an “EX” command is issued on a SQL statement, if the DB2X data extractor was selected for the observation request and the SQL statement was bound with the EXPLAIN(YES) option.

Static EXPLAIN data is obtained at the time of the measurement. Any changes made to the DB2 objects since the measurement was requested will not be reflected in the EXPLAIN request.

Dynamic EXPLAIN

A dynamic EXPLAIN is requested when an “EX” command is issued on a SQL statement that does not have static EXPLAIN data available. Application Performance Analyzer will issue a dynamic EXPLAIN request on the SQL text of the statement you have selected.

Note: Not all SQL statements can be the subject of a dynamic EXPLAIN request. Included among these are UPDATE or DELETE statements with a WHERE CURRENT OF clause.

A prerequisite for this report is activation of the DB2+ option during the measurement.

The dynamic EXPLAIN request is executed at the time you request it. It is not issued at the time of the measurement. Thus, any changes made to the DB2 objects since the measurement was requested will affect the dynamic EXPLAIN request. It is valid to select a DECLARE CURSOR or a SELECT INTO statement. Application Performance Analyzer will remove the DECLARE CURSOR clause or the INTO clause before issuing the dynamic EXPLAIN request. It will also substitute any :H host variable placeholders in static SQL statements with a question mark. A dynamic EXPLAIN request can be requested on SQL statements up to 15000 bytes long.

Field descriptions

The values of certain columns from each row of PLAN_TABLE are displayed in each report line. To see more detailed information, including values of additional PLAN_TABLE columns, issue the “++” line command or press the ENTER key. For full descriptions of these columns, refer to *DB2 Universal Database for z/OS: Application Programming and SQL Guide*.

Under Heading	This is Displayed
Blk Num	The value of the QBLOCKNO column. This is also an input field. Use the “++” line command or press the ENTER key to display more information about the PLAN_TABLE row.
Plan Num	The value of the PLANNO column.
Mix Op	The value of the MIXOPSEQ column.
Join Mthd	The value of the METHOD column.
Acc Type	The value of the ACCESTYPE column.
Match Cols	The value of the MATCHCOLS column.
Index Only	The value of the INDEXONLY column.
Sort New	U J O G The values of the SORTN_UNIQ, SORTN_JOIN, SORTN_ORDERBY and SORTN_GROUPBY columns.
Sort Comp	U J O G The values of the SORTC_UNIQ, SORTC_JOIN, SORTC_ORDERBY and SORTC_GROUPBY columns.
Table Name	The value of the TNAME column.

Sample reports

A sample report is shown here:

File View Navigate Help										
DB2 EXPLAIN (0167/CICS23A)								Row 00001 of 00010		
Command ==>								Scroll ==> CSR		
Blk Num.	Plan Num.	Mix Op	Join Mthd	Acc Type	Match Cols	Index Only	Sort New U J O G	Sort Comp U J O G	Table Name	
0001	1	0	0	R	0	N	N N N N	N N N N	MAIN	
0001	2	0	3		0	N	N N N N	Y N N N		
0002	1	0	0	R	0	N	N N N N	N N N N	DEP1	
0003	1	0	0	R	0	N	N N N N	N N N N	MAIN	
0004	1	0	0	R	0	N	N N N N	N N N N	DEP2	
0005	1	0	0	R	0	N	N N N N	N N N N	MAIN	
0005	2	0	3		0	N	N N N N	Y N N N		
0006	1	0	0	R	0	N	N N N N	N N N N	DEP1	
0007	1	0	0	R	0	N	N N N N	N N N N	MAIN	
0008	1	0	0	R	0	N	N N N N	N N N N	DEP2	

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Blk Num	Display context help information.
++	Blk Num	Show additional details.

Note: There are no line commands on headings for this report.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown below (shown in three scrollable screen segments).

```
File View Navigate Help
+-----+
DB2 EXPLAIN Data for Selected Row                                     More:  +
Block number                0003
Plan number                 0001
Join method                 None
Table creator               USER4
Table name                  MAIN
Access type                 Table space scan
Matching columns            0
Index creator               n/a
Index name                  n/a
Index only                  No
Merge join columns          0
Correlation name            T3
Page range screening        n/a
Join type                   n/a
Query block type            SELECT
Direct row access           n/a

Sort      New      Composite
Unique    No       No
Join      No       No
Order by  No       No
Group by  No       No

Lock mode          Intent Share
Prefetch           Pure sequential
Function evaluation After data retrieval and sorting
Multiple index operation sequence no. 0

Parallelism Information:
Number of tasks                0
Group identifier               0
Join degree                    0
Join group id                  0
Sort composite group id        0
+-----+
```

File View Navigate Help

Sort new table group id	0	More: - +
Parallelism mode	n/a	
Descriptive Names Mapped to PLAN_TABLE Column Names		
<u>Descriptive Name</u>	<u>Column Name</u>	
Block number	QBLOCKNO	
Plan number	PLANNO	
Join method	METHOD	
Table creator	CREATOR	
Table name	TNAME	
Access type	ACCESSTYPE	
Matching columns	MATCHCOLS	
Index creator	ACCESSCREATOR	
Index name	ACCESSNAME	
Index only	INDEXONLY	
Unique	SORTN_UNIQ, SORTC_UNIQ	
Join	SORTN_JOIN, SORTC_JOIN	
Order by	SORTN_ORDERBY, SORTC_ORDERBY	
Group by	SORTN_GROUPBY, SORTC_GROUPBY	
Lock mode	TSLOCKMODE	
Prefetch	PREFETCH	
Function evaluation	COLUMN_FN_EVAL	
Multiple index operation sequence no.	MIXOPSEQ	
Number of tasks	ACCESS_DEGREE	
Group identifier	ACCESS_PGROUP_ID	
Join degree	JOIN_DEGREE	
Join group id	JOIN_PGROUP_ID	
Sort composite group id	SORTC_PGROUP_ID	
Sort new table group id	SORTN_PGROUP_ID	
Parallelism mode	PARALLELISM_MODE	
Merge join columns	MERGE_JOIN_COLS	
Correlation name	CORRELATION_NAME	
Page range screening	PAGE_RANGE	
Join type	JOIN_TYPE	

File View Navigate Help

Query block type	QBLOCK_TYPE	More: -
Direct row access	PRIMARY_ACCESSTYPE	

DB2SQL category in C01 report

More DB2 measurement data is presented in the C01 CPU Usage by Category report, under the category DB2SQL. If you expand the DB2SQL with the “+” line command, SQL Statement items will be displayed.

A sample is shown here:

File View Navigate Help

C01: CPU Usage by Category (0645/CICS23A) Row 00001 of 00014
Command ==> Scroll ==> CSR

Name	Description	Percent of CPU time * 10.00% ±2.6%	
		*...1...2...3...4...5...6...7...8.	
SYSTEM	System/OS Services	76.39	=====
DB2SQL	SQL Processing	17.02	=====
→ 00008	PFSAMPC(1466) FETCH	8.00	=====
→ 00003	PFSAMPB(408) SET HOS	2.10	=====
→ 00010	PFSAMPB(816) UPDATE	2.03	=====
→ 00004	PFSAMPC(1316) SELECT	1.56	=====
→ 00006	PFSAMPC(1347) SELECT	0.94	=====
→ 00002	PFSAMPB(678) SELECT	0.67	=====
→ 00001	PFSAMPA(816) SELECT	0.67	=====
→ 00007	PFSAMPC(1443) OPEN	0.61	=====
→ 00009	PFSAMPC(1562) CLOSE	0.40	=====
APPLCN	Application Code	6.58	=====

You can enter the “+” command to further expand each SQL statement one more level to display a breakdown by load module.

SQL Statement

This item attributes measured activity to a DB2 SQL statement.

Name Column

A sequence number is assigned by Application Performance Analyzer to each unique SQL statement observed during the measurement. This sequence number is shown in the name field. It is possible for some sequence numbers to be missing (sequence gaps) from the report. This will occur if a sequence number was assigned to SQL statements but no CPU activity was measured for these statements.

Description Column

The name of the program that issued the SQL request followed by the precompiler statement number (enclosed in parentheses) is shown here. This is followed by the SQL function (e.g. SELECT, INSERT, COMMIT).

Chapter 7. MQSeries performance analysis reports

This section describes the MQSeries performance analysis reports.

For information about ...	See ...
The MQSeries data extractor	“Overview of MQSeries data extractor ” on page 395
Q01 MQSeries activity summary	“Q01 - MQSeries activity summary” on page 396
Q02 MQSeries CPU usage by queue	“Q02 - MQSeries CPU usage by queue” on page 398
Q03 MQSeries CPU usage by request	“Q03 - MQSeries CPU usage by request” on page 401
Q04 MQSeries CPU usage by transaction	“Q04 - MQSeries CPU usage by Txn” on page 403
Q05 MQSeries service time by queue	“Q05 - MQSeries service time by queue” on page 406
Q06 MQSeries Serv Time by Request	“Q06 - MQSeries service time by request” on page 409
Q07 MQSeries service time by transaction	“Q07 - MQSeries service time by Txn” on page 411
Q08 MQSeries wait time by queue	“Q08 - MQSeries wait time by queue” on page 415
Q09 MQSeries wait time by request	“Q09 - MQSeries wait time by request” on page 417
Q10 MQSeries wait time by transaction	“Q10 - MQSeries wait time by Txn” on page 420
Q11 MQ+ Activity Timeline	“Q11 - MQ+ Activity Timeline” on page 423
Q12 MQ+ CPU/SVC Time by Queue	“Q12 - MQ+ CPU/SVC Time by Queue” on page 426
Q13 MQ+ CPU/SVC Time by Request	“Q13 - MQ+ CPU/SVC Time by Request” on page 429
Q14 MQ+ CPU/SVC Time by Txn	“Q14 - MQ+ CPU/SVC Time by Txn” on page 432

Overview of MQSeries data extractor

In order to use the MQSeries Performance Analysis Reports, the MQSeries data extractor must be turned on when the Observation Request is entered. You must select the MQS data extractor in the Enter an Observation Request panel.

This data extractor provides the ability to observe/sample and report on MQSeries interface calls (both dynamic and static) in Batch, IMS and CICS programs. More specifically, to show the CPU and wait time spent in MQSeries interface calls and to attribute the time spent to a particular MQSeries interface call.

When the MQSeries data extractor is selected, Application Performance Analyzer will record the following information in the sample file for each MQSeries call that it observes:

- Environment (Batch, IMS or CICS)
- Load module that issued the call
- Offset within the load module of the return address from the MQ call
- Type of MQI call (MQOPEN, MQGET, etc.)
- Queue Manager name

- Object name (for example, the queue name)
- Message size (actual length for MQPUT/MQPUT1, buffer length for MQGET)
- MQ Options (for MQOPEN, MQGET, MQPUT MQCLOSE)
- Message type, priority and persistence
- Transaction ID (CICS and IMS)

Note: In an IMS environment, Application Performance Analyzer might not be able to determine the default Queue Manager name for some samples if the Application Performance Analyzer task has not previously sampled any. This might result in the MQ object name being unknown for the first few calls. Subsequent sampling runs will obtain the MQ object name for each sample.

The MQ+ extractor

MQ+ is a measurement option where the precise number of MQ calls, the exact MQ service time, and CPU time by MQ call are counted. When you select the MQ+ option, Application Performance Analyzer captures the data that is required to produce the MQ+ timeline and service time reports Q11 through Q14.

Selecting the MQ+ option has a small impact on the performance of the target address space. Be careful when you use the MQ+ feature with other products that also intercept MQ calls because unpredictable results might occur. Your installer can choose to limit access to this feature.

Q01 - MQSeries activity summary

Usage

Use this report to see a summary of the MQSeries requests (Calls) issued during the observation session and a list of the MQSeries objects referenced by these requests.

Detail line descriptions

Access to the following MQSeries objects observed

Each referenced object is described under this heading. For each object, the following information is reported:

Under Heading	This is Displayed
Object Seq. Nbr	A unique sequence number assigned by Application Performance Analyzer to each unique object.
Object Manager Name	The name of the MQSeries Queue Manager – usually four characters. This name is combined with the object name to fully qualify the name.
Object Name	A one to 48 character MQSeries object name. Some functions do not reference an object. In this case, Application Performance Analyzer shows an entry with 'n/a' in this field.

Under Heading	This is Displayed
Object Type	<p>The type of object. One of the following is shown:</p> <ul style="list-style-type: none"> • Queue • Namelist • Process • Storage Class • Queue Manager • Channel • Auth Info • CF Structure • Alias Queue • Model Queue • Local Queue • Remote Queue • Sender Channel • Server Channel • Reqstr Channel • Recvr Channel • Current® Channel • Saved Channel • SVRCON Channel • CLNTCON Channel

MQSeries calls observed

Each observed MQSeries request is listed under this heading. For each request, the following information is reported:

Under Heading	This is Displayed
Module	The name of the load module that issued the MQSeries request.
CSECT	The name of the CSECT in the module containing the MQSeries CALL.
Offset	The hexadecimal offset in the CSECT of the return address to the CALL.

Under Heading	This is Displayed
Function	<p>The MQSeries function:</p> <ul style="list-style-type: none"> • CONNECT • DISCONN • OPEN • CLOSE • GET • PUT • PUT1 • COMMIT • BACKOUT • INQUIRE • SET
Queue Mgr	The Queue Manager name.
Object Name	The object name.

Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
Q01: MQSeries Activity Summary (0643/MQTST01) Row 00001 of 00023
Command ==> _____ Scroll ==> CSR

Access to the Following MQSeries Objects Observed

Object Sequence Number 0001
Queue Manager Name CSQ1
Object Name n/a

Object Sequence Number 0002
Queue Manager Name CSQ1
Object Name SYSTEM.DEFAULT.ALIAS.QUEUE
Object Type Queue

MQSeries Calls Observed

Module CSECT Offset Function Queue Mgr Object Name
MQBCS01 MQBCS01 0030A4 CONNECT CSQ1
MQBCS01 MQBCS01 00313E OPEN CSQ1 SYSTEM.DEFAULT.ALIAS.Q
MQBCS01 MQBCS01 00334C PUT CSQ1 SYSTEM.DEFAULT.ALIAS.Q
MQBCS01 MQBCS01 0033DC CLOSE CSQ1 SYSTEM.DEFAULT.ALIAS.Q
MQBCS01 MQBCS01 0033DC CLOSE CSQ1
MQBCS01 MQBCS01 003452 COMMIT CSQ1
MQBCS01 MQBCS01 0034c8 DISCONN CSQ1

```

Q02 - MQSeries CPU usage by queue

Usage

Use this report to see how CPU resources were consumed by MQSeries Requests. The percentage of CPU usage is reported by MQSeries Queue Name. Expand the Queue Name detail lines to see a further breakdown by individual MQSeries Request.

Quantification

Each report line quantifies CPU usage for an MQSeries Queue Name. This is further broken down by MQSeries Request.

Detail line hierarchy

An unexpanded Q02 report shows a line for each MQSeries Queue. You can expand each line to reveal one additional hierarchical level of detail.

The hierarchy is illustrated here:

```
Level 1 MQSeries Queue
  Level 2 MQSeries Request
  Level 2 MQSeries Request
  ...
```

Detail line descriptions

MQSeries queue detail line

This is the first-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of CPU Time	The percentage of CPU time consumed while executing MQSeries Requests for the indicated MQSeries Queue Name.

MQSeries request detail line

This is a second-level detail line shown directly under the MQSeries Queue detail line. It quantifies CPU usage for a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of CPU Time	The percentage of CPU time consumed while executing the indicated MQSeries Request.

Sample reports

A sample report is shown here. It has been fully expanded by entering “+” on the Name field.

```

File View Navigate Help
-----
Q02: MQSeries CPU Usage by Queue (0643/MQTST01)          Row 00001 of 00010
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00% ±2.8%
          *....1....2....3....4....5....6....7.
CSQ1      SYSTEM.DEFAULT.ALIAS.QUEUE 75.90 =====
→ PUT      MQBCS01+334C      75.50 =====
→ OPEN     MQBCS01+313E      0.32
→ CLOSE    MQBCS01+33DC      0.08

CSQ1      No Object Name      8.83 ===
→ CONNECT  MQBCS01+30A4      7.06 ===
→ DISCONN  MQBCS01+34C8      1.60 =
→ CLOSE    MQBCS01+33DC      0.08
→ COMMIT   MQBCS01+3452      0.08

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Queue, Request	Display context help information.
++	Queue, Request	Show additional details.
+	Queue	Expand to reveal next level.
–	Queue	Collapse to hide next level.
SV	Queue	Sort next level by value.
SN	Queue	Sort next level by name.
P	Request	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size
+	Percent of CPU	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent of CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > PUT          MQBCS01+334C           78.70 000000000000000000000000 |
+-----+

Calculation Details
MQ Series CPU measurements             1,201
Total CPU measurements                 1,526
Percent of total                       78.70%

MQSeries Request Details
Calling Module    MQBCS01
CSECT            MQBCS01
Offset           00334C
Request Type     PUT
Queue Manager    CSQ1
Object Name      SYSTEM.DEFAULT.LOCAL.QUEUE
Object Type      Queue
```

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of CPU Time	The percentage of CPU time consumed while executing MQSeries Requests for the indicated MQSeries Queue Name.

Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
Q03: MQSeries CPU Usage by Request (0643/MQTST01)          Row 00001 of 00007
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00% ±2.8%
          *....1....2....3....4....5....6....7.
PUT       MQBCS01+334C          75.50 =====
CONNECT   MQBCS01+30A4           7.06 ===
DISCONN   MQBCS01+34C8          1.60 =
OPEN      MQBCS01+313E          0.32
CLOSE     MQBCS01+33DC          0.08
CLOSE     MQBCS01+33DC          0.08
COMMIT    MQBCS01+3452          0.08

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Request, Queue	Display context help information.
++	Request, Queue	Show additional details.
+	Request	Expand to reveal next level.
–	Request	Collapse to hide next level.
P	Request	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size
+	Percent of CPU	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.

Cmd	When Applied To Object	Action
–	Percent of CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| > PUT      MQBCS01+334C      78.70 000000000000000000000000 |
+-----+
+-----+
Calculation Details
MQ Series CPU measurements      1,201
Total CPU measurements          1,526
Percent of total                 78.70%
+-----+
MQSeries Request Details
Calling Module    MQBCS01
CSECT             MQBCS01
Offset            00334C
Request Type      PUT
Queue Manager     CSQ1
Object Name       SYSTEM.DEFAULT.LOCAL.QUEUE
Object Type       Queue
+-----+

```

Q04 - MQSeries CPU usage by Txn

Usage

Use this report to see how CPU resources were consumed by MQSeries Requests. The percentage of CPU usage is reported by CICS or IMS transaction. Expand the transaction detail lines to see a further breakdown by MQSeries Queue and by individual MQSeries Request.

Quantification

Each report line quantifies CPU usage for a CICS or IMS transaction under which MQSeries Requests were serviced. This is further broken down by MQSeries Queue and by MQSeries Request.

Detail line hierarchy

An unexpanded Q04 report shows a line for each CICS or IMS transaction. You can expand each line to reveal one additional hierarchical level of detail.

The hierarchy is illustrated here:

```

Level 1 CICS/IMS Transaction Level
Level 2 MQSeries Queue
Level 3 MQSeries Request
Level 3 MQSeries Request
...

```

Detail line descriptions

CICS/IMS transaction detail line

This is the first-level detail line. Each line shows information about a CICS or IMS transaction under which MQSeries requests were issued.

Under Heading	This is Displayed
Name	A CICS or IMS transaction code. This is the transaction under which measured MQSeries Requests were issued. "Batch" is shown here for request not issued under control of a CICS or IMS transaction.
Description	"CICS Transaction" or "IMS Transaction". "Not in IMS/CICS Txn" is shown here if the request was not issued under control of a CICS or IMS transaction.
Percent of CPU Time	The percentage of CPU time consumed while executing MQSeries Requests under control of the indicated transaction.

MQSeries queue detail line

This is the second-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of CPU Time	The percentage of CPU time consumed while executing MQSeries Requests for the indicated MQSeries Queue Name.

MQSeries request detail line

This is a third-level detail line shown directly under the MQSeries Queue detail line. It quantifies CPU usage for a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of CPU Time	The percentage of CPU time consumed while executing the indicated MQSeries Request.

Sample reports

A sample report is show here. It has been fully expanding by entering "+" on the Name heading.

```

File View Navigate Help
-----
Q04: MQSeries CPU Usage by Txn/Queue (0025/MQTST01) Row 00001 of 00015
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of CPU time * 10.00% ±2.8%
          *....1....2....3....4....5....6....7.
MQS1      CICS Transaction      13.71 =====
→ CSQ1    CSQ1.DEFXMIT.QUEUE  13.20 =====
→ GET     MQSAMP1+2DF2          10.92 =====
→ OPEN    MQSAMP1+2C2C          1.94 =
→ CLOSE   MQSAMP1+31A0         0.34
→ CSQ1    No Object Name      0.50
→ CLOSE   MQSAMP1+31A0         0.50

MQDR      CICS Transaction      8.03 ====
→ CSQ1    CSQ1.DEFXMIT.QUEUE  7.80 ====
→ PUT     CSQ4CVK1+284E        5.65 ===
→ OPEN    CSQ4CVK1+277E        1.86 =
→ CLOSE   CSQ4CVK1+29E2        0.28
→ CSQ1    No Object Name      0.23
→ CLOSE   CSQ4CVK1+29E2        0.12

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Transactions, Queue, Request	Display context help information.
++	Transactions, Queue, Request	Show additional details.
+	Transactions, Queue	Expand to reveal next level.
–	Transactions, Queue	Collapse to hide next level.
SV	Transactions, Queue	Sort next level by value.
SN	Transactions, Queue	Sort next level by name.
P	Request	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size
+	Percent of CPU	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent of CPU	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File  View  Navigate  Help
-----
+----- The following report line was selected -----+
| > PUT          MQBCS01+334C          78.70 000000000000000000000000|
+-----+

Calculation Details
MQ Series CPU measurements          1,201
Total CPU measurements              1,526
Percent of total                    78.70%

MQSeries Request Details
Calling Module    MQBCS01
CSECT            MQBCS01
Offset           00334C
Request Type     PUT
Queue Manager    CSQ1
Object Name      SYSTEM.DEFAULT.LOCAL.QUEUE
Object Type      Queue

```

Q05 - MQSeries service time by queue

Usage

Use this report to see how time was consumed by MQSeries Requests. The percentage of time is reported by MQSeries Queue Name. Expand the Queue Name detail lines to see a further breakdown by individual MQSeries Request.

Quantification

Each report line quantifies service time for an MQSeries Queue Name. The service time is the actual time measured MQSeries requests were being processed. This is further broken down by MQSeries Request.

Detail line hierarchy

An unexpanded Q05 report shows a line for each MQSeries Queue. You can expand each line to reveal one additional hierarchical level of detail.

The hierarchy is illustrated here:

```

Level 1 MQSeries Queue
Level 2 MQSeries Request
Level 2 MQSeries Request
...
```

Detail line descriptions

MQSeries queue detail line

This is the first-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of Time	The percentage of the measurement interval duration MQSeries Requests for the indicated Queue Name were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

MQSeries request detail line

This is a second-level detail line shown directly under the MQSeries Queue detail line. It quantifies time consumed during executions of a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of Time	The percentage of the measurement interval duration the indicated MQSeries request was being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

Sample reports

A sample report is show here. It has been fully expanded by pressing “+” on the Name heading.

File View Navigate Help		
Q05: MQSeries Service Time by Queue (0025/MQTST01)		Row 00001 of 00010
Command ==>		Scroll ==> CSR
Name	Description	Percent of time * 10.00% ±0.9%
		*....1....2....3....4....5....6....7.
CSQ1	CSQ1.DEFXXMIT.QUEUE	29.71 =====
→ GET	MQSAMP1+2DF2	14.79 =====
→ PUT	CSQ4CVK1+284E	8.56 ===
→ OPEN	CSQ4CVK1+277E	2.64 =
→ OPEN	MQSAMP1+2C2C	2.54 =
→ CLOSE	CSQ4CVK1+29E2	0.61
→ CLOSE	MQSAMP1+31A0	0.55
CSQ1	No Object Name	0.90
→ CLOSE	MQSAMP1+31A0	0.50
→ CLOSE	CSQ4CVK1+29E2	0.39

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Queue, Request	Display context help information.
++	Queue, Request	Show additional details.
+	Queue	Expand to reveal next level
–	Queue	Collapse to hide next level
SV	Queue	Sort next level by value.
SN	Queue	Sort next level by name.
P	Request	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size
+	Percent of Time	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent of Time	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > PUT          MQBCS01+334C          72.46 000000000000000000000000 |
+-----+

Calculation Details
MQ Series activity measurements          1,645
Total measurements                      2,270
Percent of total                        72.46%

MQSeries Request Details
Calling Module    MQBCS01
CSECT            MQBCS01
Offset           00334C
Request Type     PUT
Queue Manager    CSQ1
Object Name      SYSTEM.DEFAULT.LOCAL.QUEUE
Object Type      Queue
```

```

File View Navigate Help
+*****+
|*****- The following report line was selected *****|
| → PUT      MQBCS01+334C      60.38 =====|
|*****+
|
|Calculation Details
|The 60.38% quantification represents 1,102 samples during
|which the indicated MQSeries request was being serviced
|The percentage is the portion of the total session elapsed
|time of 1,825 samples.
|
|MQSeries Request Details
|Calling Module      MQBCS01
|CSECT               MQBCS01
|Offset              00334C
|Request Type        PUT
|Queue Manager       CSQ1
|Object Name         SYSTEM.DEFAULT.ALIAS.QUEUE
|Object Type         Queue
|*****+

```

Q06 - MQSeries service time by request

Usage

Use this report to see how time was consumed by MQSeries Requests. The percentage of time is reported by MQSeries Request. Expand the MQSeries Request lines to see a further breakdown by MQSeries Queue.

Quantification

Each report line quantifies service time for an MQSeries Request. This is further broken down by MQSeries Queue Name.

Detail line hierarchy

An unexpanded Q06 report shows a line for each MQSeries Request. You can expand each line to reveal one additional hierarchical level of detail.

The hierarchy is illustrated here:

```

Level 1 MQSeries Request
  Level 2 MQSeries Queue
  Level 2 MQSeries Queue
  ...

```

Detail line descriptions

MQSeries request detail line

This is a first-level detail line shown directly under the MQSeries Queue detail line. It quantifies consumption of time for a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.

Under Heading	This is Displayed
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of Time	The percentage of the measurement interval duration the indicated MQSeries request was being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

MQSeries queue detail line

This is the second-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of Time	The percentage of the measurement interval duration MQSeries Requests for the indicated Queue Name were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
Q06: MQSeries Service Time by Request (0643/MQTST01)          Row 00001 of 00007
Command ==> _____ Scroll ==> CSR
Name      Description      Percent of time * 10.00% ±2.3%
          *....1....2....3....4....5....6....7.
PUT       MQBCS01+334C      60.38 =====
CONNECT   MQBCS01+30A4      10.84 =====
DISCONN   MQBCS01+34C8      1.42 =
COMMIT    MQBCS01+3452      1.09 =
OPEN      MQBCS01+313E      0.21
CLOSE     MQBCS01+33DC      0.05
CLOSE     MQBCS01+33DC      0.05

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Request, Queue	Display context help information.

Usage

Use this report to see how time was consumed by MQSeries Requests. The percentage of time is reported by CICS or IMS transaction. Expand the transaction detail lines to see a further breakdown by MQSeries Queue and by individual MQSeries Request.

Quantification

Each report line quantifies time consumed by MQSeries requests in a CICS or IMS transaction. This is further broken down by MQSeries Queue and by MQSeries Request.

Detail line hierarchy

An unexpanded Q07 report shows a line for each CICS or IMS transaction. You can expand each line to reveal one additional hierarchical level of detail.

The hierarchy is illustrated here:

```
Level 1 CICS/IMS Transaction
Level 2 MQSeries Queue
Level 3 MQSeries Request
Level 3 MQSeries Request
...

```

Detail line descriptions

CICS/IMS transaction detail line

This is the first-level detail line. Each line shows information about a CICS or IMS transaction under which MQSeries requests were issued.

Under Heading	This is Displayed
Name	A CICS or IMS transaction code. This is the transaction under which measured MQSeries Requests were issued. "Batch" is shown here for request not issued under control of a CICS or IMS transaction.
Description	"CICS Transaction" or "IMS Transaction." "Not in IMS/CICS Txn" is shown here if the request was not issued under control of a CICS or IMS transaction.
Percent of Time	The percentage of the measurement interval duration MQSeries Requests under control of the indicated transaction were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

MQSeries queue detail line

This is the second-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.

Under Heading	This is Displayed
Percent of Time	The percentage of the measurement interval duration MQSeries Requests for the indicated Queue Name were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

MQSeries request detail line

This is a third-level detail line shown directly under the MQSeries Queue detail line. It quantifies time consumption for a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of Time	The percentage of the measurement interval duration the indicated MQSeries request was being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

Sample reports

A fully expanded report is shown here:

```

File View Navigate Help
-----
Q07: MQSeries Service Time by Txn/Queue (0025/MQTST01)      Row 00001 of 00015
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of time * 10.00% ±0.9%
          *....1....2....3....4....5....6....7.
MQS1      CICS Transaction      18.40 =====
→ CSQ1    CSQ1.DEFXMIT.QUEUE      17.89 =====
→ GET     MQSAMP1+2DF2      14.79 =====
→ OPEN    MQSAMP1+2C2C      2.54 =
→ CLOSE   MQSAMP1+31A0      0.55
→ CSQ1    No Object Name      0.50
→ CLOSE   MQSAMP1+31A0      0.50

MQDR      CICS Transaction      12.21 ====
→ CSQ1    CSQ1.DEFXMIT.QUEUE      11.82 ====
→ PUT     CSQ4CVK1+284E      8.56 ==
→ OPEN    CSQ4CVK1+277E      2.64 =
→ CLOSE   CSQ4CVK1+29E2      0.61
→ CSQ1    No Object Name      0.39
→ CLOSE   CSQ4CVK1+29E2      0.39

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Transaction, Queue, Request	Display context help information.
++	Transaction, Queue, Request	Show additional details.
+	Transaction, Queue	Expand to reveal next level.
–	Transaction, Queue	Collapse to hide next level.
SV	Transaction, Queue	Sort next level by value.
SN	Transaction, Queue	Sort next level by name.
P	Request	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size
+	Percent of Time	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent of Time	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > PUT          MQBCS01+334C          72.46 000000000000000000000000 |
+-----+

Calculation Details
MQ Series activity measurements          1,645
Total measurements                      2,270
Percent of total                        72.46%

MQSeries Request Details
Calling Module    MQBCS01
CSECT            MQBCS01
Offset           00334C
Request Type     PUT
Queue Manager    CSQ1
Object Name      SYSTEM.DEFAULT.LOCAL.QUEUE
Object Type      Queue
```

Q08 - MQSeries wait time by queue

Usage

Use this report to see how much wait time occurred during processing of MQSeries Requests. The percentage of time is reported by MQSeries Queue Name. Expand the Queue Name detail lines to see a further breakdown by individual MQSeries Request.

Quantification

Each report line quantifies wait time attributed to requests for an MQSeries Queue Name. This is further broken down by MQSeries Request.

Detail line hierarchy

An unexpanded Q08 report shows a line for each MQSeries Queue. You can expand each line to reveal one additional hierarchical level of detail.

The hierarchy is illustrated here:

```
Level 1 MQSeries Queue
  Level 2 MQSeries Request
  Level 2 MQSeries Request
  ...
```

Detail line descriptions

MQSeries queue detail line

This is the first-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue..
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of Time	The percentage of the measurement interval duration MQSeries Requests for the indicated Queue Name were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

MQSeries request detail line

This is a second-level detail line shown directly under the MQSeries Queue detail line. It quantifies wait time during executions of a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.

Under Heading	This is Displayed
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of Time	The percentage of the measurement interval duration the indicated MQSeries request was being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

Sample reports

A fully expanded report is shown here:

```

File View Navigate Help
-----
Q08: MQSeries Wait Time by Queue (0025/MQTST01)          Row 00001 of 00011
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of time * 10.00% ±0.9%
          *....1....2....3....4....5....6....7.
CSQ1      CSQ1.DEFXMIT.QUEUE    5.80 ==
→ GET      MQSAMP1+2DF2             3.01 ==
→ PUT      CSQ4CVK1+284E      1.60 =
→ OPEN     CSQ4CVK1+277E      0.59
→ OPEN     MQSAMP1+2C2C        0.38
→ CLOSE    CSQ4CVK1+29E2        0.18
→ CLOSE    MQSAMP1+31A0        0.01

CSQ1      No Object Name     0.10
→ CLOSE    MQSAMP1+31A0      0.08
→ CLOSE    CSQ4CVK1+29E2      0.01

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Queue, Request	Display context help information.
++	Queue, Request	Show additional details.
+	Queue	Expand to reveal next level.
–	Queue	Collapse to hide next level.
SV	Queue	Sort next level by value.
SN	Queue	Sort next level by name.
P	Request	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.

Cmd	When Applied To Object	Action
+	Description	Expand field size
+	Percent of Time	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent of Time	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| > PUT      MQBCS01+334C      19.55 0000000000      |
+-----+
+-----+
Calculation Details
MQ Series wait measurements      444
Total measurements                2,270
Percent of total                  19.55%
+-----+
MQSeries Request Details
Calling Module    MQBCS01
CSECT            MQBCS01
Offset           00334C
Request Type     PUT
Queue Manager    CSQ1
Object Name      SYSTEM.DEFAULT.LOCAL.QUEUE
Object Type      Queue
+-----+

```

Q09 - MQSeries wait time by request

Usage

Use this report to see how much wait time occurred during processing of MQSeries Requests. The percentage of wait time is reported by MQSeries Request. Expand the MQSeries Request lines to see a further breakdown by MQSeries Queue.

Quantification

Each report line quantifies wait time for an MQSeries Request. This is further broken down by MQSeries Queue Name.

Detail line hierarchy

An unexpanded Q09 report shows a line for each MQSeries Request. You can expand each line to reveal one additional hierarchical level of detail.

The hierarchy is illustrated here:

```

Level 1 MQSeries Request
Level 2 MQSeries Queue
Level 2 MQSeries Queue
...

```

Detail line descriptions

MQSeries request detail line

This is a first-level detail line shown directly under the MQSeries Queue detail line. It quantifies wait time for a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of Time	The percentage of the measurement interval duration the indicated MQSeries request was being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

MQSeries queue detail line

This is the second-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of Time	The percentage of the measurement interval duration MQSeries Requests for the indicated Queue Name were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

Sample reports

A sample report is shown here:

```

File View Navigate Help
-----
Q09: MQSeries Wait Time by Request (0643/MQTST01)          Row 00001 of 00003
Command ==> _____ Scroll ==> CSR

Name      Description      Percent of time * 10.00% ±2.3%
          *....1....2....3....4....5....6....7.
COMMIT    MQBCS01+3452            1.04 =
CONNECT   MQBCS01+30A4            0.38
DISCONN   MQBCS01+34C8            0.21

```


Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Request, Queue	Display context help information.
++	Request, Queue	Show additional details.
+	Request	Expand to reveal next level.
–	Request	Collapse to hide next level.
P	Request	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size
+	Percent of Time	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent of Time	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information. A sample detail window for this report is shown here:

```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| > PUT      MQBCS01+334C      19.55 0000000000      |
+-----+

Calculation Details
MQ Series wait measurements      444
Total measurements              2,270
Percent of total                 19.55%

MQSeries Request Details
Calling Module      MQBCS01
CSECT              MQBCS01
Offset             00334C
Request Type       PUT
Queue Manager      CSQ1
Object Name        SYSTEM.DEFAULT.LOCAL.QUEUE
Object Type        Queue

```

Q10 - MQSeries wait time by Txn

Usage

Use this report to see how much wait time occurred during processing of MQSeries Requests. The percentage of wait time is reported by CICS or IMS transaction. Expand the transaction detail lines to see a further breakdown by MQSeries Queue and by individual MQSeries Request.

Quantification

Each report line quantifies wait time in MQSeries requests in a CICS or IMS transaction. This is further broken down by MQSeries Queue and by MQSeries Request.

Detail line hierarchy

An unexpanded Q10 report shows a line for each CICS or IMS transaction. You can expand each line to reveal one additional hierarchical level of detail (using the “+” line command).

The hierarchy is illustrated here:

```

Level 1 CICS/IMS Transaction
  Level 2 MQSeries Queue
    Level 3 MQSeries Request
    Level 3 MQSeries Request
    ...

```

Detail line descriptions

CICS/IMS transaction detail line

This is the first-level detail line. Each line shows information about a CICS or IMS transaction under which MQSeries requests were issued.

Under Heading	This is Displayed
Name	A CICS or IMS transaction code. This is the transaction under which measured MQSeries requests were issued. “Batch” is shown here for requests not issued under control of a CICS or IMS transaction.

Under Heading	This is Displayed
Description	Either “CICS Transaction” or “IMS Transaction.” If the request was not issued under control of a CICS or IMS transaction, “Not in IMS/CICS Txn” will be displayed.
Percent of Time	The percentage of the measurement interval duration during which MQSeries requests under control of the indicated transaction were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

MQSeries queue detail line

This is the second-level detail line. Each line shows information about an MQSeries Queue for which measurement data was recorded.

Under Heading	This is Displayed
Name	The MQSeries Queue Manager name. This name, in combination with the Queue Name, uniquely identifies the MQSeries Queue.
Description	The MQSeries Queue Name. This name, in combination with the Queue Manager Name, uniquely identifies the MQSeries Queue.
Percent of Time	The percentage of the measurement interval duration MQSeries Requests for the indicated Queue Name were being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

MQSeries request detail line

This is a third-level detail line shown directly under the MQSeries Queue detail line. It quantifies wait time for a specific MQSeries Request.

Under Heading	This is Displayed
Name	The MQSeries Request function. This is the MQSeries function specified by the MQSeries Request.
Description	Program name and offset. This is the name of the program in which the MQSeries CALL was issued and the hexadecimal offset of the CALL return address.
Percent of Time	The percentage of the measurement interval duration the indicated MQSeries request was being processed. This represents the percentage of samples for MQSeries requests out of the total number of samples, except for CICS measurements, where it represents the percentage of samples for MQSeries requests out of the total number of CICS samples.

Sample reports

A fully expanded report is shown here:

```

File View Navigate Help
-----
Q10: MQSeries Wait Time by Transaction (0025/MQTST01)          Row 00001 of 00015
Command ==> ----- Scroll ==> CSR

Name      Description      Percent of time * 2.5% ±0.9%
                        *....1....2....3....4....5....6....7.
MQS1      CICS Transaction      3.64 =====
→ CSQ1    CSQ1.DEFXMIT.QUEUE    3.62 =====
→ GET     MQSAMP1+2DF2              3.01 =====
→ OPEN    MQSAMP1+2C2C         0.59 =
→ CLOSE   MQSAMP1+31A0        0.01
→ CSQ1    No Object Name     0.01
→ CLOSE   MQSAMP1+31A0        0.01

MQDR      CICS Transaction      2.25 ====
→ CSQ1    CSQ1.DEFXMIT.QUEUE    2.17 ====
→ PUT     CSQ4CVK1+284E         1.60 ===
→ OPEN    CSQ4CVK1+277E         0.38 =
→ CLOSE   CSQ4CVK1+29E2         0.18
→ CSQ1    No Object Name     0.08
→ CLOSE   CSQ4CVK1+29E2         0.08

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Transaction, Queue, Request	Display context help information.
++	Transaction, Queue, Request	Show additional details.
+	Transaction, Queue	Expand to reveal next level.
–	Transaction, Queue	Collapse to hide next level.
SV	Transaction, Queue	Sort next level by value.
SN	Transaction, Queue	Sort next level by name.
P	Request	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name, Description, Percent CPU	Display context help information.
+	Name	Expand to reveal all entries.
+	Description	Expand field size
+	Percent of Time	Zoom in scale.
–	Name	Collapse to show only first level.
–	Description	Reduce field size.
–	Percent of Time	Zoom out scale.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| > PUT      MQBCS01+334C      19.55 0000000000      |
+-----+

Calculation Details
MQ Series wait measurements      444
Total measurements              2,270
Percent of total                 19.55%

MQSeries Request Details
Calling Module      MQBCS01
CSECT               MQBCS01
Offset              00334C
Request Type        PUT
Queue Manager       CSQ1
Object Name         SYSTEM.DEFAULT.LOCAL.QUEUE
Object Type         Queue
```

Q11 - MQ+ Activity Timeline

Usage

Use the Q11 report to see information about the chronology of MQ calls that are intercepted during the measurement. You can also use the Q11 report to identify calls with excessive service times and CPU times. Each line shows information about one intercepted MQ call. You must enable the MQ+ feature before the measurement performs.

By default, the detail lines are sorted in ascending chronological sequence. You can also request that the data is sorted by service time. Enter the **SD line** command on the “Seqno” heading field to sort in this sequence. This will bring MQ calls that might have excessive service times to the top of the report.

The number of MQ calls that is displayed in the Q11 report is limited by the value of the MQIMaxTraceSize parameter that is specified during Application Performance Analyzer installation, or by the value on panel 2 of the measurement request if your installation has configured this field. The report is truncated when the number of MQ calls issued reaches the value that is specified for MQIMaxTraceSize.

Quantification

Each report line shows the following information for each MQ call:

- The type of call and where it originated.
- The length of the message.
- The time of the call.
- The service time (duration) for the MQ call processing.
- The CPU time for the MQ call processing.

The CPU time applies only to the region being measured. MQ runs in multiple address spaces and CPU might also be consumed in other MQ regions.

Detail Line Hierarchy

An unexpanded report shows a line for each MQ call that is intercepted by the MQ+ feature. You can expand each line to reveal one additional hierarchical level of detail by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 MQ Call Details
  Level 2 MQ Queue Manager and Queue
    ...
```

Detail Line Descriptions

MQ Call detail line

MQ Call detail line is the first-level detail line. Each line shows information about one MQ call.

Under Heading	This is Displayed
Seqno	A unique sequence number that is assigned by Application Performance Analyzer
Call	The MQ call type
Location	The CSECT and offset where the call originated
Msg Len	The length of the MQ message
Call Time	The time of day at which the MQ call was issued
Svc Time	The service time (duration) of the MQ call in seconds
CPU Time	The CPU time that the MQ call consumed in seconds

MQ Queue Manager and Queue Name detail line

MQ Queue Manager and Queue Name detail line is second-level detail line. The MQ Queue Manager and Queue Name detail line displays the MQ queue manager name and the queue name that is used in the request.

Sample Report

An expanded sample report is shown as follows:

```
-----
Q11: MQ+ Activity Timeline (0098/CICS42A)                               Row 00001 of 03172
-----
```

Seqno	Call	Location	Msg Len	Call Time	Svc Time	CPU Time
00001	Put	CSQ4CVK1+4FC2	200	9:06:38.82	0.00076	0.00076
→CSQ7	CSQ7.DEFXXMIT.QUEUE					
00002	Close	CSQ4CVK1+5176	0	9:06:38.82	0.00027	0.00027
→CSQ7						
00003	Open	CSQ4CVK1+4EDA	0	9:06:38.85	0.00045	0.00045
→CSQ7	CSQ7.DEFXXMIT.QUEUE					
00004	Put	CSQ4CVK1+4FC2	200	9:06:38.85	0.00072	0.00072
→CSQ7	CSQ7.DEFXXMIT.QUEUE					
00005	Put	CSQ4CVK1+4FC2	200	9:06:38.85	0.00060	0.00060
→CSQ7	CSQ7.DEFXXMIT.QUEUE					
00006	Close	CSQ4CVK1+5176	0	9:06:38.86	0.00020	0.00021
→CSQ7						
00007	Open	MQSAMP1+3AB8	0	9:06:38.86	0.00050	0.00050
→CSQ7	CSQ7.DEFXXMIT.QUEUE					

Line commands

The following table summarizes the line commands available in this report, and the objects and headings to which they apply. You can enter a forward slash (/) on any input field to pop up a menu of line commands that are available for that field.

on objects

Cmd	When Applied To:	Action
?	Call, Queue	Displays context help information.
++	Call	Shows additional details.
+	Call	Expands to reveal next level.
-	Call	Collapses to hide next level.
M	Call	Displays load module information.
P	Call	Displays source program mapping.

on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
-	Seqno	Collapses to hide next level.
SV	Seqno	Sorts by Call Time.
SD	Seqno	Sorts by Svc Time (Duration).

Detail window

To display a popup window that contains additional information, press the plus sign (+) twice or **Enter** on any MQ Call detail line. For example, if you press the plus sign (+) twice, the following detail window appears:

```
+-----+
| Q11 - DETAIL Window (0097/IMSDMPP5) |
+-----+----- The following report line was selected -----+
| 00012  Get  MQICS02+525A      112  6:51:00.94   0.00168  0.00072 |
+-----+-----+
|
| MQ Call Information
| Call Time          16:51:00.94      Service time      0.00168
| Call type          Get              CPU time          0.00072
| Location           DFSSAM02 in MQICS02  Offset of        0000525A
| Completion Code    0                Reason Code      0
| Message Type       Datagram          Message Size     112
| Priority            0                Persistent       No
| Object Type        Queue
| Call Options       Browse
| Object Name        SYSTEM.DEFAULT.LOCAL.QUEUE
| MQ Server Information
| Queue Manager      CSQ7              Version          07.1.0
|
+-----+-----+
+-----+
```

Q12 - MQ+ CPU/SVC Time by Queue

Usage

Use this report to see an analysis of how much time MQ calls that are intercepted during the observation session use. The analysis is arranged by queue manager. To use the Q12 report, you must activate MQ+ option during the measurement. The MQ+ option records exact CPU and service times for MQ calls. To see a further breakdown by MQ call, expand a Queue Manager report line.

Quantification

Each report line shows the following information for each MQ call.

- Number of MQ calls
- Total CPU time
- Mean CPU time
- Total service time
- Mean service time

The CPU time applies to the region being measured only. MQ executes in multiple address spaces and CPU might also be consumed in other MQ regions.

To display the percent that is used in place of the mean fields, use the setup option.

Detail Line Hierarchy

An unexpanded report shows a line for each unique MQ Queue Manager and Queue. To reveal an additional hierarchical level of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 MQ Queue Manager and Queue
Level 2 MQ Call
...
```

Detail Line Descriptions

MQ queue manager detail line

MQ queue manager detail line is the first-level detail line. The MQ queue manager detail line shows the MQ queue manager summary.

Under Heading	This is Displayed
Name	The name of the queue manager
Description	The queue name
Nbr of Calls	The number of MQ calls that are counted for this queue. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for all MQ calls for this queue. Large numbers are expressed in thousands with an M suffix.
CPU Time: Mean	The mean CPU time in seconds per MQ call for this queue. Large numbers are expressed in thousands with an M suffix.
CPU Time: Pct	The percent of total CPU time for MQ calls for this queue. Large numbers are expressed in thousands with an M suffix.

Under Heading	This is Displayed
Svc Time: Total	The total service time in seconds for all MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time in seconds per MQ call for this queue. Large numbers are expressed in minutes with an M suffix.
Svc Time: Pct	The percent of total service time for MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.

MQ Call detail line

MQ Call detail line is the second-level detail line. The MQ Call detail line is displayed directly under the MQ queue manager detail line. The MQ Call detail line quantifies the CPU and service time for each MQ call.

Under Heading	This is Displayed
Name	The MQ call type
Description	The CSECT name and offset where the call originated
Nbr of Calls	The number of MQ calls counted. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time in seconds per MQ call. Large numbers are expressed in minutes with an M suffix.
CPU Time: Pct	The percent of total CPU time for this MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Total	The total service time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time in seconds per MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Pct	The percent of total service time for this MQ call. Large numbers are expressed in minutes with an M suffix.

Sample reports

A sample report is shown as follows. The queue manager is expanded to the second level MQ call.

```

-----
Q12: MQ+ CPU/SVC Time by Queue (0098/CICS42A)                               Row 00001 of 00008
-----
Name      Description      Nbr of    --CPU Time--    --Svc Time--
                            Calls      Total   Mean       Total   Mean
CSQ7      CSQ7.DEFXMIT.QUEUE      1,189      0.96    0.00081      1.91    0.00161
->Put      CSQ4CVK1+4FC2          393      0.36    0.00092      0.64    0.00163
->Get      MQSAMP1+3C4C          400      0.37    0.00092      0.64    0.00160
->Open     MQSAMP1+3AB8          200      0.13    0.00065      0.48    0.00241
->Open     CSQ4CVK1+4EDA          196      0.10    0.00053      0.14    0.00075
CSQ7      CSQ7              397      0.09    0.00025      0.14    0.00035
->Close    CSQ4CVK1+5176         197      0.04    0.00023      0.06    0.00035
->Close    MQSAMP1+401A          200      0.05    0.00026      0.07    0.00036

```

Line Commands

The following table summarizes the line commands available in this report, and the objects and headings to which they apply. To open a menu of line commands available for any input fields, enter a forward slash (/) on the field.

on objects

Cmd	When Applied To:	Action
?	Queue, Call	Displays context help information.
++	Queue, Call	Shows additional details.
+	Queue	Expands to reveal next level.
-	Queue	Collapses to hide next level.
M	Call	Displays load module information.
P	Call	Displays source program mapping.

on headings

Cmd	When Applied To Heading	Action
?	Name	Displays context help information.
+	Name	Expands to reveal all entries.
-	Name	Collapses to hide next level.
SV	Name	Sorts by Call Time.
SD	Name	Sorts by Total Svc Time (Duration).

Detail window

To open a window that contains additional information, press the plus sign (+) twice or **Enter**. A sample detail window for a queue is shown as follows:

```
+-----+
| Q12 - DETAIL Window (0098/CICS42A) |
+-----+
| +----- The following report line was selected -----+ |
| | CSQ7  CSQ7.DEFXMIT.QUEUE  1,189  0.96  0.00081  1.91  0.00161 | |
| +-----+ |
| Queue Identification |
| Queue Manager       | CSQ7 |
| Object Name         | CSQ7.DEFXMIT.QUEUE |
| Number of MQ Calls  | 1,189 |
| Total CPU Time      | (seconds) 0.96875 |
| Mean CPU per Call   | (seconds) 0.00081 |
| Total Service Time  | (seconds) 1.91547 |
| Mean Time per Call  | (seconds) 0.00161 |
| 0.00161 |
| +-----+ |
+-----+
```

SETUP options

Enter the **SETUP** primary command to select options for this report. The following option is available:

Display Percent used in place of Mean fields.

When selected, this option displays the percent of total CPU and total service time used by the MQ calls, rather than the mean time.

Q13 - MQ+ CPU/SVC Time by Request

Usage

Use Q13 report to see an analysis of how much time the MQs that are intercepted use during the observation session. The analysis is arranged by MQ call. To use Q13 report, you must activate the MQ+ option during the measurement. The MQ+ option records exact CPU and service times for MQ calls. To see a further breakdown by queue, expand an MQ call report line.

Quantification

Each report line shows the following information for each MQ call:

- Number of MQ calls
- Total CPU time
- Mean CPU time
- Total service time
- Mean service time

The CPU time applies to the region being measured only. MQ executes in multiple address spaces and CPU might also be consumed in other MQ regions.

To display the percent used in place of the mean fields, use a setup option.

Detail Line Hierarchy

An unexpanded report shows a line for each unique MQ call. To reveal an additional hierarchical level of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 MQ Call
  Level 2 MQ Queue Manager and Queue
  ...
```

Detail Line Descriptions

MQ Call detail line

MQ Call detail line is the first-level detail line. The MQ Call detail line quantifies the CPU and service time for each MQ call.

Under Heading	This is Displayed
Name	The MQ call type
Description	The CSECT name and offset where the call originated
Nbr of Calls	The number of MQ calls counted. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.

Under Heading	This is Displayed
CPU Time: Mean	The mean CPU time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
CPU Time: Pct	The percent of total CPU time for this MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Total	The total service time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Pct	The percent of total service time for this MQ call. Large numbers are expressed in minutes with an M suffix.

MQ queue manager detail line

MQ queue manager detail line is the second-level detail line. The MQ queue manager detail line shows the MQ queue manager and queue that is used by the call.

Under Heading	This is Displayed
Name	The queue manager name
Description	The queue name
Nbr of Calls	The number of MQ calls counted for this queue. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time in seconds for MQ call for this queue. Large numbers are expressed in minutes with an M suffix.
CPU Time: Pct	The percent of total CPU time for MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.
Svc Time: Total	The total service time in seconds for MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time in seconds for MQ call for this queue. Large numbers are expressed in minutes with an M suffix.
Svc Time: Pct	The percent of total service time for MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.

Sample reports

A sample report is shown as follows. The MQ call is expanded to the second level (queue manager and queue).

Q13: MQ+ CPU/SVC Time by Request (0098/CICS42A)

Row 00001 of 00012

Name	Description	Nbr of Calls	--CPU Time-- Total Pct	--Svc Time-- Total Pct
Put	CSQ4CVK1+4FA2	393	0.36 34.11	0.64 31.33
→CSQ7	CSQ7.DEFXMIT.QUEUE	393	0.36 34.11	0.64 31.33
Get	MQSAMP1+3C2C	400	0.37 34.91	0.64 31.35
→CSQ7	CSQ7.DEFXMIT.QUEUE	400	0.37 34.91	0.64 31.35
Open	MQSAMP1+3A98	200	0.13 12.38	0.48 23.54
→CSQ7	CSQ7.DEFXMIT.QUEUE	200	0.13 12.38	0.48 23.54
Open	CSQ4CVK1+4EBA	196	0.10 9.98	0.14 7.20
→CSQ7	CSQ7.DEFXMIT.QUEUE	196	0.10 9.98	0.14 7.20
Close	CSQ4CVK1+5156	197	0.04 4.42	0.06 3.37
→CSQ7	No Object Name	197	0.04 4.42	0.06 3.37
Close	MQSAMP1+3FFA	200	0.05 4.99	0.07 3.58
→CSQ7	No Object Name	200	0.05 4.99	0.07 3.58

Line Commands

The following table summarizes the line commands available in this report, and the objects and headings to which they apply. To open a menu of line commands available for any input fields, enter a forward slash (/) on the field.

on objects

Cmd	When Applied To:	Action
?	Call, Queue	Displays context help information.
++	Call, Queue	Shows additional details.
+	Call	Expands to reveal next level.
–	Call	Collapses to hide next level.
M	Call	Displays load module information.
P	Call	Displays source program mapping.

on headings

Cmd	When Applied To Heading	Action
?	Name	Displays context help information.
+	Name	Expands to reveal all entries.
–	Name	Collapses to hide next level.
SV	Name	Sorts by Total CPU Time.
SD	Name	Sorts by Total Svc Time (Duration).

Detail window

To open a window that contains additional information, press the plus sign (+) twice or **Enter**. A sample detail window for a queue is shown as follows:

Q13 - DETAIL Window (0098/CICS42A)						
+----- The following report line was selected -----+						
Put	CSQ4CVK1+4FA2	393	0.36	34.11	0.64	31.33
+-----						
Request Identification						
Location			CSQ4CVK1+4FA2			
Number of MQ Calls			393			
Total CPU Time (seconds)			0.36164			
Percent CPU Time			34.11			
Total Service Time (seconds)			0.64235			
Percent Service Time			31.33			

SETUP options

Enter the **SETUP** primary command to select options for this report. The following option is available:

Display Percent used in place of Mean fields.

When selected, this option displays the percent of total CPU and total service time used by the MQ calls, rather than the mean time.

Q14 - MQ+ CPU/SVC Time by Txn

Usage

Use the Q14 report to see an analysis of how much time MQ calls that are intercepted during the observation session use. The analysis is arranged by CICS or IMS transaction. The Q14 report applies to CICS and IMS observations only. Before you use the Q14 report, you must activate the MQ+ option during the measurement. The MQ+ option records exact CPU and service times for MQ calls. To see a further breakdown by queue, expand an MQ call report line.

Quantification

Each report line shows the following information for each MQ call.

- Number of MQ calls
- Total CPU time
- Mean CPU time
- Total service time
- Total service time

The CPU time applies to the region being measured only. MQ executes in multiple address spaces and CPU might also be consumed in other MQ regions.

To display the percent that is used in place of the mean fields, use a setup option.

Detail Line Hierarchy

An unexpanded report shows a line for each unique MQ call. To reveal an additional hierarchical level of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```

Level 1 Transaction Name and Description
Level 2 MQ Queue Manager and Queue
Level 3 MQ Call
...
```

Detail Line Descriptions

Transaction detail line

Transaction detail line is the first-level detail line. The transaction detail line shows the transaction that issues the MQ call.

Under Heading	This is Displayed
Name	The CICS or IMS transaction ID.
Description	The transaction description if available.
Nbr of Calls	The number of MQ calls counted for this transaction. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for all MQ calls for this transaction. Large numbers are expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time in seconds per MQ call for this transaction. Large numbers are expressed in minutes with an M suffix.
CPU Time: Pct	The percent of total CPU time for MQ calls for this transaction. Large numbers are expressed in minutes with an M suffix.
Svc Time: Total	The total service time in seconds for all MQ calls for this transaction. Large numbers are expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time in seconds per MQ call for this transaction. Large numbers are expressed in minutes with an M suffix.
Svc Time: Pct	The percent of total service time for MQ calls for this transaction. Large numbers are expressed in minutes with an M suffix.

MQ queue manager detail line

MQ queue manager detail line is the second-level detail line. The MQ queue manager detail line shows the MQ queue manager and queue that is used by the call.

Under Heading	This is Displayed
Name	The queue manager name
Description	The queue name
Nbr of Calls	The number of MQ calls counted for this queue. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for all MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time in seconds per MQ call for this queue. Large numbers are expressed in minutes with an M suffix.
CPU Time: Pct	The percent of total CPU time for MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.
Svc Time: Total	The total service time in seconds for all MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time in seconds per MQ call for this queue. Large numbers are expressed in minutes with an M suffix.

Under Heading	This is Displayed
Svc Time: Pct	The percent of total service time for MQ calls for this queue. Large numbers are expressed in minutes with an M suffix.

MQ Call detail line

MQ Call detail line is the third-level detail line. The MQ Call detail line quantifies the CPU and service time for each MQ call.

Under Heading	This is Displayed
Name	The MQ call type
Description	The CSECT name and offset where the call originated
Nbr of Calls	The number of MQ calls counted. Large numbers are expressed in thousands with a K suffix.
CPU Time: Total	The total CPU time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
CPU Time: Mean	The mean CPU time in seconds per MQ call. Large numbers are expressed in minutes with an M suffix.
CPU Time: Pct	The percent of total CPU time for this MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Total	The total service time in seconds for this MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Mean	The mean service time in seconds per MQ call. Large numbers are expressed in minutes with an M suffix.
Svc Time: Pct	The percent of total service time for this MQ call. Large numbers are expressed in minutes with an M suffix.

Sample reports

A sample report that is expanded two levels is shown as follows:

```

-----
Q14: MQ+ CPU/SVC Time by Txn (0098/CICS42A)                               Row 00001 of 00006
-----
Name      Description      Nbr of    --CPU Time--    --Svc Time--
      Calls      Total      Mean      Total      Mean
MQS1      800      0.55      0.00069      1.19      0.00149
->CSQ7    600      0.50      0.00083      1.12      0.00187
->CSQ7    200      0.05      0.00026      0.07      0.00036
MQDR      786      0.51      0.00065      0.85      0.00109
->CSQ7    589      0.46      0.00079      0.79      0.00134
->CSQ7    197      0.04      0.00023      0.06      0.00035

```

Line Commands

The following table summarizes the line commands available in this report, and the objects and headings to which they apply. To open a menu of line commands available for any input fields, enter a forward slash (/) on the field.

on objects

Cmd	When Applied To:	Action
?	Transaction, Queue, Call	Displays context help information
++	Transaction, Queue, Call	Shows additional details.
+	Transaction, Queue	Expands to reveal next level.
-	Transaction, Queue	Collapses to hide next level.
M	Call	Displays load module information.
P	Call	Displays source program mapping.

on headings

Cmd	When Applied To Heading	Action
?	Name	Displays context help information.
+	Name	Expands to reveal all entries.
-	Name	Collapses to hide next level.
SV	Name	Sorts by Total CPU Time.
SV	Name	Sorts by Total CPU Time.

Detail window

To open a window that contains additional information, press the plus sign (+) twice or **Enter**. A sample detail window for a transaction is shown as follows:

```
+-----+
| Q14 - DETAIL Window (0098/CICS42A)                                     |
+-----+----- The following report line was selected -----+
| MQS1           800      0.55  52.28      1.19 58.48|
+-----+-----+

Transaction Identification
Transaction Name           MQS1
Number of MQ Calls         800
Total CPU Time (seconds)   0.55419
Percent CPU Time           52.28
Total Service Time (seconds) 1.19887
Percent Service Time       58.48
+-----+-----+
+-----+

```

SETUP options

Enter the **SETUP** primary command to select options for this report. The following option is available:

Display Percent used in place of Mean fields.

When selected, this option displays the percent of total CPU and total service time used by the MQ calls, rather than the mean time.

Chapter 8. Java/USS/HFS performance analysis reports

This section describes the Java performance analysis reports.

For information about ...	See ...
The Java data extractor	“Overview of Java data extractor ” on page 438
J01 Java summary and attributes	“J01 - Java summary and attributes” on page 440
J02 Java heap usage timeline	“J02 - Java heap usage timeline” on page 441
J03 Java CPU usage by thread	“J03 - Java CPU usage by thread” on page 443
J04 Java CPU usage by package	“J04 - Java CPU usage by package” on page 445
J05 Java CPU usage by class	“J05 - Java CPU usage by class” on page 448
J06 Java CPU usage by method	“J06 - Java CPU usage by method” on page 450
J07 Java CPU usage by call path	“J07 - Java CPU usage by call path” on page 453
J09 Java service time by package	“J09 - Java service time by package” on page 456
J10 Java service time by class	“J10 - Java service time by class” on page 459
J11 Java service time by method	“J11 - Java service time by method” on page 462
J12 java service time by call path	“J12 - Java service time by call path” on page 465
J14 Java wait time by package	“J14 - Java wait time by package” on page 467
J15 Java wait time by class	“J15 - Java wait time by class” on page 470
J16 Java wait time by method	“J16 - Java wait time by method” on page 473
J17 Java wait time by call path	“J17 - Java wait time by call path” on page 476
H01 HFS Service Time by Path Name	“H01 - HFS Service Time by Path Name” on page 479
H02 HFS Service Time by Device	“H02 - HFS Service Time by Device” on page 481
H03 HFS File Activity	“H03 - HFS File Activity” on page 484
H04 HFS File Attributes	“H04 - HFS File Attributes” on page 486
H05 HFS Device Activity	“H05 - HFS Device Activity” on page 487
H06 HFS Device Attributes	“H06 - HFS Device Attributes” on page 489
H07 HFS Activity Timeline	“H07 - HFS Activity Timeline” on page 490
H08 HFS Wait Time by Path Name	“H08 - HFS Wait Time by Path Name” on page 492
H09 HFS Wait Time by Device	“H09- HFS Wait Time by Device” on page 494
H10 HFS Service Time by Request	“H10- HFS Service Time by Request” on page 497
H11 HFS Wait Time by Request	“H11- HFS Wait Time by Request” on page 499

Overview of Java data extractor

In order to use the Java Performance Analysis Reports, the Java data extractor must be turned on when the Observation Request is entered. You must select the Java data extractor in the Schedule New Measurement panel.

The Java data extractor collects Java call stack information for each Java application thread. The call stack information identifies the methods in the call chain. Information about each method includes the package (if any), class, method and signature (parameter types and return type), and the source line number being executed (if available).

Considerations for Java

Before Java programs can be sampled, the J9VM support in Application Performance Analyzer must be enabled. Contact your systems programmer to verify whether this support is enabled.

Measuring a Java application requires loading a JVMTI agent to obtain Java samples. The JVMTI agent is loaded when the target Java job is started. The agent remains alive until the Java job terminates. The agent sits in a wait state until a sampling session is requested. After the sampling session completes, the agent returns to a wait state.

Only one observation at a time is supported for a specific Java address space.

IMS Java programs are supported in Java Message Processing (JMP) and Java Batch Processing (JBP) regions.

CICS Java programs are supported.

Application Performance Analyzer will stop sampling Java programs when the main thread ends, even if the specified number of samples has not been reached.

Java measurement reports are unrelated to CPU Usage Analysis and CPU Wait Analysis reports, since Java samples are extracted by running a JVMTI agent asynchronously with CPU samples.

Java calls that are observed with a native method at the top of the call stack are only included in the Service Time reports. This is because the J9VM does not know whether the native method is executing, waiting, or queued for execution.

Java native methods are identified in the method detail pop-up window of Java Service Time reports.

Using the JVMTI agent

You must specify the JVMTI agent in a runtime parameter of the target Java job. The agent is loaded using the Java `-agentpath:` runtime parameter. Specify the full path name of either the 31-bit JVMTI agent (`libCAZJTA11.so`) or the 64-bit JVMTI agent (`libCAZJTA14.so`) depending on whether your target Java job is 31-bit or 64-bit.

The format of the `-agentpath` runtime parameter is:

`-agentpath:/dir/agent=stcid,n`

where:

dir

The path to the Application Performance Analyzer JVMTI agent.

agent

The name of the Application Performance Analyzer JVMTI agent you are loading. Use `libCAZJTA11.so` for 31-bit. Use `libCAZJTA14.so` for 64-bit.

stcid

The Application Performance Analyzer started task id. This is needed only when you have more than one Application Performance Analyzer started task operating on your system.

n

The number of minutes to wait for the Application Performance Analyzer started task to become active.

An example of how to specify a 64-bit JVMTI agent in JCL that uses BPXBATCH to run the Java program *prog* follows. The example assumes that the USS components of Application Performance Analyzer have been installed in a directory named **/usr/lpp/apa/v14r2**, and that there is only one Application Performance Analyzer started task in the system.

```
//STEP EXEC PGM=BPXBATCH,  
//PARM='sh java -agentpath:/usr/lpp/apa/v14r2/libCAZJTA14.so prog'
```

If there is more than one Application Performance Analyzer started task in the system, the **-agentpath:** runtime parameter can specify the system id of the started task. The following example shows how to specify that the JVMTI agent is to be loaded for the started task with a system id of CAZ1.

```
//STEP EXEC PGM=BPXBATCH,  
//PARM='sh java -agentpath:/usr/lpp/apa/v14r2/libCAZJTA14.so=CAZ1 prog'
```

The JVMTI agent must locate the Application Performance Analyzer started task. By default, it will timeout after 1 minute if the started task is not found. This time limit can be overridden. The example that follows shows how to specify a time limit of 9 minutes.

```
//STEP EXEC PGM=BPXBATCH,  
//PARM='sh java -agentpath:/usr/lpp/apa/v14r2/libCAZJTA14.so=CAZ1,9 prog'
```

USS multiple address space measurements

Spawned address spaces and substeps might be generated when measuring USS. Application Performance Analyzer will measure these additional address spaces if you specify a value in the USS observations field in the Schedule New Measurement panel.

When you use this feature, a USS master record will be displayed above all the associated measurements. The master record has a status of **USS**.

An example is shown here:

File View Navigate Help

R02: IBM APA for z/OS Observation List (ZRAY)

Row 00001 of 00221

Command ==>

Scroll ==> CSR

ReqNum	Owned By	Description	Job Name	Date/Time	Samples	Status
02385 +	USER1	USS TEST#1	ARAUTEE	Apr-18 19:56	2,500	USS
→ 02386		BPXBATCH RUN		Apr-18 19:56	10	Ended
→ 02387		BPXPRECP *OMVSEX		Apr-18 19:56	7	Ended
→ 02388		BPXPRECP *OMVSEX	*Java*	Apr-18 19:57	2,500	Ended
→ 02389		BPXPRFC STEP1		Apr-18 19:56	29	Ended
→ 02390		BPXPRFC STEP1		Apr-18 19:57	2,500	Ended
→ 02391		BPXPRFC STEP1		Apr-18 19:57	2,500	Ended
→ 02392		BPXPRFC STEP1	*Java*	Apr-18 19:57	2,500	Ended
→ 02393		BPXPRFC STEP1	*Java*	Apr-18 19:57	2,500	Ended

You can expand the USS master record by entering a “+” on the sequence number. The additional measurements in the expanded record include the original measurement (the initiating step) and any spawned address spaces or substeps.

The description field in the subordinate measurements under the USS master record is populated with the program name and step name. For spawned address spaces, this would normally be BPXPRFC STEP1. For substeps, this would normally be BPXPRECP *OMVSEX.

If Java is detected in a step, then *Java* is placed in the description to the right of the program and step name.

If the step is run from the USS shell, and a Java command string is available, then the Java command string will be placed in the description instead of the information described above.

J01 - Java summary and attributes

Usage

This report displays general information about the observed Java environment. There are four sections:

- Java Virtual Machines
- Java Packages
- Java Classes
- Java Methods

Java Virtual Machines

This section identifies Java Virtual Machines (JVMs) observed during the measurement session.

Java packages

This section lists each of the Java packages in which activity was observed during the measurement session. Each package is assigned a unique sequence number, which is cross referenced in other reports.

Java classes

This section lists each of the Java classes in which activity was observed during the measurement session. Each class is assigned a unique sequence number, which is cross referenced in other reports.

Java methods

This section lists each of the Java methods in which activity was observed during the measurement session. Each method is assigned a unique sequence number, which is cross referenced in other reports.

Warnings and errors

In some circumstances Application Performance Analyzer will be unable to produce complete Java reports when the Java data extractor is turned on during measurement. In this case, a 'Warnings and Errors' section will be displayed in J01 with a message indicating the problem. Please refer to the Application Performance Analyzer *Messages Guide* for specific details of the problem.

Sample reports

A sample report is shown here.

```

File View Navigate Help
-----
J01: Java Summary/Attributes (8551/JVMTST01) Row 00001 of 00082
Command ==> _____ Scroll ==> CSR

Observed Java Virtual Machines (JVMs)

JVmId Identifier Heap Max Description
00001 18754508 1M 67 J2RE 1.4.2 IBM z/OS Persistent Reusable VM
                        build cm142-20060824 (SR6)

Observed Java Packages

PkgId Package Name
00001 java/util/zip
00002 java/lang
00003 java/util/jar
00004 sun/misc
00005 java/security
00006 java/net
00007 java/io
00008 com/ibm/jvm/io

Observed Java Classes

ClsId PkgId Class Name
00001 00002 Object
00002 00001 ZipFile
00003 00003 JarFile
00004 00004 URLClassPath$Loader
00005 00004 URLClassPath$JarLoader
00006 00004 URLClassPath$3

Observed Java Methods

MthId ClsId Method Name
00001 00002 open
00002 00002 <init>
00003 00003 <init>
00004 00003 <init>
00005 00005 getJarFile
00006 00005 <init>
00007 00006 run
00008 00007 doPrivileged1

```

J02 - Java heap usage timeline

Overview

This timeline analysis report breaks the observation session duration into a number of (approximately) fixed-length, chronological time intervals. Each line represents one of these intervals. By default, 15 intervals are reported, each representing approximately the same number of samples. This illustrates any progressive resource usage trends. The values under the heading Storage quantify the amount of heap storage allocated by the JVM during the interval.

A SETUP option is available from which you can specify the number of intervals and whether to include total heap storage in the report. Heap storage used is presented in green, and the additional storage to make up the total is presented in white.

Detail line descriptions

Each line represents reports values under the following headings:

- SEQN
- Storage
- Total


```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
+ 0001    1615K    2048K -----+
+-----+

Information about sampled interval

Interval Number      1
Nbr of Samples       20
Heap Used            1615K
Heap Total           2048K

```

SETUP options

Enter the SETUP primary command to select options for this report. The following popup will be displayed:

```

File View Navigate Help
+-----+
Options for Memory Usage Timeline
+-----+
Number of Intervals . . . . . 15
This is the number of equal time intervals within
the duration of the measurement that are to be
reported. Each report line will show measurement
information for one interval.

/ Report on Heap usage and Heap total, unselect
to report on Heap usage only.
+-----+
001 of 00015
====> CSR

```

Number of Intervals

Use this option to change the number of equal time intervals that are reported.

Report on Heap usage and total

Select this option to include total heap storage in the report. Heap usage is displayed in green and total heap storage is displayed in white.

J03 - Java CPU usage by thread

Usage

Use this report to see how CPU time was consumed by execution of Java programs for each Java thread. The report shows one line for each Java thread. When the JVM reuses a z/OS Task Control Block (TCB), the individual CPU times for the threads cannot be obtained. In this case, the thread name is preceded by a number in parentheses. All threads that have reused a particular TCB will have the same number and the percentage used will indicate the total of all threads using the same TCB.

Quantification

Each report line quantifies time measured as a percentage of total time. The percentage represents the ratio of the CPU time in the indicated Java thread to the total CPU time consumed during the sampling period.

Detail line descriptions

Java Thread detail line

This report shows one detail line for each unique Java thread.

Under Heading	This is Displayed
JavaID	The unique sequence number assigned to this Java thread.
Thread Name	The name of the thread.
Percent of Time	The percentage of CPU used by this thread out of the total used during the sampling period..

Sample reports

A sample report is shown here. The (1) before the Thread Name indicates that these threads reused the same TCB.

```
File View Navigate Help
-----
J03: Java CPU Usage by Thread (0116/JVMTST01)          Row 00001 of 00012
Command ==> _____ Scroll ==> CSR

JavaID  Thread Name          Percent of CPU Time * 10.00%
      *....1....2....3....4....5....6....7...
0003    (1)Attachment 2305    18.72 =====
0002    (1)Alpha          18.72 =====
0001    main               18.56 =====

Note: Items in parentheses indicate a thread that reused a TCB
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	JavaId	Display context help information.
++	JavaId	Show additional details.

on headings

Cmd	When Applied To Object	Action
?	JavaId	Display context help information.
SV	JavaId	Sort next level by value.
SN	JavaId	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a popup window containing additional information.

For example, entering “++” on a sequence number will cause this detail window to appear.

```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
+ 0003      (1)Attachment 2305      18.72 =====+
+-----+
Calculation Details
Total CPU time      24.99
Thread Name        (1)Attachment 2305
Thread CPU time     4.68
Percent of total    18.72%

```

J04 - Java CPU usage by package

Usage

Use this report to see how CPU time was consumed by execution of Java programs in each unique package. The unexpanded report shows one or more lines for each Java package in which execution was observed.

You can further expand each line item to show classes within the package, then methods within the class, then source lines within the method.

Quantification

Each report line quantifies time measured as a percentage of total time, the percentage represents the ratio of the number of CPU active measurements in the indicated Java object to the total number of CPU active observations.

Detail line hierarchy

An unexpanded report shows a line for each Java Package. The name field shows a sequence number assigned to each unique Package. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```

Level 1 Java Package
Level 2 Java Class
Level 3 Java Method
Level 4 Java Line Number
...

```

Detail line descriptions

Java package detail line

This is the first-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number is assigned to each observed Java Package and is displayed in this column.
Pkg/Cls/Mthd	The name of a Java Package.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java class detail line

This is the second-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java class is displayed in this column.
Pkg/Cls/Mthd	The name of a Java class.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java method detail line

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java Method is displayed in this column.
Pkg/Cls/Mthd	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java line number

This is the fourth-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Pkg/Cls/Mthd	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

Sample reports

A sample report is shown here. It has been fully expanded to show all four levels.

```
File View Navigate Help
-----
J04: Java CPU Usage by Package (0116/JVMTST01)          Row 00001 of 00276
Command ==> _____ Scroll ==> CSR

JavaId  Pkg/Cls/Mthd                                     Percent of CPU Time * 10.00%  ±3.1%
*....1....2....3....4....5....6....7...
00002   java/lang                                     39.52 =====
→ 00104   StrictMath                                 20.05 =====
  → 00228   log                                       10.52 =====
    → 00000   line # unknown                         10.52 =====
  → 00226   sqrt                                       9.53 =====
    → 00000   line # unknown                         9.53 =====
→ 00029   Math                                       15.83 =====
  → 00219   log                                       10.71 =====
    → 02290   line # 2290                             9.04 =====
    → 00000   line # unknown                         1.67 =
  → 00227   sqrt                                       5.01 ==
    → 02312   line # 2312                             4.12 ==
    → 00000   line # unknown                         0.88
  → 00048   max                                       0.09
    → 02760   line # 2760                             0.09
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Package, Class, Method, line number	Display context help information.
++	Package, Class, Method, line number	Show additional details.
+	Package, Class, Method	Expand to reveal next level.
–	Package, Class, Method	Collapse to hide next level.

on headings

Cmd	When Applied To Object	Action
?	JavaId, Pkg/Cls/Mthd, Percent of Time	Display context help information.
+	JavaId	Expand to reveal all entries.
+	Pkg/Cls/Mthd	Expand description field size.
+	Percent of Time	Zoom in scale.
–	JavaId	Collapse to show only first level.
–	Pkg/Cls/Mthd	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	JavaId	Sort next level by value.
SN	JavaId	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java class will cause this detail window to appear.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00104      StrictMath      20.05 ===== |
+-----+
Calculation Details
  Application code CPU measurements      204
  Total CPU measurements                 1,017
  Percent of total                       20.05%

Class name:
  StrictMath

Package Name :
  Java/lang
+-----+
```

Note: If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

J05 - Java CPU usage by class

Usage

Use this report to see how CPU time was consumed by execution of Java programs in each unique class. The unexpanded report shows one or more lines for each Java class in which execution was observed.

Note: The class name is implicitly qualified by the package name, which can be seen in the detail window for the class.

You can further expand each line item to show methods within the class, then source lines within the method.

Quantification

Each report line quantifies time measured as a percentage of total time, the percentage represents the ratio of the number of CPU active measurements in the indicated Java object to the total number of CPU active observations.

Detail line hierarchy

An unexpanded report shows a line for each Java class. The name field shows a sequence number assigned to each unique class. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

Level 1 Java Class
 Level 2 Java Method
 Level 3 Java Line Number

Detail line descriptions

Java class detail line

This is the first-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number is assigned to each observed Java class and is displayed in this column.
Class/Method	The name of a Java class.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java method detail line

This is the second-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java method is displayed in this column.
Class/Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java line number

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Class/Method	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

Sample reports

A sample report is shown here. It has been expanded to the second level.

```
File View Navigate Help
-----
J05: Java CPU Usage by Class (0116/JVMTST01)          Row 00001 of 00186
Command ==> _____ Scroll ==> CSR

JavaID  Class/Method          Percent of CPU Time* 10.00%  ±3.1%
      *....1....2....3....4....5....6....7...
00102  Burner                 32.15 =====
→ 00220    calc                27.72 =====
→ 00221    baby                 4.42 ==

00104  StrictMath            20.05 =====
→ 00228    log                  10.52 =====
→ 00226    sqrt                 9.53 =====

00029  Math                   15.83 =====
→ 00219    log                  10.71 =====
→ 00227    sqrt                 5.01 ==
→ 00048    max                   0.09

00019  JarFile                 1.37 =
→ 00037    hasClassPathAttribute 0.98
→ 00085    getManifest           0.19
→ 00114    initializeVerifier     0.09
→ 00025    getJarEntry            0.09
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Class, Method, line number	Display context help information.
++	Class, Method, line number	Show additional details.
+	Class, Method	Expand to reveal next level.
–	Class, Method	Collapse to hide next level.

on headings

Cmd	When Applied To Object	Action
?	JavaID, Class/Method, Percent of Time	Display context help information.
+	JavaID	Expand to reveal all entries.

Cmd	When Applied To Object	Action
+	Class/Method	Expand description field size.
+	Percent of Time	Zoom in scale.
–	JavaId	Collapse to show only first level.
–	Class/Method	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	JavaId	Sort next level by value.
SN	JavaId	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```

File View Navigate Help
+-----+
| +----- The following report line was selected -----+
| | → 00104   calc                               27.72 ===== |
| +-----+
|
| Calculation Details
|   Application code CPU measurements           282
|   Total CPU measurements                     1,017
|   Percent of total                           27.72%
|
| Method Name:
|   calc
|
| Method Descriptor:
|   (I)D
|
| Method Signature:
|   calc(int) double
|
| Class Name:
|   Burner
|
| Package Name:
|   com/basamps/sample
|
+-----+

```

Note: If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

J06 - Java CPU usage by method

Usage

Use this report to see how CPU time was consumed by execution of Java programs in each unique method. The unexpanded report shows one or more lines for each Java method in which execution was observed.

Note: The method name is implicitly qualified by its package and class names, which can be seen in the detail window for the method.

You can further expand each line item to show methods within the class, then source lines within the method.

Quantification

Each report line quantifies time measured as a percentage of total time, the percentage represents the ratio of the number of CPU active measurements in the indicated Java object to the total number of CPU active observations.

Detail line hierarchy

An unexpanded report shows a line for each Java method. The name field shows a sequence number assigned to each unique method. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```
Level 1 Java Method
      Level 2 Java Line Number
```

Detail line descriptions

Java method detail line

This is the first-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method is displayed in this column.
Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java line number

This is the second-level detail line.

Under Heading	This is Displayed
MthId	The line number of a Java source statement.
Method	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
J06: Java CPU Usage by Method (0116/JVMST01) Row 00001 of 00186
Command ==> _____ Scroll ==> CSR

MthId  Method                                Percent of CPU Time * 10.00%  ±3.1%
      *....1....2....3....4....5....6....7...
00220  calc                                27.72 =====
→ 00029  line # 29                        25.46 =====
→ 00024  line # 24                         1.37
→ 00036  line # 36                         0.29
→ 00027  line # 27                         0.19
→ 00026  line # 26                         0.19
→ 00000  line # unknown                    0.19

00219  log                                10.71 =====
→ 02290  line # 2290                       9.04 =====
→ 00000  line # unknown                     1.67 =

00228  log                                10.52 =====
→ 00000  line # unknown                    10.52 =====

00226  sqrt                                9.53 =====
→ 00000  line # unknown                     9.53 =====

00227  sqrt                                5.01 =====
→ 02312  line # 2312                       4.12 ===
→ 00000  line # unknown                     0.88

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Method, line number	Display context help information.
++	Method, line number	Show additional details.
+	Method	Expand to reveal next level.
–	Method	Collapse to hide next level.

on headings

Cmd	When Applied To Object	Action
?	MthId, Method, Percent of Time	Display context help information.
+	MthId	Expand to reveal all entries.
+	Method	Expand description field size.
+	Percent of Time	Zoom in scale.
–	MthId	Collapse to show only first level.
–	Method	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	MthId	Sort next level by value.
SN	MthId	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00220   calc                               27.72 ===== |
+-----+
Calculation Details
  Application code CPU measurements           282
  Total CPU measurements                     1,017
  Percent of total                           27.72%

Method Name:
  calc

Method Descriptor:
  (I)D

Method Signature:
  calc(int) double

Class Name:
  Burner

Package Name:
  com/basamps/sample
+-----+
```

Note: If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

J07 - Java CPU usage by call path

Usage

Use this report to see how CPU time was consumed by execution of Java programs in each unique call path. The unexpanded report shows one or more lines for each Java method in which execution was observed. Execution in a method is quantified and reported separately for each different call path. (A call path represents a path of control in the form: A calls B calls C calls D ... etc.)

By expanding the first-level method line you can see a line for each of the calling methods in the path of control. These are shown in reverse order of control. In the case of A calls B calls C calls D, method D (in which execution was observed) is reported in the first-level line and the second-level lines show C then B then A.

Quantification

The first-level report line quantifies CPU time measured as a percentage of total time, the percentage represents the ratio of the number of CPU active measurements in the indicated Java object to the total number of CPU active observations.

Detail line hierarchy

An unexpanded report shows a line for each Java method line. The name field shows a sequence number assigned to each unique method line. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

Level 1 Java Method
Level 2 Calling Java Method Line

Detail line descriptions

Java method detail line

This is the first-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method is displayed in this column.
Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java line number

This is the second-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method.
Method	The line number of the statement that invoked the next method in the call path and the name of the method.

Sample reports

A sample report is shown here. It has been expanded to the second level.

```
File View Navigate Help
-----
J07: Java CPU Usage by Call Path (0116/JVMTST01)          Row 00001 of 01831
Command ==> _____ Scroll ==> CSR

MthId  Method                                     Percent of CPU Time * 10.00%  ±3.1%
      *....1....2....3....4....5....6....7...
00220  calc                                     25.36 =====
→ 00221   line 16 baby
→ 00218   line 25 main

00228  log                                      10.42 =====
→ 00219   line 2290 log
→ 00220   line 29 calc
→ 00221   line 16 baby
→ 00218   line 25 main

00226  sqrt                                      9.43 =====
→ 00227   line 2312 sqrt
→ 00220   line 29 calc
→ 00221   line 16 baby
→ 00218   line 25 main

00219  log                                      8.94 =====
→ 00220   line 29 calc
→ 00221   line 16 baby
→ 00218   line 25 main
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Method, line number	Display context help information.
++	Method, line number	Show additional details.
+	Method	Expand to reveal next level.
–	Method	Collapse to hide next level.

on headings

Cmd	When Applied To Object	Action
?	MthId, Method, Percent of Time	Display context help information.
+	MthId	Expand to reveal all entries.
+	Method	Expand description field size.
+	Percent of Time	Zoom in scale.
–	MthId	Collapse to show only first level.
–	Method	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	MthId	Sort next level by value.
SN	MthId	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```

File  View  Navigate  Help
+-----+
+-----+ The following report line was selected -----+
| -> 00220   calc                               27.72 ===== |
+-----+
Calculation Details
  Application code CPU measurements          282
  Total CPU measurements                    1,017
  Percent of total                          27.72%

Method Name:
  calc

Method Descriptor:
  (I)D

Method Signature:
  calc(int) double

Class Name:
  Burner

Package Name:
  com/basamps/sample

```

J09 - Java service time by package

Usage

Use this report to see how service time was consumed by execution of Java programs in each unique package. The unexpanded report shows one or more lines for each Java package in which execution was observed.

You can further expand each line item to show classes within the package, then methods within the class, then source lines within the method.

Quantification

Each report line quantifies service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (package, class, method or line) was in flight to the total number of samples. An observation is counted as execution regardless of the CPU state (active, WAIT, or queued).

Detail line hierarchy

An unexpanded report shows a line for each Java method line. The name field shows a sequence number assigned to each unique method line. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```

Level 1 Java Package
      Level 2 Java Class
            Level 3 Java Method
                  Level 4 Java Line Number

```

Detail line descriptions

Java package detail line

This is the first-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java package and is displayed in this column.
Pkg/Cls/Mthd	The name of a Java package.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java class detail line

This is the second-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java class is displayed in this column.
Pkg/Cls/Mthd	The name of a Java class.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java method detail line

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java method is displayed in this column.
Pkg/Cls/Mthd	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java line number

This is the fourth-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Pkg/Cls/Mthd	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
J09: Java Service Time by Package (0116/JVMTST01)          Row 00001 of 01831
Command ==> _____ Scroll ==> CSR

JavaId  Pkg/Cls/Mthd          Percent of Time * 10.00%  ±2.4%
      *....1....2....3....4....5....6....7...
00002   java/lang          33.01 =====
→ 00104   StrictMath        16.50 =====
→ 00029   Math              12.87 =====
→ 00005   ClassLoader        1.01 =
→ 00010   String            0.65
→ 00017   ClassLoader$NativeLibrar 0.47
→ 00040   StringBuffer       0.29
→ 00096   Thread            0.29
→ 00021   Runtime           0.11
→ 00022   System            0.11
→ 00077   Character          0.11
→ 00057   Class             0.11
→ 00097   Shutdown          0.11
→ 00001   Object            0.05
→ 00047   StringCoding       0.05
→ 00049   StringCoding$DecoderCach 0.05
→ 00079   Throwable         0.05
→ 00103   FloatingDecimal    0.05

00020   com/baseamps/sample  28.84 =====
→ 00102   Burner            28.84 =====

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Package, Class, Method, line number	Display context help information.
++	Package, Class, Method, line number	Show additional details.
+	Package, Class, Method	Expand to reveal next level.
–	Package, Class, Method	Collapse to hide next level.

on headings

Cmd	When Applied To Object	Action
?	JavaId, Pkg/Cls/Mthd, Percent of Time	Display context help information.
+	JavaId	Expand to reveal all entries.
+	Pkg/Cls/Mthd	Expand description field size.
+	Percent of Time	Zoom in scale.
–	JavaId	Collapse to show only first level.
–	Pkg/Cls/Mthd	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	JavaId	Sort next level by value.
SN	JavaId	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java class will cause this detail window to appear.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00104 StrictMath 16.50 ===== |
+-----+

Calculation Details
Application code CPU measurements      277
Total measurements                     1,678
Percent of total                       16.50%

Class Name:
StrictMath

Package Name:
java/lang
```

Note: If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

J10 - Java service time by class

Usage

Use this report to see how service time was consumed by execution of Java programs in each unique class. The unexpanded report shows one or more lines for each Java class in which execution was observed.

Note: The class name is implicitly qualified by the package name, which can be seen in the detail window for the class.

You can further expand each line item to show methods within the class, then source lines within the method.

Quantification

Each report line quantifies service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (package, class, method or line) was in flight to the total number of samples. An observation is counted as execution regardless of the CPU state (active, WAIT, or queued).

Detail line hierarchy

An unexpanded report shows a line for each Java class. The name field shows a sequence number assigned to each unique class. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```
Level 1 Java Class
Level 2 Java Method
Level 3 Java Line Number
```

Detail line descriptions

Java class detail line

This is the first-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java class and is displayed in this column.
Class/Method	The name of a Java class.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java method detail line

This is the second-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java method is displayed in this column.
Class/Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java line number

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Class/Method	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

Sample reports

A sample report is shown here. It has been expanded to the second level.

```
File View Navigate Help
-----
J10: Java Service Time by Class (0116/JVMTST01)          Row 00001 of 00208
Command ==> _____ Scroll ==> CSR

JavaID  Class/Method          Percent of Time * 10.00%  ±2.4%
      *....1....2....3....4....5....6....7...
00102  Burner                28.84 =====
→ 00220  calc                 23.95 =====
→ 00221  baby                 4.88 ==

00104  StrictMath            16.50 =====
→ 00226  sqrt                  8.28 ===
→ 00228  log                   8.22 ===

00029  Math                   12.87 =====
→ 00219  log                     8.52 ===
→ 00227  sqrt                   4.23 ==
→ 00048  max                    0.11

00018  ZipFile                 1.54 =
→ 00049  getEntry                0.77
→ 00062  open                  0.59
→ 00039  getInflater            0.05
→ 00054  read                   0.05
→ 00035  getEntry                0.05
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Class, Method, line number	Display context help information.
++	Class, Method, line number	Show additional details.
+	Class, Method	Expand to reveal next level.
–	Class, Method	Collapse to hide next level.

on headings

Cmd	When Applied To Object	Action
?	JavaId, Class/Method, Percent of Time	Display context help information.
+	JavaId	Expand to reveal all entries.
+	Class/Method	Expand description field size.
+	Percent of Time	Zoom in scale.
–	JavaId	Collapse to show only first level.
–	Class/Method	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	JavaId	Sort next level by value.
SN	JavaId	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| -> 00220  calc                23.95 ===== |
+-----+
Calculation Details
Application code activity measurements      402
Total measurements                        1,678
Percent of total                          23.95%

Method Name:
calc

Method Descriptor:
(I)D

Method Signature:
calc(int) double

Class Name:
Burner

Package Name:
com/basamps/sample

```

Note: If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

J11 - Java service time by method

Usage

Use this report to see how service time was consumed by execution of Java programs in each unique method. The unexpanded report shows one or more lines for each Java method in which execution was observed.

Note: The method name is implicitly qualified by its package and class names, which can be seen in the detail window for the method.

You can further expand each line item to show methods within the class, then source lines within the method.

Quantification

Each report line quantifies service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (package, class, method or line) was in flight to the total number of samples. An observation is counted as execution regardless of the CPU state (active, WAIT, or queued).

Detail line hierarchy

An unexpanded report shows a line for each Java method. The name field shows a sequence number assigned to each unique method. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```

Level 1 Java Method
Level 2 Java Line Number

```

Detail line descriptions

Java method detail line

This is the first-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method is displayed in this column.
Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java line number

This is the second-level detail line.

Under Heading	This is Displayed
MthId	The line number of a Java source statement.
Method	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java line number

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Class/Method	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

Sample reports

A sample report is shown here. It has been expanded to the second level.

```
File View Navigate Help
-----
J11: Java Service Time by Method (0116/JVMTST01)          Row 00001 of 00313
Command ==> _____ Scroll ==> CSR

JavaID  Class/Method          Percent of CPU Time * 10.00%  ±2.4%
      *...1...2...3...4...5...6...7...
00220   calc                23.95 =====
→ 00029   line # 29         21.51 =====
→ 00024   line # 24          1.31 =
→ 00036   line # 36          0.41
→ 00027   line # 27          0.35
→ 00000   line # unknown    0.23
→ 00026   line # 26          0.11

00219   log                 8.52 =====
→ 02290   line # 2290        6.19 =====
→ 00000   line # unknown    2.32 =

00226   sqrt                8.28 =====
→ 00000   line # unknown    8.28 =====

00228   log                 8.22 =====
→ 00000   line # unknown    8.22 =====
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Method, line number	Display context help information.
++	Method, line number	Show additional details.
+	Method	Expand to reveal next level.
–	Method	Collapse to hide next level.

on headings

Cmd	When Applied To Object	Action
?	MthId, Method, Percent of Time	Display context help information.
+	MthId	Expand to reveal all entries.
+	Method	Expand description field size.
+	Percent of Time	Zoom in scale.
–	MthId	Collapse to show only first level.
–	Method	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	MthId	Sort next level by value.
SN	MthId	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| -> 00220   calc                               23.95 ===== |
+-----+
+-----+
Calculation Details
Application code activity measurements      402
Total measurements                          1,678
Percent of total                            23.95%

Method Name:
calc

Method Descriptor:
(I)D

Method Signature:
calc(int) double

Class Name:
Burner

Package Name:
com/basamps/sample
+-----+

```

Note: If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

J12 - Java service time by call path

Usage

Use this report to see how service time was consumed by execution of Java programs in each unique call path. The unexpanded report shows one or more lines for each Java method in which execution was observed. Execution in a method is quantified and reported separately for each call path. (A call path represents a path of control in the form: A calls B calls C calls D, etc.)

By expanding the first-level method line you can see a line for each of the calling methods in the path of control. These are shown in reverse order of control. In the case of A calls B calls C calls D, method D (in which execution was observed) is reported in the first-level line and the second-level lines show C then B then A.

Quantification

The first-level report line quantifies service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (method or line) was in flight to the total number of samples. An observation is counted as execution regardless of the CPU state (active, WAIT, or queued).

Detail line hierarchy

An unexpanded report shows a line for each Java method line. The name field shows a sequence number assigned to each unique method line. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```

Level 1 Java Method
Level 2 Calling Java Method Line

```

Detail line descriptions

Java method detail line

This is the first-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method is displayed in this column.
Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java line number

This is the second-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method.
Method	The line number of the statement that invoked the next method in the call path and the name of the method.
Percent of Time	The percentage of activity measured in the indicated Java object.

Sample reports

A sample report is shown here. It has been expanded to the second level.

```
File View Navigate Help
-----
J12: Java Service Time by Call Path (0116/JVMTST01)          Row 00001 of 02766
Command ==> ----- Scroll ==> CSR

MthId  Method                                     Percent of Time * 10.00%  ±2.4%
      *....1....2....3....4....5....6....7...
00220  calc                                     21.45 =====
→ 00221  line 16 baby
→ 00218  line 25 main

00226  sqrt                                     8.22 ====
→ 00227  line 2312 sqrt
→ 00220  line 29 calc
→ 00221  line 16 baby
→ 00218  line 25 main

00228  log                                     8.16 ====
→ 00219  line 2290 log
→ 00220  line 29 calc
→ 00221  line 16 baby
→ 00218  line 25 main

00219  log                                     6.13 ===
→ 00220  line 29 calc
→ 00221  line 16 baby
→ 00218  line 25 main
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Method, line number	Display context help information.
++	Method, line number	Show additional details.
+	Method	Expand to reveal next level.
–	Method	Collapse to hide next level.

on headings

Cmd	When Applied To Object	Action
?	MthId, Method, Percent of Time	Display context help information.
+	MthId	Expand to reveal all entries.
+	Method	Expand description field size.
+	Percent of Time	Zoom in scale.
–	MthId	Collapse to show only first level.
–	Method	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	MthId	Sort next level by value.
SN	MthId	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a line number will cause this detail window to appear.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| → 00218   line 25 main                               |
+-----+
Calculation Details
  Application code activity measurements           1
  Total measurements                             1,678
  Percent of total                               0.05%

Method Name:
  main[Ljava/lang/String;)V

Method Descriptor:
  (I)D

Method Signature:
  main(java.lang.String[]) void

Class Name:
  Burner3Test
+-----+
```

J14 - Java wait time by package

Usage

Use this report to see how much WAIT time was measured during execution of Java programs in each unique package. The unexpanded report shows one or more lines for each Java package in which execution was observed.

You can further expand each line item to show classes within the package, then methods within the class, then source lines within the method.

Quantification

Each report line quantifies WAIT time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (package, class, method or line) was in a wait state, to the total number of samples.

Detail line hierarchy

An unexpanded report shows a line for each Java package. The name field shows a sequence number assigned to each unique package. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```
Level 1 Java Package
  Level 2 Java Class
    Level 3 Java Method
      Level 4 Java Line Number
```

Detail line descriptions

Java package detail line

This is the first-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number is assigned to each observed Java package and is displayed in this column.
Pkg/Cls/Mthd	The name of a Java package.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java class detail line

This is the second-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java class is displayed in this column.
Pkg/Cls/Mthd	The name of a Java Class.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java method detail line

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.

Under Heading	This is Displayed
Pkg/Cls/Mthd	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java line number

This is the fourth-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Pkg/Cls/Mthd	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
J14: Java Wait Time by Package (0116/JVMTST01) Row 00001 of 00022
Command ==> ----- Scroll ==> CSR

JavaID  Pkg/Cls/Mthd          Percent of Time * 2.50%  ±2.4%
      *....1....2....3....4....5....6....7...
00006  java/util/zip          0.89 ==
→ 00018  ZipFile              0.89 ==

00002  java/lang             0.77 ==
→ 00005  ClassLoader          0.35 =
→ 00096  Thread              0.23
→ 00017  ClassLoader$NativeLibrar 0.05
→ 00057  Class               0.05
→ 00021  Runtime             0.05

00018  com/dovetail/jzos      0.23
→ 00078  ZFile               0.23

00005  java/io              0.17
→ 00098  FileInputStream      0.11
→ 00012  UnixFileSystem        0.05

00007  java/util/jar         0.05
→ 00019  JarFile              0.05

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Package, Class, Method, line number	Display context help information.
++	Package, Class, Method, line number	Show additional details.
+	Package, Class, Method	Expand to reveal next level.
–	Package, Class, Method	Collapse to hide next level.

on headings

Cmd	When Applied To Object	Action
?	JavaId, Pkg/Cls/Mthd, Percent of Time	Display context help information.
+	JavaId	Expand to reveal all entries.
+	Pkg/Cls/Mthd	Expand description field size.
+	Percent of Time	Zoom in scale.
–	JavaId	Collapse to show only first level.
–	Pkg/Cls/Mthd	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	JavaId	Sort next level by value.
SN	JavaId	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java class will cause this detail window to appear.

```
File View Navigate Help
+-----+
| +----- The following report line was selected -----+
| | -> 00018 ZipFile 0.89 == |
| +-----+
|
| Calculation Details
| Application code wait time measurements 15
| Total measurements 1,678
| Percent of total 0.89%
|
| Class Name:
| ZipFile
|
| Package Name:
| java/util/zip
|
+-----+
```

Note: If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

J15 - Java wait time by class

Usage

Use this report to see how much WAIT time was measured during execution of Java programs in each unique class. The unexpanded report shows one or more lines for each Java class in which execution was observed.

Note: The class name is implicitly qualified by the package name, which can be seen in the detail window for the class.

You can further expand each line item to show methods within the class, then source lines within the method.

Quantification

Each report line quantifies WAIT time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (class, method or line) was in a wait state, to the total number of samples.

Detail line hierarchy

An unexpanded report shows a line for each Java class. The name field shows a sequence number assigned to each unique class. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

```
Level 1 Java Class
Level 2 Java Method
Level 3 Java Line Number
```

Detail line descriptions

Java class detail line

This is the first-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number is assigned to each observed Java class and is displayed in this column.
Class/Method	The name of a Java class.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java method detail line

This is the second-level detail line.

Under Heading	This is Displayed
JavaID	A unique sequence number assigned to each observed Java method is displayed in this column.
Class/Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java line number

This is the third-level detail line.

Under Heading	This is Displayed
JavaID	The line number of a Java source statement.
Class/Method	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

Sample reports

A sample report is shown here. It has been expanded to the second level.

```

File View Navigate Help
-----
J15: Java Wait Time by Class (0116/JVMTST01) Row 00001 of 00033
Command ==> ----- Scroll ==> CSR

JavaId  Class/Method          Percent of Time * 2.50%  ±2.4%
      *....1....2....3....4....5....6....7...
00018  ZipFile                0.89 ==
→ 00049  getEntry              0.65 =
→ 00062  open                  0.23

00005  ClassLoader              0.35 =
→ 00139  findBootstrapClass        0.35 =

00029  ZFile                   0.23
→ 00173  fopen                    0.23

00096  Thread                    0.23
→ 00203  start                    0.23

00098  FileInputStream           0.11
→ 00207  readBytes                0.11

00019  JarFile                   0.05
→ 00037  hasClassPathAttribute    0.05

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Class, Method, line number	Display context help information.
++	Class, Method, line number	Show additional details.
+	Class, Method	Expand to reveal next level.
–	Class, Method	Collapse to hide next level.

on headings

Cmd	When Applied To Object	Action
?	JavaId, Class/Method, Percent of Time	Display context help information.
+	JavaId	Expand to reveal all entries.
+	Class/Method	Expand description field size.
+	Percent of Time	Zoom in scale.
–	JavaId	Collapse to show only first level.
–	Class/Method	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	JavaId	Sort next level by value.
SN	JavaId	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```
File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| -> 00049  getEntry                                0.65 |
+-----+
Calculation Details
Application code wait time measurements      11
Total measurements                          1,678
Percent of total                             0.65%

Method Name:
getEntry

Method Descriptor:
(JLjava/lang/String;)J

Method Signature:
getEntry(long, java.lang.String) long

Class Name:
ZipFile

Package Name:
java/util/zip
+-----+
```

Note: If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

J16 - Java wait time by method

Usage

Use this report to see how much WAIT time was measured during execution of Java programs in each unique method. The unexpanded report shows one or more lines for each Java method in which execution was observed.

Note: The method name is implicitly qualified by its package and class names, which can be seen in the detail window for the method.

You can further expand each line item to show methods within the class, then source lines within the method.

Quantification

Each report line quantifies WAIT time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which execution of the indicated Java object (method or line) was in a wait state, to the total number of samples.

Detail line hierarchy

An unexpanded report shows a line for each Java Method. The name field shows a sequence number assigned to each unique Method. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

Level 1	Java Method
Level 2	Java Line Number

Detail line descriptions

Java method detail line

This is the first-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method is displayed in this column.
Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java line number

This is the second-level detail line.

Under Heading	This is Displayed
MthId	The line number of a Java source statement.
Method	The line number of a Java source statement or “unknown” if the line number could not be determined.
Percent of Time	The percentage of activity measured in the indicated Java object.

Sample reports

A sample report is shown here. It has been expanded to the second level.


```

File View Navigate Help
-----
J16: Java Wait Time by Method (0116/JVMTST01) Row 00001 of 00035
Command ==> ----- Scroll ==> CSR

JavaId Class/Method Percent of CPU Time * 2.50% ±2.4%
*....1....2....3....4....5....6....7...
00049 getEntry 0.65 =
→ 00000 line # unknown 0.65 =

00139 findBootstrapClass 0.35 =
→ 00000 line # unknown 0.35 =

00062 open 0.23
→ 00000 line # unknown 0.23

00173 fopen 0.23
→ 00000 line # unknown 0.23

00203 start 0.23
→ 00000 line # unknown 0.23

00207 readBytes 0.11
→ 00000 line # unknown 0.11

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Method, line number	Display context help information.
++	Method, line number	Show additional details.
+	Method	Expand to reveal next level.
–	Method	Collapse to hide next level.

on headings

Cmd	When Applied To Object	Action
?	MthId, Method, Percent of Time	Display context help information.
+	MthId	Expand to reveal all entries.
+	Method	Expand description field size.
+	Percent of Time	Zoom in scale.
–	MthId	Collapse to show only first level.
–	Method	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	MthId	Sort next level by value.
SN	MthId	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| -> 00049   getEntry                                0.65 |
+-----+
Calculation Details
Application code wait time measurements      11
Total measurements                          1,678
Percent of total                             0.65%

Method Name:
  getEntry

Method Descriptor:
  (JLjava/lang/String;)J

Method Signature:
  getEntry(long, java.lang.String) long

Class Name:
  ZipFile

Package Name:
  java/util/zip
+-----+
```

Note: If you have Java source program mapping information specified, this detail window will display the Java source when invoked from a Java line number object.

J17 - Java wait time by call path

Usage

Use this report to see how much WAIT time was measured during execution of Java programs in each unique call path. The unexpanded report shows one or more lines for each Java method in which execution was observed. Execution in a method is quantified and reported separately for each call path. (A call path represents a path of control in the form of: A calls B calls C calls D, etc.)

By expanding the first-level method line you can see a line for each of the calling methods in the path of control. These are shown in reverse order of control. In the case of A calls B calls C calls D, method D (in which execution was observed) is reported in the first-level line and the second-level lines show C then B then A.

Quantification

The first-level report line quantifies WAIT time measured as a percentage of total time, the percentage represents the ratio of the number of samples in which execution of the indicated Java object (method or line) was in a wait state, to the total number of samples.

Detail line hierarchy

An unexpanded report shows a line for each Java method line. The name field shows a sequence number assigned to each unique method line. You can expand each line to reveal additional hierarchical levels of detail. The hierarchy is illustrated here:

Level 1 Java Method
Level 2 Calling Java Method Line

Detail line descriptions

Java method detail line

This is the first-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method is displayed in this column.
Method	The name of a Java method.
Percent of Time	The percentage of activity measured in the indicated Java object.

Java line number

This is the second-level detail line.

Under Heading	This is Displayed
MthId	A unique sequence number assigned to each observed Java method.
Method	The line number of the statement that invoked the next method in the call path and the name of the method.

Sample reports

A sample report is shown here. It has been expanded to the second level.

```
File View Navigate Help
-----
J17: Java Wait Time by Call Path (0116/JVMTST01) Row 00001 of 00158
Command ==> ----- Scroll ==> CSR

MthId  Method                                     Percent of Time * 2.50%  ±2.4%
      *....1....2....3....4....5....6....7...
00049  getEntry                                0.59 =
→ 00035 line 173 getEntry
→ 00036 line 257 getEntry
→ 00025 line 244 getJarEntry
→ 00037 line 483 hasClassPathAtt
→ 00038 line 29 jarFileHasClassP
→ 00028 line 889 getClassPath
→ 00002 line 351 getLoader
→ 00003 line 205 getResource
→ 00004 line 846 run
→ 00005 doPrivileged1
→ 00006 line 389 doPrivileged
→ 00007 line 371 findClass
→ 00008 line 572 loadClass
→ 00009 line 442 loadClass
→ 00010 line 504 loadClass

00139 findBootstrapClass                        0.29 =
→ 00140 line 1062 findBootstrapC
→ 00008 line 565 loadClass
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Method, line number	Display context help information.
++	Method, line number	Show additional details.
+	Method	Expand to reveal next level.
–	Method	Collapse to hide next level.

on headings

Cmd	When Applied To Object	Action
?	MthId, Method, Percent of Time	Display context help information.
+	MthId	Expand to reveal all entries.
+	Method	Expand description field size.
+	Percent of Time	Zoom in scale.
–	MthId	Collapse to show only first level.
–	Method	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	MthId	Sort next level by value.
SN	MthId	Sort next level by name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a Java method will cause this detail window to appear.

```

File View Navigate Help
+-----+-----+-----+-----+-----+-----+
+-----+-----+-----+-----+-----+-----+
| - - - - - The following report line was selected - - - - - |
| - - - - - | - - - - - | - - - - - | - - - - - | - - - - - |
| - - - - - | - - - - - | - - - - - | - - - - - | - - - - - |
+-----+-----+-----+-----+-----+-----+
|
| 00049  getEntry  0.65
|
+-----+-----+-----+-----+-----+-----+
|
| Calculation Details
| Application code wait time measurements 11
| Total measurements 1,678
| Percent of total 0.65%
|
| Method Name:
| getEntry
|
| Method Descriptor:
| (Ljava/lang/String;)J
|
| Method Signature:
| getEntry(long, java.lang.String) long
|
| Class Name:
| ZipFile
|
| Package Name:
| java/util/zip
|
+-----+-----+-----+-----+-----+-----+

```

H01 - HFS Service Time by Path Name

Usage

Use this report to see how Service time was consumed by HFS file activity during the observation session. Each report line shows an HFS file, listed by path name, for which activity was observed. If HFS file activity was observed during a sample, but could not be attributed to a specific file, the activity is aggregated to a single report line with a path name of “unknown”.

Quantification

Each report line quantifies Service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an HFS call against the indicated HFS file was inflight to the total number of samples. An observation is counted as inflight regardless of the CPU state: Active, WAIT, or Queued.

Detail line descriptions

HFS File detail line

Under Heading	This is Displayed
FileId	A unique sequence number assigned to each HFS file.
Path Name	The HFS file path name.
Percent of Time	The percentage of activity measured in the indicated HFS file.

Sample reports

A sample report is shown here.

```

File View Navigate Help
-----
H01: HFS Service Time by Path Name (8242/JVMTST01)          Row 00001 of 00070
Command ==> _____ Scroll ==> CSR

FileId   Path Name                                     Percent of Time * 10.00%  ±1.0%
*....1....2....3....4....5....6..
00002    /dev/ttyp0001                                70.36
00000    unknown                                    66.59
00001    /dev/ttyp0000                                50.49
00063    /tmp/ofile.txt                               13.28
00021    /Z18/usr/lpp/java/J1.4/lib/core.                  1.59
00080    /Z18/usr/lpp/java/J1.4/lib/core.                  1.18
00062    /u/zfs/iface.txt                                 0.53
00041    /Z18/usr/lpp/java/J1.4/lib/ext/d                   0.32
00032    /Z18/usr/lpp/java/J1.4/lib/ibmor                   0.18
00075    /u/zfs/platz                                       0.18
00044    /Z18/usr/lpp/java/J1.4/lib/ext/i                   0.16
00005    /dev/ptyp0001                                      0.15
00043    /Z18/usr/lpp/java/J1.4/lib/ext/i                   0.15
00072    /u/zfs/platz                                       0.15
00070    /u/zfs/platz                                       0.14
00036    /u/zfs/platz                                       0.12

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	FileId	Display context help information.
++	FileId	Show additional details.

on headings

Cmd	When Applied To Heading	Action
?	FileId, Path Name, Percent of Time	Display context help information.
+	Path Name	Expand description field size.
+	Percent of Time	Zoom in scale.
–	Path Name	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	FileId	Sort next level by value.
SN	FileId	Sort next level by FileId.
SP	FileId	Sort next level by Path Name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a FileId will cause this detail window to appear.

```

File View Navigate Help
+-----+
+-----+ The following report line was selected -----+
| 00002 /dev/ttyp001 70.36 |
+-----+

Calculation Details
HFS file measurements 7.036
Total measurements 10.000
Percent of total 70.36%

HFS File Information
Path name /dev/ttyp0001
File type Character Special File Major 2 Minor 1
Opened 7:05:22.45 Friday Mar 16 2007
Device# 4
Serial# 17
Open Flags Read/Write Read_Only Write_Only
Not_a_controlling_terminal
+-----+

```

SETUP options

The SETUP command displays the following options:

```

Minimum Percentage of Time . . . . . 0.00

This is the minimum percentage of HFS activity
measured for which an item is to be included in
the report.

```

By default, all HFS files with inflight activity during an observation session are displayed. Use the Minimum Percent of Time option to limit the report to files with activity above the specified threshold.

H02 - HFS Service Time by Device

Usage

Use this report to see how Service time was consumed by HFS device activity during the observation session. The unexpanded report shows an HFS device, listed by device number, for which activity was observed. If HFS file activity was observed during a sample, but could not be attributed to a specific file and device, the activity is aggregated to a single report line with a device number of “unknown”. You can further expand each line item to show the HFS files associated with the device.

Quantification

Each report line quantifies Service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an HFS call against the indicated HFS device was inflight to the total number of samples. An observation is counted as inflight regardless of the CPU state: Active, WAIT, or Queued.

Detail line hierarchy

An unexpanded report shows a line for each HFS device. The name field shows a sequence number assigned to each unique device. You can expand each line to reveal an additional hierarchical level of detail. The hierarchy is illustrated here: Level 1 HFS Device Level 2 HFS File

```

Level 1 HFS Device
Level 2 HFS File

```

Detail line descriptions

HFS Device detail line

This is the first-level detail line.

Under Heading	This is Displayed
DevId	A unique sequence number assigned to each HFS device.
Device#>Path Name	The HFS device number.
Percent of Time	The percentage of activity measured in the indicated HFS device.

HFS File detail line

This is the first-level detail line.

Under Heading	This is Displayed
DevId	A unique sequence number assigned to each HFS file.
Device#>Path Name	The HFS file path name..
Percent of Time	The percentage of activity measured in the indicated HFS file.

Sample reports

A sample report is shown here. It has been expanded to the second level.

```
File View Navigate Help
-----
H02: HFS Service Time by Device (8242/JVMTST01) Row 00001 of 00085
Command ==> _____ Scroll ==> CSR

DevId Device#>PathName Percent of Time * 10.00% ±1.0%
      *....1....2....3....4....5....6..
00001 4 85.07
→ 00002 /dev/ttyp0001 70.36
→ 00001 /dev/ttyp0000 50.49
→ 00005 /dev/ptyp0001 0.15
→ 00066 /dev/null 0.06
→ 00004 /dev/ptyp0000 0.06
→ 00066 /dev/null 0.04
→ 00066 /dev/null 0.03
→ 00066 /dev/null 0.02
→ 00066 /dev/null 0.02
→ 00066 /dev/null 0.01
→ 00066 /dev/null 0.01

00000 unknown 66.59
00009 8 13.28
→ 00063 /tmp/ofile.txt 13.28
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	DevId, FileId	Display context help information.

Cmd	When Applied To Object	Action
++	DevId, FileId	Show additional details.
+	DevId	Expand to reveal next level.
-	DevId	Collapse to hide next level.
SV	DevId	Sort next level by value.
SN	DevId	Sort next level by FileId.
SP	DevId	Sort next level by Path Name.

on headings

Cmd	When Applied To Heading	Action
?	DevId, Device#>PathName, Percent of Time	Display context help information.
+	DevId	Expand to reveal all entries.
+	Device#>PathName	Expand field size.
+	Percent of Time	Zoom in scale.
-	DevId	Collapse to show only first level.
-	Device#>PathName	Reduce field size.
-	Percent of Time	Zoom out scale.
SV	DevId	Sort next level by value.
SN	DevId	Sort next level by DevId.
SD	DevId	Sort next level by Device#.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a DevId will cause this detail window to appear.

File View Navigate Help		
+----- The following report line was selected -----+		
00001	4	85.07
+-----+		
Calculation Details		
HFS device measurements		8.507
Total measurements		10.000
Percent of total		85.07%
HFS Device Information		
Device	4	
Dataset name	HFS.ADCD.DEV	
DD name	SYS00006	
Physical file system	HFS	
Mount point	/X235/dev	
Mounted	8:40:24.22 Friday Mar 9 2007	

SETUP options

The SETUP command displays the following options:

```
Minimum Percentage of Time . . . . . 0.00  
  
This is the minimum percentage of HFS activity  
measured for which an item is to be included in  
the report.
```

By default, all HFS devices with inflight activity during an observation session are displayed. Use the Minimum Percent of Time option to limit the report to devices with activity above the specified threshold.

H03 - HFS File Activity

Usage

Use this report to display the Read/Write counts for each HFS file captured during the observation session. Each report line shows an HFS file, listed by path name, and its associated Read/Write count.

Quantification

Each report line quantifies the Read/Write count by subtracting the Read count at the start of the observation session from the Read count at the end of the observation session; subtracting the Write count at the start of the observation session from the Write count at the end of the observation session; and adding the two differences together.

Detail line descriptions

HFS File detail line

Under Heading	This is Displayed
FileId	A unique sequence number assigned to each HFS file.
Path Name	The HFS file path name.
File Type	The HFS file type.
Reads/Writes	The Read/Write count for the indicated HFS file.

Sample reports

A sample report is shown here.

File View Navigate Help			
H03: HFS File Activity (8242/JVMTST01)		Row 00001 of 00198	
Command ==> _____		Scroll ==> CSR	
FileId	Path Name	File Type	Reads/Writes
00063	/tmp/ofile.txt	Regular File	55,985
00021	/Z18/usr/lpp/java/J1.4/lib/core.jar	Regular File	715
00080	/Z18/usr/lpp/java/J1.4/lib/core.jar	Regular File	644
00062	/u/zfs/ofile.txt	Regular File	261
00005	/dev/ptyp0001	Character Special File	171
00070	/u/zfs/platz	Regular File	100
00066	/dev/null	Character Special File	98
00036	/u/zfs/platz	Regular File	98
00068	/u/zfs/platz	Regular File	97
00074	/dev/null	Character Special File	96
00035	/dev/null	Character Special File	89
00064	/u/zfs/platz	Regular File	88
00072	/u/zfs/platz	Regular File	88
00069	/dev/null	Character Special File	86
00075	/u/zfs/platz	Regular File	84
00065	/dev/null	Character Special File	74

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	FileId	Display context help information.
++	FileId	Show additional details.

on headings

Cmd	When Applied To Heading	Action
?	FileId	Display context help information.
SV	FileId	Sort next level by value.
SN	FileId	Sort next level by FileId.
SD	FileId	Sort next level by Path Name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a FileId will cause this detail window to appear.

```

File View Navigate Help
-----
File 00063
  Path name      /tmp/ofile.txt
  File type      Regular File
  Opened         7:08:32.33 Friday Mar 16 2007
  Device#        8
  Serial#        491
  Open Flags     Write_Only Truncate Create

  File Activity      Initial      Last      Delta
  Read Requests      0              0
  Write Requests     0          55,985    55,985
  Dir I/O Blocks     12           12         0
  Blocks Read        1             1         0
  Blocks Written     0          55,985    55,985
  Bytes Read         12           12         0
  Bytes Written      0        2,127,115  2,127,115

```

SETUP options

The **SETUP** command displays the following options:

Enter "/" to select an option

_ Omit files for which no activity was observed during the measurement interval. Unselect to include all files.

By default, all HFS files are displayed. Select this option to omit HFS files that had no read/write activity during the observation session.

H04 - HFS File Attributes

Usage

Use this report to see detailed information about each HFS file that was open during the observation session. This is useful as a reference report when working with printed copies of other HFS reports that do not show full HFS file details. (When browsing online, the popup detail windows show this information.)

Detail line descriptions

The following information is shown for each HFS device.

Under Heading	This is Displayed
FileId	A unique sequence number assigned to the HFS file. This is shown in other HFS reports that display HFS file information.
Path Name	The HFS file path name.
File Type	The HFS file type.
Major	If the file type is Character Special, the associated Major number is displayed.
Minor	If the file type is Character Special, the associated Minor number is displayed.
Opened	The date and time that the file was opened (local time).
Device#	The HFS device number associated with the file.
Serial#	The HFS file serial number.

Under Heading	This is Displayed
Open Flags	All the file Open Flags that are set are listed here.
Mode Flags - File Type	The HFS file type listed in the HFS Mode Flags.
Mode Flags - Permissions	The file permissions (Read/Write/Execute) categorized by Owner, Group, and Other.
Mode Flags - Set Id Flags	The Set Id is indicated by either Userid or Group. The Sticky bit setting is also displayed here (if on).
File Activity	The file activity is listed by category. The initial counts recorded at the start of the observation session, the final counts recorded at the end of the observation, and the delta are all listed.

Sample reports

A sample report is shown here.

```

File  View  Navigate  Help
-----
H04: HFS File Attributes (8242/JVMTST01)                      Row 00001 of 02162
Command ==> _____ Scroll ==> CSR_

HFS file information reported for 115 files.

FileId 00001
Path name      /dev/ttyp0000
File type      Character Special File Major 2      Minor 0
Opened         6:47:58.93 Friday Mar 16 2007
Device#        4
Serial#        12
Open Flags     Read/Write Read_Only Write_Only
               Not_a_controlling_terminal

File Activity   Initial           Last           Delta
Read Requests   11              12             1
Write Requests  33              40             7
Dir I/O Blocks  19              19             0
Blocks Read     5               5              0
Blocks Written  0               0              0
Bytes Read      14,883          14,901         18
Bytes Written   1,244           1,350         106

```

H05 - HFS Device Activity

Usage

Use this report to display the Read/Write counts for each HFS device captured during the observation session. Each report line shows an HFS device, listed by device number, and its associated Read/Write count.

Quantification

Each report line quantifies the Read/Write count by subtracting the Read count at the start of the observation session from the Read count at the end of the observation session; subtracting the Write count at the start of the observation session from the Write count at the end of the observation session; and adding the two differences together.

Detail line descriptions

The following information is shown for each HFS device.

Under Heading	This is Displayed
DevId	A unique sequence number assigned to each HFS device.
Device#	The HFS device number.
Mount Point	The directory at which the file system was mounted.
Reads/Writes	The Read/Write count for the indicated HFS device.

Sample reports

A sample report is shown here.

```

File View Navigate Help
-----
H05: HFS Device Activity (8242/JVMTST01) Row 00001 of 00009
Command ==> _____ Scroll ==> CSR
DevId Device# Mount Point Reads/Writes
00009 8 /X235/tmp 55,985
00004 24 /Z18/usr/lpp/java 6,463
00001 4 /X235/dev 996
00005 11 /u/zfs 984
00003 10 /u 81
00007 12 /Z18/usr/lpp/db2/db2810 12
00008 16 /Z18/usr/lpp/cicsts/cicsts31 12
00002 3 /Z18 0
00006 7 /X235/etc 0

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	DevId	Display context help information.
++	DevId	Show additional details.

on headings

Cmd	When Applied To Heading	Action
?	DevId	Display context help information.
SV	DevId	Sort next level by value.
SN	DevId	Sort next level by DevId.
SD	DevId	Sort next level by Device#.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a DevId will cause this detail window to appear.

File View Navigate Help				
Device 00004				
Device#	24			
Dataset name	JVA140.HFS			
DD name	SYS00025			
Physical file system	HFS			
Mount point	/Z18/usr/lpp/java			
Mounted	8:40:36.62 Friday Mar 9 2007			
Device Activity	Initial	Last	Delta	
Read Requests	186,308	192,771	6,463	
Write Requests	0	0	0	
Dir I/O Blocks	67,554	73,030	5,476	
Blocks Read	247,016	258,524	11,508	
Blocks Written	0	0	0	
Bytes Read	462,232,053	501,613,789	39,381,736	
Bytes Written	0	0	0	

SETUP options

The SETUP command displays the following options:

```
Enter "/" to select an option

_ Omit devices for which no activity was observed
during the measurement interval. Unselect to
include all devices.
```

By default, all HFS devices are displayed. Select this option to omit HFS devices that had no read/write activity during the observation session.

H06 - HFS Device Attributes

Usage

Use this report to see detailed information about each HFS device captured during the observation session. This is useful as a reference report when working with printed copies of other HFS reports that do not show full HFS device details. (When browsing online, the popup detail windows show this information.)

Detail line descriptions

The following information is shown for each HFS device.

Under Heading	This is Displayed
DevId	A unique sequence number assigned to the HFS device. This is shown in other HFS reports that display HFS device information.
Device#	The HFS device number.
Dataset Name	The dataset containing the HFS file system.
DD Name	The DD name assigned to the HFS dataset.
Physical File System	The file system type - HFS, zFS, NFS.
Mount Point	The directory at which the file system was mounted.
Mounted	The date and time that the file system was mounted (local time).

Under Heading	This is Displayed
Device Activity	The device activity is listed by category. The initial counts recorded at the start of the observation session, the final counts recorded at the end of the observation, and the delta are all listed.

Sample reports

A sample report is shown here.

```

File  View  Navigate  Help
-----
H06: HFS Device Attributes (8242/JVMTST01)          Row 00001 of 0165
Command ==> _____ Scroll ==> CSR

HFS device information reported for 9 devices.

DevId 00001
Device#                4
Dataset name           HFS.ADCD.DEV
DD name                SYS00006
Physical file system    HFS
Mount point            /X235/dev
Mounted                8:40:24.22 Friday Mar 9 2007

Device Activity        Initial          Last          Delta
Read Requests         5,922          6,138          216
Write Requests        1,070          1,850          780
Dir I/O Blocks         565            579            14
Blocks Read            56             56             0
Blocks Written         0              0              0
Bytes Read             220,179        221,394        1,215
Bytes Written          70,730         71,540         810

```

H07 - HFS Activity Timeline

Usage

Use this report to see, for each HFS file, how activity on the file was distributed over the measurement interval.

Quantification

A graph, in bar chart format, is displayed for each observed HFS file. The horizontal axis represents the measurement interval which spans 50 columns. Each column represents an equal 1/50th sub-interval of time. A scale is shown at the bottom of the graph indicating the percentage of time progression in the overall interval.

In each column, a vertical graph shows (roughly) the percentage of time during the sub-interval that activity on the HFS file took place. A vertical bar of 1, 2, 3, 4 or 5 characters, extending upward from the scale, is displayed indicating the percentage of time in the sub-interval during which file activity was observed.

Detail line descriptions

HFS Activity Distribution

A group of lines is shown for each reported HFS file. Some information about the HFS files is displayed to the left, and a bar chart is displayed on the right.

File View Navigate Help			
FileId 00002			
Path name	/dev/tty0001		
File type	Character Special File	Major 2	Minor 1
Opened	7:05:22.45 Friday Mar 16 2007		
Device#	4		
Serial#	17		
Open Flags	Read/Write	Read_Only	Write_Only
	Not_a_controlling_terminal		
File Activity	Initial	Last	Delta
Read Requests	7	20	13
Write Requests	29	60	31
Dir I/O Blocks	19	19	0
Blocks Read	5	5	0
Blocks Written	0	0	0
Bytes Read	14,810	15,073	263
Bytes Written	1,829	2,252	423

SETUP options

The SETUP command displays the following options:

```
Enter "/" to select an option

_ Omit files for which no activity was observed
during the measurement interval. Unselect to
include all files.
```

By default, all HFS files are displayed. Select this option to omit HFS files that had no read/write activity during the observation session.

H08 - HFS Wait Time by Path Name

Usage

Use this report to identify delays resulting from waits during HFS requests. Each report line shows an HFS file, listed by path name, for which wait time was observed. If a wait was observed during a sample where there was an inflight HFS request, but could not be attributed to a specific file, the wait is aggregated to a single report line with a path name of "unknown".

Quantification

Each report line quantifies wait time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an HFS call against the indicated HFS file was in a wait to the total number of samples.

Detail line descriptions

HFS File detail line

Under Heading	This is Displayed
FileId	A unique sequence number assigned to each HFS file.
Path Name	The HFS file path name
Percent of Time	The percentage wait time measured for the indicated file.

Sample reports

A sample report is shown here.

File	View	Navigate	Help
H08: HFS Wait Time by Path Name (8242/JVMTST01)			Row 00001 of 00046
Command ==>			Scroll ==> CSR
FileId	Path Name	Percent of Time * 10.00%	±1.0%
		*....1....2....3....4....5....6..	
00002	/dev/ttyp0001	70.29	
00000	unknown	66.53	
00001	/dev/ttyp0000	50.46	
00021	/Z18/usr/lpp/java/J1.4/lib/core.	0.94	
00080	/Z18/usr/lpp/java/J1.4/lib/core.	0.62	
00063	/tmp/ofile.txt	0.32	
00041	/Z18/usr/lpp/java/J1.4/lib/ext/d	0.31	
00062	/u/zfs/ofile.txt	0.24	
00032	/Z18/usr/lpp/java/J1.4/lib/ibmor	0.18	
00044	/Z18/usr/lpp/java/J1.4/lib/ext/i	0.14	
00026	/Z18/usr/lpp/java/J1.4/lib/chars	0.09	
00042	/Z18/usr/lpp/java/J1.4/lib/ext/g	0.09	
00034	/Z18/usr/lpp/java/J1.4/lib/ibmpk	0.08	
00072	/u/zfs/platz	0.08	
00075	/u/zfs/platz	0.08	
00029	/Z18/usr/lpp/java/J1.4/lib/ibmjg	0.07	
00036	/u/zfs/platz	0.07	
00054	/Z18/usr/lpp/java/J1.4/lib/ext/r	0.07	

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	FileId	Display context help information.
++	FileId	Show additional details.

on headings

Cmd	When Applied To Heading	Action
?	FileId, Path Name, Percent of Time	Display context help information.
+	Path Name	Expand description field size.
+	Percent of Time	Zoom in scale.
–	Path Name	Reduce description field size.
–	Percent of Time	Zoom out scale.
SV	FileId	Sort next level by value.
SN	FileId	Sort next level by FileId.
SP	FileId	Sort next level by Path Name.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a FileId will cause this detail window to appear.

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 00002 /dev/ttyp0001 70.29 |
+-----+

Calculation Details
HFS file wait time measurements 7,029
Total measurements 10,000
Percent of total 70.29%

HFS File Information
Path name /dev/ttyp0001
File type Character Special File Major 2 Minor 1
Opened 7:05:22.45 Friday Mar 16 2007
Device# 4
Serial# 17
Open Flags Read/Write Read_Only Write_Only
Not_a_controlling_terminal
```

SETUP options

The SETUP command displays the following options:

```
Minimum Percentage of Time . . . . . 0.00

This is the minimum percentage of HFS wait time
measured for which an item is to be included in
the report.
```

By default, all HFS files with wait time during an observation session are displayed. Use the Minimum Percent of Time option to limit the report to files with wait time above the specified threshold.

H09- HFS Wait Time by Device

Usage

Use this report to identify delays resulting from waits during HFS requests. Each report line shows an HFS device, listed by device number, for which wait time was observed. If a wait was observed during a sample, where there was an inflight HFS request, but could not be attributed to a specific file and device, the wait is aggregated to a single report line with a device number of "unknown". You can further expand each line item to show the HFS files associated with the device.

Quantification

Each report line quantifies wait time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an HFS call against the indicated HFS device was in a wait to the total number of samples.

Detail line hierarchy

An unexpanded report shows a line for each HFS device. The name field shows a sequence number assigned to each unique device. You can expand each line to reveal an additional hierarchical level of detail. The hierarchy is illustrated here:

```
Level 1 HFS Device
Level 2 HFS File
```

Detail line descriptions

HFS Device detail line

This is the first-level detail line.

Under Heading	This is Displayed
DevId	A unique sequence number assigned to each HFS device.
Device#>Path Name	The HFS device number.
Percent of Time	The percentage wait time measured for the indicated HFS device.

HFS File detail line

This is the second-level detail line.

Under Heading	This is Displayed
DevId	A unique sequence number assigned to each HFS file.
Device#>Path Name	The HFS file path name.
Percent of Time	The percentage activity measured for the indicated HFS file.

Sample reports

A sample report is shown here. It has been expanded to the second level.

```
File View Navigate Help
-----
H09: HFS Wait Time by Device (8242/JVMTST01) Row 00001 of 00057
Command ==> Scroll ==> CSR
-----
DevId Device#>PathName Percent of Time * 10.00% ±1.0%
      *....1....2....3....4....5....6..
00001 4 84.84
→ 00002 /dev/ttyp0001 70.29
→ 00001 /dev/ttyp0000 50.46

00000 unknown 66.53
00004 24 3.27
→ 00021 /Z18/usr/lpp/java/J1.4/lib/core 0.94
→ 00080 /Z18/usr/lpp/java/J1.4/lib/core 0.62
→ 00041 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.31
→ 00032 /Z18/usr/lpp/java/J1.4/lib/ibmo 0.18
→ 00044 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.14
→ 00026 /Z18/usr/lpp/java/J1.4/lib/char 0.09
→ 00042 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.09
→ 00034 /Z18/usr/lpp/java/J1.4/lib/ibmp 0.08
→ 00029 /Z18/usr/lpp/java/J1.4/lib/ibmj 0.07
→ 00054 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.07
→ 00081 /Z18/usr/lpp/java/J1.4/lib/grap 0.07
→ 00043 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.06
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	DevId, FileId	Display context help information.
++	DevId, FileId	Show additional details.

Cmd	When Applied To Object	Action
+	DevId	Expand to reveal next level.
–	DevId	Collapse to hide next level.
SV	DevId	Sort next level by value.
SN	DevId	Sort next level by FileId.
SP	DevId	Sort next level by Path Name.

on headings

Cmd	When Applied To Heading	Action
?	DevId, Device#>Path Name, Percent of Time	Display context help information.
+	DevId	Expand to reveal all entries.
+	Device#>Path Name	Expand field size.
+	Percent of Time	Zoom in scale.
–	DevId	Collapse to show only first level.
–	Device#>Path Name	Reduce field size.
–	Percent of Time	Zoom out scale.
SV	DevId	Sort next level by value.
SN	DevId	Sort next level by DevId.
SD	DevId	Sort next level by Device#.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a DevId will cause this detail window to appear.

File View Navigate Help	
+----- The following report line was selected -----+	
00001 4	84.84
+-----+	
Calculation Details	
HFS device wait time measurements	8.484
Total measurements	10,000
Percent of total	84.84%
HFS Device Information	
Device#	4
Dataset name	HFS.ADCD.DEV
DD name	SYS00006
Physical file system	HFS
Mount point	/X235/dev
Mounted	8:40:24.22 Friday Mar 9 2007

SETUP options

The SETUP command displays the following options:

Minimum Percentage of Time 0.00

This is the minimum percentage of HFS wait time measured for which an item is to be included in the report.

By default, all HFS devices with wait time during an observation session are displayed. Use the Minimum Percent of Time option to limit the report to devices with activity above the specified threshold.

H10- HFS Service Time by Request

Usage

Use this report to see how Service time was consumed by HFS file requests during the observation session. The unexpanded report shows an HFS request, listed by Request name, for which activity was observed. If an HFS file request was observed during a sample, but could not be attributed to a specific file, the request is aggregated to a single report line with a request name of "unknown". You can further expand each line item to show the HFS files associated with the request.

Quantification

Each report line quantifies Service time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an HFS request was inflight to the total number of samples. An observation is counted as inflight regardless of the CPU state: Active, WAIT, or Queued.

Detail line hierarchy

An unexpanded report shows a line for each HFS request. The name field shows a sequence number assigned to each unique request type. You can expand each line to reveal an additional hierarchical level of detail. The hierarchy is illustrated here:

Level 1 HFS Request
Level 2 HFS File

Detail line descriptions

HFS Request detail line

This is the first-level detail line.

Under Heading	This is Displayed
ReqId	A unique sequence number assigned to each request type.
Request>Path Name	The HFS request name.
Percent of Time	The percentage activity measured for the indicated HFS request.

HFS File detail line

This is the second-level detail line.

Under Heading	This is Displayed
ReqId	A unique sequence number assigned to each HFS file.
Request>Path Name	The HFS file path name.
Percent of Time	The percentage activity measured for the indicated HFS file.

Sample reports

A sample report is shown here. It has been expanded to the second level.

```
File View Navigate Help
-----
H10: HFS Service Time by Request (8242/JVMTST01) Row 00001 of 00090
Command ==> _____ Scroll ==> CSR

ReqId Request>PathName Percent of Time * 10.00% ±1.0%
      *....1....2....3....4....5....6..
00001 read 86.02
→ 00002 /dev/ttyp0000 70.35
→ 00001 /dev/ttyp0000 50.48
→ 00021 /Z18/usr/lpp/java/J1.4/lib/core 1.52
→ 00080 /Z18/usr/lpp/java/J1.4/lib/core 1.10
→ 00062 /u/zfs/iface.txt 0.53
→ 00041 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.32
→ 00032 /Z18/usr/lpp/java/J1.4/lib/ibmo 0.18
→ 00075 /u/zfs/platz 0.18
→ 00043 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.15
→ 00044 /Z18/usr/lpp/java/J1.4/lib/ext/ 0.15
→ 00072 /u/zfs/platz 0.15
→ 00070 /u/zfs/platz 0.14
→ 00036 /u/zfs/platz 0.12
→ 00064 /u/zfs/platz 0.12
→ 00022 /Z18/usr/lpp/java/J1.4/lib/grap 0.11
→ 00005 /dev/ptyp0001 0.11
→ 00026 /Z18/usr/lpp/java/J1.4/lib/char 0.10
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	ReqId, FileId	Display context help information.
++	ReqId, FileId	Show additional details.
+	ReqId	Expand to reveal next level.
–	ReqId	Collapse to hide next level.
SV	ReqId	Sort next level by value.
SN	ReqId	Sort next level by FileId.
SP	ReqId	Sort next level by Path Name.

on headings

Cmd	When Applied To Heading	Action
?	ReqId, Request>PathName, Percent of Time	Display context help information.
+	ReqId	Expand to reveal all entries.
+	Request>Path Name	Expand field size.
+	Percent of Time	Zoom in scale.
–	ReqId	Collapse to show only first level.

Cmd	When Applied To Heading	Action
–	Request>Path Name	Reduce field size.
–	Percent of Time	Zoom out scale.
SV	ReqId	Sort next level by value.
SN	ReqId	Sort next level by ReqId.
SR	ReqId	Sort next level by Request.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a ReqId will cause this detail window to appear.

```

File  View  Navigate  Help
+-----+
| +-----+ The following report line was selected +-----+
| | 00001  read                               86.02 |
| +-----+
|
| Calculation Details
|   HFS request measurements          8.602
|   Total measurements               10,000
|   Percent of total                 86.02%
|
+-----+

```

SETUP options

The SETUP command displays the following options:

```

Minimum Percentage of Time . . . . . 0.00

This is the minimum percentage of HFS activity
measured for which an item is to be included in
the report.

```

By default, all HFS requests captured during an observation session are displayed. Use the Minimum Percent of Time option to limit the report to requests with activity above the specified threshold.

H11- HFS Wait Time by Request

Usage

Use this report to identify delays resulting from waits during HFS requests. Each report line shows an HFS request, listed by Request name, for which wait time was observed. If a wait was observed during a sample, where there was an inflight HFS request, but could not be attributed to a specific file, the wait is aggregated to a single report line with a request name of "unknown". You can further expand each line item to show the HFS files associated with the request.

Quantification

Each report line quantifies wait time measured as a percentage of total time. The percentage represents the ratio of the number of samples in which an HFS request was in a wait, to the total number of samples.

Detail line hierarchy

An unexpanded report shows a line for each HFS request. The name field shows a sequence number assigned to each unique request type. You can expand each line to reveal an additional hierarchical level of detail. The hierarchy is illustrated here:

Level 1	HFS Request
Level 2	HFS File

Detail line descriptions

HFS Request detail line

This is the first-level detail line.

Under Heading	This is Displayed
ReqId	A unique sequence number assigned to each request type.
Request>Path Name	The HFS request name.
Percent of Time	The percentage wait time measured for the indicated HFS request.

HFS File detail line

This is the second-level detail line.

Under Heading	This is Displayed
ReqId	A unique sequence number assigned to each HFS file.
Request>Path Name	The HFS file path name.
Percent of Time	The percentage wait time measured for the indicated HFS file.

Sample reports

A sample report is shown here.

File View Navigate Help			

H11: HFS Wait Time by Request (8242/JVMTST01)		Row 00001 of 00052	
Command ==> -----		Scroll ==> CSR	

ReqId	Request>PathName	Percent of Time * 10.00%	±1.0%
		*....1....2....3....4....5....6..	
00001	read	35.38	
→ 00002	/dev/ttyp0001	70.29	
→ 00001	/dev/ttyp0000	50.46	
→ 00021	/Z18/usr/lpp/java/J1.4/lib/core	0.94	
→ 00080	/Z18/usr/lpp/java/J1.4/lib/core	0.62	
→ 00041	/Z18/usr/lpp/java/J1.4/lib/ext/	0.31	
→ 00062	/u/zfs/iface.txt	0.24	
→ 00032	/Z18/usr/lpp/java/J1.4/lib/ibmo	0.18	
→ 00044	/Z18/usr/lpp/java/J1.4/lib/ext/	0.14	
→ 00026	/Z18/usr/lpp/java/J1.4/lib/char	0.09	
→ 00042	/Z18/usr/lpp/java/J1.4/lib/ext/	0.09	
→ 00034	/Z18/usr/lpp/java/J1.4/lib/ibmp	0.08	
→ 00072	/u/zfs/platz	0.08	
→ 00075	/u/zfs/platz	0.08	
→ 00029	/Z18/usr/lpp/java/J1.4/lib/ibmj	0.07	
→ 00036	/u/zfs/platz	0.07	
→ 00054	/Z18/usr/lpp/java/J1.4/lib/ext/	0.07	
→ 00081	/Z18/usr/lpp/java/J1.4/lib/grap	0.07	

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	ReqId, FileId	Display context help information.
++	ReqId, FileId	Show additional details.
+	ReqId	Expand to reveal next level.
–	ReqId	Collapse to hide next level.
SV	ReqId	Sort next level by value.
SN	ReqId	Sort next level by FileId.
SP	ReqId	Sort next level by Path Name.

on headings

Cmd	When Applied To Heading	Action
?	ReqId, Request>PathName, Percent of Time	Display context help information.
+	ReqId	Expand to reveal all entries.
+	Request>Path Name	Expand field size.
+	Percent of Time	Zoom in scale.
–	ReqId	Collapse to show only first level.
–	Request>Path Name	Reduce field size.
–	Percent of Time	Zoom out scale.
SV	ReqId	Sort next level by value.
SN	ReqId	Sort next level by ReqId.
SR	ReqId	Sort next level by Request.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

For example, entering “++” on a ReqId will cause this detail window to appear.

```

File  View  Navigate  Help
+-----+
| +-----+ The following report line was selected -----+
| | 00001   read                                     85.38 |
| +-----+
|
| Calculation Details
|   HFS request wait time measurements           8.538
|   Total measurements                          10,000
|   Percent of total                            85.38%
| +-----+

```

SETUP options

The SETUP command displays the following options:

```

Minimum Percentage of Time . . . . . 0.00

This is the minimum percentage of HFS wait time
measured for which an item is to be included in
the report.

```

By default, all HFS requests captured during an observation session are displayed. Use the Minimum Percent of Time option to limit the report to requests with wait time above the specified threshold.

Chapter 9. WebSphere performance analysis reports

This section describes the WebSphere (WAS) performance analysis reports.

For information about...	See...
The WAS data extractor	“Overview of WAS data extractor” on page 503
Measuring WAS servant address space activity	“Measuring WAS servant address space activity” on page 504
B01 WAS Summary	“B01 - WAS Summary” on page 504
B02 WAS Activity	“B02 - WAS Activity” on page 507
B03 WAS Activity by Origin	“B03 - WAS Activity by Origin” on page 511
B04 WAS Activity by Servant	“B04 - WAS Activity by Servant” on page 515
B05 WAS EJB Activity	“B05 - WAS EJB Activity” on page 520
B06 WAS EJB Activity by Origin	“B06 - WAS EJB Activity by Origin” on page 523
B07 WAS EJB Activity by Servant	“B07 - WAS EJB Activity by Servant” on page 526
B08 WAS Servlet/JSP Activity	“B08 – WAS Servlet/JSP Activity” on page 529
B09 WAS Servlet/JSP by Origin	“B09 - WAS Servlet/JSP by Origin” on page 532
B10 WAS Servlet/JSP by Servant	“B10 WAS Servlet/JSP by Servant” on page 535
B11 WAS/CICS Calls	“B11 - WAS/CICS Calls” on page 538
B12 WAS/DB2 Calls	“B12 - WAS/DB2 Calls” on page 541
B13 Async Work Requests	“B13 - Async Work Requests” on page 544
B14 Async Work by Work Mgr	“B14 - Async Work by Work Mgr” on page 547
B15 Async Work by Servant	“B15 - Async Work by Servant” on page 549
B16 WOLA Inbound Requests	“B16 - WOLA Inbound Requests” on page 552
B17 WOLA Inbound by Origin	“B17 - WOLA Inbound by Origin” on page 555
B18 WOLA Inbound by Servant	“B18 - WOLA Inbound by Servant” on page 559
B19 WOLA Outbound Requests	“B19 - WOLA Outbound Requests” on page 563
B20 WOLA Outbound by Register	“B20 - WOLA Outbound by Register” on page 565
B21 WOLA Outbound by Servant	“B21 - WOLA Outbound by Servant” on page 567

Overview of WAS data extractor

To use the WebSphere Performance Analysis Reports, WAS must be enabled in Application Performance Analyzer by your installation, and the WAS data extractor must be turned on when the Observation Request is entered. You select the WAS data extractor in the Options panel when creating a new measurement. The WAS data extractor is valid only if the target job is an active WAS controller address space. The WAS controller is not actually sampled, since no application code runs in a WAS controller. Instead, all WAS requests processed by the target WAS controller are recorded in the sample file. The sampling frequency will be changed to 1 per second and the number of samples will be changed to the sampling duration in seconds when the WAS measurement request begins.

When the WAS data extractor is selected, SMF records are activated for the target WAS controller address space. The SMF records contain information about each WAS request processed by the server. This SMF data is extracted and written to the sample file.

Sequence Numbers

The sequence numbers assigned to unique occurrences of object names (EJBs, servlets, and so on) do not necessarily indicate the order in which the objects were invoked.

CPU and Service Times

CPU time (including zIIP and zAAP time) is measured in microseconds. zIIP and zAAP CPU times are normalized to CP time. Service time (elapsed time) is measured in milliseconds. Total service time can exceed the sampling duration, because WAS processes multiple requests in parallel.

CPU Usage Breakdown

The SMF records contain information at the request level, giving total CPU and service times for each request. If the request invokes the Web container or EJB container, the SMF records contain information for each servlet/JSP or method invoked, to a maximum of 30 unique occurrences. Included in this information is CPU time, service time, and the number of times the object was invoked.

The sum of CPU times and service times for the breakdown will not add up to the CPU time and service time for the request, since not all activity is recorded in the breakdown when processing a request.

Similarly, the invocation count for a servlet/JSP or method will not add up to the request count at the request level.

Request Types

The type of a request is determined by its SMF record. Only a single type is recorded for each request. For example, if a request arrives via HTTP for a managed bean, the request type is HTTP. It will be counted once as an HTTP request. It will not be counted as an Mbean request.

Measuring WAS servant address space activity

If during measurement of the controller, one or more WebSphere Application Services servant address spaces become active, they will also be automatically measured in separate child observation sessions. The servant observation sessions use a sampling frequency based on the number of samples and duration entered for the WAS request, and end when the controller measurement ends. You may select any of the following extractors when WAS is selected: CICS, DB2, DB2+, CDB2, DB2V, and JAVA. However, these extractors are only enabled for the servant observation sessions. Upon completion of the measurement, all servant observations will include a copy of the controller's B01 to B10 reports for your convenience.

Note: Measurement of servant region activity requires the Application Performance Analyzer WLM intercept be enabled during installation. Contact your system programmer to verify that the WLM intercept is enabled in Application Performance Analyzer.

B01 - WAS Summary

Usage

Use this report to see a summary of the WAS requests that were observed for the duration of the measurement.

Detail Line descriptions

System Identification

This section identifies the z/OS system on which the measurement was done.

System name

The system name taken from the CVTSNAME field of the MVS CVT control block.

Sysplex

The sysplex name taken from the ECVTSPLX field of the MVS ECVT control block.

Job name

The job name of the WAS controller address space.

Job id

The job identifier of the WAS controller address space.

ASID

The address space identifier of the WAS controller address space, displayed in hex.

WAS Identification

This section identifies the WAS server on which the measurement was done.

Cell

The cell short name of the WAS server.

Node

The node name of the WAS server.

Cluster

The cluster name of the WAS server.

Server

The server name of the WAS server.

WAS version

The version number of the WAS server.

Service level

The build level of the WAS server.

Request Counts

This section provides counts of the number of requests observed for each request type. Requests are counted once only for a single type.

Total requests

The total number of requests observed. This is the sum of all request counts below except for timed out requests.

IIOP requests

The number of Internet Inter-ORB Protocol requests observed.

HTTP requests

The number of Hypertext Transfer Protocol requests observed.

HTTPS requests

The number of Hypertext Transfer Protocol Secure requests observed.

MDB Plan A requests

The number of Message Driven Bean Plan A requests observed. A plan "A" request is an MDB request from a listener port that is listening in the controller.

MDB Plan B requests

The number of Message Driven Bean Plan B requests observed. A plan "B" request is an MDB request from a listener port that is listening in the servant.

MDB Plan C requests

The number of Message Driven Bean Plan C requests observed. A plan "C" request is an MDB request from an activation specification that is listening in the adjunct.

SIP requests

The number of Session Initiation Protocol requests observed.

SIPS requests

The number of Session Initiation Protocol Secure requests observed.

MBean requests

The number of Managed Bean requests observed.

OTS requests

The number of Object Transaction Service requests observed.

Internal requests

The number of internal requests observed.

Inbound WOLA requests

The number of inbound WOLA requests observed.

Unknown requests

The number of unknown requests observed.

Asynchronous requests

The number of asynchronous requests observed.

Timed out requests

The number of requests that timed out and were not processed by a servant region. This count is not included in the total at the top, since the requests are already included in one of the other request counts.

Outbound WOLA

The number of outbound WOLA requests sent. The count is not included in the total at the top because these are requests to another system.

Outbound unknown

The number of outbound requests sent of an unknown type. This count is not included in the total at the top because these are requests to another system.

Service Time

This section shows the service time (elapsed time) for all of the requests observed. Note that the total service time can exceed the sampling duration, because WAS processes multiple requests in parallel.

Total service time

The total service time, measured from the time that the request was received to the time that the controller finished processing the request response.

WLM queued time

The total time that the requests spent on the Workload Manager queue.

Dispatched time

The total time that the requests spent being processed by the servant region.

Controller time

The total time that the requests spent being processed by the controller region.

Asynchronous time

The total time that is spent processing asynchronous requests. The time is not included in the total service time because these requests are independently dispatched and can run in parallel.

CPU Usage

This section shows the CPU time recorded for all of the requests observed.

Enclave CPU time

The total CPU time consumed by each observed request, as reported by the enclave when it was deleted. This includes normalized zIIP and zAAP time.

Encl zIIP CPU time

The total zIIP CPU time consumed by each observed request, as reported by the enclave when it was deleted. This time is normalized.

Encl zAAP CPU time

The total zAAP CPU time consumed by each observed request, as reported by the enclave when it was deleted. This time is normalized.

Encl CPU s/units

The total CPU service units for each observed request, as reported by the enclave when it was deleted.

Encl zIIP s/units

The total zIIP service units for each observed request, as reported by the enclave when it was deleted.

Encl zAAP s/units

The total zAAP service units for each observed request, as reported by the enclave when it was deleted.

Async Encl CPU time

The total CPU time that is consumed by each observed asynchronous request, as reported by the enclave when it was deleted. This includes normalized zIIP and zAAP time.

Async Encl zIIP CPU

The total zIIP CPU time that is consumed by each observed asynchronous request, as reported by the enclave when it was deleted. This time is normalized.

Async Encl zAAP CPU

The total zAAP CPU time that is consumed by each observed asynchronous request, as reported by the enclave when it was deleted. This time is normalized.

Sample reports

A sample report is shown here.

File View Navigate Help			
B01: WAS Summary (0144/AZSR00A)		Row 00001 of 00024	
Command ==>		Scroll ==> CSR	
System Identification		WAS Identification	
System name:	X235	Cell:	AZBASEA
Sysplex:	ADCDPL	Node:	AZNODEA
Job name:	AZSR00A	Cluster:	AZSR00
Job id:	STC08056	Server:	AZSR00A
ASID:	007A	WAS version:	7.0.0.12
		Service level:	cf121027
Request Counts		Service Time	
Total requests:	218	Total service time:	00:03:27.005
IIOP requests:	0	WLM queued time:	00:00:00.176
HTTP requests:	218	Dispatched time:	00:00:02.732
HTTPS requests:	0	Controller time:	00:03:24.095
MDB Plan A requests:	0	Asynchronous time:	
00:00:00.000			
MDB Plan B requests:	0		
MDB Plan C requests:	0	CPU Usage	
SIP requests:	0	Enclave CPU time:	00:00:10.327
SIPS requests:	0	Encl zIIP CPU time:	00:00:09.341
MBean requests:	0	Encl zAAP CPU time:	00:00:00.000
OTS requests:	0	Encl CPU s/units:	24940
Internal requests:	0	Encl zIIP s/units:	22552
Inbound WOLA requests:	0	Encl zAAP s/units:	
0			
Unknown requests:	0	Async Encl CPU time:	00:00:00.000
Asynchronous requests:	0	Async Encl zIIP CPU:	00:00:00.000
Timed out requests:	0	Async Encl zAAP CPU:	00:00:00.000
Outbound WOLA:	0		
Outbound unknown:	0		

B02 - WAS Activity

Usage

This report shows quantification by the classification name of the request. You can expand each request line to see a breakdown and quantification by object (EJB or Web application) and method or servlet/JSP within the object.

Quantification

Each report line shows the following for each WAS request and, when expanded, the object invocation lines for the request.

- Count of the number of requests or invocations of an object.
- Total CPU time for the request or invocation.
- Mean CPU time for the request or invocation.
- Total service time for the request or invocation.
- Mean service time for the request or invocation.

Detail Line hierarchy

An unexpanded report shows a line for each unique WAS request. You can expand each line to reveal two additional hierarchical levels of detail.

The hierarchy is illustrated here:

Level 1 WAS request
 Level 2 EJB or Web application
 Level 3 Method or servlet/JSP
 Level 2 EJB or Web application
 Level 3 Method or servlet/JSP

Detail Line descriptions

WAS Request detail line

This is the first level detail line. Each line shows information about a WAS request for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The request name.
Count	The number of requests counted for this request name. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests counted for this request name. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time per request. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all requests counted for this request name.
Svc Time: Mean	The mean service time per request.

Object detail line

This is the second level detail line shown directly under the Request detail line. It quantifies invocation of an EJB or a Web application at the object level.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The EJB or Web application name.
Count	The number of invocations counted for this object. Large numbers will be expressed in thousands or millions with a K or M suffix. There can be multiple invocations of the object in one request. Therefore the level 2 counts do not necessarily add up to the level 1 count.
CPU Time: Total	The total CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore the level 2 CPU times do not necessarily add up to the level 1 CPU times.
CPU Time: Mean	The mean CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore the level 2 CPU times do not necessarily add up to the level 1 CPU times.
Svc Time: Total	The total service time (elapsed time) for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore the level 2 service times do not necessarily add up to the level 1 service times.
Svc Time: Mean	The mean service time for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore the level 2 service times do not necessarily add up to the level 1 service times.

Invocation detail line

This is the third level detail line shown directly under the Object detail line. It quantifies invocation of a method or servlet/JSP within the object.

Under Heading	This is Displayed
Seqno	A level 4 sequence number within the level 3 line.
Name	The EJB method name or the Web application servlet/JSP name.
Count	The number of invocations counted for this method or servlet/JSP. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.

Under Heading	This is Displayed
CPU Time: Mean	The mean CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this method or servlet/JSP within its context.
Svc Time: Mean	The mean service time for all invocations of this method or servlet/JSP within its context.

Sample reports

A sample report is shown here with the first level 1 line fully expanded.

B02: WAS Activity (0144/AZSR00A)				Row 00001 of 00038		
Command ==>				Scroll ==> CSR		
Seqno	Request, EJB/Webapp Method/Servlet Name	Request Count	--CPU Time-- Total	Mean	--Svc Time-- Total	Mean
00001	/PlantsByWebSphere/servlet/ShoppingServlet	40	6.30	0.15765	1.30	0.03269
> 00002	PlantsByWebSphere#PlantSByWebSphere.war	80	4.53	0.05665	0.81	0.01023
> 00003	ShoppingServlet	40	4.26	0.10668	0.78	0.01955
> 00002	/shopping.jsp	17	0.04	0.00270	0.01	0.00070
> 00006	/product.jsp	11	0.03	0.00300	0.00	0.00036
> 00010	/cart.jsp	11	0.17	0.01618	0.02	0.00181
> 00014	/login.jsp	1	0.00	0.00812	0.00	0.00100
> 00003	PlantsByWebSphere::PlantsByWebSphereEJB.jar::ShoppingCart	64	0.11	0.00181	0.01	0.00015
> 00008	getItems:	29	0.01	0.00047	0.00	0.00006
> 00009	getTotalCost:	11	0.00	0.00050	0.00	0.00000
> 00011	addItem:com.ibm.websphere.samples.plantsbywebsphereejb.ShoppingCartItem	11	0.00	0.00055	0.00	0.00018
> 00013	getCartContents:	11	0.00	0.00051	0.00	0.00000
> 00012	create:	2	0.08	0.04259	0.00	0.00300
> 00001	PlantsByWebSphere::PlantsByWebSphereEJB.jar::Catalog	39	1.36	0.03498	0.11	0.00284
> 00007	getItemInventory:java.lang.String	22	0.30	0.01388	0.02	0.00104
> 00001	getItemsByCategory:int	17	1.05	0.06228	0.08	0.00517
00002	/PlantsByWebSphere/servlet/ImageServlet	174	3.96	0.02276	205.62	1.18173

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.

Cmd	When applied to object	Action
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

B03 - WAS Activity by Origin

Usage

This report shows quantification by the origin of the request. You can expand each origin line to see a breakdown and quantification by request, object (EJB or Web application) and method or servlet/JSP within the object.

Quantification

Each report line shows the following for each request origin and, when expanded, the request lines and object invocation lines for the request.

- Count of the number of requests or invocations of an object.
- Total CPU time for the request or invocation.
- Mean CPU time for the request or invocation.
- Total service time for the request or invocation.
- Mean service time for the request or invocation.

Detail Line hierarchy

An unexpanded report shows a line for each unique request origin. You can expand each line to reveal three additional hierarchical levels of detail.

The hierarchy is illustrated here:

- Level 1** WAS request origin
 - Level 2** WAS request
 - Level 3** EJB or Web application
 - Level 4** Method or servlet/JSP
 - Level 2** WAS request
 - Level 3** EJB or Web application
 - Level 4** Method or servlet/JSP

Detail Line descriptions

WAS Request origin detail line

This is the first level detail line. Each line shows information about a WAS request origin for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The origin name, identifying from whence the WAS request came.
Count	The number of requests counted for this origin. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests counted for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all requests counted for this origin.
Svc Time: Mean	The mean service time for this origin.

WAS Request detail line

This is the second level detail line shown directly under the Origin detail line. It quantifies the WAS requests that came from the origin above.

Under Heading	This is Displayed
Seqno	A unique level 2 sequence number within the level 1 line.
Name	The request name.
Count	The number of requests counted for this request name that came from the origin above. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests counted for this request name that came from the origin above. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this request. The CPU time includes normalized zIIP and zAAP CPU time.

Under Heading	This is Displayed
Svc Time: Total	The total service time (elapsed time) for all requests counted for this request name that came from the origin above.
Svc Time: Mean	The mean service time for this request.

Object detail line

This is the third level detail line shown directly under the Request detail line. It quantifies invocation of an EJB or a Web application at the object level.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB or Web application name.
Count	The number of invocations counted for this object. Large numbers will be expressed in thousands or millions with a K or M suffix. There can be multiple invocations of the object in one request. Therefore the level 3 counts do not necessarily add up to the level 2 count.
CPU Time: Total	The total CPU time for all invocations of this object within its context. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore the level 3 CPU times do not necessarily add up to the level 2 CPU times.
CPU Time: Mean	The mean CPU time for all invocations of this object within its context. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore the level 3 CPU times do not necessarily add up to the level 2 CPU times.
Svc Time: Total	The total service time (elapsed time) for all invocations of this object within its context. There is processing in addition to the service time incurred by these invoked objects. Therefore the level 3 service times do not necessarily add up to the level 2 service times.
Svc Time: Mean	The mean service time for all invocations of this object within its context. There is processing in addition to the service time incurred by these invoked objects. Therefore the level 3 service times do not necessarily add up to the level 2 service times.

Invocation detail line

This is the fourth level detail line shown directly under the Object detail line. It quantifies invocation of a method or servlet/JSP.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name or the Web application servlet/JSP name.
Count	The number of invocations counted for this method or servlet/JSP. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method or servlet/JSP. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method or servlet/JSP. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this method or servlet/JSP.
Svc Time: Mean	The mean service time for all invocations of this method or servlet/JSP.

Sample reports

A sample report is shown here with the first level 1 line partially expanded.

```

B03: WAS Activity by Origin (0144/AZSR00A)                                Row 00012 of 00038
Command ==>                                                                Scroll ==> CSR

      Origin,Req,EJB/Web      Request  --CPU Time--      --Svc Time--
Seqno Method/Servlet Name      Count   Total    Mean    Total    Mean
00001 ip addr=99.247.184.65      100     6.39   0.06395  104.24   1.04240
> 00002 /PlantsByWebSphere/serv  78     1.83   0.02346  103.34   1.32494
   let/ImageServlet
> 00001 /PlantsByWebSphere/serv  22     4.56   0.20750   0.89    0.04070
   let/ShoppingServlet
> 00002 PlantsByWebSphere#Pla  44     3.57   0.08130   0.62    0.01418
   ntsByWebSphere.war
> 00003 ShoppingServlet        22     3.40   0.15490   0.59    0.02722
> 00002 /shopping.jsp           8      0.02   0.00279   0.00    0.00087
> 00006 /product.jsp            7      0.02   0.00296   0.00    0.00028
> 00010 /cart.jsp               7      0.12   0.01802   0.01    0.00228
> 00003 PlantsByWebSphere::Pl  41     0.10   0.00251   0.00    0.00021
   antsByWebSphereEJB.java
   r::ShoppingCart
> 00008 getItems:              19     0.00   0.00049   0.00    0.00005
> 00009 getTotalCost:          7      0.00   0.00058   0.00    0.00000
> 00011 addItem:com.ibm.web    7      0.00   0.00063   0.00    0.00028
   sphere.samples.plan
   tsbywebsphereeejb.Sh
   oppingCartItem
> 00013 getCartContents:        7      0.00   0.00059   0.00    0.00000
> 00012 create:                 1      0.08   0.08112   0.00    0.00600
> 00001 PlantsByWebSphere::Pl  22     0.71   0.03251   0.05    0.00268
   antsByWebSphereEJB.java
   r::Catalog
> 00007 getItemInventory:java  14     0.20   0.01477   0.01    0.00107
   va.lang.String
> 00001 getItemsByCategory:    8      0.50   0.06354   0.04    0.00550
   int
00002 ip addr=70.30.134.79     118     3.93   0.03332  102.76   0.87088

```


Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

B04 - WAS Activity by Servant

Usage

This report shows quantification by servant in which the request ran. You can expand each servant line to see a breakdown and quantification by request, object (EJB or Web application) and method or servlet/JSP within the object.

Quantification

Each report line shows the following for each servant region and, when expanded, the request lines and object invocation lines for the request.

- Count of the number of requests or invocations of an object.
- Total CPU time for the request or invocation.
- Mean CPU time for the request or invocation.

- Total service time for the request or invocation.
- Mean service time for the request or invocation.

Detail Line hierarchy

An unexpanded report shows a line for each unique servant region. You can expand each line to reveal three additional hierarchical levels of detail.

The hierarchy is illustrated here:

Level 1 WAS servant region

Level 2 WAS request

Level 3 EJB or Web application

Level 4 Method or servlet/JSP

Level 2 WAS request

Level 3 EJB or Web application

Level 4 Method or servlet/JSP

Detail Line descriptions

WAS Request servant detail line

This is the first level detail line. Each line shows information about a WAS servant region for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The job name and job id of the servant region in which the request was processed.
Count	The number of requests counted for this servant. Large numbers will be expressed in thousands or millions with a K or M suffix. Note: An Affinity Count is displayed in the detail window for this line. This is a count of the number of requests queued to this specific servant region because the requests had an affinity to the servant, possibly because of HTTP session affinity.
CPU Time: Total	The total CPU time for all requests counted for this servant. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this servant. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all requests counted for this servant.
Svc Time: Mean	The mean service time for this servant.

WAS Request detail line

This is the second level detail line shown directly under the servant detail line. It quantifies the WAS requests that came from the servant above.

Under Heading	This is Displayed
Seqno	A unique level 2 sequence number within the level 1 line.
Name	The request name.
Count	The number of requests counted for this request name that ran in the servant above. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests counted for this request name that ran in the servant above. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this request. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all requests counted for this request name that ran in the servant above.
Svc Time: Mean	The mean service time for this request.

Object detail line

This is the third level detail line shown directly under the Request detail line. It quantifies invocation of an EJB or a Web application at the object level.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB or Web application name.
Count	The number of invocations counted for this object. Large numbers will be expressed in thousands or millions with a K or M suffix. There can be multiple invocations of the object in one request. Therefore the level 3 counts do not necessarily add up to the level 2 count.
CPU Time: Total	The total CPU time for all invocations of this object within its context. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore the level 3 CPU times do not necessarily add up to the level 2 CPU times.
CPU Time: Mean	The mean CPU time for all invocations of this object within its context. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore the level 3 CPU times do not necessarily add up to the level 2 CPU times.

Under Heading	This is Displayed
Svc Time: Total	The total service time (elapsed time) for all invocations of this object within its context. There is processing in addition to the service time incurred by these invoked objects. Therefore the level 3 service times do not necessarily add up to the level 2 service times.
Svc Time: Mean	The mean service time for all invocations of this object within its context. There is processing in addition to the service time incurred by these invoked objects. Therefore the level 3 service times do not necessarily add up to the level 2 service times.

Invocation detail line

This is the fourth level detail line shown directly under the Object detail line. It quantifies invocation of a method or servlet/JSP.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name or the Web application servlet/JSP name.
Count	The number of invocations counted for this method or servlet/JSP. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method or servlet/JSP. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method or servlet/JSP. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this method or servlet/JSP.
Svc Time: Mean	The mean service time for all invocations of this method or servlet/JSP.

Sample reports

A sample report is shown here with the first level 1 line partially expanded.

B04: WAS Activity by Servant (0144/AZSR00A)

Row 00012 of 00038

Command ==>

Scroll ==> CSR

Seqno	Servant, Req, EJB/Web Method/Servlet Name	Request Count	--CPU Time-- Total	Mean	--Svc Time-- Total	Mean
00001	AZSR00AS STC08061	100	6.39	0.06395	104.24	1.04240
> 00002	/PlantsByWebSphere/servlet/ImageServlet	78	1.83	0.02346	103.34	1.32494
> 00001	/PlantsByWebSphere/servlet/ShoppingServlet	22	4.56	0.20750	0.89	0.04070
> 00002	PlantsByWebSphere#PlantsByWebSphere.war	44	3.57	0.08130	0.62	0.01418
> 00003	ShoppingServlet	22	3.40	0.15490	0.59	0.02722
> 00002	/shopping.jsp	8	0.02	0.00279	0.00	0.00087
> 00006	/product.jsp	7	0.02	0.00296	0.00	0.00028
> 00010	/cart.jsp	7	0.12	0.01802	0.01	0.00228
> 00003	PlantsByWebSphere::PlantsByWebSphereEJB.java::ShoppingCart	41	0.10	0.00251	0.00	0.00021
> 00008	getItems:	19	0.00	0.00049	0.00	0.00005
> 00009	getTotalCost:	7	0.00	0.00058	0.00	0.00000
> 00011	addItem:com.ibm.web sphere.samples.plantsbywebsphereejb.ShoppingCartItem	7	0.00	0.00063	0.00	0.00028
> 00013	getCartContents:	7	0.00	0.00059	0.00	0.00000
> 00012	create:	1	0.08	0.08112	0.00	0.00600
> 00001	PlantsByWebSphere::PlantsByWebSphereEJB.java::Catalog	22	0.71	0.03251	0.05	0.00268
> 00007	getItemInventory:java.lang.String	14	0.20	0.01477	0.01	0.00107
> 00001	getItemsByCategory:int	8	0.50	0.06354	0.04	0.00550
00002	AZSR00AS STC08062	118	3.93	0.03332	102.76	0.87088

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

B05 - WAS EJB Activity

Usage

This report shows quantification by EJB name, for those requests that invoked an EJB. You can expand each EJB line to see a breakdown and quantification by method within the EJB.

Quantification

Each report line shows the following for each EJB object and, when expanded, the methods invoked for the object.

- Count of the number of requests or invocations of the EJB or method.
- Total CPU time for the EJB or method.
- Mean CPU time for the EJB or method.
- Total service time for the EJB or method.
- Mean service time for the EJB or method.

Detail Line hierarchy

An unexpanded report shows a line for each unique EJB. You can expand each line to reveal three additional hierarchical levels of detail.

The hierarchy is illustrated here:

Level 1 EJB

Level 2 Method

Detail Line descriptions

EJB detail line

This is the first level detail line. Each line shows information about an EJB for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The EJB name.

Under Heading	This is Displayed
Count	The number of invocations counted for this EJB. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this EJB. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time per EJB. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this EJB.
Svc Time: Mean	The mean service time per EJB.

Method detail line

This is the second level detail line shown directly under the EJB detail line. It quantifies invocation of a method within the EJB.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The EJB method name.
Count	The number of invocations counted for this method. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this method.
Svc Time: Mean	The mean service time for all invocations of this method.

Sample reports

A sample report is shown here with the level 1 lines fully expanded.

B05: WAS EJB Activity (0144/AZSR00A)

Row 00001 of 00019

Command ==>

Scroll ==> CSR

Seqno	Request, EJB/Webapp Method/Servlet Name	Request Count	--CPU Time-- Total Mean	--Svc Time-- Total Mean
00001	PlantsByWebSphere::Plants ByWebSphereEJB.jar::Catalog	213	3.16 0.01487	0.27 0.00128
> 00005	getItemImageBytes:java. lang.String	174	1.80 0.01036	0.16 0.00093
> 00001	getItemsByCategory:int	17	1.05 0.06228	0.08 0.00517
> 00007	getItemInventory:java.l ang.String	22	0.30 0.01388	0.02 0.00104
00003	PlantsByWebSphere::Plants ByWebSphereEJB.jar::Shopp ingCart	64	0.11 0.00181	0.01 0.00015
> 00012	create:	2	0.08 0.04259	0.00 0.00300
> 00008	getItems:	29	0.01 0.00047	0.00 0.00006
> 00011	addItem:com.ibm.websphe re.samples.plantsbywebs phereejb.ShoppingCartIt em	11	0.00 0.00055	0.00 0.00018
> 00013	getCartContents:	11	0.00 0.00051	0.00 0.00000
> 00009	getTotalCost:	11	0.00 0.00050	0.00 0.00000

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.

Cmd	When applied to object	Action
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

B06 - WAS EJB Activity by Origin

Usage

This report shows quantification of EJB invocations by the origin of requests that invoked the EJB. You can expand each origin line to see a breakdown and quantification by EJB and method within the EJB.

Quantification

Each report line shows the following for each request origin and, when expanded, the EJB and method lines for the origin.

- Count of the number of requests or invocations of an EJB or method.
- Total CPU time for the EJB or method.
- Mean CPU time for the EJB or method.
- Total service time for the EJB or method.
- Mean service time for the EJB or method.

Detail Line hierarchy

An unexpanded report shows a line for each unique request origin. You can expand each line to reveal two additional hierarchical levels of detail.

The hierarchy is illustrated here:

Level 1 WAS request origin
Level 2 EJB
Level 3 Method
Level 2 EJB
Level 3 Method

Detail Line descriptions

WAS Request origin detail line

This is the first level detail line. Each line shows information about a WAS request origin for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The origin name, identifying from whence the WAS request came.
Count	The number of EJB invocations counted for this origin. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all EJB invocations counted for this origin. The CPU time includes normalized zIIP and zAAP CPU time.

Under Heading	This is Displayed
CPU Time: Mean	The mean CPU time for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all EJB invocations counted for this origin.
Svc Time: Mean	The mean service time for this origin.

EJB detail line

This is the second level detail line shown directly under the Origin detail line. It quantifies invocation of an EJB.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The EJB name.
Count	The number of invocations counted for this EJB within the origin above. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this EJB within the origin above. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this EJB within the origin above. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this EJB within the origin above.
Svc Time: Mean	The mean service time for all invocations of this EJB within the origin above.

Method detail line

This is the third level detail line shown directly under the EJB detail line. It quantifies invocation of a method within the EJB.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name.
Count	The number of invocations counted for this method within its context. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method within its context. The CPU time includes normalized zIIP and zAAP CPU time.

Under Heading	This is Displayed
Svc Time: Total	The total service time (elapsed time) for all invocations of this method within its context.
Svc Time: Mean	The mean service time for all invocations of this method within its context.

Sample reports

A sample report is shown here with the first level 1 line fully expanded.

```

B06: WAS EJB Activity by Origin (0144/AZSR00A)                                Row 00001 of 00022
Command ==>                                                                    Scroll ==> CSR
      Origin,EJB,      Request      --CPU Time--      --Svc Time--
Seqno Method Name      Count      Total      Mean      Total      Mean
00001 ip addr=99.247.184.65      141      1.65      0.01175      0.14      0.00102
> 00001 PlantsByWebSphere::Plan      100      1.55      0.01554      0.13      0.00136
    tsByWebSphereEJB.jar::C
    atalog
> 00005 getItemImageBytes:jav      78      0.83      0.01075      0.07      0.00098
    a.lang.String
> 00007 getItemInventory:java      14      0.20      0.01477      0.01      0.00107
    .lang.String
> 00001 getItemByCategory:in      8      0.50      0.06354      0.04      0.00550
    t
> 00003 PlantsByWebSphere::Plan      41      0.10      0.00251      0.00      0.00021
    tsByWebSphereEJB.jar::S
    hoppingCart
> 00008 getItem:      19      0.00      0.00049      0.00      0.00005
> 00009 getTotalCost:      7      0.00      0.00058      0.00      0.00000
> 00011 addItem:com.ibm.websp      7      0.00      0.00063      0.00      0.00028
    here.samples.plantsby
    websphereejb.Shopping
    CartItem
> 00013 getCartContents:      7      0.00      0.00059      0.00      0.00000
> 00012 create:      1      0.08      0.08112      0.00      0.00600
00002 ip addr=70.30.134.79      136      1.62      0.01196      0.13      0.00102

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.

Cmd	When applied to object	Action
SS	Seqno	Sort by Service time.

On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

B07 - WAS EJB Activity by Servant

Usage

This report shows quantification of EJB invocations by the servant region in which the EJB was invoked. You can expand each servant line to see a breakdown and quantification by EJB and method within the EJB.

Quantification

Each report line shows the following for each servant region and, when expanded, the EJB and method lines for the servant.

- Count of the number of requests or invocations of an EJB or method.
- Total CPU time for the EJB or method.
- Mean CPU time for the EJB or method.
- Total service time for the EJB or method.
- Mean service time for the EJB or method.

Detail Line hierarchy

An unexpanded report shows a line for each unique servant region. You can expand each line to reveal two additional hierarchical levels of detail.

The hierarchy is illustrated here:

```

Level 1 WAS servant region
    Level 2 EJB
        Level 3 Method
    Level 2 EJB
        Level 3 Method

```

Detail Line descriptions

WAS Request servant detail line

This is the first level detail line. Each line shows information about a WAS servant for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The job name and job id of the servant region in which the request was processed.
Count	The number of EJB invocations counted for this servant. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all EJB invocations counted for this servant. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this servant. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all EJB invocations counted for this servant.
Svc Time: Mean	The mean service time for this servant.

EJB detail line

This is the second level detail line shown directly under the servant detail line. It quantifies invocation of an EJB.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The EJB name.
Count	The number of invocations counted for this EJB within the servant above. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this EJB within the servant above. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this EJB within the servant above. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this EJB within the servant above.
Svc Time: Mean	The mean service time for all invocations of this EJB within the servant above.

Method detail line

This is the third level detail line shown directly under the EJB detail line. It quantifies invocation of a method within the EJB.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name.
Count	The number of invocations counted for this method within its context. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method within its context. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this method within its context.
Svc Time: Mean	The mean service time for all invocations of this method within its context.

Sample reports

A sample report is shown here with the first level 1 line fully expanded.

B07: WAS EJB Activity by Origin (0144/AZSR00A)				Row 00001 of 00022		
Command ==>				Scroll ==> CSR		
Servant,EJB Seqno Method Name	Request Count	--CPU Time-- Total Mean	--Svc Time-- Total Mean			
00001 AZSR00AS STC08061	141	1.65	0.01175	0.14	0.00102	
> 00001 PlantsByWebSphere::Plan tsByWebSphereEJB.jar::C atalog	100	1.55	0.01554	0.13	0.00136	
> 00005 getItemImageBytes:jav a.lang.String	78	0.83	0.01075	0.07	0.00098	
> 00007 getItemInventory:java .lang.String	14	0.20	0.01477	0.01	0.00107	
> 00001 getItemByCategory:in t	8	0.50	0.06354	0.04	0.00550	
> 00003 PlantsByWebSphere::Plan tsByWebSphereEJB.jar::S hoppingCart	41	0.10	0.00251	0.00	0.00021	
> 00008 getItem:	19	0.00	0.00049	0.00	0.00005	
> 00009 getTotalCost:	7	0.00	0.00058	0.00	0.00000	
> 00011 addItem:com.ibm.websp here.samples.plantsby websphereejb.Shopping CartItem	7	0.00	0.00063	0.00	0.00028	
> 00013 getCartContents:	7	0.00	0.00059	0.00	0.00000	
> 00012 create:	1	0.08	0.08112	0.00	0.00600	
00002 AZSR00AS STC08062	136	1.62	0.01196	0.13	0.00102	

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

B08 – WAS Servlet/JSP Activity

Usage

This report shows quantification by Web application name for those requests that invoked a servlet or JSP. You can expand each Web application line to see a breakdown and quantification by servlet or JSP name within the Web application.

Quantification

Each report line shows the following for each Web application and, when expanded, the servlet/JSP invoked within the application.

- Count of the number of requests or invocations of the Web application or servlet/JSP.
- Total CPU time for the Web application or servlet/JSP.
- Mean CPU time for the Web application or servlet/JSP.
- Total service time for the Web application or servlet/JSP.
- Mean service time for the Web application or servlet/JSP.

Detail Line hierarchy

An unexpanded report shows a line for each unique Web application. You can expand each line to reveal an additional level of detail.

Level 1 Web application

Level 2 Servlet/JSP

Detail Line descriptions

Web application detail line

This is the first level detail line. Each line shows information about a Web application for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The Web application name.
Count	The number of invocations counted for this Web application. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this Web application. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time per Web application. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this Web application.
Svc Time: Mean	The mean service time per Web application.

Servlet/JSP detail line

This is the second level detail line shown directly under the Web application detail line. It quantifies invocation of a servlet/JSP within the Web application.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The servlet/JSP name.
Count	The number of invocations counted for this servlet/JSP. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this servlet/JSP. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this servlet/JSP. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this servlet/JSP.

Under Heading	This is Displayed
Svc Time: Mean	The mean service time for all invocations of this servlet/JSP.

Sample reports

A sample report is shown here with the level 1 lines fully expanded.

```

B08: WAS Servlet/JSP Activity (0144/AZSR00A)                               Row 00001 of 00008
Command ==>                                                                Scroll ==> CSR
Web App,                                                                    --CPU Time--
Seqno  Servlet/JSP Name              Request Count    Total      Mean      --Svc Time--
                                Total      Mean      Total      Mean
00002  PlantsByWebSphere#PlantsB    254           5.92     0.02333   1.93     0.00761
        yWebSphere.war
> 00004  ImageServlet               174           1.39     0.00801   1.11     0.00641
> 00003  ShoppingServlet             40            4.26     0.10668   0.78     0.01955
> 00002  /shopping.jsp               17            0.04     0.00270   0.01     0.00070
> 00006  /product.jsp                11            0.03     0.00300   0.00     0.00036
> 00010  /cart.jsp                   11            0.17     0.01618   0.02     0.00181
> 00014  /login.jsp                  1             0.00     0.00812   0.00     0.00100

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
–	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
–	Seqno	Collapse to hide next level entries.

Cmd	When applied to object	Action
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

B09 - WAS Servlet/JSP by Origin

Usage

This report shows quantification of Web application invocations by the origin of requests that invoked the Web application. You can expand each origin line to see a breakdown and quantification by Web application and servlet/JSP within the Web application.

Quantification

Each report line shows the following for each request origin and, when expanded, the Web application and servlet/JSP lines for the request.

- Count of the number of invocations of a Web application or servlet/JSP.
- Total CPU time for the Web application or servlet/JSP.
- Mean CPU time for the Web application or servlet/JSP.
- Total service time for the Web application or servlet/JSP.
- Mean service time for the Web application or servlet/JSP.

Detail Line hierarchy

An unexpanded report shows a line for each unique request origin. You can expand each line to reveal two additional hierarchical levels of detail.

The hierarchy is illustrated here:

Level 1 WAS request origin
Level 2 Web application
Level 3 Servlet/JSP
Level 2 Web application
Level 3 Servlet/JSP

Detail Line descriptions

WAS Request origin detail line

This is the first level detail line. Each line shows information about a WAS request origin for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The origin name, identifying from whence the WAS request came.

Under Heading	This is Displayed
Count	The number of Web application invocations counted for this origin. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all Web application invocations counted for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all Web application invocations counted for this origin.
Svc Time: Mean	The mean service time for this origin.

Web application detail line

This is the second level detail line shown directly under the Origin detail line. It quantifies invocation of a Web application.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The Web application name.
Count	The number of invocations counted for this Web application within the origin above. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this Web application within the origin above. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this Web application within the origin above. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this Web application within the origin above.
Svc Time: Mean	The mean service time for all invocations of this Web application within the origin above.

Servlet/JSP detail line

This is the third level detail line shown directly under the Web application detail line. It quantifies invocation of a servlet/JSP within the Web application.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The servlet/JSP name.

Under Heading	This is Displayed
Count	The number of invocations counted for this servlet/JSP within its context. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this servlet/JSP within its context.
Svc Time: Mean	The mean service time for all invocations of this servlet/JSP within its context.

Sample reports

A sample report is shown here with the level 1 lines fully expanded.

```

B09: WAS Servlet/JSP by Origin (0144/AZSR00A)          Row 00001 of 00017
Command ==>                                           Scroll ==> CSR

      Origin,Web App,      Request      --CPU Time--      --Svc Time--
Seqno  Servlet/JSP Name      Count      Total      Mean      Total      Mean
00001 ip addr=99.247.184.65      122      4.21      0.03458      1.18      0.00974
> 00002 PlantsByWebSphere#Plant      122      4.21      0.03458      1.18      0.00974
    sByWebSphere.war
  > 00004 ImageServlet              78      0.64      0.00823      0.56      0.00724
  > 00003 ShoppingServlet           22      3.40      0.15490      0.59      0.02722
  > 00002 /shopping.jsp              8      0.02      0.00279      0.00      0.00087
  > 00006 /product.jsp              7      0.02      0.00296      0.00      0.00028
  > 00010 /cart.jsp                 7      0.12      0.01802      0.01      0.00228
00002 ip addr=70.30.134.79      132      1.70      0.01293      0.74      0.00565
> 00002 PlantsByWebSphere#Plant      132      1.70      0.01293      0.74      0.00565
    sByWebSphere.war
  > 00004 ImageServlet              96      0.75      0.00783      0.55      0.00573
  > 00003 ShoppingServlet           18      0.85      0.04774      0.18      0.01016
  > 00002 /shopping.jsp              9      0.02      0.00262      0.00      0.00055
  > 00006 /product.jsp              4      0.01      0.00306      0.00      0.00050
  > 00010 /cart.jsp                 4      0.05      0.01297      0.00      0.00100
  > 00014 /login.jsp                1      0.00      0.00812      0.00      0.00100

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.

Cmd	When applied to object	Action
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

B10 WAS Servlet/JSP by Servant

Usage

This report shows quantification of Web application invocations by the servant region in which the Web application ran. You can expand each servant line to see a breakdown and quantification by Web application and servlet/JSP within the Web application.

Quantification

Each report line shows the following for each servant region and, when expanded, the Web application and servlet/JSP lines that ran in the servant.

- Count of the number of invocations of a Web application or servlet/JSP.
- Total CPU time for the Web application or servlet/JSP.
- Mean CPU time for the Web application or servlet/JSP.
- Total service time for the Web application or servlet/JSP.
- Mean service time for the Web application or servlet/JSP

Detail Line hierarchy

An unexpanded report shows a line for each unique servant region. You can expand each line to reveal two additional hierarchical levels of detail.

The hierarchy is illustrated here:

- Level 1** WAS servant region
- Level 2** Web application

Level 3 Servlet/JSP
Level 2 Web application
Level 3 Servlet/JSP

Detail Line descriptions

WAS Request servant detail line

This is the first level detail line. Each line shows information about a WAS servant for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The job name and job id of the servant region in which the request was processed.
Count	The number of Web application invocations counted for this servant. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all Web application invocations counted for this servant. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this servant. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all Web application invocations counted for this servant.
Svc Time: Mean	The mean service time for this servant.

Web application detail line

This is the second level detail line shown directly under the servant detail line. It quantifies invocation of a Web application.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The Web application name.
Count	The number of invocations counted for this Web application within the servant above. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this Web application within the servant above. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this Web application within the servant above. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this Web application within the servant above.

Under Heading	This is Displayed
Svc Time: Mean	The mean service time for all invocations of this Web application within the servant above.

Servlet/JSP detail line

This is the third level detail line shown directly under the Web application detail line. It quantifies invocation of a servlet/JSP within the Web application.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The servlet/JSP name.
Count	The number of invocations counted for this servlet/JSP within its context. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
Svc Time: Total	The total service time (elapsed time) for all invocations of this servlet/JSP within its context.
Svc Time: Mean	The mean service time for all invocations of this servlet/JSP within its context.

Sample reports

A sample report is shown here with the level 1 lines fully expanded.

```

B10: WAS Servlet/JSP by Servant (0144/AZSR00A)                               Row 00001 of 00017
Command ==>                                                                    Scroll ==> CSR

      Servant,Web App,      Request  --CPU Time--      --Svc Time--
Seqno Servlet /JSP Name    Count    Total    Mean    Total    Mean
00001 AZSR00AS STC08061      122      4.21    0.03458    1.18    0.00974
> 00002 PlantsByWebSphere#Plant  122      4.21    0.03458    1.18    0.00974
   sByWebSphere.war
> 00004 ImageServlet         78      0.64    0.00823    0.56    0.00724
> 00003 ShoppingServlet      22      3.40    0.15490    0.59    0.02722
> 00002 /shopping.jsp         8      0.02    0.00279    0.00    0.00087
> 00006 /product.jsp          7      0.02    0.00296    0.00    0.00028
> 00010 /cart.jsp             7      0.12    0.01802    0.01    0.00228
00002 AZSR00AS STC08062      132      1.70    0.01293    0.74    0.00565
> 00002 PlantsByWebSphere#Plant  132      1.70    0.01293    0.74    0.00565
   sByWebSphere.war
> 00004 ImageServlet         96      0.75    0.00783    0.55    0.00573
> 00003 ShoppingServlet      18      0.85    0.04774    0.18    0.01016
> 00002 /shopping.jsp         9      0.02    0.00262    0.00    0.00055
> 00006 /product.jsp          4      0.01    0.00306    0.00    0.00050
> 00010 /cart.jsp             4      0.05    0.01297    0.00    0.00100
> 00014 /login.jsp            1      0.00    0.00812    0.00    0.00100

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

On objects

Cmd	When applied to object	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details about this line.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

On headings

Cmd	When applied to object	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal next level entries.
-	Seqno	Collapse to hide next level entries.
SV	Seqno	Sort next level entries by value.
SC	Seqno	Sort by CPU time.
SS	Seqno	Sort by Service time.

B11 - WAS/CICS Calls

Usage

This report shows service times for CICS Distributed Program Link calls from the WAS servant region. You can expand each CICS region line to see a breakdown and quantification of program and start time within the CICS region.

A prerequisite for this report is activation of the WAS and CICS options during the measurement. This report is available only when you view the reports for the WebSphere Application Services servant address space measurements.

Quantification

Each report line shows the following for each CICS region, and when expanded, the CICS program and start time for each call of the program.

- Count of the number of invocations of the CICS program
- Total service time for the CICS program
- Mean service time for the CICS program

Detail Line Hierarchy

An unexpanded report shows a line for each CICS region. You can expand each line to reveal two additional hierarchical levels of detail (using the + line command). The hierarchy is illustrated here:

Level 1 CICS Region

Level 2 CICS program

Level 3 Start time of program

Detail Line Descriptions

CICS region detail line

This is the first-level detail line. Each line shows the information about a CICS region for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS VTAM® application id of the region in which the request was processed.
Count	The number of CICS program invocations counted for this region. Large numbers will be expressed in thousands or millions with a K or M suffix.
Svc Time: Total	The total service time (elapsed time) for all CICS program invocations counted for this region.
Svc Time: Mean	The mean service time for this region.

CICS program detail line

This is the second-level detail line shown directly under the CICS region detail line. It quantifies the invocation of a CICS program within the CICS region.

Under Heading	This is Displayed
Name	The CICS program name.
Count	The number of invocations counted for this CICS program within the region above. Large numbers will be expressed in thousands or millions with a K or M suffix.
Svc Time: Total	The total service time (elapsed time) for all invocations of this CICS program within the region above.
Svc Time: Mean	The mean service time for all invocations of this CICS program within the region above.

Start time detail line

This is the third-level detail line shown directly under the CICS program detail line. It quantifies the invocation of a single program within the CICS region.

Under Heading	This is Displayed
Name	The time the program started.
Count	This will always be '1' at this level.
Svc Time: Total	The total service time (elapsed time) for the invocation of this program.
Svc Time: Mean	The mean service time for the invocation of this program. This will always be the same as the total.

Sample reports

A sample report is shown here. The CICS region has been expanded to the third level (start time).

```

File View Navigate Help
-----
CAZTA001 CICS Calls (7760/BZSR00BS) Row 00001 of 00004
Command ==> ----- Scroll ==> CSR

Name          Count          --Svc Time--
                Total          Mean
CICS42A        2              2.15      1.07763
+ BURNER        2              2.15      1.07763
  → 11:53:16    1              1.08      1.08284
  → 11:53:18    1              1.07      1.07243

```

Line Commands

The line commands available in this report, and the objects and headings to which they apply, are summarized here: (You can always enter a "/" on any input field to open a menu of line commands available for that field).

On objects

Cmd	When applied to	Action
?	Name	Display context help information
+	Name	Expand to reveal next level
-	Name	Collapse to hide next level
SV	Name	Sort next level entries by value
SN	Name	Sort next level entries by name
SS	Name	Sort next level entries by service time

On headings

Cmd	When applied to heading	Action
?	Name	Display context help information
+	Name	Expand to reveal all entries
-	Name	Collapse to show only first level
SV	Name	Sort next level by value

Cmd	When applied to heading	Action
SN	Name	Sort next level by name
SS	Name	Sort next level by service time

B12 - WAS/DB2 Calls

Usage

This report shows exact SQL call counts, SQL processing CPU times and SQL processing service times for DB2 calls initiated from WAS requests. You can expand each WAS request line to see details of the SQL calls made by each WAS request.

A prerequisite for this report is activation of the WAS and DB2+ options during the measurement. This report is available only when viewing the reports for the appropriate WebSphere Application Services servant address space measurements.

Quantification

Each report line shows the following for each WAS request, and when expanded, the SQL calls made by the request.

- Count of the number of SQL calls from an object
- Total task CPU time for processing the SQL call
- Mean task CPU time or percent of total used
- Total service time for processing the SQL call
- Mean service time or percent of total used

A setup option is available to display the percent used in place of the mean fields.

Detail Line Hierarchy

An unexpanded report shows a line for each WAS request. You can expand each line to reveal two additional hierarchical levels of detail (using the + line command). The hierarchy is illustrated here:

Level 1 WAS request
Level 2 SQL request
Level 3 SQL statement text

Detail Line Descriptions

WAS Request detail line

This is the first level detail line. Each line shows information about a WAS request for which measurement data was recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
WAS Request	The request name.
Nbr of SQL Calls	The number of SQL calls counted for this request. Large numbers will be expressed in thousands or millions with a K or M suffix.

Under Heading	This is Displayed
CPU Time: Total	The total task CPU time for all SQL calls counted for this request. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean task CPU time for all SQL calls counted for this request. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time:Pct	The percent of total CPU time this request used.
SVC Time: Total	The total service time (elapsed time) for all SQL calls counted for this request. Large numbers will be expressed in thousands or millions with a K or M suffix.
SVC Time: Mean	The mean service time for all SQL calls counted for this request. Large numbers will be expressed in thousands or millions with a K or M suffix.
SVC Time:Pct	The percent of total service time this request used.

SQL Request detail line

This is the second-level detail line. It quantifies an individual SQL statement.

Under Heading	This is Displayed
Seqno	A sequence number assigned to uniquely identify the SQL statement. Either "S" or "D" precedes the sequence number, indicating whether the SQL statement is static or dynamic.
DB2 Call	The DBRM name, precompiler statement number and SQL function. When the statement number is zero, it indicates that the SQL statement was not produced by the DB2 precompiler or the SQL preprocessor, but was generated by some other means. For example, JDBC SQL statements have statement numbers that are zero.
Nbr of SQL Calls	The number of SQL calls counted for this SQL statement. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total task CPU time for all SQL calls counted for this SQL statement. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean task CPU time for all SQL calls counted for this SQL statement. Large numbers will be expressed in thousands or millions with a K or M suffix.
CPU Time:Pct	The percent of total CPU time this SQL statement used.

Under Heading	This is Displayed
SVC Time: Total	The total service time (elapsed time) for all SQL calls counted for this SQL statement. Large numbers will be expressed in thousands or millions with a K or M suffix.
SVC Time: Mean	The mean service time for all SQL calls counted for this SQL statement. Large numbers will be expressed in thousands or millions with a K or M suffix.
SVC Time:Pct	The percent of total service time this SQL statement used.

SQL statement text detail line

This is the third-level detail line shown directly under the SQL request detail line. It shows the SQL statement text. If necessary, more than one line is displayed in order to show the full SQL text.

Sample reports

A sample report is shown here. The WAS request has been expanded to the second level.

File View Navigate Help						
B12: WAS/DB2 Calls (9043/BZSR00BS)				Row 00001 of 00020		
Command ==> _____				Scroll ==> CSR		
Seqno	WAS Request/DB2 Call	Nbr of SQL Calls	--CPU Time-- Total	Mean	--Svc Time-- Total	Mean
00001	/WasDb2Tester/Db2TesterServ1	674	0.20	0.00030	0.22	0.00033
± 000004	SYSLH200 0 FETCH	668	0.20	0.00030	0.22	0.00033
→ 000006	SYSSTAT 0 COMMIT	2	0.00	0.00130	0.00	0.00139
→ 000002	SYSLH200 0 DESCRIBE	1	0.00	0.00013	0.00	0.00001
→ 000003	SYSLH200 0 OPEN	1	0.00	0.00017	0.00	0.00001
→ 000005	SYSLH200 0 CLOSE	1	0.00	0.00018	0.00	0.00001
→ 000007	SYSSTAT 0 ROLLBACK	1	0.00	0.00029	0.00	0.00091
00002	/WasDb2Tester/Db2EjbTesterSe	674	0.21	0.00031	0.28	0.00042
→ 000004	SYSLH200 0 FETCH	668	0.20	0.00029	0.27	0.00040
→ 000008	SYSSTAT 0 CNCT TO U	1	0.00	0.00271	0.00	0.00495
→ 000001	SYSLH200 0 PREPARE	1	0.00	0.00659	0.00	0.00079
→ 000002	SYSLH200 0 DESCRIBE	1	0.00	0.00029	0.00	0.00029
→ 000003	SYSLH200 0 OPEN	1	0.00	0.00021	0.00	0.00001
→ 000010	SYSLH200 0 CLOSE	1	0.00	0.00019	0.00	0.00001
→ 000007	SYSSTAT 0 ROLLBACK	1	0.00	0.00078	0.00	0.00553
00003	/WasDb2Tester/Db2SpTesterSer	5	0.01	0.00267	14.61	2.92395
→ 000006	SYSSTAT 0 COMMIT	2	0.00	0.00252	0.02	0.01294
→ 000008	SYSSTAT 0 CNCT TO U	1	0.00	0.00291	0.00	0.00522
→ 000009	SYSSTAT 0 CALL STAT	1	0.00	0.00523	14.58	14.58690
→ 000007	SYSSTAT 0 ROLLBACK	1	0.00	0.00017	0.00	0.00177

Line Commands

The line commands available in this report, and the objects and headings to which they apply, are summarized here: (You can always enter a "/" on any input field to popup a menu of line commands available for that field).

On objects

Cmd	When applied to	Action
?	Seqno	Display context help information
++	Seqno	Show additional details

Cmd	When applied to	Action
+	Seqno	Expand to reveal next level
–	Seqno	Collapse to hide next level
SV	Seqno	Sort next level entries by value
SC	Seqno	Sort next level entries by CPU time
SS	Seqno	Sort next level entries by service time

On headings

Cmd	When applied to heading	Action
?	Seqno	Display context help information
++	Seqno	Show additional details
+	Seqno	Expand to reveal all entries
–	Seqno	Collapse to show only first level
SV	Seqno	Sort next level by value
SC	Seqno	Sort next level by CPU time
SS	Seqno	Sort next level by service time

SETUP options

Enter the SETUP primary command to select options for this report. The following window is displayed:

```

+-----+
| Options for WAS/DB2 Calls |
| Enter "/" to select an option |
|   /  Display Percent used in place of Mean fields |
+-----+
```

Display Percent used in place of Mean fields

When selected, this displays the percent of total CPU and total service time used by the WAS request and SQL statement, rather than the mean time.

B13 - Async Work Requests

Usage

The B13 report shows request counts, CPU times, and service times for asynchronous requests that are observed during a WebSphere measurement. The B13 report shows quantification by the package or class name of the request. To see a breakdown and quantification by work manager within the package, expand each request line.

To use this report, you must activate the WAS option during the measurement.

Quantification

Each report line shows the following information for each package/class. When you expand any package/class, the work manager lines for that package/class are displayed.

- Count of the number requests for a package/class or work manager
- Total CPU time for the package/class or work manager
- Mean CPU time for the package/class or work manager
- Total service time for the package/class or work manager
- Mean service time for the package/class or work manager

Detail Line Hierarchy

A report that is not expanded shows a line for each Package/Class. To reveal an additional hierarchical level of detail, expand each line by using the + line command. The hierarchy is illustrated as follows:

```
Level 1 Package/Class
Level 2 Work Manager
```

Detail Line Descriptions

Package/Class detail line

Package/Class detail line is the first-level detail line. Each line shows information about a package/class for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Package/Class	The package or class name.
Count	The number of requests that are counted for this package/class. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this package/class. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time per package/class. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this package/class.
SVC Time: Mean	The mean service time per package/class.

Work Manager detail line

Work Manager detail line is the second-level detail line. It shows information about the work manager used in this request.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Work Mgr	The work manager name
Count	The number of requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.

Under Heading	This is Displayed
CPU Time: Total	The total CPU time for all requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per work manager. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
SVC Time: Mean	The mean service time per work manager. Large numbers are expressed in thousands or millions with a K or M suffix.

Sample reports

A sample report that is fully expanded is shown as follows.

File View Navigate Help

B13: Async Work Requests (0993/CZSR00C)
Command ==>

Row 00001 of 00010
Scroll ==> CSR

Seqno	Package/Class Work Mgr	Request Count	--CPU Time-- Total Mean	--Svc Time-- Total Mean
00001	com.ibm.ws.asynchbeans.CJ WorkListenerRunnable	32	0.79 0.02471	0.02 0.00079
→ 00001	wm/bnetwm1	32	0.79 0.02471	0.02 0.00079
00002	/WasTester/AsyncServletTe ster1	10	24.73 2.47375	13.79 1.37989
→ 00001	wm/bnetwm1	10	24.73 2.47375	13.79 1.37989
00003	com.banknet.wastester.ser vlets.AsyncServletTester2 \$StartupWork	9	22.17 2.46348	12.17 1.35254
→ 00002	wm/bnetwm2	9	22.17 2.46348	12.17 1.35254

Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input field.

on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
–	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SC	Seqno	Sorts next level entries by CPU time.
SS	Seqno	Sorts next level entries by service time.

on headings

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
–	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

B14 - Async Work by Work Mgr

Usage

The B14 report shows request counts, CPU times, and service times for asynchronous requests that are observed during a WebSphere measurement. The B13 report shows quantification by the work manager of the request. To see a breakdown and quantification by package/class within the work manager, expand each request line.

To use this report, you must activate the WAS option during the measurement.

Quantification

Each report line shows the following information for each work manager. When you expand each report line, the package/class lines for that work manager are displayed.

- Count of the number requests for the work manager or package/class
- Total CPU time for the work manager or package/class
- Mean CPU time for the work manager or package/class
- Total service time for the work manager or package/class
- Mean service time for the work manager or package/class

Detail Line Hierarchy

A report that is not expanded shows a line for each Work Manager. To reveal an additional hierarchical level of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 Work Manager
Level 2 Package/Class
```

Detail Line Descriptions

Work Manager detail line

Work Manager detail line is the first-level detail line. Each line shows information about a work manager for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Work Mgr	The work manager name

Under Heading	This is Displayed
Count	The number of requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per work manager. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
SVC Time: Mean	The mean service time per work manager. Large numbers are expressed in thousands or millions with a K or M suffix.

Package/Class detail line

Package/Class detail line is the second-level detail line that is shown directly under the work manager detail line. The Package/Class detail line shows information about the package/class used in this request.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Package/Class	The package or class name.
Count	The number of requests that are counted for this package/class. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this package/class. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time per package/class. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this package/class.
SVC Time: Mean	The mean service time per package/class.

Sample reports

A sample report that is fully expanded is shown as follows.

File View Navigate Help

B14: Async Work by Work Mgr (0993/CZSR00C)
Command ==>

Row 00001 of 00009
Scroll ==> CSR

Seqno	Work Mgr Package/Class	Request Count	--CPU Time--		--Svc Time--	
			Total	Mean	Total	Mean
00001	wm/bnetwm1	42	25.52	0.60782	13.82	0.32915
→ 00001	com.ibm.ws.asynchbeans. CJWorkListenerRunnable	32	0.79	0.02471	0.02	0.00079
→ 00002	/WasTester/AsyncServlet Tester1	10	24.73	2.47375	13.79	1.37989
00002	wm/bnetwm2	9	22.17	2.46348	12.17	1.35254
→ 00003	com.banknet.wastester.s ervlets.AsyncServletTes ter2\$StartupWork	9	22.17	2.46348	12.17	1.35254

Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input field.

on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details
+	Seqno	Expands to reveal all entries.
–	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

on headings

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
–	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

B15 - Async Work by Servant

Usage

The B15 report shows request counts, CPU times, and service times for asynchronous requests that are observed during a WebSphere measurement. The B15 report shows quantification by the WebSphere servant region processing the requests. To see a breakdown and quantification by package/class and work manager within the servant, expand each request line.

To use this report, you must activate the WAS option during the measurement.

Quantification

Each report line shows the following information for each work manager. When you expand each report line, the package/class lines for that work manager are displayed.

- Count of the number requests for the servant region, package/class, or work manager
- Total CPU time for the servant region, package/class, or work manager
- Mean CPU time for the servant region, package/class, or work manager
- Total service time for the servant region, package/class, or work manager

- Mean service time for the servant region, package/class, or work manager

Detail Line Hierarchy

A report that is not expanded shows a line for each WebSphere servant region. To reveal two additional hierarchical levels of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 WebSphere Servant region
Level 2 Package/Class
Level 3 Work Manager
```

Detail Line Descriptions

Servant region detail line

Servant region detail line is the first level detail line. It shows information about the servant region processing the requests.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Package/Class	The servant region name and job id.
Count	The number of requests that are counted for this servant region. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this servant region. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per servant region. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this servant region. Large numbers are expressed in thousands or millions with a K or M suffix.
SVC Time: Mean	The mean service time per servant region. Large numbers are expressed in thousands or millions with a K or M suffix.

Package/Class detail line

Package/Class detail line is the second-level detail line that is shown directly under the work manager detail line. The Package/Class detail line shows information about the package/class used in this request.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Package/Class	The package or class name.
Count	The number of requests that are counted for this package/class. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this package/class. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time per package/class. The CPU time includes normalized zIIP and zAAP CPU time.

Under Heading	This is Displayed
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this package/class.
SVC Time: Mean	The mean service time per package/class.

Work Manager detail line

Work Manager detail line is the third level detail line. Each line shows information about a work manager for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Work Mgr	The work manager name.
Count	The number of requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per work manager. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this work manager. Large numbers are expressed in thousands or millions with a K or M suffix.
SVC Time: Mean	The mean service time per work manager. Large numbers are expressed in thousands or millions with a K or M suffix.

Sample reports

A sample report that is fully expanded is shown as follows.

File View Navigate Help

B15: Async Work by Servant (0993/CZSR00C)

Row 00001 of 00011

Command ==> _____ Scroll ==> CSR

Servant,Pkg/Class	Request	--CPU Time--		--Svc Time--	
Seqno Work Mgr	Count	Total	Mean	Total	Mean
00001 CZSR00CS STC01530	51	47.69	0.93529	25.99	0.50975
→ 00001 com.ibm.ws.asyncbeans.CJWorkListenerRunnable	32	0.79	0.02471	0.02	0.00079
→ 00001 wm/bnetwm1	32	0.79	0.02471	0.02	0.00079
→ 00002 /WasTester/AsyncServletTester1	10	24.73	2.47375	13.79	1.37989
→ 00001 wm/bnetwm1	10	24.73	2.47375	13.79	1.37989
→ 00003 com.banknet.wastester.servlets.AsyncServletTester2\$StartupWork	9	22.17	2.46348	12.17	1.35254
→ 00002 wm/bnetwm2	9	22.17	2.46348	12.17	1.35254

Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input field.

on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
–	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SC	Seqno	Sorts next level entries by CPU time.
SS	Seqno	Sorts next level entries by service time.

on headings

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
–	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

B16 - WOLA Inbound Requests

Usage

The B16 report shows request counts, CPU times and service times for WOLA Inbound requests observed during a WebSphere measurement. The B16 report shows quantification by the request name of the inbound request. To see a breakdown and quantification by object, for example, EJB or Web application, and invocation of method or servlet/JSP within the object, expand each request line.

To use the B16 report, you must activate the WAS option during the measurement.

Quantification

Each report line shows the following information for WOLAInbound request. When you expand each report line, the object invocation lines for the request are displayed.

- Count of the number of requests or invocations of an object
- Total CPU time for the request or invocation
- Mean CPU time for the request or invocation
- Total service time for the request or invocation
- Mean service time for the request or invocation

Detail Line Hierarchy

A report that is not expanded shows a line for each WOLA Inbound request. To reveal two additional hierarchical levels of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 WOLA Inbound request
  Level 2 EJB or Web application
    Level 3 Method or servlet/JSP
```

Detail Line Descriptions

WOLA Inbound request detail line

WOLA Inbound request detail line is the first-level detail line. Each line shows information about a WOLA Inbound request for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The request name.
Count	The number of requests that are counted for this request name. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this request name. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per request. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this request name.
SVC Time: Mean	The mean service time per request.

Object detail line

Object detail line is the second-level detail line that is shown directly under the WOLA Inbound request detail line. The object detail line quantifies invocation of an EJB or a Web application at the object level.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The EJB or Web application name.
Count	The number of invocations that are counted for this object. Large numbers are expressed in thousands or millions with a K or M suffix. There can be multiple invocations of the object in one request. Therefore, the level 2 counts do not necessarily add up to the level 1 count.
CPU Time: Total	The total CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore, the level 2 CPU times do not necessarily add up to the level 1 CPU times.

Under Heading	This is Displayed
CPU Time: Mean	The mean CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore, the level 2 CPU times do not necessarily add up to the level 1 CPU times.
SVC Time: Total	The total service time (elapsed time) for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore, the level 2 service times do not necessarily add up to the level 1 service times.
SVC Time: Mean	The mean service time for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore, the level 2 service times do not necessarily add up to the level 1 service times.

Invocation detail line

Invocation detail line is the third level detail line that is shown directly under the Object detail line. The invocation detail line quantifies invocation of a method or servlet/JSP within the object.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name or the Web application servlet/JSP name.
Count	The number of invocations that are counted for this method or servlet/JSP. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all invocations of this method or servlet/JSP within its context.
SVC Time: Mean	The mean service time for all invocations of this method or servlet/JSP within its context.

Sample reports

A sample report that is fully expanded is shown as follows.

File View Navigate Help

B16: WOLA Inbound Requests (0998/CZSR00C)

Row 00001 of 00005

Command ==>

Scroll ==> CSR

Seqno	Request,EJB/Webapp, Method/Servlet Name	Request Count	--CPU Time-- Total Mean	--Svc Time-- Total Mean
00001	ejb/com/ibm/ola/olasample 1_echoHome	60	0.63 0.01054	2.86 0.04770
± 00001	OLASample2::OLA_Sample2 .jar::olasample1_echo	60	0.09 0.00159	0.20 0.00333
→ 00001	execute:byte[]	60	0.09 0.00159	0.20 0.00333

Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input field.

on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
–	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SC	Seqno	Sorts next level entries by CPU time.
SS	Seqno	Sorts next level entries by service time.

on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
–	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

B17 - WOLA Inbound by Origin

Usage

B17 report shows request counts, CPU times, and service times for WOLA Inbound requests observed during a WebSphere measurement. The B17 report shows quantification by the origin of the request. To see a breakdown and quantification by request, object, for example, EJB or Web application, within the request, and invocation of method or servlet/JSP within the object, expand each request line.

To use the B17 report, you must activate the WAS option during the measurement.

Quantification

Each report line shows the following information for each request origin. When you expand each report line, the request lines and the object invocation lines for the request are displayed.

- Count of the number of requests or invocations of an object
- Total CPU time for the request or invocation
- Mean CPU time for the request or invocation
- Total service time for the request or invocation
- Mean service time for the request or invocation

Detail Line Hierarchy

A report that is not expanded shows a line for each Request Origin. To reveal three additional hierarchical levels of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 Request Origin
  Level 2 WOLA Inbound request
    Level 3 EJB or Web application
      Level 4 Method or servlet/JSP
```

Detail Line Descriptions

Request Origin detail line

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The origin name, identifying from whence the request came.
Count	The number of requests that are counted for this origin.
CPU Time: Total	The total CPU time for all requests that are counted for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for this origin. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this origin.
SVC Time: Mean	The mean service time for this origin.

WOLA Inbound request detail line

WOLA Inbound request detail line is the second level detail line that is shown directly under the Request Origin detail line. Each line shows information about a WOLA Inbound request for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The request name.

Under Heading	This is Displayed
Count	The number of requests that are counted for this request name. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this request name. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per request. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this request name.
SVC Time: Mean	The mean service time per request.

Object detail line

Object detail line is the third level detail line that is shown directly under the WOLA Inbound request detail line. The object detail line quantifies invocation of an EJB or a Web application at the object level.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The EJB or Web application name.
Count	The number of invocations that are counted for this object. Large numbers are expressed in thousands or millions with a K or M suffix. There can be multiple invocations of the object in one request. Therefore, the level 2 counts do not necessarily add up to the level 1 count.
CPU Time: Total	The total CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore, the level 2 CPU times do not necessarily add up to the level 1 CPU times.
CPU Time: Mean	The mean CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore, the level 2 CPU times do not necessarily add up to the level 1 CPU times.
SVC Time: Total	The total service time (elapsed time) for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore, the level 2 service times do not necessarily add up to the level 1 service times.
SVC Time: Mean	The mean service time for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore, the level 2 service times do not necessarily add up to the level 1 service times.

Invocation detail line

Invocation detail line is the fourth level detail line that is shown directly under the Object detail line. The invocation detail line quantifies invocation of a method or servlet/JSP within the object.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name or the Web application servlet/JSP name.
Count	The number of invocations that are counted for this method or servlet/JSP. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all invocations of this method or servlet/JSP within its context.
SVC Time: Mean	The mean service time for all invocations of this method or servlet/JSP within its context.

Sample reports

A sample report that is fully expanded is shown as follows.

```

File View Navigate Help
-----
B17: WOLA Inbound by Origin (0998/CZSR00C) Row 00001 of 00008
Command ==> Scroll ==> CSR

  Origin,Req,EJB/Web, Request  --CPU Time--  --Svc Time--
Seqno Method/Servlet Name Count   Total   Mean   Total   Mean
-----
00001 lcom::QAREX2B ::000000AC0      60      0.63   0.01054   2.86   0.04770
      0000001::002B
± 00001 ejb/com/ibm/ola/olasamp      60      0.63   0.01054   2.86   0.04770
   le1_echoHome
→ 00001 OLASample2::OLA_Samp1      60      0.09   0.00159   0.20   0.00333
   e2.jar::olasample1_ec
   ho
→ 00001 execute:byte[]      60      0.09   0.00159   0.20   0.00333

```

Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input field.

on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
-	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.

Cmd	When Applied To:	Action
SC	Seqno	Sorts next level entries by CPU time.
SS	Seqno	Sorts next level entries by service time.

on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
–	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

B18 - WOLA Inbound by Servant

Usage

B18 report shows request counts, CPU times and service times for WOLA Inbound requests observed during a WebSphere measurement. The B18 report shows quantification by the WebSphere servant region that processed the request. To see a breakdown and quantification by request, object, for example, EJB or Web application, within the request, and invocation of method or servlet/JSP within the object, expand each servant region line.

To use this report, you must activate the WAS option during the measurement.

Quantification

Each report line shows the following information for each WebSphere servant region. When you expand each report line, the request lines and the object invocation lines for the WebSphere servant region are displayed.

- Count of the number of requests or invocations of an object
- Total CPU time for the request or invocation
- Mean CPU time for the request or invocation
- Total service time for the request or invocation
- Mean service time for the request or invocation

Detail Line Hierarchy

A report that is not expanded shows a line for each WebSphere servant region. To reveal three additional hierarchical levels of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```

Level 1 WebSphere Servant Region
  Level 2 WOLA Inbound request
    Level 3 EJB or Web application
      Level 4 Method or servlet/JSP

```

Detail Line Descriptions

WebSphere Servant Region detail line

WebSphere Servant Region detail line is the first-level detail line. The WebSphere Servant Region detail line shows information about the servant region processing the requests.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The servant region name and job id.
Count	The number of requests that are counted for this servant region. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this servant region. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time per servant region. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this servant region.
SVC Time: Mean	The mean service time per servant region.

WOLA Inbound request detail line

WOLA Inbound request detail line is the second-level detail line that is shown directly under the WebSphere Servant Region detail line. Each line shows information about a WOLA Inbound request for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The request name.
Count	The number of requests that are counted for this request name. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all requests that are counted for this request name. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Mean	The mean CPU time per request. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this request name.
SVC Time: Mean	The mean service time per request.

Object detail line

Object detail line is the third level detail line that is shown directly under the WOLA Inbound request detail line. The object detail line quantifies invocation of an EJB or a Web application at the object level.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.

Under Heading	This is Displayed
Name	The EJB or Web application name.
Count	The number of invocations that are counted for this object. Large numbers are expressed in thousands or millions with a K or M suffix. There can be multiple invocations of the object in one request. Therefore, the level 2 counts do not necessarily add up to the level 1 count.
CPU Time: Total	The total CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore, the level 2 CPU times do not necessarily add up to the level 1 CPU times.
CPU Time: Mean	The mean CPU time for all invocations of this object. The CPU time includes normalized zIIP and zAAP CPU time. There is processing in addition to the CPU time incurred by these invoked objects. Therefore, the level 2 CPU times do not necessarily add up to the level 1 CPU times.
SVC Time: Total	The total service time (elapsed time) for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore, the level 2 service times do not necessarily add up to the level 1 service times.
SVC Time: Mean	The mean service time for all invocations of this object. There is processing in addition to the service time incurred by these invoked objects. Therefore, the level 2 service times do not necessarily add up to the level 1 service times.

Invocation detail line

Invocation detail line is the fourth level detail line that is shown directly under the Object detail line. The invocation detail line quantifies invocation of a method or servlet/JSP within the object.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The EJB method name or the Web application servlet/JSP name.
Count	The number of invocations that are counted for this method or servlet/JSP. Large numbers are expressed in thousands or millions with a K or M suffix.
CPU Time: Total	The total CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
CPU Time: Mean	The mean CPU time for all invocations of this method or servlet/JSP within its context. The CPU time includes normalized zIIP and zAAP CPU time.
SVC Time: Total	The total service time (elapsed time) for all invocations of this method or servlet/JSP within its context.
SVC Time: Mean	The mean service time for all invocations of this method or servlet/JSP within its context.

Sample reports

A sample report that is fully expanded is shown as follows.

```
File View Navigate Help
-----
B18: WOLA Inbound by Servant (0998/CZSR00C) Row 00001 of 00007
Command ==> Scroll ==> CSR

  Servant,Req,EJB/Web, Request  --CPU Time--  --Svc Time--
Seqno Method/Servlet Name Count Total Mean Total Mean
00001 CZSR00CS STC01546 60 0.63 0.01054 2.86 0.04770
± 00001 ejb/com/ibm/ola/olasamp 60 0.63 0.01054 2.86 0.04770
   le1_echoHome
→ 00001 OLASample2::OLA_Sampl 60 0.09 0.00159 0.20 0.00333
   e2.jar::olasample1_ec
   ho
→ 00001 execute:byte[] 60 0.09 0.00159 0.20 0.00333
```

Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input filed.

on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
–	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SC	Seqno	Sorts next level entries by CPU time.
SS	Seqno	Sorts next level entries by service time.

on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
–	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SC	Seqno	Sorts next level by CPU time.
SS	Seqno	Sorts next level by service time.

B19 - WOLA Outbound Requests

Usage

B19 report shows request counts, number of bytes sent and received, and service times for WOLA Outbound requests observed during a WebSphere measurement. The B19 report shows quantification by the originating request. To see a breakdown and quantification by register name and service name, expand each request line

To use this report, you must activate the WAS option during the measurement.

Quantification

Each report line shows the following information for each Outbound Request. When you expand each report line, the register names and service names for the request are displayed.

- Count of the number of requests
- Bytes sent for the request
- Bytes received for the request
- Total service time for the request
- Mean service time per request

Detail Line Hierarchy

A report that is not expanded shows a line for each WOLA Outbound Request. To reveal two additional hierarchical levels of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 WOLA Outbound Request
Level 2 Register
Level 3 Service
```

Detail Line Descriptions

WOLA Outbound Request detail line

WOLA Outbound Request detail line is the first-level detail line. The WOLA Outbound Request detail line shows information about the WOLA outbound requests.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The WOLA outbound request name.
Count	The number of requests that are counted for this request name that issued outbound requests. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for outbound requests.
Bytes Received	The total number of bytes received for this request name.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this request name.
SVC Time: Mean	The mean service time per request.

Register detail line

Register detail line is the second-level detail line that is shown directly under the WOLA Outbound Request detail line. The register detail line quantifies the use of a particular register name for outbound requests.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The register name.
Count	The number of requests that are counted for this register name. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for this register name.
Bytes Received	The total number of bytes received for this register name.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this register name.
SVC Time: Mean	The mean service time per register name.

Service detail line

Service detail line is the third-level detail line that is shown directly under the Register detail line. The service detail line quantifies requests for a service within the register.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The service name.
Count	The number of requests that are counted for this service. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for this service.
Bytes Received	The total number of bytes received for this service.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this service.
SVC Time: Mean	The mean service time for this service.

Sample reports

A sample report that is fully expanded is shown as follows.

File View Navigate Help

B19: WOLA Outbound Requests (1005/CZSR00C)

Row 00001 of 00004

Command ==>

Scroll ==> CSR

Request, Register, Seqno Service	Request Count	---Bytes--- Sent Rcvd	--Svc Time-- Total Mean
00001 /ATSSample1Web/InvokeWas2 BatchServlet	65	1495 7800	0.86 0.01325
→ 00001 EXER3B	65	1495 7800	0.86 0.01325
→ 00001 ServiceName	65	1495 7800	0.86 0.01325

Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input field.

on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
–	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SS	Seqno	Sorts next level entries by service time.

on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
–	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SS	Seqno	Sorts next level by service time.

B20 - WOLA Outbound by Register

Usage

B20 report shows request counts, number of bytes sent and received, and service times for WOLA Outbound requests observed during a WebSphere measurement. The B20 report shows quantification by the register name of the request. To see a breakdown and quantification by service name, expand each register name.

To use this report, you must activate the WAS option during the measurement.

Quantification

Each report line shows the following information for each register name. When you expand each report line, service names for the request are displayed.

- Count of the number of requests by register or service
- Bytes sent for the register or service
- Bytes received for the register or service
- Total service time for the register or service
- Mean service time per register or service

Detail Line Hierarchy

A report that is not expanded shows a line for each unique register name. To reveal one additional hierarchical levels of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 Register
Level 2 Service
```

Detail Line Descriptions

Register detail line

Register detail line is the first level detail line. Each line shows information about a register for which measurement data is recorded.

Under Heading	This is Displayed
Seqno	A level 1 sequence number within the level 1 line.
Name	The register name.
Count	The number of requests that are counted for this register name. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for this register name.
Bytes Received	The total number of bytes received for this register name.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this register name.
SVC Time: Mean	The mean service time per register name.

Service detail line

Service detail line is the second-level detail line that is shown directly under the Register detail line. The service detail line quantifies requests for a service within the register.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The service name.
Count	The number of requests that are counted for this service. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for this service.
Bytes Received	The total number of bytes received for this service.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this service.
SVC Time: Mean	The mean service time for this service.

Sample reports

A sample report that is fully expanded is shown as follows:

File View Navigate Help

B20: WOLA Outbound by Register (1005/CZSR00C)
Command ==>

Row 00001 of 00002
Scroll ==> CSR

Seqno	Register,Service	Request Count	--CPU Time-- Total	Mean	--Svc Time-- Total	Mean
00001	EXER3B	65	1495	7800	0.86	0.01325
→ 00001	ServiceName	65	1495	7800	0.86	0.01325

Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input field.

on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
–	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SS	Seqno	Sorts next level entries by service time.

on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
–	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SS	Seqno	Sorts next level by service time.

B21 - WOLA Outbound by Servant

Usage

B21 report shows request counts, number of bytes sent and received, and service times for WOLA Outbound requests observed during a WebSphere measurement. The B21 report shows quantification by the WebSphere servant region in which the outbound requests were issued. To see a breakdown and quantification by register name and service name, expand each servant region line.

To use the B21 report, you must activate the WAS option during the measurement.

Quantification

Each report line shows the following information for each WebSphere servant region that processed the request. When you expand each report line, the register names and service names for the request are displayed.

- Count of the number of outbound requests
- Bytes sent for the outbound requests
- Bytes received for the outbound requests
- Total service time for the outbound requests
- Mean service time per outbound requests

Detail Line Hierarchy

A report that is not expanded shows a line for each WebSphere servant region. To reveal two additional hierarchical levels of detail, expand each line by using the **+ line** command. The hierarchy is illustrated as follows:

```
Level 1 WebSphere Servant
Level 2 Register
Level 3 Service
```

Detail Line Descriptions

WebSphere Servant Region detail line

WebSphere Servant Region detail line is the first level detail line. The WebSphere Servant Region detail line shows information about the WebSphere servant region processing the requests.

Under Heading	This is Displayed
Seqno	A unique level 1 sequence number.
Name	The WebSphere servant region name and job id.
Count	The number of outbound requests counted for this servant region. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for outbound requests.
Bytes Received	The total number of bytes received for this request name.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this request name.
SVC Time: Mean	The mean service time per request.

Register detail line

Register detail line is the second-level detail line that is shown directly under the WebSphere servant region detail line. The register detail line quantifies the use of a particular register name for outbound requests.

Under Heading	This is Displayed
Seqno	A level 2 sequence number within the level 1 line.
Name	The register name.

Under Heading	This is Displayed
Count	The number of requests that are counted for this register name. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for this register name.
Bytes Received	The total number of bytes received for this register name.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this register name.
SVC Time: Mean	The mean service time per register name.

Service detail line

Service detail line is the third-level detail line that is shown directly under the Register detail line. The service detail line quantifies requests for a service within the register.

Under Heading	This is Displayed
Seqno	A level 3 sequence number within the level 2 line.
Name	The service name.
Count	The number of requests that are counted for this service. Large numbers are expressed in thousands or millions with a K or M suffix.
Bytes Sent	The total number of bytes sent for this service.
Bytes Received	The total number of bytes received for this service.
SVC Time: Total	The total service time (elapsed time) for all requests that are counted for this service.
SVC Time: Mean	The mean service time for this service.

Sample reports

A sample report that is fully expanded is shown as follows.

```

File View Navigate Help
-----
B21: WOLA Outbound by Servant (1005/CZSR00C) Row 00001 of 00003
Command ==> Scroll ==> CSR

  Servant,Register, Request  ---Bytes---  --Svc Time--
Seqno Service      Count    Sent    Rcvd    Total    Mean
00001 CZSR00CS STC01546      65    1495    7800    0.86  0.01325
± 00001 EXER3B          65    1495    7800    0.86  0.01325
→ 00001 ServiceName      65    1495    7800    0.86  0.01325

```

Line Commands

The following table summarizes the line commands available in this report and the objects and headings to which they apply. To open a menu of line commands available of any fields, enter a forward slash (/) on the input field.

on objects

Cmd	When Applied To:	Action
?	Seqno	Displays context help information.
++	Seqno	Shows additional details.
+	Seqno	Expands to reveal next level.
–	Seqno	Collapses to hide next level.
SV	Seqno	Sorts next level entries by value.
SS	Seqno	Sorts next level entries by service time.

on headings

Cmd	When Applied To Heading	Action
?	Seqno	Displays context help information.
+	Seqno	Expands to reveal all entries.
–	Seqno	Collapses to show first level only.
SV	Seqno	Sorts next level by value.
SS	Seqno	Sorts next level by service time.

Chapter 10. Multiple address space reports

This section describes the multiple address space reports.

For information about ...	See ...
X01 CICS mean service time by transaction (for multiple CICS address spaces)	“X01 - CICS mean service time by transaction” on page 571
X02 CICS total service time by transaction (for multiple CICS address spaces)	“X02 - CICS total service time by txn” on page 578
X03 CICS mean service time by terminal ID (for multiple CICS address spaces)	“X03 - CICS mean service time by terminal ID” on page 586
X04 CICS total service time by terminal ID (for multiple CICS address spaces)	“X04 - CICS total service time by terminal ID” on page 594
X05 Combined DB2 IMS MQ Timeline	“X05 - Combined DB2 IMS MQ Timeline” on page 602
X06 IMS MASS Region Summary	“X06 - IMS MASS Region Summary” on page 606
X07 DB2 Stored Procedures Summary	“X07 - DB2 Stored Procedures Summary” on page 608

X01 - CICS mean service time by transaction

Usage

Use this report to see an analysis of how time was spent by the CICS transactions that were measured during the observation session in multiple regions. CICS sample data from the selected regions is merged to produce a single report showing multi-region activity. Transaction data from the multiple regions is correlated using the network unit of work ID to relate the remote activity to the local transaction. Since this is based on sample data, there are samples from the remote region that do not match with a local transaction. These are reported under the remote transaction name, such as CSMI.

Expand a CICS transaction report line to see a further breakdown by region, program, CICS command, DLI request and SQL request.

Quantification

Each report line quantifies time as arithmetic means for each measured transaction. The means are calculated by dividing the total of all time spent servicing all occurrences of a transaction by its number of occurrences. The means are expressed in units of seconds. The mean service time is shown and is further broken down into execution time, suspend time, and delay time.

Detail line hierarchy

An unexpanded X01 report shows one line for each measured CICS transaction. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1 CICS Transaction
  Level 2 CICS Region Applid
    Level 3 CICS Program
      Level 4 CICS Command
        Level 4 CICS Command
```

```

Level 2 CICS Region Applid
Level 3 CICS Program
Level 4 SQL Request
Level 4 SQL Request

Level 2 CICS Region Applid
Level 3 CICS Program
Level 4 DLI Request
Level 4 DLI Request

Level 2 CICS Region Applid
Level 3 CICS Program
Level 4 Module
Level 4 Module
Level 4 System Services

Level 2 CICS Region Applid
Level 3 CICS Program
Level 4 Adabas Request
Level 4 Adabas Request

Level 2 CICS Region Applid
Level 3 System Services
Level 4 Module
Level 4 Module
Level 4 System Services

```

Detail line descriptions

CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	A functional description (if the transaction is a recognized CICS transaction).
Error	The margin of error for the mean values calculated by using the number of executions of the transaction as the sample size.
Execution	The mean time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction.
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The mean service time for the transaction. This includes execution, suspend, and delay time.

CICS region applid detail line

This is the second-level detail line shown directly under the CICS transaction detail line. This line represents the VTAM applid of the CICS region sampled. If a transaction shows more than 1 region applid, then activity was measured in multiple regions for that transaction.

Under Heading	This is Displayed
Name	The CICS region applid. This is the VTAM applid of the region where the samples were taken.
NTxns	The number of executions of the transaction.
Description	"Region Applid"
Execution	The mean time, in seconds, that a CPU was actively executing for the transaction in the region.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction in the region.
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed in the region.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none">• CICS dispatch delay• MVS dispatch delay• MVS WAIT
Service	The mean service time for the transaction in the region. This includes execution, suspend, and delay time.

CICS program or system services detail line

This is a third-level detail line shown directly under the CICS region applid detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The fourth-level lines shown under this item can be either CICS command lines, SQL Request lines, DLI Request lines or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays "EXEC CICS." If lines grouped under this line are SQL request lines, the description displays "EXEC SQL." If lines grouped under this line are DLI request lines, the description displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if the CICS module name is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.

Under Heading	This is Displayed
Execution	The mean time, in seconds, that CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The mean service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend, and delay time.

CICS command detail line

These lines are displayed under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command description. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command description is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The mean time, in seconds, that CPU execution was observed while the CICS command was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed while the CICS command was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The mean service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

SQL request detail line

These lines are displayed under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The mean time, in seconds, that CPU execution was observed while the SQL request was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed while the SQL request was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none">• CICS dispatch delay• MVS dispatch delay
Service	The mean service time for the transaction during which the SQL request was being processed. This includes execution, suspend and delay time.

DLI request detail line

These lines are displayed under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The mean time, in seconds, that CPU execution was observed while the DLI request was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed while the DLI request was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none">• CICS dispatch delay• MVS dispatch delay
Service	The mean service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

Module/system services detail line

These lines are displayed under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, "CICS" is displayed in the name field and "System Services" is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or "CICS" if a module name could not be determined.
Description	A functional description of the module if one is available. "System Services" is displayed if the module name could not be determined.
Execution	The mean time, in seconds, for execution of the module within the grouping under which the detail line is displayed.
Suspend	This field will contain a value of zero.
Delay	The mean time, in seconds, that the identified module was preempted by MVS.
Service	The mean service time for the transaction during which the identified module was executing or delayed.

Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The mean time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	The mean time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none">• CICS dispatch delay• MVS dispatch delay
Service	The mean service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (transaction). A sample is shown here:

```

File View Navigate Help
-----
X01: CICS Mean Service Time by Txn (1682/CICS32A) Row 00001 of 00002
Command ==> ----- Scroll ==> CSR

Name  NTxns Description      Error  Execution  + Suspend + Delay = Service
-----
RDDR      2                ±71.4%   0.359    16.333   0.809   17.502
READ     680                ± 3.8%   0.020     2.860   0.068    2.950

```

You can enter the + line command on a transaction to expand to the next level. A sample of the report with a transaction expanded to the third level of the hierarchy (CICS Region Applid and CICS Program) is shown here:

```

File View Navigate Help
-----
X01: CICS Mean Service Time by Txn (1682/CICS32A) Row 00001 of 00010
Command ==> ----- Scroll ==> CSR

Name  NTxns Description      Error  Execution  + Suspend + Delay = Service
-----
RDDR      2                ±71.4%   0.359    16.333   0.809   17.502
→ CICS32A      Region Applid      0.119    16.333   0.749   17.202
→ READRVR      EXEC CICS      0.119    16.333   0.749   17.202

→ CICS32B      Region Applid      0.031     0.000   0.007   0.039
→ DFHMIRS      EXEC CICS      0.021     0.000   0.001   0.023
→ DFHMIRS      CICS Program      0.005     0.000   0.003   0.009
→ CICS         System Services    0.003     0.000   0.001   0.005

```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	Transaction, Region Applid, Load Module	Expand to reveal next level.
-	Transaction, Region Applid, Load Module	Collapse to hide next level.
SV	Transaction, Region Applid, Load Module	Sort next level by value.
SN	Transaction, Region Applid, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for this report is shown below. This example shows a CICS region:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| CICS32A   Region Applid      0.089   17.172   0.929   18.191 |
+-----+
Calculation Details
CICS Transaction          RDDR
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are mean times for the command for all executions of the
transaction and are calculated as follows:

(1) Times command observed in txn/program      607
(2) Duration of one sample interval            0.029970
(3) (1) A (2) = total time for command         18.191790
(4) Number of executions of transaction         1
(5) (3) S (4) = mean time for the command      18.191790

The execution measurement counts are
Executing (CPU active)      3
Suspended by CICS          573
Delayed
  CICS dispatch delay      29
  MVS delay (WAIT)         0
  MVS delay (Busy) 2
```

X02 - CICS total service time by txn

Usage

Use this report to view an analysis of how time was spent by the CICS transactions that were measured during the observation session in multiple regions. CICS sample data from the selected regions is merged to produce a single report showing multi-region activity. Transaction data from the multiple regions is correlated using the network unit of work ID to relate the remote activity to the local transaction. Since this is based on sample data, there will be samples from the remote region that do not match with a local transaction. These are reported under the remote transaction name, such as CSMI.

Expand a CICS transaction report line to see a further breakdown by region, program, CICS command, DLI request and SQL request.

Quantification

Each report line quantifies total times for each measured transaction. The total times are expressed in units of seconds. The total service time is shown and is further broken down into execution time, suspend time, and delay time.

Detail line hierarchy

An unexpanded X02 report shows one line for each measured CICS transaction. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1 CICS Transaction
  Level 2 CICS Region Applid
    Level 3 CICS Program
      Level 4 CICS Command
      Level 4 CICS Command

    ...

  Level 2 CICS Region Applid
    Level 3 CICS Program
      Level 4 SQL Request
      Level 4 SQL Request

    ...

  Level 2 CICS Region Applid
    Level 3 CICS Program
      Level 4 DLI Request
      Level 4 DLI Request

    ...

  Level 2 CICS Region Applid
    Level 3 CICS Program
      Level 4 Module
      Level 4 Module
      Level 4 System Services

    ...

  Level 2 CICS Region Applid
    Level 3 CICS Program
      Level 4 Adabas Request
      Level 4 Adabas Request

    ...

  Level 2 CICS Region Applid
    Level 3 System Services
      Level 4 Module
      Level 4 Module
      Level 4 System Services
```

Detail line descriptions

CICS transaction detail line

This is the first-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	A functional description (if the transaction is a recognized CICS transaction).
Error	The margin of error based on a sample population of the number of executions of the transaction.

Under Heading	This is Displayed
Execution	The total time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction.
Delay	The total time, in seconds, that execution of the transaction was delayed. Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The total service time for the transaction. This includes execution, suspend, and delay time.

CICS region applid detail line

This is the second-level detail line shown directly under the CICS transaction detail line. This line represents the VTAM applid of the CICS region sampled. If a transaction shows more than 1 region applid, then activity was measured in multiple regions for that transaction.

Under Heading	This is Displayed
Name	The CICS region applid. This is the VTAM applid of the region where the samples were taken.
NTxns	The number of executions of the transaction.
Description	"Region Applid"
Execution	The total time, in seconds, that a CPU was actively executing for the transaction in the region.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction in the region.
Delay	The total time, in seconds, that execution of the transaction was delayed in the region. Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The total service time for the transaction in the region. This includes execution, suspend, and delay time.

CICS program or system services detail line

This is a third-level detail line shown directly under the CICS region applid detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The fourth-level lines shown under this item can be either CICS command lines, SQL Request lines, DLI Request lines or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays "EXEC CICS." If lines grouped under this line are SQL request lines, the description displays "EXEC SQL." If lines grouped under this line are DLI request lines, the description displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if the CICS module name is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.
Execution	The total time, in seconds, that CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	<p>The total time, in seconds, that execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The total service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend, and delay time.

CICS command detail line

These lines are displayed under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command description. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command description is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The total time, in seconds, that CPU execution was observed while the CICS command was being processed.

Under Heading	This is Displayed
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	<p>The total time, in seconds, that execution of the transaction was delayed while the CICS command was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

SQL request detail line

These lines are displayed under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The total time, in seconds, that CPU execution was observed while the SQL request was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	<p>The total time, in seconds, that execution of the transaction was delayed while the SQL request was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the SQL request was being processed. This includes execution, suspend and delay time.

DLI request detail line

These lines are displayed under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The total time, in seconds, that CPU execution was observed while the DLI request was being processed.

Under Heading	This is Displayed
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	The total time, in seconds, that execution of the transaction was delayed while the DLI request was being processed. Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

Module/system services detail line

These lines are displayed under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, “CICS” is displayed in the name field and “System Services” is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or “CICS” if a module name could not be determined.
Description	A functional description of the module if one is available. “System Services” is displayed if the module name could not be determined.
Execution	The total time, in seconds, for execution of the module within the grouping under which the detail line is displayed.
Suspend	This field will contain a value of zero.
Delay	The total time, in seconds, that the identified module was preempted by MVS.
Service	The total service time for the transaction during which the identified module was executing or delayed.

Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The total time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.

Under Heading	This is Displayed
Delay	The total time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

Sample reports

When the report is first displayed, only the first level of the hierarchy is visible (transaction). A sample is shown here:

File View Navigate Help							
X02: CICS Total Service Time by Txn (1684/CICS32A)				Row 00001 of 00002			
Command ==> _____				Scroll ==> CSR			
Name	NTxns	Description	Error	Execution	Total Time + Suspend	in Seconds + Delay	= Service
READ	340		± 5.4%	7.672	1028.360	27.422	1063.455
RDDR	1		±99.9%	0.449	17.172	1.018	18.641

You can enter the + line command on a transaction to expand to the next level. A sample of the report with a transaction expanded to the third level of the hierarchy (CICS Region Applid and CICS Program) is shown here:

File View Navigate Help							
X02: CICS Total Service Time by Txn (1684/CICS32A)				Row 00001 of 00011			
Command ==> _____				Scroll ==> CSR			
Name	NTxns	Description	Error	Execution	Total Time + Suspend	in Seconds + Delay	= Service
READ	340		± 5.4%	7.672	1028.360	27.422	10623.455
→ CICS32B		Region Applid		3.686	970.788	3.956	978.430
→ SAMPREAD		EXEC CICS		3.416	970.788	3.926	978.130
→ SAMPREAD		CICS Program		0.149	0.000	0.029	0.179
→ CICS		System Services		0.119	0.000	0.000	0.119
→ CICS32A		Region Applid		3.986	57.572	23.466	85.024
→ DFHMIRS		CICS Program		2.697	57.482	22.327	82.507
→ CICS		System Services		1.288	0.089	1.138	2.517
RDDR	1		±99.9%	0.449	17.172	1.018	18.641

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.

Cmd	When Applied To Object	Action
++	Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	Transaction, Region Applid, Load Module	Expand to reveal next level.
–	Transaction, Region Applid, Load Module	Collapse to hide next level.
SV	Transaction, Region Applid, Load Module	Sort next level by value.
SN	Transaction, Region Applid, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for this report is shown below. This example shows a CICS region:

```

File View Navigate Help
+-----+
+-----+----- The following report line was selected -----+
| CICS32B      Region Applid      3.686   970.788   3.956   978.430 |
+-----+

Calculation Details
CICS Transaction      READ
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are total times for all executions of the command within
the transaction and are calculated as follows:

(1) Times command observed in txn/program      32647
(2) Duration of one sample interval            0.029970
(3) (1) A (2) = total time for command         978.430590

The execution measurement counts are
Executing (CPU active)      123
Suspended by CICS          32392
Delayed
  CICS dispatch delay      103
  MVS delay (WAIT)         0
  MVS delay (Busy)         29

```

X03 - CICS mean service time by terminal ID

Usage

Use this report to see an analysis of how time was spent on CICS terminals that were measured during the observation session in multiple regions. CICS sample data from the selected regions is merged to produce a single report showing multiregion activity. Transaction data from the multiple regions is correlated using the network unit of work id to relate the remote activity to the local transaction. Since this is based on sample data, there will be samples from the remote region that do not match with a local transaction. These will be reported under the remote transaction name, such as CSMI.

Expand a CICS terminal report line to see a further breakdown by transaction, region, program, CICS command, DLI request and SQL request.

Quantification

Each report line quantifies time as arithmetic means for all measured transactions on the terminal. The means are calculated by dividing the total of all time spent servicing all occurrences of transactions on the terminal by the number of occurrences. The means are expressed in units of seconds. The mean service time is shown and is further broken down into execution time, suspend time, and delay time.

Detail line hierarchy

An unexpanded X03 report shows one line for each measured CICS terminal and 1 line for all non-terminal attached transactions. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```

Level 1 CICS Terminal
  Level 2 CICS Transaction
    Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 CICS Command
          Level 5 CICS Command

```



```

Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 SQL Request
        Level 5 SQL Request

Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 DLI Request
        Level 5 DLI Request

Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 Module
        Level 5 Module
        Level 5 System Services

Level 3 CICS Region Applid
      Level 4 CICS Program
        Level 5 Adabas Request
        Level 5 Adabas Request

Level 3 CICS Region Applid
      Level 4 System Services
        Level 5 Module
        Level 5 Module
        Level 5 System Services

```

Detail line descriptions

CICS terminal detail line

This is the first-level detail line. Each line shows information about a CICS terminal for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS terminal ID. This is the terminal ID or N/A if a terminal ID was not available during the sample. A terminal might not be available because the transaction was running non-terminal attached, or the transaction was not attached to the terminal during initialization or termination.
NTxns	The number of executions of transactions on this terminal.
Description	This is either Terminal Txn or Non-Terminal Txn.
Error	The margin of error for the mean values calculated by using the number of executions of transactions for this terminal as a sample size.
Execution	The mean time, in seconds, that a CPU was actively executing transactions on this terminal.
Suspend	The mean time, in seconds, that CICS had suspended execution of transactions on this terminal.
Delay	<p>The mean time, in seconds, that execution of transactions on this terminal was delayed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT

Under Heading	This is Displayed
Service	The mean service time for transactions on this terminal. This includes execution, suspend, and delay time.

CICS transaction detail line

This is the second-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	A functional description (if the transaction is a recognized CICS transaction).
Error	The margin of error for the mean values calculated by using the number of executions of the transaction as the sample size.
Execution	The mean time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction.
Delay	The mean time, in seconds, that execution of the transaction was delayed. Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The mean service time for the transaction. This includes execution, suspend, and delay time.

CICS region applid detail line

This is the third-level detail line shown directly under the CICS transaction detail line. This line represents the VTAM applid of the CICS region sampled. If a transaction shows more than 1 region applid, then activity was measured in multiple regions for that transaction.

Under Heading	This is Displayed
Name	The CICS region applid. This is the VTAM applid of the region where the samples were taken.
NTxns	The number of executions of the transaction.
Description	"Region Applid"
Execution	The mean time, in seconds, that a CPU was actively executing for the transaction in the region.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction in the region.

Under Heading	This is Displayed
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed in the region.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The mean service time for the transaction in the region. This includes execution, suspend, and delay time.

CICS program or system services detail line

This is a fourth-level detail line shown directly under the CICS region applid detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The fifth-level lines shown under this item can be either CICS command lines, SQL Request lines, DLI Request lines or Module lines.

If no CICS application program was dispatched, “CICS” is shown under the Name heading and “System Services” under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. “CICS” is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays “EXEC CICS.” If lines grouped under this line are SQL request lines, the description displays “EXEC SQL.” If lines grouped under this line are DLI request lines, the description displays “EXEC DLI.” Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and “CICS Program” is displayed if the CICS module name is not recognized; indicating this is likely an application program. “System Services” is displayed if no application program was in control.
Execution	The mean time, in seconds, that CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.
Delay	<p>The mean time, in seconds, that execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT

Under Heading	This is Displayed
Service	The mean service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend, and delay time.

CICS command detail line

These lines are displayed under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command description. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command description is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The mean time, in seconds, that CPU execution was observed while the CICS command was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	The mean time, in seconds, that execution of the transaction was delayed while the CICS command was being processed. Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The mean service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

SQL request detail line

These lines are displayed under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The mean time, in seconds, that CPU execution was observed while the SQL request was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the SQL request was being processed.

Under Heading	This is Displayed
Delay	The mean time, in seconds, that execution of the transaction was delayed while the SQL request was being processed. Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The mean service time for the transaction during which the SQL request was being processed. This includes execution, suspend and delay time.

DLI request detail line

These lines are displayed under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The mean time, in seconds, that CPU execution was observed while the DLI request was being processed.
Suspend	The mean time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	The mean time, in seconds, that execution of the transaction was delayed while the DLI request was being processed. Transaction execution can be delayed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The mean service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

Module/system services detail line

These lines are displayed under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, “CICS” is displayed in the name field and “System Services” is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or “CICS” if a module name could not be determined.
Description	A functional description of the module if one is available. “System Services” is displayed if the module name could not be determined.
Execution	The mean time, in seconds, for execution of the module within the grouping under which the detail line is displayed.
Suspend	This field will contain a value of zero.

Under Heading	This is Displayed
Delay	The mean time, in seconds, that the identified module was preempted by MVS.
Service	The mean service time for the transaction during which the identified module was executing or delayed.

Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The mean time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The mean time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	The mean time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The mean service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

Sample reports

A sample report that has been expanded four levels is shown below .

File View Navigate Help							
X03: CICS Mean Service Time by Term (1684/CICS32A)					Row 00001 of 00033		
Command ==> _____					Scroll ==> CSR		
Name	NTxns	Description	Error	Execution	Mean Time in Seconds + Suspend + Delay	=	Service
ET36	1	Terminal Attached	±99.9%	0.449	17.172	1.018	18.641
→ RDDR	1		±99.9%	0.449	17.172	1.018	18.641
→ CICS32A		Region Applid		0.089	17.172	0.929	18.191
→ READDRVR		EXEC CICS		0.089	17.172	0.929	18.191
→ +0700		START TRANSID(READ)		0.059	12.377	0.029	12.467
→ +0884		START TRANSID(READ)		0.000	0.719	0.149	0.869
→ +0B84		START TRANSID(READ)		0.000	0.749	0.059	0.809
→ +0984		START TRANSID(READ)		0.000	0.509	0.149	0.659
→ +0904		START TRANSID(READ)		0.000	0.539	0.089	0.629
→ +0A04		START TRANSID(READ)		0.000	0.539	0.059	0.599
→ +0784		START TRANSID(READ)		0.000	0.479	0.089	0.569
→ +0804		START TRANSID(READ)		0.000	0.389	0.119	0.509
→ +0A84		START TRANSID(READ)		0.000	0.329	0.089	0.419
→ +0B04		START TRANSID(READ)		0.000	0.359	0.029	0.389
→ +0BFC		SEND TEXT		0.029	0.179	0.059	0.269

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Terminal, Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	Terminal, Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	Terminal, Transaction, Region Applid, Load Module	Expand to reveal next level.
–	Terminal, Transaction, Region Applid, Load Module	Collapse to hide next level.
SV	Terminal, Transaction, Region Applid, Load Module	Sort next level by value.
SN	Terminal, Transaction, Region Applid, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.

Cmd	When Applied To Object	Action
–	Name	Collapse to show only first level.
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for this report is shown below. This example shows a CICS region:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| CICS32A   Region Applid      0.089   17.172   0.929   18.191 |
+-----+
Calculation Details
CICS Transaction          RDDR
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are mean times for the command for all executions of the
transaction and are calculated as follows:

(1) Times command observed in txn/program      607
(2) Duration of one sample interval            0.029970
(3) (1) A (2) = total time for command         18.191790
(4) Number of executions of transaction         1
(5) (3) S (4) = mean time for the command      18.191790

The execution measurement counts are
Executing (CPU active)      3
Suspended by CICS          573
Delayed
  CICS dispatch delay      29
  MVS delay (WAIT)         0
  MVS delay (Busy)         2
```

X04 - CICS total service time by terminal ID

Usage

Use this report to view an analysis of how time was spent on CICS terminals that were measured during the observation session in multiple regions. CICS sample data from the selected regions is merged to produce a single report showing multiregion activity. Transaction data from the multiple regions is correlated using the network unit of work ID to relate the remote activity to the local transaction. Since this is based on sample data, there will be samples from the remote region that do not match with a local transaction. These are reported under the remote transaction name, such as CSMI.

Expand a CICS terminal report line to see a further breakdown by transaction, region, program, CICS command, DLI request and SQL request.

Quantification

Each report line quantifies total times for transactions measured on a terminal. The total times are expressed in units of seconds. The total service time is shown and is further broken down into execution time, suspend time, and delay time.

Detail line hierarchy

An unexpanded X04 report shows one line for each measured CICS terminal and 1 line for all non-terminal attached transactions. You can expand each line to reveal additional hierarchical levels of detail.

The hierarchy is illustrated here:

```
Level 1 CICS Terminal
  Level 2 CICS Transaction
    Level 3 CICS Region Applid
      Level 4 CICS Program
      Level 5 CICS Command
      Level 5 CICS Command

    Level 3 CICS Region Applid
      Level 4 CICS Program
      Level 5 SQL Request
      Level 5 SQL Request

    Level 3 CICS Region Applid
      Level 4 CICS Program
      Level 5 DLI Request
      Level 5 DLI Request

    Level 3 CICS Region Applid
      Level 4 CICS Program
      Level 5 Module
      Level 5 Module
      Level 5 System Services

    Level 3 CICS Region Applid
      Level 4 CICS Program
      Level 5 Adabas Request
      Level 5 Adabas Request

    Level 3 CICS Region Applid
      Level 4 System Services
      Level 5 Module
      Level 5 Module
      Level 5 System Services
```

Detail line descriptions

CICS terminal detail line

This is the first-level detail line. Each line shows information about a CICS terminal for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS terminal ID. This is the terminal ID or N/A if a terminal ID was not available during the sample. A terminal might not be available because the transaction was running non-terminal attached, or the transaction was not attached to the terminal during initialization or termination.
NTxns	The number of executions of transactions on this terminal.
Description	This is either Terminal Txn or Non-Terminal Txn.

Under Heading	This is Displayed
Error	The margin of error for the mean values calculated by using the number of executions of transactions for this terminal as a sample size.
Execution	The total time, in seconds, that a CPU was actively executing transactions on this terminal.
Suspend	The total time, in seconds, that CICS had suspended execution of transactions on this terminal.
Delay	<p>The total time, in seconds, that execution of transactions on this terminal was delayed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The total service time for transactions on this terminal. This includes execution, suspend, and delay time.

CICS transaction detail line

This is the second-level detail line. Each line shows information about a CICS transaction for which measurement data was recorded.

Under Heading	This is Displayed
Name	The CICS transaction code.
NTxns	The number of executions of the transaction.
Description	A functional description (if the transaction is a recognized CICS transaction).
Error	The margin of error based on a sample population of the number of executions of the transaction.
Execution	The total time, in seconds, that a CPU was actively executing for the transaction.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction.
Delay	<p>The total time, in seconds, that execution of the transaction was delayed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The total service time for the transaction. This includes execution, suspend, and delay time.

CICS region applid detail line

This is the third-level detail line shown directly under the CICS transaction detail line. This line represents the VTAM applid of the CICS region sampled. If a transaction shows more than 1 region applid, then activity was measured in multiple regions for that transaction.

Under Heading	This is Displayed
Name	The CICS region applid. This is the VTAM applid of the region where the samples were taken.
NTxns	The number of executions of the transaction.
Description	"Region Applid"
Execution	The total time, in seconds, that a CPU was actively executing for the transaction in the region.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction in the region.
Delay	<p>The total time, in seconds, that execution of the transaction was delayed in the region.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The total service time for the transaction in the region. This includes execution, suspend, and delay time.

CICS program or system services detail line

This is a fourth-level detail line shown directly under the CICS region applid detail line. This line represents a CICS program (usually an application) that was in control during execution of the transaction. The fifth-level lines shown under this item can be either CICS command lines, SQL Request lines, DLI Request lines or Module lines.

If no CICS application program was dispatched, "CICS" is shown under the Name heading and "System Services" under the Description heading.

Under Heading	This is Displayed
Name	The module name of the CICS program. If lines grouped under this line are CICS command lines, this field is displayed in red. For Module lines grouped under this line, the field is turquoise. "CICS" is displayed here if no application program was in control.
Description	If lines grouped under this line are CICS command lines, the description displays "EXEC CICS." If lines grouped under this line are SQL request lines, the description displays "EXEC SQL." If lines grouped under this line are DLI request lines, the description displays "EXEC DLI." Otherwise, if the program name is a recognized CICS module name (a DFH* name), a functional description is shown, and "CICS Program" is displayed if the CICS module name is not recognized; indicating this is likely an application program. "System Services" is displayed if no application program was in control.
Execution	The total time, in seconds, that CPU execution was observed while transaction control was under the CICS program identified in the Name column.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while transaction control was under the CICS program identified in the Name column.

Under Heading	This is Displayed
Delay	<p>The total time, in seconds, that execution of the transaction was delayed while transaction control was under the CICS program identified in the Name column.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay • MVS WAIT
Service	The total service time for the transaction during which control was under the CICS program identified in the Name column. Service time includes execution, suspend, and delay time.

CICS command detail line

These lines are displayed under a CICS Program detail line. Each one represents a CICS command issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC CICS command. This hexadecimal offset appears in +xxxx format. If the CSECT containing the EXEC CICS is not the same name as the module identified in the CICS Program line above, this field contains the CSECT name. In this case, the offset is shown in the description field. This field is always displayed in red.
Description	The CICS command description. If, as noted above, the CSECT name containing the EXEC CICS is different from the module name, the CICS command description is preceded by the hexadecimal offset of the command from the start of the CSECT.
Execution	The total time, in seconds, that CPU execution was observed while the CICS command was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the CICS command was being processed.
Delay	<p>The total time, in seconds, that execution of the transaction was delayed while the CICS command was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the CICS command was being processed. This includes execution, suspend, and delay time.

SQL request detail line

These lines are displayed under a CICS program detail line. Each line represents an SQL request issued by the program identified in the name field of the CICS program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC SQL command. This is in +xxxx format. This field is always displayed in red.
Description	The SQL request function – SELECT, FETCH, UPDATE, etc.
Execution	The total time, in seconds, that CPU execution was observed while the SQL request was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the SQL request was being processed.
Delay	<p>The total time, in seconds, that execution of the transaction was delayed while the SQL request was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the SQL request was being processed. This includes execution, suspend and delay time.

DLI request detail line

These lines are displayed under a CICS Program detail line. Each line represents an IMS DLI request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC DLI command. This is in +xxxx format. This field is always displayed in red.
Description	The DLI function code followed by the PCB name.
Execution	The total time, in seconds, that CPU execution was observed while the DLI request was being processed.
Suspend	The total time, in seconds, that CICS had suspended execution of the transaction while the DLI request was being processed.
Delay	<p>The total time, in seconds, that execution of the transaction was delayed while the DLI request was being processed.</p> <p>Transaction execution can be delayed for one of the following reasons:</p> <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the DLI request was being processed. This includes execution, suspend, and delay time.

Module/system services detail line

These lines are displayed under a CICS Program detail line. Each line represents a module that was executing under control of the program identified in the name field of the CICS Program line under which these lines are grouped. If Application Performance Analyzer was unable to determine a module name, “CICS” is displayed in the name field and “System Services” is displayed in the description field.

Under Heading	This is Displayed
Name	The name of the module that was executing or “CICS” if a module name could not be determined.
Description	A functional description of the module if one is available. “System Services” is displayed if the module name could not be determined.
Execution	The total time, in seconds, for execution of the module within the grouping under which the detail line is displayed.
Suspend	This field will contain a value of zero.
Delay	The total time, in seconds, that the identified module was preempted by MVS.
Service	The total service time for the transaction during which the identified module was executing or delayed.

Adabas request detail line

These lines appear under a CICS Program detail line. Each one represents an Adabas request issued by the program identified in the name field of the CICS Program line under which these lines are grouped.

Under Heading	This is Displayed
Name	The hexadecimal offset in the identified CICS program of the return address of the EXEC ADABAS command. This is in +xxxx format. This field is always displayed in red.
Description	The Adabas request function -- OP, CL, L2, etc. When Natural calls Adabas, the Natural program name and statement number are displayed. If the statement is within an INCLUDE member, the INCLUDE member name is displayed.
Execution	The total time, in seconds, during which CPU execution was observed while the Adabas request was being processed.
Suspend	The total time, in seconds, during which CICS had suspended execution of the transaction while the Adabas request was being processed.
Delay	The total time, in seconds, during which execution of the transaction was delayed while the Adabas request was being processed for one of the following reasons: <ul style="list-style-type: none"> • CICS dispatch delay • MVS dispatch delay
Service	The total service time for the transaction during which the Adabas request was being processed. This includes execution, suspend and delay time.

Sample reports

A sample report that has been expanded five levels is shown below .

File View Navigate Help							
X04: CICS Total Service Time by Term (1684/CICS32A)					Row 00001 of 00098		
Command ==> -----					Scroll ==> CSR		
Name	NTxns	Description	Error	Execution	Total Time + Suspend	in Seconds + Delay	= Service
N/A	340	Non-Terminal Atta	± 5.4%	7.672	1028.360	27.422	1063.455
→ READ	340		± 5.4%	7.672	1028.360	27.422	1063.455
→ CICS32B		Region Applid		3.686	970.788	3.956	978.430
→ SAMPREAD		EXEC CICS		3.416	970.788	3.926	978.130
→ +04C4		READ FILE(FILEA)		3.266	970.788	3.926	977.981
→ ALLOCATE		Wait on Interregion		0.000	863.885	0.000	863.885
→ IRLINK		Wait on InterRegion Li		0.000	106.873	0.000	106.873
→ CICSdly		CICS Dispatch Delay		0.000	0.000	3.086	3.086
→ MVSBusy		MVS Delay (Busy)		0.000	0.000	0.839	0.839
→ CICSSusp		Suspend		0.000	0.029	0.000	0.029
→ +0468		RETURN		0.089	0.000	0.000	0.089
→ +03E0		RETRIEVE		0.059	0.000	0.000	0.059
→							

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Object	Action
?	Terminal, Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Display context help information.
++	Terminal, Transaction, Region Applid, Load Module, CSECT, Command, SQL Request, DLI Request	Show additional details.
+	Terminal, Transaction, Region Applid, Load Module	Expand to reveal next level.
–	Terminal, Transaction, Region Applid, Load Module	Collapse to hide next level.
SV	Terminal, Transaction, Region Applid, Load Module	Sort next level by value.
SN	Terminal, Transaction, Region Applid, Load Module	Sort next level by name.
M	Load Module	Display load module information.
P	Command, CSECT, SQL Request, DLI Request, CICS Active Module	Display source program mapping.

on headings

Cmd	When Applied To Object	Action
?	Name	Display context help information.
+	Name	Expand to reveal all entries.
–	Name	Collapse to show only first level.

Cmd	When Applied To Object	Action
SV	Name	Sort next level by value.
SN	Name	Sort next level by name.

Detail window

You can enter “++” (or press the enter key) on any line to open a window containing additional information.

A sample detail window for this report is shown below. This example shows a CICS region:

```

File View Navigate Help
+-----+
+-----+ The following report line was selected +-----+
| CICS32B      Region Applid      3.686   970.788   3.956   978.430 |
+-----+
Calculation Details
CICS Transaction          READ
The quantities shown represent the service time for execution of the
indicated CICS command while processing this transaction. The
quantities are total times for all executions of the command within
the transaction and are calculated as follows:

(1) Times command observed in txn/program      32647
(2) Duration of one sample interval            0.029970
(3) (1) A (2) = total time for command         978.430590

The execution measurement counts are
Executing (CPU active)      123
Suspended by CICS          32392
Delayed
CICS dispatch delay        103
MVS delay (WAIT)           0
MVS delay (Busy)           29

```

X05 - Combined DB2 IMS MQ Timeline

Usage

This report combines a subset of data from the F02 DB2 SQL Activity Timeline, the I02 IMS DL/I Call Timeline, and the Q11 MQ+ Activity Timeline reports for a single measurement. When additional information for a specific subsystem is required, refer to the individual timeline report.

Use this report to see information about the chronology of calls for DB2, IMS, and MQ that were intercepted over the duration of the measurement and to identify any calls with excessive service time (duration). Each line displays information about one intercepted call for either DB2, IMS, or MQ. One or more of the DB2+, IMS+ or MQ+ features must have been enabled when the measurement was performed.

By default, the detail lines are sorted in ascending chronological sequence (SV). You can also request that the data is sorted by service time (duration). Enter the SD line command on the SeqNo heading field to sort by duration. This brings the calls that had excessive service time to the top of the report. If you enter SV or SD a second time, the calls are sorted in the reverse order.

The number of DB2, IMS, and MQ calls that are displayed in this report is limited:

- The value of the DB2IMaxTraceSize, IMSIMaxTraceSize, and MQIMaxTraceSize parameters that are specified during Application Performance Analyzer installation
- Or by the values on panel 2 of the measurement request (if your installation configured these fields)

The report is truncated when the number of calls that are issued reaches the value that is specified for the appropriate MaxTraceSize parameter.

Quantification

Each report line shows the following information for one call.

- The sequence number within each subsystem reported.
- The subsystem for this call (DB2, IMS or MQ).
- The function for the call.
- The object of the call.
- The resulting status for the call.
- The time the call was issued.
- The service time (duration) for the call processing.
- The CPU time for the call processing.

The CPU time applies only to the region that is being measured. Any execution in other address spaces is not reported.

Detail line hierarchy

An unexpanded report shows a line for each intercepted call. You can expand each line for DB2 and MQ to reveal one additional hierarchical level of detail by using the + line command.

The hierarchy is illustrated here:

```

Level 1 DB2 SQL Call Details
  Level 2 SQL text
  ...
Level 1 IMS DLI Call Details
  ...
Level 1 MQ Call Details
  Level 2 MQ Queue Manager and Queue
  ...

```

Detail line descriptions

DB2 SQL Call detail line

This is a first-level detail line that shows information about one SQL call.

Under Heading	This is Displayed
Seqno	A sequence number assigned by Application Performance Analyzer that is unique to the SQL call. This is sequential within each subsystem.
System	DB2.
Function	The name of the SQL function.
Object	The DBRM name.
Status	The SQL return code. Blank when zero.
Call Time	The time of day at which the SQL call started.

Under Heading	This is Displayed
Svc Time	The service time (duration) of the SQL call in seconds.
CPU Time	The CPU time that the SQL call consumed in seconds.

SQL Text

This is a second-level detail line that is shown directly under the DB2 SQL call detail line. It shows the SQL statement text. If necessary, more than one line is displayed to show the full SQL text.

IMS DLI Call detail line

This is a first-level detail line that shows the information about one DLI call.

Under Heading	This is Displayed
Seqno	A sequence number assigned by Application Performance Analyzer that is unique to the DLI call. This is sequential within each subsystem.
System	IMS.
Function	The DLI function code.
Object	The PCB name.
Status	The PCB status code.
Call Time	The time of day when the DLI call started.
Svc Time	The service time (duration) of the DLI call in seconds.
CPU Time	The CPU time that the DLI call consumed in seconds.

MQ Call detail line

This is a first-level detail line that shows information about one MQ call.

Under Heading	This is Displayed
Seqno	A sequence number assigned by Application Performance Analyzer that is unique to the MQ call. This is sequential within each subsystem.
System	MQ.
Function	The MQ call type.
Object	Queue.
Status	The return code and reason code returned by MQ. Blank when both are zero.
Call Time	The time of day at which the MQ call started.
Svc Time	The service time (duration) of the MQ call in seconds.
CPU Time	The CPU time that the MQ call consumed in seconds.

MQ Queue Manager and Queue Name detail line

This is a second-level detail line that is shown directly under the MQ call detail line. It displays the MQ queue manager name and the queue name that are used in the request.

Sample report

A sample report is shown here:

```
-----
X05: Combined DB2 IMS MQ Timeline (0490/IMSDMPP1)      Row 00047 of 00627
Seqno  System  Function  Object  Status  Call Time  Svc Time  CPU time
000045  IMS      GN       IVPDB2      12:06:50.29  0.011088  0.008552
000046  IMS      GN       IVPDB2      12:06:50.30  0.000156  0.000155
000003  DB2     SELECT   FABPGM06    12:06:50.37  0.009207  0.008881
000001  MQ      Close    Queue       12:06:50.41  0.000215  0.000215
000047  IMS     CHNG     ALTPCB      12:06:50.41  0.000292  0.000292
000048  IMS     ISRT     ALTPCB      12:06:50.41  0.000144  0.000143
000049  IMS      GU       IOPCB       12:06:50.41  0.005714  0.002133
000050  IMS      GN       IVPDB2      12:06:50.42  0.008603  0.004261
000051  IMS      GN       IVPDB2      12:06:50.43  0.071402  0.040834
000052  IMS      GN       IVPDB2      12:06:50.50  0.050327  0.034989
000053  IMS      GN       IVPDB2      12:06:50.55  0.021318  0.009039
000054  IMS      GN       IVPDB2      12:06:50.57  0.000168  0.000168
000004  DB2     SELECT   FABPGM06    12:06:50.67  0.009888  0.009165
000002  MQ      Open     Queue       12:06:50.70  0.000684  0.000684
000003  MQ      Put      Queue       12:06:50.70  0.001024  0.001012
000004  MQ      Get      Queue       12:06:50.70  0.000860  0.000860
000005  MQ      Close    Queue       12:06:50.71  0.000180  0.000180
000055  IMS     CHNG     ALTPCB      12:06:50.73  0.000332  0.000328
000056  IMS     ISRT     ALTPCB      12:06:50.73  0.000160  0.000160
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized here: (You can always enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied To Heading	Action
?	Seqno	Display context help information.
++	Seqno	Show additional details.
+	Seqno	Expand to reveal next level.
–	Seqno	Collapse to hide next level.
M	Seqno (IMS and MQ only)	Display load module information.
P	Seqno (IMS and MQ only)	Display source program mapping.

on heading

Cmd	When Applied To Heading	Action
?	Seqno	Display context help information.
+	Seqno	Expand to reveal all entries.
–	Seqno	Collapse to hide next level.
SV	Seqno	Sort by Call Time.
SD	Seqno	Sort by Svc Time (Duration).

X06 - IMS MASS Region Summary

Usage

Use this report to view a summary of the IMS Dependent Regions in which the measured transaction executed. Each detail line summarizes a region with the count of that transaction and the averages for Service time (duration), CPU time, and DL/I calls. If the DB2+ feature is active, the average SQL calls is also reported. If the MQ+ feature is active, the average MQ calls is also reported. The total line sums the transaction counts and reports the average values across all regions for the other columns.

By default, the detail lines are sorted in ascending region name sequence (SN) with the Total line at the bottom. You can also request that the detail lines be sorted by transaction count (SV). Entering either SN or SV a second time will sort the detail lines in the reverse order (ascending or descending).

Quantification

Each report line shows the following for one region.

- The IMS Dependent Region name.
- The IMS subsystem name.
- The APA measurement request number for the region.
- The number of times the transaction code executed.
- The average service time (duration) per transaction.
- The average CPU time per transaction.
- The average DL/I calls per transaction.
- The average SQL calls per transaction.
- The average MQ calls per transaction.

Keep in mind that the CPU time applies only to the region being measured. Any execution in other address spaces will not be reported.

Detail line hierarchy

The X06 report shows only one detail line level. It cannot be expanded.

Detail line descriptions

Under Heading	This is Displayed
Region	The IMS dependent region name.
IMS	The IMS subsystem name.
ReqNum	The APA measurement request number for this IMS dependent region.
Txn Count	The total number of transactions executed for this transaction code.
Svc time per Trn	The average service time (duration) per transaction execution for this transaction code.
CPU time per Trn	The average CPU time per transaction execution for this transaction code.
DLI per Trn	The average number of DL/I calls per transaction execution for this transaction code.
SQL per Trn	The average number of SQL calls per transaction execution for this transaction code.

Under Heading	This is Displayed
MQ per Trn	The average number of MQ calls per transaction execution for this transaction code.

Sample reports

A sample report is shown here:

```
-----
X06: IMS MASS Region Summary (00054/IMSFMPP5)          Row 00001 of 00006
Command ==>                                           Scroll ==> CSR

Transaction Name: IMSQATR

Region  IMS   ReqNum Txn count Svc/Txn   CPU/Txn   DLI/Txn   SQL/Txn   MQ/Txn
IMSFMPP1 IMSF   00050      17   1.6146   0.1865    7.52     0.94     3.76
IMSFMPP2 IMSF   00051      17   1.6041   0.1103    7.47     0.00     0.00
IMSFMPP3 IMSF   00052      17   1.7298   0.1680    7.58     0.94     0.00
IMSFMPP4 IMSF   00053      31   0.8641   0.0740    2.90     0.93     3.87
IMSFMPP5 IMSF   00054      18   1.5979   0.1185    7.44     0.00     3.55
  Total  n/a     n/a      100   1.3967   0.1233    6.08     0.61     2.48
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized here: (You can always enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied to Heading	Action
?	Region	Display context help information.
++	Region	Show additional details about this line.

on heading

Cmd	When Applied to Heading	Action
?	Region	Display context help information.
SV	Region	Sort next level entries by value.
SN	Region	Sort next level entries by value.

Detail window

You can enter “++” or press the Enter key on any line to display a window that contains additional information.

A sample detail window for this report is shown here:

```

X06 - DETAIL Window (00054/IMSFMP5)
Command ==> Scroll ==> CSR

+-----+ The following report line was selected +-----+
| IMSFMPP1 IMSF 00050 17 1.6146 0.1865 7.52 0.94 3.76 |
+-----+

IMS Transaction Information
IMS Trancode IMSQATR      IMS system  IMSF
PSB name     IMSQAPGM     Txn count   17
Total time   27.4492      Total CPU time 3.1714
Total DLI call count 128
Total SQL call count 16
Total MQ call count 64

```

X07 - DB2 Stored Procedures Summary

Usage

To gain access to the DB2 Stored Procedures Summary report, issue the “X” line command from the Observation Session List. The “X” line command starts Performance Analysis Reporting in a mode that enables access to the DB2 Stored Procedures Summary report. Before entering the line command, you must tag at least one measurement that contains DB2 Stored Procedures data by entering the “T” line command in the Observation Session List. Up to 20 measurements can be tagged at one time.

This report presents a summary of the DB2 Stored Procedures from the tagged measurements. Each detail line summarizes the Stored Procedure information for each DBRM from each measurement. The Number of Invocations reports the number of invocations for the DBRM during that measurement. The reported information also includes the number of total SQL calls, the average number of SQL calls per invocation, the mean CPU time per invocation, and the mean service time per invocation.

By default, the detail lines are sorted in ascending DBRM name sequence (SN). You can also request that the detail lines be sorted by invocation count (SV). Entering either SN or SV a second time sorts the detail lines in the reverse order (ascending or descending).

Quantification

Each report line shows the following information for one region:

- The DBRM name
- The DB2 subsystem name
- The measurement request number for the region
- The number of Stores Procedure invocations for the DBRM
- The total DB2 SQL calls
- The average SQL calls per invocation
- The mean CPU time per invocation
- The mean Service (elapsed) time per invocation.

Detail line hierarchy

The X07 report shows only one detail line level. It cannot be expanded.

Detail line descriptions

Under Heading	This is Displayed
Name	The DBRM name.

Under Heading	This is Displayed
DB2 Sysid	The DB2 subsystem name.
ReqNum	The measurement request number for this DB2 Stored Procedure DBRM.
Nbr of Invocations	The total number of invocations that are executed for this DB2 Stored Procedure DBRM.
SQL Calls - Total	The total number of SQL calls for this DB2 Stored Procedure DBRM.
SQL Calls - Average	The average number of SQL calls per invocation of this DB2 Stored Procedure DBRM.
Mean CPU time	The average CPU time per invocation of this DB2 Stored Procedure DBRM.
Mean SVC time	The average Service (elapsed) time per invocation of this DB2 Stored Procedure DBRM.

Sample report

A sample report is shown here:

```
-----
X07: DB2 Stored Procedures Summary (00000/DB2SP)                      Row 00001 of 00010
Command ==> DB2                                                    Scroll ==> CSR
Name      Sysid  ReqNum  Nbr of  --- SQL Calls ---      Mean      Mean
          Sysid  ReqNum  Invocations  Total  Average      CPU Time  Svc Time
DBSPX01   DBCG   00483      2        25      12.50      0.00313  0.00492
DBSPX04   DBBG   00487     19    30,198    1589.36     0.41540  2.01899
DBSPX04   DBCG   00483      7    16,281    2325.85     0.67438  5.16866
DBSPX04   DBBG   00482      9    14,926    1658.44     0.47700  3.27659
DBSPX05   DBBG   00486      9        29       3.22     0.00315  5.84723
DBSPX05   DBBG   00480      4        13       3.25     0.00333  6.93522
DBSPX06   DBCG   00483     14        20       1.42     0.00150  3.98819
DBUDF01   DBBG   00488     19     9,959     524.15     0.10413  0.13577
DBUDF01   DBCG   00483      8     5,425     678.12     0.15136  0.30382
DBUDF01   DBBG   00484      9     4,979     553.22     0.11495  0.17004
-----
```

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized here: (You can always enter a “/” on any input field to open a menu of line commands available for that field).

on objects

Cmd	When Applied to Heading	Action
?	Name	Display context help information.
++	Name	Show additional details about this line.
M	Name	Display load module information.

on heading

Cmd	When Applied to Heading	Action
?	Name	Display context help information.
SV	Name	Sort next level entries by value.
SN	Name	Sort next level entries by name.

Detail window

You can enter “++” or press the Enter key on any line to display a window that contains additional information.

A sample detail window for this report is shown here:

```
X07 - DETAIL Window (00483/DBCGWLM)          Scroll ==> CSR
Command ==>

+----- The following report line was selected -----+
| DBSPX01  DBCG   00483      2      25    12.50    0.00313  0.00492|
+-----+

CPU and Service Time for DBRM                  DBSPX01
  Total CPU Time (seconds)                      0.00626
  Total Service Time (seconds)                  0.00985

  Nbr of Invocations                            2
  Mean CPU per Invocation (seconds)             0.00313
  Mean Time per Invocation (seconds)            0.00492

  Nbr of SQL Calls                             25
  Mean CPU per Call (seconds)                   0.00025
  Mean Time per Call (seconds)                  0.00039
```


Chapter 11. Miscellaneous Reports

This section describes Application Performance Analyzer reports that are not categorized in a performance analysis report set.

A06 – Measured Job JCL

Application Performance Analyzer captures the JCL for a measured batch job. The A06 report presents the captured JCL in an Edit session, which is useful for determining the specific details of the job that was measured, such as execution parameters, STEPLIBs, data files, or instream data. The A06 report can also be useful during the development and testing phase for resubmitting the same JCL to compare similar measurements. The A06 report is not produced for started tasks (STCs) or measured TSO address spaces.

```
File View Navigate Help
-----
R01: IBM APA for z/OS Performance Reports (00929/QACOSA01) Row 00001 of 00007
Command ==> Scroll ==> CSR

Select a category from the list below to view the available reports
A Admin/Miscellaneous      I IMS Measurement        E CICS Measurement
S Statistics/Storage       F DB2 Measurement       Q MQ Measurement
C CPU Usage Analysis       D DASD I/O Analysis     G Coupling Facility
W CPU WAIT Analysis        V Variance Reports       X Multi Address Space
J Java Measurement         B WebSphere App Server   H HFS Analysis
K SRB Measurement

-----

Enter S to make a selection or enter the report code on the command line

A01 Source Program Mapping
A02 Request XML or Printed Reports
A03 Java Source Mapping
A04 Source Mapping Dataset List
A05 Source Mapping Common List
A06 Measured Job JCL
```

Selecting report A06 will place the user in ISPF EDIT of the JCL where they can view, edit or submit the JCL. The temporary dataset will be allocated by using the ZPREFIX ISPF variable as the high level qualifier. If ZPREFIX is not set (for example, PROFILE NOPREFIX), ISPF variable ZUSER will be used instead.

```
File Edit Edit_Settings Menu Utilities Compilers Test Help
-----
EDIT          USER1.CAZJCL1.TEMP          Columns 00001 00072
Command ==> Scroll ==> CSR
***** ***** Top of Data *****
000001 //QACOSA01 JOB (), 'COBSAM01', CLASS=A, MSGCLASS=T, NOTIFY=&SYSUID
000002 /**
000003 /** COBOL - COPY SEQUENTIAL INPUT FILE TO SEQUENTIAL OUTPUT FILE
000004 /**          PARM SPECIFIES THE NUMBER OF ITERATIONS
000005 /**
000006 /**
000007 //COBSAM EXEC PGM=COBSAM01, PARM='100'
000008 //STEPLIB DD DSN=USER1.LOADLIB, DISP=SHR
000009 //          DD DISP=SHR, DSN=CEE.SCEERUN
000010 //          DD DISP=SHR, DSN=CEE.SCEELKED
000011 //SYSPRINT DD SYSOUT=*
000012 //SYSOUT DD SYSOUT=*
000013 //IFILE DD DSN=USER1.SRCLIB(SAMP), DISP=SHR
000014 //OFILE DD DUMMY
000015 //SYSUDUMP DD SYSOUT=*
***** ***** Bottom of Data *****
```

Chapter 12. Source program mapping

This section describes the Source Program Mapping feature.

For information about ...	See ...
Entering source mapping details	“A01 - Source program mapping panel” on page 615
Java source program mapping	“A03 - Java source program mapping panel” on page 618
Source mapping dataset list	“A04 - Source mapping dataset list” on page 620
Source mapping common data set list	“A05 - Source mapping common list” on page 622
Source program mapping pick list	“A011 - Source program mapping pick list” on page 623
The source program attribution report	“P01 - Source program attribution” on page 624
DWARF Source Program Attribution report	“P03 - DWARF Source Program Attribution” on page 628
DWARF Source Lines report	“P04 - DWARF Source Lines” on page 630

Introduction to source program mapping

Application Performance Analyzer handles source program mapping differently for Java than for other programming languages.

The common data set list

If the Common Data Store (CDS) is enabled during installation of Application Performance Analyzer, users have the ability to create and maintain a common list of source information data sets (for languages other than Java) that is unique to each instance of Application Performance Analyzer. The common data set list is shareable by all users of the Application Performance Analyzer instance. It is accessed from the ‘A05: Source Mapping Common List’ panel. All users may view the common list and authorized users may update the common list. When Application Performance Analyzer is searching for program source, it will search the user’s personal list as defined in the ‘A04: Source Mapping Dataset List’ panel first, and if not found, then search the common list.

For languages other than Java

When you specify source program mapping files, many reports allow you to enter a “P” line command to view the program source associated with that entry in the report. The “P” line command is available on many object types: CSECTs, DB2 SQL statements, CICS commands, etc. The data is displayed in the P01: Source Program Attribution report. This report can also be included in a print request.

The ‘P’ line command

When you enter the ‘P’ line command, Application Performance Analyzer first checks if the source is loaded. If it is, the source is displayed in the P01: Source Program Attribution report.

If the source is not loaded, your A04: Source Mapping Dataset List is searched for the source member. If no source member is found in any of the data sets, the common list as defined in A05: Source Mapping Common List is searched. If no source member is found in any of the data sets in the list, the A01: Source Program Mapping panel is displayed, allowing you to enter the source mapping information for the current observation session.

When one or more source members are found in your A04: Source Mapping Dataset List or the A05: Source Mapping Common List, the behavior of Application Performance Analyzer depends on whether or not you requested to match the compile date and time. When you request to not match the compile

date and time, the first instance of a source member is loaded regardless of its date and time and the source is displayed in the P01: Source Program Attribution report.

When you request to match the compile date and time, the first source member found that matches the load module compile date and time is loaded and the source is displayed in the P01: Source Program Attribution report.

If none of the source members match the compile date and time, a pick list of datasets that contain the source member is displayed in the A011: Source Programming Mapping Pick List panel. When you select one of these source members, it is loaded and you are returned to the report from which you entered the 'P' line command. You must then re-enter the 'P' line command to display in the P01: Source Program Attribution report.

The 'P' line command for COBOL with DWARF

When a COBOL program is compiled with the TEST option, the DWARF debugging information (which includes the source) is embedded in the load module. When you enter the 'P' line command against such a program, Application Performance Analyzer recognizes that the DWARF debugging information is available in the load module, and loads the source directly from that load module. The source is displayed in the P01: Source Program Attribution report.

This feature requires READ access to the dataset in which the corresponding load module resides. The Common Data Store is not used for COBOL with DWARF, nor is the A01 Source Program Mapping panel. As an alternative to DWARF, the COBOL compile listing may be used for source mapping in the usual manner.

This feature requires access to the TZ environment variable. The CONFIG BASIC TZ setting must be configured with appropriate values during the installation of Application Performance Analyzer. Contact your system programmer to verify the TZ environment variable is configured in Application Performance Analyzer.

The 'P' line command for C/C++ (without timestamp match)

When you enter the 'P' line command, Application Performance Analyzer first checks if the source is loaded. If it is, the source is displayed in the P01: Source Program Attribution report.

Typically, source mapping for C/C++ programs is dependent on an exact match between the listing timestamp and the CSECT timestamp generated at compile time. A recompiled C/C++ source listing cannot be loaded directly from the A01, A04 or A11 panels. In some cases, this function is required when the source listing that matches the compiled program is not available. To accommodate this situation, Application Performance Analyzer will allow a listing to be loaded for a specific CSECT with no timestamp matching. You must enter the 'P' line command on a CSECT in one of the supporting reports. You are then directed to the A01: Source Program Mapping panel where you specify the listing to be loaded. This listing will then be loaded and related to the CSECT selected, without timestamp checking, and you are returned to the report. You must then re-enter the 'P' line command to display the P01: Source Program Attribution report.

For Java

When you specify source program mapping files for Java, the program source is viewed in the detail windows in the Java reports, rather than by using the "P" line command. The detail window from a Java Line Number contains Java source mapping information. This detail window is displayed by entering the "++" command (or the Enter key) on the Java Line Number.

Using DWARF debug files

If C/C++ programs are compiled with DWARF, you can source map the programs by using DWARF debug files. To source map, you need to specify the "P" line command on a CSECT object in the various CPU reports. This displays the P04: DWARF Source Lines report. In the P04 report, you can use the "P" line command again on a source line object in order to display the P03: DWARF Source Program Attribution report.

You can also go directly to the P03 DWARF Source Program Attribution report (without going through the P04 report), by using the "P" line command on an object code address report line in the C03 report, or an attribution offset line in the W03 report.

The debug file is located within the CSECT for the compiled program. Application Performance Analyzer can extract the debug file name from the executable program during sampling. Therefore, you do not need to identify the debug file via the A01 panel for source mapping. However, Application Performance Analyzer can only extract information from an executable USS file if Application Performance Analyzer can locate the file during sampling. If the USS program is executed by using a relative path name, you must specify the directory in which the executable program can be found. You specify the directory in the Options panel (panel 2) when you create the request.

A01 - Source program mapping panel

Overview

This panel allows you to specify and manage associations between source program mapping (SPM) files and observation sessions. Application Performance Analyzer's SPM feature allows measured addresses to be mapped to their corresponding source program statements. You must identify SPM files for each of the observation sessions that use this feature. An SPM file can be sequential or a member in a partitioned data set.

It can be one of the following file types:

- A listing produced by the compiler (COBOL, C, OR C++)
- An ADATA (Associated Data) file produced by High Level Assembler
- A SYSDEBUG file (COBOL or PL/I)
- A side file member produced by the CAZLANGX utility
- A side file member produced by the IPVLANGO utility (for COBOL modules that have been optimized by the Automatic Binary Optimizer for z/OS product).

The SPM files can be retrieved from:

- A PDS(E) or sequential file
- A third party listing (if your installation has enabled support for this)

This panel consists of two sections:

1. An input area in which you can specify an SPM file name and type.
2. A report area in which existing SPM file associations are listed.

A sample Source Program Mapping panel is shown here:

```

File  View  Navigate  Help
-----
A01: Source Program Mapping (1972/TSTJ0B01)          Row 00001 of 00058
Command ===> _____ Scroll ===> CSR

Enter the following information to specify a source mapping file to be
used in the analysis of this measurement information.

File type . . . . _ (L=listing, A=ADATA, S=LANGX SideFile, D=SYSDEBUG)
Data set name . . _____
                    (Leave blank to search A04 dataset list)
Member name . . . _____ Match on Compile Date & Time  Y

Seqn ID-ReqNum Type/Status Lang Member DSN
0001 FF21-00002 L-Inact   ASM  CAZC0010 BNPFF2100B.LISTINGS
0002 DEM0-00003 L-Inact   ASM  BKNC0120 BN00.TSTP.LISTINGS
0003 DEM0-00004 L-Inact   COB  CAZC0B01 USER1.TSTP.LISTINGS
0004 DEM0-00005 L-Inact   COB  SAMCAZ03 USER2.CICS.LISTINGS

```

Another sample Source Program Mapping panel is shown here. Support for third-party listings has been enabled.

```

File View Navigate Help
-----
A01: Source Program Mapping (1971/TSTJOB01) Row 00001 of 00058
Command ==> ----- Scroll ==> CSR

Enter the following information to specify a source mapping file to be
used in the analysis of this measurement information.

File type . . . . - (L=listing, A=ADATA, S=LANGX SideFile, D=SYSDEBUG)
Repository. . . . - (T=Third Party, O=Other)
Data set name . . -----
                    (Leave blank to search A04 dataset list)
Member name . . . ----- Match on Compile Date & Time Y

Seqn ID-ReqNum Type/Status Lang Member DSN
0001 FF21-00002 L-Inact ASM CAZC0010 BNPFF.FF2100B.LISTINGS
0002 DEM0-00003 L-Inact ASM BKNC0120 BN00.TSTP.LISTINGS
0003 DEM0-00004 L-Inact COB CAZCOB01 USER1.TSTP.LISTINGS
0004 DEM0-00005 L-Inact COB SAMCAZ03 USER2.CICS.LISTINGS

```

File specification input area

In this area, you enter information about an SPM file to be associated with the current observation session. The fields are described below, but these might vary depending on your installation.

File type

Specify L for a compiler listing file, A for an assembler ADATA file, S for a LANGX SideFile, or D for a SYSDEBUG file.

Source information files are supported for the following language versions:

COBOL:

- PP 5740 OS/VS COBOL
- PP 5668-958 VS COBOL II
- PP 5688-197 COBOL for MVS/VM
- PP 5648-A25 COBOL for OS/390/VM
- PP 5655-G53 Enterprise COBOL V3
- PP 5655-S71 Enterprise COBOL V4
- PP 5655-W32 Enterprise COBOL V5
- PP 5655-EC6 IBM Enterprise COBOL for z/OS V6

PL/I:

- PP 5655-H31 Enterprise PL/I for z/OS v3 (LANGX side files only)
- PP 5655-W67 Enterprise PL/I for z/OS v4 (LANGX side files & SYSDEBUG)
- PP 5655-PL5 Enterprise PL/I for z/OS v5 (LANGX side files & SYSDEBUG)

C/C++:

- PP 5694-A01 z/OS C/C++ V1.20 and above

For complete information on compiler options, refer to [“Required compiler options for creating listings or CAZLANGX side files”](#) on page 711.

Repository

T for a third party repository, or O for any other type, such as a PDS or sequential data set.

Data set name

Specify the name of the sequential or partitioned data set containing the SPM file. Your TSO Prefix will be added as the first qualifier if you enter a name without quotes.

If this field is left blank, the A04 Source Map Dataset List is searched for the member name specified.

Member name

Include the member name if the data set is partitioned.

A member name is required for SYSDEBUG even if the file is being loaded from a sequential file.

Match on Compile Date and Time

Specify 'Y' for Yes if you want the compile date and time of the source to be matched to the date and time in the matching CSECT in the measurement data. This feature only works with LE compliant modules.

If you use this feature in conjunction with a blank dataset name, your A04 Source Mapping Dataset List is searched for a source module with a compile date and time matching the CSECT. If one is found, it will be loaded. If matching source members are found, but none have the correct date and time stamp, you are given a Pick List of datasets and you can choose to use one of these.

If you specify 'N' for No in conjunction with a blank dataset name, the first instance of a matching source member in your A04 Source Mapping Dataset List is loaded, regardless of its date and time.

The behavior of this setting applies only to non C/C++ Source Map datasets. For C/C++, the field is ignored. C/C++ source mapping always requires a date/time match.

List of existing SPM file associations

This section shows a scrollable list of existing associations between SPM files and observation sessions. These SPM associations are “private” to your own TSO userid and are recorded in your TSO profile. Each TSO user needs to set up his or her own SPM information.

Any entries for file associations applicable to the current observation session will appear at the top of the list. The value under the ID-ReqNum field will be displayed in red to indicate this.

Fields displayed in the File Association List are described here:

Seqn

This is simply the line number of the entry. Line commands can be entered to this field.

ID-ReqNum

This shows the observation session request number with which the SPM file is associated. The request number is prefixed by the Application Performance Analyzer identifier.

Type/Status

This indicates the type of SPM file and whether the mapping information has been “loaded” (available for use). “L” indicates a compiler listing file, “A” indicates an assembler ADATA file, “S” indicates a LANGX SideFile, and “D” indicates a SYSDEBUG file.

Lang

The source program language is shown here: ASM, C, C++, COB, or PLI.

Member

The member within a partitioned data set is shown here. This field is blank if the data set is non-partitioned.

DSN

The data set name of the SPM file is shown here.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	Seqn	Display context help information.
++	Seqn	Show additional details.
C	Seqn	Copy this SPM file association to the current observation session.
D	Seqn	Delete this entry.
L	Seqn	Load this SPM file and bind it to the current observation session.
F	Seqn	Fill the input fields with the values for this SPM file association

A03 - Java source program mapping panel

Overview

This panel allows you to specify information needed by the Source Program Mapping (SPM) feature for Java programs.

During the measurement, the measurement task determines and records source file names for each of the Java classes in which execution is observed. However, the source file names are not fully qualified. Use this panel to specify sequences of file name prefixes that will be concatenated as high level qualifiers to the captured source program file names in order to form fully qualified HFS path names.

The A03 panel lets you save a set of file name prefixes in an ordered list. Each name in the list is assigned a search sequence ("SrchSeq"): 01, 02, 03, etc.

Note: It is helpful to think of the file name prefixes as directory names, and think of stored Java class source file names as files within these directories. Using this analogy, SPM tries to locate a Java class source file by searching each of these directories. It searches the directories in the sequence (01, 02, 03, etc.) indicated by the SrchSeq value.

You can store a default, global list of prefixes and you can store a list for a specific measurement. When attempting to resolve file names, SPM will search the directories specified for the particular measurement first, and then it will search the global list.

If you enable Application Performance Analyzer for jar file source mapping support, the directories specified in the A03 panel are searched for jar files when you attempt to find the Java class source file. If a standalone Java source file is not found in a directory, any jar files in that directory would be searched for a matching Java source file. The jar files must be encoded in UTF-8 format. If you add Java source encoded in EBCDIC to a jar file, the source would not be extracted in readable form. Jar support is provided primarily for applications that are developed on workstations, such as WebSphere applications. Contact your system programmer to verify whether jar file support is enabled.

The Java source program mapping panel consists of two sections:

1. An input area in which you specify a file name prefix to be added to a list, and an option specifying whether you are working with the global (default) list or the list for the current measurement.

2. A scrollable list of file name prefixes. The list you are working with (current measurement or default) appears at the top of the list.

A sample Java source program mapping panel is shown here:

```

File View Navigate Help
-----
A03: Java Source Program Mapping (7544/JVMTST01)          Row 00001 of 00007
Command ==> ----- Scroll ==> CSR

Enter "/"
/   To work with file name prefix list for curent measurement. Blank
    for global (default) file name prefix list.

Enter new HFS path name prefix to be added (up to 150 characters)
-----
-----
Seqn  ID-ReqNum  SrchSeq  Path Name
0001  SST -07544  01      /u/java/src
0002  SST -07544  02      /u/jtest/pathOne
0003  SST -07537  01      /u/jtest/pathThree/security/Section/src
0004  SST -07537  02      /u/java/src
0005  SST -07537  03      /u/jtest/pathFive/development/source
0006  SST -07537  04      /u/jtest/pathFour
0007  SST -07537  05      /u/jtest/pathTwo/alphaAlpha/bravoBravo/charlieCharli

```

File prefix specification input area

Specify either '/' or blank in the option field to indicate whether you want to work with the file prefix list for the current measurement or with the global (default) file prefix list.

To add a new file name prefix to the selected list, enter the prefix name in the two line input field. A prefix name can have up to 150 characters. The name will be added to the end of the ordered list, which means it will be assigned the highest SrchSeq value.

Detail lines

This area is scrollable. Each detail line displays a file name prefix, which are organized by ordered-list groups.

Under Heading	This is Displayed
Seqn	A sequence number indicating the detail line's position in the entire scrollable list. This field accepts line commands. Enter "/" to display a line command menu for this field.
ID-ReqNum	The name of the measurement task and the request number of the measurement to which the file prefix applies. A value of 00000 appears for the request number if the path name is part of the default list and applies globally.
SrchSeqn	A value indicating the relative sequence in which the file prefix is applied. SrchSeq values for an ordered list begin with 01 and appear in sequence (01, 02, 03, etc.). The maximum value is 99.
Path Name	The file path name prefix. Do not end this name with a forward slash (/) if your Java source is stored in jar files.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a "/" on any input field to open a menu of line commands available for that field.)

on objects

Cmd	When Applied To	Action
?	Seqn	Display context help information.
D	Seqn	Delete the entry.
H	Seqn	Move higher in search order.
L	Seqn	Move lower in search order.
S	Seqn	Copy path name to input field.

Java report detail window

Once the Java source program mapping details have been entered in the A03 panel, the source can be viewed in the detail windows of the Java reports. Display the detail window by entering the “++” line command (or enter key) on the Java Line Number object in the Java report.

A sample Java report detail window with source mapping is shown here:

```

File View Navigate Help
-----
+----- The following report line was selected -----+
|      → 00817   line # 817           0.33           |
+-----+
Package Name      java/lang
Class Name        String
Method Signature  charAt(int) char
Source File Name  /u/java/src/java/lang/String.java

LineNo Source Statement
00814      *                string.
00815      */
00816      public char charAt(int index) {
00817          if ((index < 0) || (index >= count)) {
00818              throw new StringIndexOutOfBoundsException(index);
00819          }
00820          return value[index + offset];
00821      }
00822
00823      /**
00824       * Copies characters from this string into the destination char
00825       * array.

```

A04 - Source mapping dataset list

Overview

This panel allows you to specify a list of dataset names that Source Program Mapping (SPM) will use to search for a source program. The datasets will be searched in the specified order. The list is saved in the common data store, if enabled, otherwise it is saved in your ISPF profile. The list is searched when the 'P' line command is entered and when you do not specify a dataset name in the A01 Source Program Mapping panel.

A sample panel is shown here:

```

File View Navigate Help
-----
A04: Source Mapping Dataset List (1068/TSTJOB01)          Row 00001 of 00020
Command ==> _____ Scroll ==> PAGE

Specify up to 20 listing repository datasets. These will be searched
when the P line command is entered or on the A01 panel when you leave
the dataset name blank on a new entry.

Match on Compile Date & Time      Y

Seqn  File Type Repository  Dataset Name
0001   S      0          USR1.IDILANGX
0002   L      0          USR1.COBO.LISTING
0003   D      0          USR1.TST.COBO.L.DEBUG
0004   A      0          USR1.ADATA
0005   -      -
0006   -      -
0007   -      -
0008   -      -
0009   -      -
0010   -      -
0011   -      -
0012   -      -
0013   -      -
0014   -      -
0015   -      -
0016   -      -
0017   -      -
0018   -      -
0019   -      -
0020   -      -

```

Match on Compile Date & Time description

The value entered here applies to all entries in the dataset list. Specify 'Y' for Yes if you want the compile date and time of the source to be matched to the date and time in the matching CSECT in the measurement data. Specify 'N' for No if you want the source to be loaded regardless of its date and time. For more details, refer to [“Match on Compile Date and Time” on page 617](#).

Dataset list description

A scrollable list of up to 20 dataset names can be maintained here. Each row in the list consists of four parts: a sequence number, a file type, a repository and a dataset name field. These fields are described below.

Seqn

A sequence number indicating the detail line's position in the list. This field accepts line commands to Move, Insert, and Delete. To display a line command menu for this field, enter / .

File type

Specify L for a compiler listing file, A for an assembler ADATA file, S for a LANGX SideFile, or D for a SYSDEBUG file.

Repository

Specify T for a third party repository, or O for any other type.

Dataset name

The name of the dataset to be searched. This is an input field where you specify a fully qualified dataset name. The name must not be enclosed in quotes.

Commands to save and edit

This panel supports a limited set of ISPF Edit type line commands. The commands supported are listed below. (Block moves are not supported).

I

Insert

- D**
Delete
- M**
Move
- A**
After

PF3 or the END command saves the list and terminates the dialog, but you must press Enter first to record any changes. The CANCEL command terminates the dialog without saving any changes.

A05 - Source mapping common list

Overview

This panel allows you to specify a common list of dataset names that Source Program Mapping (SPM) uses to search for a source program. This list is common to all users, and is searched in the specified order when the 'P' command is used, and a source match is not found in the user's personal dataset list as defined in their A04: Source Mapping Dataset List panel. The list is saved in the common data store, and can be maintained by any user with AdministerProduct authorization. Users without AdministerProduct authorization can view the list, but update operations are disabled. For details on setting up AdministerProduct authorization, refer to Chapter 2 of the *Application Performance Analyzer for z/OS Customization Guide*.

When datasets in the common list are searched, the user's setting for 'Match on Compile Date & Time' as defined in their A04: Source Mapping Dataset List panel is used. By default, Application Performance Analyzer will not search for an exact match on compile date and time.

A sample panel is shown here:

```

File View Navigate Help
-----
A05 - Source Mapping Common List (0002/TSTJOB)          Row 00001 of 00050
Command ==> _____ Scroll ==> CSR

Specify up to 50 listing repository datasets to be used as a common
list of datasets for all users when source mapping.

Seqn  File Type Repository  Dataset Name
0001   L      0          COMMON.COBOL.SOURCE
0002   S      0          COMMON.PLI.IDILANGX
0003   A      0          COMMON.ADATA
0004   -      -          _____
0005   -      -          _____
0006   -      -          _____
0007   -      -          _____
0008   -      -          _____
0009   -      -          _____
0010   -      -          _____

```

Dataset list description

A scrollable list of up to 50 dataset names can be maintained here. Each one in the list consists of four parts: a sequence number, a file type, a repository, and a dataset name field. These fields are described below.

Seqn

A sequence number indicating the detail line's position in the list. This field accepts line commands to Move, Insert, and Delete. To display a line command menu for this field, enter / .

File type

Specify L for a compiler listing file, A for an assembler ADATA file, S for a LANGX SideFile, or D for a SYSDEBUG file.

Repository

Specify T for a third party repository, or O for any other type.

Dataset name

The name of the dataset to be searched. This is an input field where you specify a fully qualified dataset name. The name must not be enclosed in quotes.

Commands to save and edit

This panel supports a limited set of ISPF Edit type line commands. The commands supported are listed below. (Block moves are not supported).

I

Insert

D

Delete

M

Move

A

After

PF3 or the END command saves the list and terminates the dialog, but you must press Enter first to record any changes. The CANCEL command terminates the dialog without saving any changes.

A011 - Source program mapping pick list

Overview

This dialog is displayed by the 'P' line command and the A01 Source Program Mapping panel. It is displayed when you have requested that your SPM dataset list be searched for a source member with a compile date/time match, but no date/time match can be found. A list of datasets containing members which match the SPM mapping request, but not the date and time, is presented in the Pick List.

From this list you can select (pick) an SPM dataset that you wish to use for source mapping purposes. After selecting an SPM dataset and pressing Enter, the selected SPM dataset and member will be loaded and bound to the current observation session. Also, when displayed from the A01 Source Program Mapping panel, a new row is added to the A01 SPM list reflecting this addition.

A sample pick list panel is shown here:

```
File View Navigate Help
-----
A011: Source Program Mapping Pick List (2399/TSTJOB01)      Row 00001 of 00002
Command ==> _____ Scroll ==> CSR

Member Name: LPFRAYVS
Load Module: LPFRAYVS CSECT: LPFRAYVS
Observed Compile Date and Time: n/a

Seqn  Dataset Name                      Compile Date and Time
0001  USR1.TST.COBOL.LISTING2          2006/01/30 07:09:05
0002  USR1.TST.COBOL.LISTING5          2006/01/30 11:16:09
0003  USR1.TST.COBOL.LISTING7          2007/07/02 13:21:29
0004  USR1.TST.COBOL.LISTINGE          2006/04/17 16:45:02

\+-----+
| No match found. Select a dataset from the list and press Enter, or press PF3 |
| to return to the previous panel without a selection. This Pick List is      |
| displayed because you specified a blank dataset name and 'Match on Compile   |
| Date & Time', but no date and time matches were found for this member in    |
| your list of datasets.                                                       |
+-----+
```

Field descriptions

Member name

The source member name.

Load module

The load module name that matched the source member and the measurement.

CSECT

The CSECT name that matched the source member and the measurement.

Observed compile date and time

The date and time extracted from the LE entry point for the CSECT. This is only available for LE compliant modules.

Pick list description

This lower section of this panel is a scrollable list. Each row in the list consists of three fields: a sequence number, a dataset name, and compile date & time. These fields are described below.

The Select line command allows you to select the SPM dataset you want to use. When this dialog is displayed from the A01 Source Program Mapping panel, after selecting a dataset and pressing Enter, the selected dataset is loaded and added to your list of SPM file associations and you are returned to the A01 dialog. When this dialog is displayed from the 'P' line command, the source member from the selected dataset is loaded and after pressing Enter, you are returned to the report from which you entered the 'P' line command. You must then re-enter the 'P' line command to display in the P01: Source Program Attribution report. In either case, press PF3 to return without making a selection.

Seqn

A sequence number indicating the detail line's position in the entire scrollable list. This field accepts the 'S' (Select) line command.

Dataset name

The name of the SPM dataset containing the SPM data for the CSECT found in the current observation.

Compile Date and Time

The date and time when this SPM member was created (compiled).

P01 - Source program attribution

Overview

This report maps measured CPU activity to its corresponding source program statements. You use the "P" line command, on an eligible line command field, to launch this report. (See the individual Performance Analysis reports to determine which lines allow the "P" command.) Source statements from a single compile (or assembly) unit are shown. Depending on the selected SETUP options, all or part of the source program is shown. A count value is shown for statements in which CPU activity was measured; each count value indicates the number of times execution in the statement was observed. Optionally, depending on a SETUP option, the counts are also shown graphically.

This report also shows attribution of CPU usage measured in system modules referred back to the points of invocation in application modules ("Referred Attribution"). This referred attribution line is displayed directly under the source statement, and is displayed in pink.

A sample report is shown here with the graphics option turned off.

```

File View Navigate Help
-----
P01: Source Program Attribution (0453/TSTJOB01) Row 00001 of 00043
Command ==> ----- Scroll ==> CSR

LineNo Offset Count Source Statement
000120
000121          *- - - - -
000122 00034A          Open Input  DataFile1
          9  <- CPU time attributed to above statement
000123
000124 00036C          If DataFile1-file-status-ok
000128          End-If
000129
000130 000388          Open Output  DataFile2
          7  <- CPU time attributed to above statement
000131
000132 0003A6          If DtaFile2-file-status-ok
000167          *- - - - -
000168
000169 0004B0          2      Read DataFile1
000170          At End
000171 0004F4          Set DataFile1-eof To True
000186 00050A          Move dataRecord to dataRecordCopy
000187
000188 000510          8      Perform until Char-Column > 80
000189
000190 000524          If dataChar(Char-Column) Not = Space
000193 00056C          Move 1 to Word-Length(Word-Count)
000194
000195 000582          6      Perform until dataChar(Char-Column) = Spac
000196          or Char-Column > 80
000197 0005AE          Add 1 to Char-Column
000229 00066A          Move Word-Length(Word-Subscript1) to ws-Word-
000230
000231 000688 735      Perform until Word-Updated or

```

```

File View Navigate Help
-----
P01: Source Program Attribution (0453/TSTJOB01) Row 00001 of 00043
Command ==> ----- Scroll ==> CSR

LineNo Offset Count Source Statement
000169 0004B0          2      Read DataFile1
000170          At End
000171 0004F4          Set DataFile1-eof To True
000186 00050A          Move dataRecord to dataRecordCopy
000187
000188 000510          8      Perform until Char-Column > 80
000189
000190 000524          If dtaChar(Char-Column) Not = Space
000193 00056C          Move 1 to Word-Length(Word-Count)
000194
000195 000582          6      Perform until dataChar(Char-Column) = Spac
000196          or Char-Column > 80
000197 0005AE          Add 1 to Char-Column
000229 00066A          Move Word-Length(Word-Subscript1) to ws-Word-
000230
000231 000688 735      Perform until Word-Updated or
000232          Word-Subscript2 > Total-Word-Co
000233
000235 0006D0          Move Word-Length(Word-Subscript1) to ws-Wo
000236
000237 0006EE          49      If All-Word-Value(Word-Subscript2) =
000238          dataRecordCopy(ws-Word-Column:ws-Word-L
000239 000730          Add 1 to All-Word-Count(Word-Subscript2)
000249 00079E          Move Total-Word-Count to Word-Subscript2
000250 0007A8          Move 1 to All-Word-Count(Word-Subscript2)
000251 0007C2          15      Move dataRecordCopy(ws-Word-Column:ws-Word
000252          to All-Word-Value(Word-Subscript2)
000253          End-If

```

Code segments

The reported CPU activity depends on the item upon which the “P” line command was entered to launch this report. Only the CPU activity which was aggregated to quantify that item is included in the source

mapping report. If, for example, this report was launched from an item on the CPU Usage by Code Slice report, then only activity for the range of addresses in the selected “slice” is reflected in the source statement counts. Statements outside such a selected address range are displayed in blue, while those within the range appear in green.

Detail line descriptions

LineNo

This field displays a 6 digit sequence number corresponding to the source statement line position. The sequence values begin at 000001 and increase by 1 for each statement. Gaps in the sequence occur if SETUP options are chosen resulting in some statements being omitted from the report. This field is also an input field and accepts line commands.

Offset

This field contains the hexadecimal offset of the object code associated with the source statement. The offset is relative to the beginning of the CSECT (Control Section). Blanks are shown here if there is no object code address associated with the statement (comments, continuations, non-procedural statements, etc.).

Count

The number of times execution was observed at the statement is shown here, or blank if no execution was measured. The maximum value is 9999. Values exceeding 9999 are shown as 9999+.

Source statement

The source program statement is shown here. For an assembler program, you can select a SETUP option to choose whether to show only the 80 byte source statement or to show the full assembly listing format (including offset, object code etc.)

Header information

A SETUP option can be selected to display information about the mapped program in the heading section of each page. This information includes: load module name, load library name, CSECT name, source mapping file name, compile date/time, and code segment address range (when applicable). It is usually preferable to turn off this option as it occupies several lines at the top of the screen.

SETUP options

Enter the SETUP primary command to select options for this report. The following pop-up window will be displayed:


```

File View Navigate Help
- +-----+-----+
P | Options for Source Program Mapping                                001 of 00068
C |                                                                    11 ==> CSR
L | Nbr of adjacent lines to display . . . . 2
  |   This specifies the number of statements
  |   without measured activity to be displayed
  |   before/after lines with activity.
0 |
0 |
0 | Enter "/" to select an option
0 |   - Display ALL statements of the source program.
0 |     (otherwise only those at or near statements
0 |       with measured activity are displayed.)
0 |   - Include assembler object code.
0 |     / Show statement count graphically.
0 |   - Show detailed information in heading.
0 |   - Show C/C++ pseudo-assembly.
0 |   - Display values as a percent.
0 |     (Not applicable to all reports)
0 |
0 |                                                                    pace
- +-----+-----+

```

Number of adjacent lines to display

Use this parameter to control how many adjacent source lines you would like to see on either side on a source line with activity. This is used to give context to the active source lines displayed. This parameter is ignored if you turn on the Display ALL statements option.

Display ALL statements

Choose this option if you would like to see the entire source program. Otherwise, only source statements with activity, or statements adjacent to statements with activity are included.

Include assembler object code

Use this option to choose whether to show only the 80 byte source statement or to show the full assembly listing format (including offset, object code etc.). This is for Assembler programs only.

Show statement count graphically

This option will cause a graph to be displayed on top of the source statements, indicating how much activity each active source statement has.

Show detailed information in heading

This option will cause detailed information about the source program to be displayed. This includes the load module, name of library it was loaded from, the CSECT, the source mapping file name, compiler name, and compile date and time.

Show C/C++ pseudo assembly

This option will cause pseudo-assembly for C/C++ programs to be displayed.

Display values as a percent

This option will cause the values for the source statement to be displayed as a percentage (instead of a count). This is only applicable when you are source mapping from a report which shows percentages.

Detail window

You can enter “++” (or the Enter key) on any line to display a pop-up window containing additional information.

A sample detail window for this report is shown here:

```

File View Navigate Help
-----
Source Statement Information
    Perform until Char-Column > 80
CSECT Name:      COB01
Offset:          000510
Object Code Size: 20 bytes
Activity Count:   8 times

Module Information for COB01
Load Address      08B00B38 to 08B01FFF
Module Size       5,320
Attributes        REUS,NORENT,APFLIB
Module Location   JPA
Loadlib DDNAME    STEPLIB
Load Library      BNPF.UTIL.LOADLIB

ESD Information for COB01
External Offset  Length  Start Addr  End Addr
COB01 000000    4152    08B00B38    08B01B6F
IGZEBST 001038    1168    09B01B70    08B01FFF

```

P03 - DWARF Source Program Attribution

Overview

The P03 report is used for source mapping DWARF programs. It requires the programs to have debug files in the ELF/DWARF format associated with them.

This report maps measured CPU or Wait activity to its corresponding source program statements. Use the “P” line command, on an eligible line command field (see below), to launch this report. Source statements from a single compile unit are shown. A count or percent value is shown for the statement selected in which CPU activity was measured; the count value indicates the number of times execution of the statement was observed. A percent value shows the percent as calculated on the report. Optionally, depending on a SETUP option, the counts are also shown graphically.

A sample report is shown here.

```

File View Navigate Help
-----
P03: DWARF Source Program Attribution (0539/JVMTST01)      Row 00028 of 00047
Command ==> _____ Scroll ==> PAGE

LineNo Count Source Statement
-----
000028                l = i + m;
000029                /*      printf(" a[I]=%d a[L]=%d

000030                c++;
000031 120                if (a[i-1] <= a[l-1]) {
000032                    i = 0;
000033                } else {
000034                    t = a[i-1];
000035                    a[i-1] = a[l-1];
000036                    a[l-1] = t;
000037                    i = i - m;
000038                    s++;
000039                }
000040                }
000041                j += 1;
000042                }
000043                m = m >> 1;
000044            }
000045            printf(" iterations=%d swaps=%d
000046        }

```

Eligible line commands

The P03 report can be launched with a “P” line command from one of the following:

- A DWARF Source Line in the P04: DWARF Source Lines report
- An object code address report line in the C03 report
- An attribution offset line in the W03 report

Detail line descriptions

Table 8. Detail Line Descriptions	
Under Heading	This is Displayed
LineNo	This field displays a 6 digit sequence number corresponding to the source statement line position.
Count	The number of times execution was observed at the statement is shown here. The maximum value is 9999. Values exceeding 9999 are shown as 9999+.
Prcnt	If the percent option has been selected in the SETUP for source mapping, the values for the statement are displayed as a percentage. This percentage is the same as percent shown on the report for that line item.
Source Statement	The source program statement is shown here.

Header information

A SETUP option can be selected to display information about the mapped program in the heading section of each page.

Table 9. Mapped Program Header Information	
Under Heading	This is Displayed
Debug file	This is the absolute path name of the DWARF debug file that was generated by the compiler for the selected CSECT (Control Section).
Debug file date	This is the current file modification date and time of the DWARF debug file. A zero value indicates that the date is unknown.
Compile date	This is the date and time that the CSECT was compiled, as recorded in the executable program. If the current file modification date and time of the debug file differs from the compile date and time by more than 1 minute, a warning is displayed.
Source file name	This is the absolute path name of the source file that contains the requested source statement line.
Source file date	This is the current file modification date and time of the source file. A zero value indicates that the date is unknown.

Table 9. Mapped Program Header Information (continued)	
Under Heading	This is Displayed
Source compile date	This is the date and time that the source file was compiled, as recorded in the DWARF debug file. If the current file modification date and time of the source file is not the same as the compile date and time, a warning is displayed. A zero value indicates that the date is unknown.

SETUP options

The following SETUP options can be selected with the SETUP primary command:

Show statement count graphically

This option will cause a graph to be displayed on top of the source statements, indicating how much activity each active source statement has.

Show detailed information in heading

This option will show the following additional header fields: Debug file, Debug file date, Compile date, Source file name, Source file date, and Source compile date.

Display values as a percent

This option will cause the values for the source statement to be displayed as a percentage (instead of a count). Not applicable to all reports.

P04 - DWARF Source Lines

Overview

The P04 report is used for mapping source lines in DWARF programs. It requires the programs to have debug files in the ELF/DWARF format associated with them.

This report maps measured CPU or Wait activity to specific source lines within a CSECT. Use the "P" line command, on an eligible line command field, to launch this report. Source statements from a single compile unit are shown. A percent value is shown for source statements in which CPU activity was measured. A "P" command can be entered on the LineNo field to see the source for that line.

A sample report is shown here.

```

File View Navigate Help
-----
P04: DWARF Source Lines (0539/JVMTST01) Row 00001 of 00017
Command ==> _____ Scroll ==> CSR

Debug file name      /u/aif04/xcs5d.dbg
Debug file date      2007-11-12 15:13:11
Compile date         2007-11-12 15:13:10

LineNo  FileNo      Percent of CPU Time * 10.00% ±3.2%
          *...1...2...3...4...5...6...7...8...9...*

000031      1      12.77=====
000027      1       6.60 =====
000035      1       4.89  ==
000034      1       4.57  ==
000028      1       4.36  ==
000036      1       4.36  ==
000040      1       3.19  ==
000025      1       2.55  =
000030      1       2.44  =
000033      1       2.44  =
000041      1       2.34  =
000038      1       2.02  =
000037      1       1.91  =
000039      1       1.70  =
000032      1       1.38  =
000026      1        0.63
000042      1        0.53

```

Detail line descriptions

Table 10. DWARF Source Detail Line Descriptions	
Under Heading	This is Displayed
LineNo	This field displays a 6 digit sequence number corresponding to the source statement line number.
Fileno	This field contains the file number for the source module within the CSECT (Control Section).
Percent of CPU Time	Displays the percent of CPU active samples on this line number out of the total number of CPU active samples taken.

Header information

Table 11. DWARF Source Header Information	
Under Heading	This is Displayed
Debug file	This is the absolute path name of the DWARF debug file that was generated by the compiler for the selected CSECT (Control Section).
Debug file date	This is the current file modification date and time of the DWARF debug file. A zero value indicates that the date is unknown.
Compile date	This is the date and time that the CSECT was compiled, as recorded in the executable program. If the current file modification date and time of the debug file differs from the compile date and time by more than 1 minute, a warning is displayed.

Line commands

The line commands available in this report, and the objects and headings to which they apply, are summarized below. (You can enter a “/” on any input field to popup a menu of line commands available for that field.)

on objects

Cmd	When Applied To Object	Action
?	LineNo	Display context help information.
++	LineNo	Show additional details.
P	LineNo	Display source program mapping.

on headings

Cmd	When Applied To Heading	Action
?	LineNo	Display context help information.
SV	LineNo	Sort next level by value.

Detail window

You can enter “++” (or the Enter key) on any line to display a popup window containing additional information.

A sample detail window for this report is shown here:

```
File View Navigate Help
+-----+
+----- The following report line was selected -----+
| 000031      7      12.77 ===== |
+-----+

Calculation Details
CPU measurements          120
In the csect              .P000014
File Number               7
Line Number               31
Total CPU measurements    939
Percent of total          12.77%

000031          if (a[i-1] <= a[l-1])  {
```

Chapter 13. Printing reports and creating XML documents

This section explains how to produce Application Performance Analyzer performance analysis reports suitable for printing, or in XML document format suitable for further processing. You generate a printable report or an XML document, in batch, by submitting JCL. In most situations, you can use Application Performance Analyzer's ISPF-based report request facility which will generate and submit the JCL for you. This facility is discussed in the first two sections of this chapter. The remaining sections explain the JCL and control statements; these sections are of interest only if you intend to prepare the JCL and control statements manually.

For information about ...	See ...
The available options, and overall capabilities of the report printing facility	“About Application Performance Analyzer’s report printing and XML document feature” on page 633
Using Application Performance Analyzer’s ISPF-based report request facility	“Using the ISPF report request facility” on page 634
How to prepare JCL to produce reports	“Preparing JCL to print reports or create XML documents” on page 638
Control statements to specify report options	“Specifying control statements” on page 640
Producing, viewing and printing high-quality reports in PDF format	“Reports in PDF format” on page 644
Processing and transferring report data contained in XML document files	“Reports in XML document format” on page 644
The sections that you can include in a performance analysis report and how to specify them in SECTION control statements	“Report SECTION descriptions ” on page 644

About Application Performance Analyzer’s report printing and XML document feature

Most of the Application Performance Analyzer’s interactive performance analysis reports are available in format suitable for printing or in XML document format suitable for further processing. Application Performance Analyzer allows you to generate reports and XML documents by submitting JCL that executes the program CAZPRINT. You can use Application Performance Analyzer’s ISPF-based report request facility to build the necessary JCL and CAZPRINT control statements. Alternatively, you can manually prepare and submit your own JCL. CAZPRINT can produce report output in three different formats:

Line printer

The traditional FBA 121 character-per-line SYSOUT format.

PDF

Adobe Portable Document Format.

XML

Extensible Markup Language document format.

Line printer format

You would typically route line printer format as a JES SYSOUT file. You produce this by specifying a PRINT control statement. You specify a DD name in the PRINT statement and supply a DD statement

for that name. This is the most direct (and convenient) way of producing report output, but formatting is constrained by inherent line printer device limitations.

PDF format

PDF is the preferable format because it offers high quality printed output as well as advanced viewing capabilities. You produce a PDF file by specifying a CONVERT control statement. You specify a DD name in the CONVERT statement and supply a DD statement for that name which defines the output file. You then need to transfer the file to a PC platform on which you can view and print the report.

XML document format

When you wish to further process the report data, you can produce an XML document file. You produce an XML document file by specifying a CONVERT control statement. You specify a DD name in the CONVERT statement and supply a DD statement for that name which defines the XML document file. You may browse, edit or further process the XML document on the mainframe, or transfer it to another platform. XML documents are produced in the English language only.

Report sections

A single performance analysis report is comprised of a number of report Sections. A report section typically has a counterpart report in the ISPF reporting environment. For example, *C01: CPU Analysis by Category* is implemented as a single report in the ISPF environment and can be included as one section of a printed report. The same 3- character identifiers used to denote ISPF reports are used to denote report sections. You specify that a report section is to be included by supplying a SECTION control statement.

Using the ISPF report request facility

To request a batch performance analysis report or XML document using Application Performance Analyzer's ISPF facility, select an observation session item in the usual way – enter the “R” line command on the observation session list screen. Then, from the report selection menu, select A02.

A screen will then be displayed listing the available report sections that you can select to be included in the report or XML document.

An example of the A02 dialog is shown here.


```

File View Navigate Help
-----
A02: Request Printed Reports (00739/TSTJOB01) Row 00001 of 00036
Command ==> _____ Scroll ==> CSR

Enter / to include a section in the report or file, blank to exclude
the section,S to include the section and set formatting options.
Enter / to select all/category sections, D to deselect. Use UP/DOWN
(PF7/PF8) to scroll the list of report sections. After entering your
selections, press ENTER to generate the JCL.

Select      Report Section
-
-          ALL Available Reports
-
  /        ALL Statistics/Storage Reports
  /        S01 Measurement Profile
  /        S02 Load Module Attributes
  /        S03 Load Module Summary
  /        S04 TCB Summary
  /        S05 Memory Usage Timeline
  /        S06 Data Space Usage Timeline
  /        S07 TCB Execution Summary
  /        S08 Processor Utilization Summary
  /        S09 Measurement Analysis
  /        S10 Observation Session Messages

-          ALL CPU Usage Analysis Reports
-
  /        C01 CPU Usage by Category
  /        C02 CPU Usage by Module
  /        C03 CPU Usage by Code Slice
  /        C04 CPU Usage Timeline
  /        C05 CPU Usage Task/Category

```

You simply make your selections, press ENTER, and Application Performance Analyzer will build and submit the JCL. The selectable report sections—as illustrated above—include only those applicable to the selected measurement file. DB2 report sections, for example, will not appear as available selections if no DB2 data exists in the measurement file. By default, all the applicable reports are selected. However, if you prefer to have the previous selections “remembered”, you can request this using the SETUP primary command while you are in this panel.

Specifying formatting options

You can modify the format of some report sections by specifying formatting options. To do so, select the report section with the “S” line command instead of a slash (/) character. A pop-up window will appear in which you can modify the current option values.

If you enter more than one “S” line command, the formatting option pop-up window for only the first one encountered will appear; you should enter “S” line commands one at a time. The following illustrates the formatting options pop-up window, which will appear if you enter the “S” line command on the C01: CPU Usage by Category report section.

```

File View Navigate Help
+-----+
| A02: Report JCL Submission (00739/TSTJOB01) |
| Command ==> _____ Scroll ==> CSR |
|                                     More: + |
| Specify the following and press ENTER to either SUBMIT the JCL or to |
| launch EDIT for the generated JCL. |
| |
| Enter "/" to select options |
| / produce PDF (Portable Document Format) file |
| / generate JES-managed report file (SYSOUT=*) |
| _ produce XML (Extensible Markup Language) file |
| |
| / EDIT the generated JCL member, otherwise SUBMIT |
| |
| Job Statement - edit if necessary |
| ==> //USER1P___JOB_(), 'CAZRPT01', CLASS=A, MSGCLASS=T, NOTIFY=&SYSUID |
| ==> /*_____ |
| ==> /*_____ |
| ==> /*_____ |
| ==> /*_____ |
| |
| PDF File DSN (if applicable) |
| ==> 'USER1.PDF' |
| |
| XML File DSN (if applicable) |
| ==> 'USER1.XML' |
| |
| Location where generated JCL is to be saved |
| JCL Library ==> 'USER1.JCL' |
| JCL Member ==> CAZRPT1 |
+-----+

```

Modify the values and press the ENTER key and you will be returned to the report section selection dialog.

Application Performance Analyzer will “remember” the option values you specify. These will become your new default values and will be used for future printed report requests.

The JCL submission/EDIT dialog

Pressing ENTER to the report section selection dialog will take you to the JCL submission dialog – if you did not modify any input fields prior to pressing ENTER. The report section selection dialog will continue to display until you have pressed ENTER without having modified any input fields.

The JCL submission dialog is illustrated below. Pressing the ENTER key will cause the generated JCL to be submitted directly, or will launch EDIT for the generated JCL member. This dialog is illustrated here.

```

File View Navigate Help
+-----+
A02: Report JCL Submission (0464/TSTJOB01)
Command ==> _____ Scroll ==> CSR

Specify the following and press ENTER to either SUBMIT the print
JCL or to launch EDIT for the generated JCL.

Enter "/" to select options
/ produce PDF (Portable Document Format) file
/ generate JES-managed report file (SYSOUT=*)
- produce XML (Extensible Markup Language) file

- EDIT the generated JCL member, otherwise SUBMIT

Job Statement - edit if necessary
==> //USER1P_____JOB_(),'CAZRPT01',CLASS=A,MSGCLASS=T,NOTIFY=&SYSUID
==> //*_____
==> //*_____

PDF File DSN (if applicable) must be cataloged FB 80
==> USER1.FB80'

XML File DSN (if applicable) must be cataloged FB 255
==> _____

Location where generated JCL is to be saved
JCL Library ==> 'USER1.JCLLIB'
JCL Member ==> CAZRPT1
+-----+

```

Input to the JCL submission/EDIT dialog

Produce PDF file

Enter a slash (/) to select this option or a space to deselect it. CAZPRINT will write a file in downloadable PDF (Portable Document Format) file.

Generate JES-managed report file

Enter a slash (/) to select this option or a space to deselect it. CAZPRINT will write a standard SYSOUT format report file.

Produce XML file

Enter a slash (/) to select this option or a space to deselect it. CAZPRINT will write a file in XML (Extensible Markup Language) document format. This option cannot be selected when either the PDF file or the JES-managed report file options are selected.

EDIT the generated JCL

Enter a slash (/) if you want EDIT to be launched for the generated JCL member when you press the ENTER key. Blank in this field will cause the JCL to be SUBMITTED immediately when you press the ENTER key.

Job Statement

The generated JOB statement is shown. You can modify the statement to suit your preferences or to comply with your installation. Be aware, however, that no validation is done on your input; an input error can cause a JCL error when the job is submitted.

This JOB statement can be customized for your installation. For more information, see “Customizing CAZJCLCM for your installation” in the *Application Performance Analyzer Customization Guide*.

PDF File DSN

If you have specified that a PDF file is to be written, you must specify the DSN of the file in this field. The file must be a sequential dataset with fixed length 80 byte records. If the file is not pre-allocated and cataloged, Application Performance Analyzer allocates and catalogs it.

XML File DSN

If you have specified that an XML document file is to be written, you must specify the DSN of the file in this field. The file must be a sequential dataset with fixed or variable length 255 byte records. If the file is not pre-allocated and cataloged, Application Performance Analyzer allocates and catalogs it.

JCL Library

Enter the DSN of a JCL library. This is a partitioned data set in which the generated JCL member will be stored before it is submitted (or EDITed). If the dataset is not pre-allocated and pre-cataloged, Application Performance Analyzer allocates and catalogs it.

JCL Member

Enter the name of the JCL member here. If the member does not exist, Application Performance Analyzer creates it.

Source program mapping

The report section selection dialog displays one selectable line for the P01 Source Program Attribution report section for each applicable program. However, you must first load the source mapping data. For details on loading source mapping data, refer to [Chapter 12, “Source program mapping,” on page 613](#). Each P01 selection line displays the name of the source mapped program.

```
File View Navigate Help
-----
A02: Request Printed Reports (0464/TSTJOB01)          Row 00031 of 00035
Command ==> ----- Scroll ==> CSR

Enter / to include a section in the report, blank to exclude the section,
S to include the section and set formatting options. Use UP/DOWN (PF7/PF8)
to scroll the list of report sections. After entering your selection,
press ENTER to generate the report JCL.

Select    Report Section

/         P01 Source Program Attribution for SAMPFINQ
/         P01 Source Program Attribution for PFSAMPA
/         P01 Source Program Attribution for PFSAMPB
/         P01 Source Program Attribution for PFSAMPC
```

Preparing JCL to print reports or create XML documents

You have the option of manually preparing and submitting your own report JCL. The ISPF report request facility will meet most requirements, but by preparing your own JCL and control statements you can use the full formatting flexibility of the CAZPRINT program.

The following CAZPRINT capabilities that are not available directly by using the ISPF report request facility are available if you prepare your own JCL and control statements:

- Include multiple instances of the same report section in a single report. For example, you can include two instances of C01: CPU Usage by Category in your report. Having multiple instances allows you to sort reports using more than one category. For example, one can be sorted by VALUE (most intense CPU activity at the top) and another sorted by program NAME.
- Include report sections from different measurement files in a single report.
- Customize the sequence in which report sections appear in the report.

The following illustrates an example of JCL and control statements to produce a performance analysis report:

```
//CAZRPT01 JOB (job parameters)
//*
//STEP1 EXEC PGM=CAZPRINT
//STEPLIB DD DISP=SHR,DSN=hlq.SCAZAUTH
//SFILE01 DD DISP=SHR,DSN=measurement.file.name
//CAZLOG DD SYSOUT=*
//PRINT1 DD SYSOUT=*
//PDFFILE DD DISP=SHR,DSN=any.file
//*
/* Instream control statements.
/*
//CAZCTL DD *
*
* PROFILE 01 Input=SFILE01
*
* SECTION S01 Profile=01
```

```

SECTION S02 Profile=01
SECTION S03 Profile=01
SECTION S04 Profile=01
SECTION S05 Profile=01
SECTION S06 Profile=01
SECTION S07 Profile=01
*
SECTION C01 Profile=01
SECTION C02 Profile=01
SECTION C03 Profile=01
SECTION C04 Profile=01
SECTION C05 Profile=01
*
SECTION W01 Profile=01
*
SECTION D01 Profile=01
SECTION D02 Profile=01
SECTION D03 Profile=01
SECTION D04 Profile=01
*
CONVERT Format=PDF DDNAME=PDFFILE
PRINT DDNAME=PRINT1
*
/*

```

The above illustrates JCL and control statements that produce output in both line printer format and in PDF format. A brief explanation of the JCL statements is presented below. Detailed descriptions of each of the DD statements are then presented later in this section. For detailed descriptions of the control statements (ddname CAZCTL) see, [“Specifying control statements”](#) on page 640.

STEPLIB

The load library containing Application Performance Analyzer components. This can be omitted if Application Performance Analyzer is installed in a linklist library.

SFILE01

The measurement file.

CAZLOG

Output file for error and informational message.

PRINT1

Output file for the line printer report.

PDFFILE

Output file for the PDF report.

CAZCTL

Control statements.

The input measurement file

You must provide a DD statement for the file (the “sample file”) containing the Application Performance Analyzer measurement data. You can choose any DD name for this file; the DD name is referred to in a PROFILE control statement. The DSN of the measurement file can be determined by displaying the ISPF report S01: Session Statistics or by entering the “++” line command to the item in the Observation Session List ISPF dialog.

Multiple measurement files

Typically you will produce a report to analyze data from a single measurement file. Application Performance Analyzer also allows you to produce multiple reports in a single job step. You can even include report sections from separate measurement files in a single report. In either event, you need to specify a separate DD statement and a separate PROFILE control statement for each measurement file.

The CAZLOG log file

You must supply a DD statement for DD name CAZLOG. Application Performance Analyzer reports any errors or informational messages to this file. Typically, you will route this as a JES file.

The report output file

If you include a PRINT control statement to produce a line printer format report, you must also supply a DD statement for this output. Typically you will specify a JES output file. If you prefer to write this to a permanent file, specify a FB or FBA file with LRECL=121. If your job step is to produce multiple line printer reports, you must supply a DD statement (and a corresponding PRINT statement) for each one.

The PDF output file

If you include a CONVERT control statement to produce a report in PDF format, you must also supply a DD statement for this file. This must be a FB, LRECL=80 file. If your job step is to produce multiple PDF reports, you must supply a DD statement (and a corresponding CONVERT statement) for each report.

Downloading and viewing a PDF file

In order to view or print a PDF file you must perform a file transfer operation to download the file to a PC. When downloading (using IND\$FILE or FTP) be sure to download in binary. Do not specify ASCII translation or CRLF. Once you have download the file you can use any version of the Adobe PDF Viewer (Acrobat) program capable of displaying PDF version 1.3.

The XML document file

If you include a CONVERT control statement to produce a report in XML document format, you must also supply a DD statement for this file. This must be a FB or VB, LRECL=255 file.

If your job step is to produce multiple XML document files, you must supply a DD statement (and corresponding CONVERT statement) for each document file.

Application Performance Analyzer creates a version 1.0 self-contained XML document using EBCDIC encoding (ebcdic-cp-us/Cp037). See [Appendix C, “XML document layout,”](#) on page 715 for a complete description of the XML document.

Processing and transferring an XML document file

The XML document file containing the report data can be browsed or edited on the mainframe, or transferred to another platform for further processing. When transferring to another platform, appropriate character set translation may be required; including carriage return and line feed characters.

Specifying control statements

The CAZCTL DD statement specifies a file containing a sequence of control statements. These control statements can be included as instream data or the DD statement can allocate a SYSIN-type member. The DD statement and the control statements are mandatory.

General syntax rules

The syntax rules for control records are as follows:

- An asterisk (*) in column 1 indicates a comment record.
- Double slashes (//) and any characters to the right are ignored. This can be used to include comment text to the right of the statement text.
- Data in columns 73 to 80 is ignored.
- A statement consists of a verb followed by positional and keyword parameters. The allowable verbs are: PROFILE, SECTION, MAP, CONVERT, PRINT, and DESC. If there are positional parameters, they must be coded before any keyword parameters.
- The verb and the positional and keyword parameters must be separated from each other by a comma and/or at least one space.
- A value containing embedded spaces must be enclosed in quotes.

- A statement can span multiple records, but a single parameter expression must be on a single record.
- Unless otherwise noted, commands are not case sensitive.

The PROFILE statement

The PROFILE statement specifies a measurement file. The format of the PROFILE statement is shown here:

```
PROFILE nn INPUT=ddn|INPUTDSN=dsn
```

The PROFILE statement requires two parameters. The first mandatory parameter is positional and specifies a numeric value from 01 to 99. This effectively labels the PROFILE statement. There is a special case where multiple PROFILE statements with the same numeric label are specified. This is for Variance reporting and is described below.

In most cases, you will only specify one PROFILE statement and this value will be 01. Specify multiple PROFILE statements if you want to report on input from more than one measurement file in a single CAZPRINT step (or print a Variance report as described below). When you specify more than one PROFILE statement, each must specify a unique value in this parameter.

You must also code either the INPUT or INPUTDSN keyword parameter. The INPUT keyword parameter specifies the DD name of the input measurement file. There must be a corresponding DD statement in the JCL. The INPUTDSN keyword parameter specifies the dataset name of the input measurement file. In this case, it is not necessary to include a corresponding DD statement in the JCL.

TYPE keyword for Variance report

To print a Variance report, you need to specify the Tagged measurement files as well as the base measurement file to which they are to be compared. In this case, additional PROFILE statements with the same numeric label are coded, and a TYPE=TAGGED keyword is added. Up to 20 PROFILE statements with TYPE=TAGGED are permitted. An example of two PROFILE statements for Variance reporting is shown below:

```
PROFILE 01 INPUT=SFILE02 TYPE=TAGGED
PROFILE 01 INPUT=SFILE01
```

There must be corresponding DDNAMEs for the two PROFILE INPUT keywords.

TYPE keyword for WebSphere servant region observations

To print WebSphere servant region observation reports, you must specify the WAS servant region measurement file and the WAS control region measurement file. In this case, additional PROFILE statements with the same numeric label are coded, and a TYPE=(TAGGED,WASS) keyword is added to the WAS servant region measurement file PROFILE statement.

Here is an example of two PROFILE statements for WebSphere servant region measurement reporting:

```
PROFILE 01 INPUT=SFILE01,TYPE=(TAGGED,WASS)
PROFILE 01 INPUT=SFILE02
```

There must be corresponding DDNAMEs for the two PROFILE INPUT keywords.

The MAP statement

The MAP statement specifies source program mapping information. This statement is required if you want the report to include mapping of addresses to application source statements, with the exception of COBOL v5 DWARF. The MAP statement is not required for COBOL v5 DWARF source mapping.

An example of a MAP statement is shown here:

```
MAP TYPE=L FILE=TEST1.PGM.LISTINGS MEMBER=COBTEST1 PROFILE=01
```

MAP statements are optional and must be placed after their corresponding PROFILE statement(s) and before PRINT or CONVERT statements. Each MAP statement specifies a file that contains information enabling Application Performance Analyzer to map sampled addresses to source program statements.

MAP statement parameters

TYPE

This keyword parameter is mandatory and specifies the type of source mapping input data. You must specify one of the following values:

L

To specify that the input file is a compiler listing.

S

To specify that the input file is a LANGX SideFile.

A

To specify that the input file is an assembler ADATA file.

D

To specify that the input file is a SYSDEBUG file.

FILE

This keyword parameter is mandatory and specifies the data set name of the file containing source mapping information.

MEMBER

This keyword parameter is optional and specifies the member name of the file. You must include the MEMBER parameter if the FILE parameter specifies a partitioned data set.

PROFILE

This keyword parameter is optional. Specify the profile number here – a numeric value between 01 and 99. The value must match a value specified in the first parameter of a PROFILE statement. If omitted, a value of 01 is assumed.

The SECTION statement

The SECTION statement specifies a section to be included in the report. At least one SECTION statement is required. SECTION statements must be placed after their corresponding PROFILE statement(s) and before PRINT or CONVERT statements. An example of a SECTION statement is shown here:

```
SECTION C01 PROFILE=01 Levels=9 Minimum=2.5 MLD=Y
```

The above example specifies that the C01 section (CPU Analysis by Category) be included in the report. PROFILE=01 refers to the PROFILE statement that specifies the measurement file from which the report section is to be produced.

Each SECTION statement can specify common parameters (those that apply to all report sections) and section-specific parameters (those that apply to specific section types). The common parameters are described here. Descriptions of the section-specific parameters are presented in [“Report SECTION descriptions”](#) on page 644.

SECTION statement common parameters

Section code

This is the first (and only) positional parameter and is mandatory. It specifies a code identifying the type of report section. It is always 3 characters in length. The first character is alphabetic and the second and third characters are numeric.

PROFILE

This keyword parameter is optional. Specify the profile number here – a numeric value between 01 and 99. The value must match a value specified in the first parameter of a PROFILE statement. If omitted, a value of 01 is assumed. By referring to a PROFILE statement, this parameter specifies the measurement file from which the report section is to be built.

The PRINT statement

The PRINT statement tells CAZPRINT to write the report in conventional line printer format – a sequential file with ANSI carriage control characters. The report will contain each of the sections specified in SECTION statements. The sections are arranged in the report in the same sequence in which the SECTION statements appeared.

An example of a PRINT statement is shown here:

```
PRINT DDNAME=PRINT1 MLD=N
```

PRINT statement parameters

DDNAME

The DDNAME keyword parameter is mandatory. This specifies the DD name for the report output. A corresponding DD statement must be provided in the JCL.

LANG

The LANG keyword parameter is optional. If omitted it defaults to ENU to indicate the reports are to be created in the English language. Other acceptable values are JPN for Japanese and KOR for Korean.

MLD

The MLD keyword parameter is optional, if omitted it defaults to Y. This specifies whether or not Multi-Line Descriptions should be printed (Y=Yes, N=No). This is similar to the PREF option in Application Performance Analyzer ISPF: “Show long descriptions on multiple lines,” and when generating JCL with Application Performance Analyzer ISPF, the PREF setting will be used to set MLD.

The CONVERT statement

A CONVERT statement can be specified instead of or in addition to a PRINT statement. Like PRINT, CONVERT tells CAZPRINT to write the report and specifies the output destination. Instead of writing the report in conventional line printer format, the CONVERT statement creates a report file in an alternate format; either PDF or XML. When XML is specified, a PRINT statement cannot be included in the job step. You cannot include a CONVERT statement for PDF and a CONVERT statement for XML in the same job step.

Two examples of CONVERT statements are shown here.

```
CONVERT DDNAME=PDF1 FORMAT=PDF MLD=N  
CONVERT DDNAME=XML1 FORMAT=XML LANG=ENU MLD=N
```

CONVERT statement parameters

DDNAME

This mandatory parameter specifies the DD name of a file to which the converted report is to be written. A corresponding DD statement must be included in the JCL. When requesting a PDF, the file must be sequential, in FB format with 80 byte records. When requesting an XML document, the file must be sequential, in FB or VB format with 255 byte records.

FORMAT

This mandatory parameter specifies the format to which the report is to be converted. It must specify PDF or XML.

LANG

The LANG keyword parameter is optional. If omitted it defaults to ENU to indicate the reports are to be created in the English language. Other acceptable values for PDF files are JPN for Japanese and KOR for Korean. ENU is the only acceptable value for XML documents.

MLD

The MLD keyword parameter is optional, if omitted it defaults to Y. This specifies whether or not multi-line descriptions should be printed (Y=Yes, N=No). This is similar to the PREF option in Application

Performance Analyzer ISPF: “Show long descriptions on multiple lines,” and when generating JCL with Application Performance Analyzer ISPF, the PREF setting will be used to set MLD.

The DESC Statement

The DESC statement tells CAZPRINT to change the observation description in the printed reports.

An example of a DESC statement is shown here:

```
DESC= "Description updated for printed report"
```

Reports in PDF format

Application Performance Analyzer can produce a report in the form of a PDF (Portable Document Format) file. On the mainframe, this is written to a sequential file with fixed-length 80 byte records. To view or print the file you will need to download it to a PC using either IND\$FILE file transfer or FTP. No data conversion is required, so be sure to specify a binary file transfer. The content in an Application Performance Analyzer PDF report is essentially the same as a corresponding SYSOUT report. However, PDF's advanced formatting capabilities make this format more readable than a SYSOUT report.

Reports in XML document format

Application Performance Analyzer can produce an XML (Extensible Markup Language) document file containing the selected report information in the English language only. On z/OS, this is written to a sequential file with fixed or variable length 255 byte records. It is encoded in EBCDIC (ebcdic-cp-us/Cp037) and may be viewed, edited, or processed on the mainframe. If the XML document file is required on another platform, it may need character set translation, including carriage return and line feed characters. After the document file has been transferred to the target platform, ensure that the encoding attribute on the XML declaration is changed to the appropriate value. For example, when downloading the file to a Windows platform, using IND\$FILE file transfer, the ASCII and CRLF parameters must be specified. After the file transfer is complete, the encoding attribute on the XML declaration must be changed to UTF-8 in the Windows document file.

The XML file is a stand-alone document and has been declared as such. For the most part, the XML elements and tags can be related to their corresponding report fields by the element names and structure. For a complete description of the XML document, see [Appendix C, “XML document layout,”](#) on page 715.

Report SECTION descriptions

This section describes the report sections that you can include in a performance analysis report and the parameters that can be specified on the corresponding SECTION statements.

SECTION statement parameter summary

Each section requires a SECTION statement. SECTION statements for some report sections accept (or require) certain keyword parameters that allow you to set formatting options. The following table summarizes the available report sections, their parameters, and their default values. The Sequence parameter accepts different values, depending on the report section. For each report section, the acceptable values are listed, with the default value listed first.

These defaults only apply until you change them by selecting the report in A02: Request Printed Reports, after that Application Performance Analyzer will “remember” your selections.

Report section	Section ID	Parameters and default values
Measurement Profile	S01	

Report section	Section ID	Parameters and default values
Load Module Attributes	S02	Sequence=NAME/ADDRESS/ SIZE/LIBRARY OmitESD=N OmitNUC=N OmitPLPA=N Omitdup=N
Load Module Summary	S03	Sequence=NAME/ADDRESS/ SIZE/LIBRARY Omitdup=N
TCB Summary	S04	
Memory Usage Timeline	S05	Intervals=45
Data Space Usage Timeline	S06	Intervals=45
TCB Execution Summary	S07	
Processor Utilization Summary	S08	
Measurement Analysis	S09	
Observation Session Messages	S10	Levels=3 MsgD=Y MsgE=Y MsgI=Y MsgW=Y
CPU Usage by Category	C01	Levels=9 Sequence=VALUE/NAME DPAGroup=Y ShowDB2=Y Minimum=0.00 MLD=Y Datamg=Y ShowIMS=Y ADABAS=Y
CPU Usage by Module	C02	Levels=9 Sequence=VALUE/NAME Minimum=0.00 MLD=Y
CPU Usage by Code Slice	C03	Levels=9 Sequence=VALUE/ ADDRESS/LOCATION SliceSize=64 Minimum=0.00
CPU Usage Timeline	C04	Intervals=45
CPU Usage Task/Category	C05	Levels=9 Sequence=VALUE/NAME DPAGroup=Y ShowDB2=Y ShowInact=Y MLD=Y Datamg=Y ShowIMS=Y ADABAS=Y

Report section	Section ID	Parameters and default values
CPU Usage Task/Module	C06	Levels=9 Sequence=VALUE/NAME ShowInact=Y MLD=Y
CPU Usage by Procedure	C07	Sequence=VALUE/NAME OmitCPU=N
CPU Usage Referred Attribution	C08	Levels=9 Sequence=VALUE/NAME MLD=Y SysView=N
CPU Usage by PSW/ObjCode	C09	Levels=2 Sequence=VALUE/ADDRESS
CPU Usage by Natural Program	C10	Levels=9 Sequence=VALUE/NAME
DASD Usage by Device	D01	Levels=9 Sequence=VALUE/NAME Minimum=0.00
DASD Usage by DDNAME	D02	Levels=9 Sequence=VALUE/NAME Minimum=0.00
DASD Usage by Dataset	D03	Levels=9 Sequence=VALUE/NAME Minimum=0.00
Dataset Attributes	D04	Sequence=FILE/DSN
DASD EXCP Summary	D05	Sequence=VALUE/NAME OmitEXCP=N
DASD VSAM Statistics	D06	Sequence=VALUE/NAME OmitEXCP=N
DASD Activity Timeline	D07	Sequence=VALUE/NAME OmitEXCP=N
DASD I/O Wait Time	D08	Levels=9 Sequence=VALUE/NAME MLD=Y
VSAM Buffer Pool Usage	D09	

Report section	Section ID	Parameters and default values
Wait Time by Task/Category	W01	Levels=9 Sequence=VALUE/NAME DPAGroup=Y ShowDB2=Y ShowInact=Y MLD=Y Datamg=Y ShowIMS=Y ADABAS=Y
Wait Time by Task/Module	W02	Levels=9 Sequence=VALUE/NAME ShowInact=Y MLD=Y
Wait Time Referred Attribution	W03	Levels=9 Sequence=VALUE/NAME ShowInact=Y MLD=Y
Wait Time by Task ENQ/RESERVE	W04	Levels=9 Sequence=VALUE/NAME MLD=Y
Wait Time by Tape DDNAME	W05	Sequence=VALUE/NAME
IMS Measurement Profile	I01	
IMS DL/I Call Timeline	I02	
IMS Transaction Timeline	I03	Levels=9
IMS Txn Activity Timeline	I04	Sequence=VALUE/NAME
IMS CPU Usage by PSB	I05	Levels=9 Sequence=VALUE/NAME MLD=Y
IMS CPU Usage by Transaction	I06	Levels=9 Sequence=VALUE/NAME MLD=Y
IMS CPU Usage by DL/I Call	I07	Levels=9 Sequence=VALUE/NAME MLD=Y
IMS WAIT Time by PSB	I08	Levels=9 Sequence=VALUE/NAME MLD=Y
IMS WAIT Time by Transaction	I09	Levels=9 Sequence=VALUE/NAME MLD=Y

Report section	Section ID	Parameters and default values
IMS WAIT Time by DL/I Call	I10	Levels=9 Sequence=VALUE/NAME MLD=Y
IMS DL/I Activity by PSB	I11	Levels=9 Sequence=VALUE/NAME MLD=Y
IMS DL/I Activity by Txn	I12	Levels=9 Sequence=VALUE/NAME MLD=Y
IMS DL/I Activity by DL/I Call	I13	Levels=9 Sequence=VALUE/NAME MLD=Y
IMS PSB/PCB Attributes	I14	
IMS DL/I Call Attributes	I15	
IMS Transaction Service Times	I16	
IMS Transaction DL/I Counts	I17	Levels=9
IMS CPU/Svc Time by DL/I Call	I18	Sequence=VALUE/NAME
IMS CPU/Svc Time by PSB	I19	Sequence=VALUE/NAME
IMS CPU/Svc Time by Txn	I20	Sequence=VALUE/NAME
IMS CPU/Svc Time by PCB	I21	Sequence=VALUE/NAME
IMS Region Transaction Summary	I22	Sequence=NAME/VALUE
CICS Session Statistics	E01	
CICS CPU and Use Counts by Pgm	E02	Sequence=VALUE/NAME/COUNT
CICS CPU Usage by Txn	E03	Levels=9 Sequence=VALUE/NAME Minimum=0.00 MLD=Y
CICS Mean Service Time by Txn	E04	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Total Service Time by Txn	E05	Levels=9 Sequence=VALUE/NAME MLD=Y

Report section	Section ID	Parameters and default values
CICS Service Time by Task ID	E06	Levels=1 Sequence=VALUE/NAME MLD=Y
CICS WAIT by Txn	E07	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Mean Service Time by Trm	E08	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Total Service Time by Trm	E09	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Mean Service Time by user ID	E10	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Total Service Time by user ID	E11	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS CPU/Service Time by Txn	E12	Levels=2 Sequence=VALUE/NAME
CICS Mean Service Time by Txn (for multiple CICS address spaces)	X01	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Total Service Time by Txn (for multiple CICS address spaces)	X02	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Mean Service Time by Term (for multiple CICS address spaces)	X03	Levels=9 Sequence=VALUE/NAME MLD=Y
CICS Total Service Time by Term (for multiple CICS address spaces)	X04	Levels=9 Sequence=VALUE/NAME MLD=Y
Combined DB2 IMS MQ Timeline	X05	Levels=9 Sequence=VALUE/DURATION MLD=Y
IMS MASS Region Summary	X06	Sequence=NAME/VALUE
DB2 Stored Procedures Summary	X07	Sequence=NAME/VALUE
DB2 Measurement Profile	F01	

Report section	Section ID	Parameters and default values
DB2 SQL Activity Timeline	F02	Levels=9 Sequence=THREAD/CPU/ DURATION
DB2 SQL Activity by DBRM	F03	Levels=9 Sequence=VALUE/NAME Minimum=0.00
DB2 SQL Activity by Statement	F04	Levels=9 Sequence=VALUE/NAME Minimum=0.00
DB2 SQL Activity by Plan	F05	Levels=9 Sequence=VALUE Minimum=0.00
DB2 SQL Statement Attributes	F06	
DB2 SQL Wait Time by DBRM	F07	Levels=9 Sequence=VALUE/NAME OfTotal=Y
DB2 SQL Wait Time by Statement	F08	Levels=9 Sequence=VALUE/NAME OfTotal=Y
DB2 SQL Wait Time by Plan	F09	Levels=9 Sequence=VALUE OfTotal=Y
DB2 SQL CPU/Svc Time by DBRM	F10	Levels=1 Sequence=VALUE/NAME/ DURATION stmtPct=N
DB2 SQL CPU/Svc Time by Stmt	F11	Levels=2 Sequence=VALUE/NAME/DURATION posSQL=Y negSQL=Y stmtSQL=N stmtPct=N
DB2 SQL CPU/Svc Time by Plan	F12	Levels=2 Sequence=VALUE/DURATION stmtPct=N
DB2 SQL Threads Analysis	F13	
DB2 CPU by Plan/Stored Proc	F14	Levels=9 Sequence=VALUE/NAME DPAGroup=Y ShowDB2=Y MLD=Y
DB2 SQL CPU/Svc Time by Rq Loc	F15	Levels=2 Sequence=VALUE/NAME/ DURATION stmtPct=N

Report section	Section ID	Parameters and default values
DB2 SQL CPU/Svc Time by Enclav	F16	Levels=2 Sequence=VALUE/NAME/ DURATION stmtPct=N
DB2 SQL CPU/Svc Time by Corrid	F17	Levels=2 Sequence=VALUE/NAME/ DURATION stmtPct=N
DB2 SQL CPU/Svc Time by Wkstn	F18	Levels=2 Sequence=VALUE/NAME/DURATION stmtPct=N
DB2 SQL CPU/Svc Time by EndUsr	F19	Levels=2 Sequence=VALUE/NAME/DURATION stmtPct=N
DB2 Class 3 Wait Times	F20	
Coupling Facility Summary	G01	
Coupling Facility Mean Times	G02	Levels=9
Coupling Facility Total Times	G03	Levels=9
K01 CPU SRB Usage by SRB Type	K01	Levels=9 Sequence=VALUE/NAME TCBSRB=Y
K02 CPU SRB Usage by PSW/ ObjCode	K02	Levels=9 Sequence=VALUE/ADDRESS
MQSeries Activity Summary	Q01	
MQSeries CPU Usage by Queue	Q02	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries CPU Usage by Request	Q03	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries CPU Usage by Txn	Q04	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries Serv Time by Queue	Q05	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries Serv Time by Request	Q06	Levels=9 Sequence=VALUE/NAME MLD=Y

Report section	Section ID	Parameters and default values
MQSeries Serv Time by Txn	Q07	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries Wait Time by Queue	Q08	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries Wait Time by Request	Q09	Levels=9 Sequence=VALUE/NAME MLD=Y
MQSeries Wait Time by Txn	Q10	Levels=9 Sequence=VALUE/NAME MLD=Y
MQ+ Activity Timeline	Q11	Levels=9 Sequence=VALUE/DURATION MLD=Y
MQ+ CPU/SVC Time by Queue	Q12	Levels=9 Sequence=VALUE/DURATION MLD=Y stmtPct=N
MQ+ CPU/SVC Time by Request	Q13	Levels=9 Sequence=VALUE/DURATION MLD=Y stmtPct=N
MQ+ CPU/SVC Time by Txn	Q14	Levels=9 Sequence=VALUE/DURATION MLD=Y stmtPct=N
Source Program Attribution	P01	Program=pgmname (no default value) AdjLines=4 AllSource=N AsmObj=Y Header=Y Percent=N
Java Summary/Attributes	J01	
Java Heap Usage Timeline	J02	Intervals=15 Totals=Y
Java CPU Usage by Thread	J03	Sequence=VALUE/NAME MLD=Y
Java CPU Usage by Package	J04	Levels=2 Sequence=VALUE/NAME MLD=Y

Report section	Section ID	Parameters and default values
Java CPU Usage by Class	J05	Levels=2 Sequence=VALUE/NAME MLD=Y
Java CPU Usage by Method	J06	Levels=2 Sequence=VALUE/NAME MLD=Y
Java CPU Usage by Call Path	J07	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Svc Time by Package	J09	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Svc Time by Class	J10	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Svc Time by Method	J11	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Svc Time by Call Path	J12	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Wait Time by Package	J14	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Wait Time by Class	J15	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Wait Time by Method	J16	Levels=2 Sequence=VALUE/NAME MLD=Y
Java Wait Time by Call Path	J17	Levels=2 Sequence=VALUE/NAME MLD=Y
HFS Service Time by Path Name	H01	Sequence=VALUE/FILEID/PATHNAME Minimum=0.00 MLD=Y
HFS Service Time by Device	H02	Levels=2 Sequence=VALUE/DEVID/DEVICE Minimum=0.00 MLD=Y
HFS File Activity	H03	Sequence=VALUE/FILEID/PATHNAME OmitEXCP=N

Report section	Section ID	Parameters and default values
HFS File Attributes	H04	
HFS Device Activity	H05	Sequence=VALUE/DEVID/DEVICE OmitEXCP=N
HFS Device Attributes	H06	
HFS Activity Timeline	H07	Sequence=VALUE/FILEID/PATHNAME OmitEXCP=N
HFS Wait Time by Path Name	H08	Sequence=VALUE/FILEID/PATHNAME Minimum=0.00 MLD=Y
HFS Wait Time by Device	H09	Levels=2 Sequence=VALUE/DEVID/DEVICE Minimum=0.00 MLD=Y
HFS Service Time by Request	H10	Levels=2 Sequence=VALUE/REQID/REQUEST Minimum=0.00 MLD=Y
HFS Wait Time by Request	H11	Levels=2 Sequence=VALUE/REQID/REQUEST Minimum=0.00 MLD=Y
Measurement Variance Summary	V01	
CICS Variance Summary	V02	
DB2 Variance Summary	V03	
IMS Variance Summary	V04	
WAS Summary	B01	
WAS Activity	B02	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS Activity by Origin	B03	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS Activity by Servant	B04	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS EJB Activity	B05	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS EJB Activity by Origin	B06	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y

Report section	Section ID	Parameters and default values
WAS EJB Activity by Servant	B07	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS Servlet/JSP Activity	B08	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS Servlet/JSP by Origin	B09	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS Servlet/JSP by Servant	B10	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
WAS/CICS Calls	B11	Levels=9 Sequence=VALUE/NAME/SERVICE
WAS/DB2 Calls	B12	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
Async Work Requests	B13	Levels=9 Sequence=VALUE/CPU/SERVICE MLD=Y
Async Work by Work Mgr	B14	Levels=9 Sequence= VALUE/CPU/SERVICE MLD=Y
Async Work by Servant	B15	Levels=9 Sequence= VALUE/CPU/SERVICE MLD=Y
WOLA Inbound Requests	B16	Levels=9 Sequence= VALUE/CPU/SERVICE MLD=Y
WOLA Inbound by Origin	B17	Levels=9 Sequence= VALUE/CPU/SERVICE MLD=Y
WOLA Inbound by Servant	B18	Levels=9 Sequence= VALUE/CPU/SERVICE MLD=Y
WOLA Outbound Requests	B19	Levels=9 Sequence= VALUE/SERVICE MLD=Y
WOLA Outbound by Register	B20	Levels=9 Sequence= VALUE/SERVICE MLD=Y

Report section	Section ID	Parameters and default values
WOLA Outbound by Servant	B21	Levels=9 Sequence= VALUE/SERVICE MLD=Y

SECTION parameter descriptions

The SECTION statement parameters are described in the following list. They are presented in alphabetical keyword sequence.

ADABAS

This parameter applies to report sections that can attribute measured system activity to Adabas while it is processing Adabas calls. Specify Y to display measurements in routines that were processing Adabas calls in a separate ADABAS category.

AdjLines

Specifies the number of adjacent source lines. This applies to the reporting of source program lines and attribution of system activity to source statements. Source statements for which system activity is measured will be reported, but those statements for which no activity is measured are normally omitted. The value of this parameter specifies the number of source lines immediately preceding and following any line with measured activity that are also to be included in the report. This helps provide some context for isolated source lines with measured activity.

AllSource

This applies to the reporting of source program lines. A value of Y specifies that all source lines are to be shown in the report, including those for which no system activity is attributed. A value of Y in this parameter overrides any value specified in the AdjLines parameter. Specify N to control which lines are reported using the AdjLines parameter.

AsmObj

This applies to the reporting of source program lines for an assembler program. Specify Y to include object code (from the assembly listing) in each source line. Specify N to omit object code.

Datamg

This parameter applies to report sections that attribute measured system activity to the data management processing category. Specify Y to display measurements in routines that were servicing data management requests in a separate DATAMG category. This includes basic access functions (such as READ and WRITE) to files. Processing of OPEN and CLOSE functions is not included in this category.

DPAGroup

This parameter applies to report sections that attribute measured system activity to program categories. This attribution can be done to Groups or Subgroups. A group is a higher level (more inclusive) categorization than a subgroup. For example, activity in DB2 modules can be attributed to the group "DB2 Subsystem" or, alternatively, to subgroups such as "Buffer Manager," "Call Attachment Facility," "Data Manager," etc. Specify DPAGroup=Y to attribute to group and DPAGroup=N to attribute to subgroup.

Header

This applies to the P01 source program report. A value of Y specifies that detailed information about the source program is to appear in the heading area in each page in the report section. This information includes: source mapping file name and type, compile date and time, compiler product and version.

Intervals

This applies to "timeline" report sections in which measurement information is reported in equal time intervals. It specifies the number of intervals into which the report section is to be divided, which is generally, one line per interval. The value must be between 2 and 256.

Levels

This applies to report sections in which lines are arranged in a hierarchy. The value, a single numeric digit: 0 to 9, specifies the number of hierarchical levels to be included in the report. These are

equivalent to the ISPF report line items in which the “+” line command is used to expand the hierarchy.

Minimum

This applies to report sections that allow you to exclude measurements of objects when those measurement values are below the specified minimum. The unit is percentage and is expressed as two digits, followed by an optional decimal point and up to two decimal places.

MLD

This applies to report sections where DPA descriptions are reported. The MLD=Y parm is used to specify that Multi Line Descriptions should be printed, so that you can see all of the description text. MLD=N specifies that Multi Line Descriptions should not be printed, in which case only one line per module/csect will be printed, and the description will be truncated if it does not fit on one line.

MsgD

This applies to report sections that display Application Performance Analyzer messages. Specify Y to display diagnostic level messages.

MsgE

This applies to report sections that display Application Performance Analyzer messages. Specify Y to display severe level and error level messages.

MsgI

This applies to report sections that display Application Performance Analyzer messages. Specify Y to display informational level messages.

MsgW

This applies to report sections that display Application Performance Analyzer messages. Specify Y to display warning level messages.

negSQL

This applies to report sections where CPU/Service time is reported by SQL statement. Specify Y to include SQL statements that end in a negative SQLCODE.

Oftotal

This applies to report sections in which SQL wait time is reported. Specify Y to quantify wait time as a percentage of total measurement interval. Specify N to quantify as a percentage of the SQL service time.

OmitCPU

This parameter applies to reports where CPU activity is attributed to program procedures. Specify Y to exclude procedures for which no CPU activity was measured, N to include them.

Omitdup

This parameter applies to report sections in which load modules are reported. A value of Y specifies that modules that have been reloaded at a new address, but have the same name and size to be reported only once.

OmitESD

This applies to report sections in which detailed information about load modules is reported. A value of Y specifies that ESD (External Symbol Dictionary) information is not to be reported.

OmitEXCP

This applies to report sections in which the number of EXCPs or read/write count is reported for files or devices. Specify Y to exclude files or devices for which no EXCPs or read/writes were counted, or specify N to include them.

OmitNUC

This applies to report sections in which load modules are reported. A value of Y specifies that Nucleus modules are to be excluded from the report.

OmitPLPA

This applies to report sections in which load modules are reported. A value of Y specifies that PLPA (Pageable Link Pack Area) modules are to be excluded from the report.

Percent

This applies to the source mapping report section - P01. Specify Y to display the values for the source statement as a percentage, or specify N to display values as a count. This is only applicable when source mapping a report that shows percentages.

posSQL

This applies to report sections where CPU/Service time is reported by SQL statement. Specify Y to include SQL statements that end successfully; that is, with a zero or positive SQLCODE.

Program

This applies to the source mapping report section (P01). It specifies the name of the source program to reported.

Pseudo

This applies to the source mapping report section - P01. Specify Y to display C/C++ pseudo-assembly.

Sequence

This specifies the sequence in which items in the report are to be sorted. Possible values for this parameter are listed below. Not all values are appropriate for each report.

- ADDRESS to sort in ascending sequence by load module address
- CPU to sort in descending sequence by SQL CPU time
- DSN to sort in ascending sequence by dataset name
- DURATION to sort in descending sequence by SQL call duration or service time
- FILE to sort in ascending sequence by DDName
- LIBRARY/LOADLIB to sort in ascending sequence by load library name
- LOCATION to sort in ascending sequence by the address of the start of the code slice in the form of csect or module plus offset
- NAME to sort in ascending sequence by item name
- SERVICE to sort in descending sequence by service time
- SIZE to sort in ascending sequence by load module size
- THREAD to sort chronologically by DB2 thread
- VALUE to sort in descending sequence by amount of measured activity

ShowDB2

This parameter applies to report sections that can attribute measured system activity to DB2 while it is processing SQL requests. Specify Y to display measurements in routines that were processing SQL requests in a separate DB2SQL category.

ShowIMS

This parameter applies to report sections that can attribute measured system activity to IMS while it is processing DLI calls. Specify Y to display measurements in routines that were processing DLI calls in a separate IMSDLI category.

ShowInact

This parameter is generally applicable to report sections that present information by TCB (Task). A value of Y (normally the default) specifies that information for inactive tasks is to be included in the report. An inactive task is one which was observed to be in a wait state for the full duration of the observation session.

SliceSize

This parameter applies to report sections that present information by code slice (block of storage containing object code). Use this parameter to vary the code slice size. A code slice size value must be between 4 and 99992 and must be an even value that is divisible by 4.

stmtPct

This parameter applies to DB2 reports that display mean times. When 'Y' is specified, the mean times are replaced with the percent of total used.

stmtSQL

This applies to report sections where CPU/Service time is reported by SQL statement. Specify Y to consolidate dynamic SQL statements by statement number, ignoring differences in SQL statement text. When 'Y' is specified, one line is displayed per statement number regardless of the contents of the SQL statement text. When 'N' is specified, one line is displayed for each unique dynamic SQL statement.

SysView

This applies to the CPU usage referred attribution report to indicate how the data is to be displayed. When 'N' is specified, data is referred back to the application modules. When 'Y' is specified, data is referred back to the system modules.

TCBSRB

This parameter applies to the CPU SRB Usage by SRB Type report. When 'Y' is specified, CPU percentages are calculated as a percentage of TCB and SRB counts. When 'N' is specified, CPU percentages are calculated as a percentage of SRB counts only.

Totals

This applies to report sections where total values can be displayed graphically, in addition to usage values. Specify Y to report on usage and total values.

Chapter 14. Batch interface commands

Application Performance Analyzer has a command language which allows you to submit requests using JCL. The command language can be used to create the same types of requests available in Application Performance Analyzer/ISPF.

Application Performance Analyzer also provides a batch import program to load the sample file of a completed observation request, or a hierarchy of requests created by an EXPH command. This program can be used as an alternative to the IMPORT command.

For information about ...	See ...
General syntax, types of commands and examples	“Command syntax” on page 661
Command summary diagram	“Command summary diagram” on page 662
Setting up the JCL	“Sample JCL” on page 664
Coding the NEW command, with keyword descriptions and examples	“NEW” on page 669
Coding the TNEW command	“TNEW” on page 679
Coding the DELETE command	“DELETE” on page 681
Coding the KEEP command	“KEEP” on page 681
Coding the CANCEL command	“CANCEL” on page 681
Batch Import command	“Batch import” on page 681

Command syntax

The batch interface command format consists of a single high level command keyword (NEW, TNEW, DELETE, KEEP, or CANCEL) followed by a series of keywords and parameters in the format: KEYWORD=(parameter1, parameter2,...).

If there is only one parameter specified for a keyword, then the parentheses “(...)” are optional. For example, DURATION=120 and DURATION=(120) are both acceptable.

When a list of parameters is specified, the parentheses “(...)” are mandatory. For example, FEATURES=(CICS,IMS,DB2).

A semicolon must be present at the end of the command string.

Example of NEW command

The following example create a new observation request. It requests that job CAZTEST01 be measured for 60 seconds and 10000 samples, with the IMS and DB2 features turned on.

```
NEW JOBNAME=CAZTEST01
ACTIVE=NO
SAMPLES=10000 DURATION=60
FEATURES=(IMS,DB2)
;
```

Example of TNEW command

The following example creates a new threshold observation request. It requests that the second step in job TSTJOB01 be measured for 60 seconds and 10000 samples. The measurement starts only when the CPU time for step 2 in TSTJOB01 exceeds 30 seconds and the EXCP count exceeds 20000.

```
TNEW JOBNAME=TSTJOB01
ACTIVE=NO
STEP=(2)
SAMPLES=10000 DURATION=60
TMSEL=("CPU=30 EXCP=20000")
;
```

Example of DELETE command

The following example deletes observation 0985.

```
DELETE REQNUM=0985
;
```

You can also choose to delete a range of requests as the following example:

```
DELETE REQNUM=(1,12,35,76)
;
DELETE REQNUM=(654-722)
;
DELETE REQNUM=(2,5-10,84)
;
```

Note: A maximum of 20 REQNUM parameters is allowed for the DELETE command.

Example of KEEP command

The following example applies the KEEP command to observation 00985. This means the request will be kept until it is manually deleted, no expiration date will apply.

```
KEEP REQNUM=00985
;
```

Example of CANCEL command


The following example cancels active observation 00985.

```
CANCEL REQNUM=00985
;
```


Command summary diagram

This diagram shows a summary of the parameters allowed in a NEW command, they are described in detail on the following pages.


APPNAME




ORIGIN

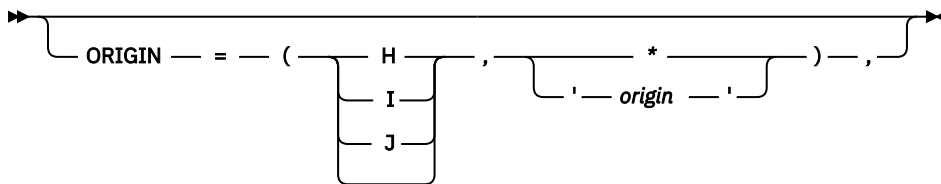

NOIMAGES



FILEEXT



Sample JCL

The following illustrates an example of how to set up the Batch Interface JCL and create a basic measurement request. There is a sample template of this JCL supplied in *hlq.SCAZSAMP* in member CAZBATCH.

```
//SAMPJOB1 JOB (job parameters)
//*
//CAZBATCH EXEC PGM=CAZBATCH,PARM='STCID=CAZ0'
//STEPLIB DD DISP=SHR,DSN=hlq.SCAZAUTH
//SYSPRINT DD SYSOUT=*
//SYSIN DD *
NEW JOBNAME=APPJOB01
ACTIVE=NO
SAMPLES=5000 DURATION=30
DESCR='Sample request for APPJOB01'
;
/*
//
```

The above example uses the Application Performance Analyzer started task named CAZ0 as specified on the EXEC statement as PARM= ' STCID=CAZ0 '. You must specify your Application Performance Analyzer started task name here. This parameter can be omitted if only one instance of Application Performance Analyzer is running on your image.

In STEPLIB, replace *hlq* with the high-level qualifier used for Application Performance Analyzer in your installation.

The commands in the above example create a NEW request to measure job APPJOB01, which is not yet active, for 5000 samples with a duration of 30 seconds. A user composed description is also specified.

Using the API to submit a command

This section describes how to code a call to the Application Performance Analyzer command API in an application program. The command API can be called from Assembler, COBOL, PL/I, C or C++ programs. Sample programs for each language are shipped in *hlq.SCAZSAMP*.

The sample program names for each language are:

- Assembler: CAZAPASM
- C: CAZAPC
- C++: CAZAPCC
- COBOL: CAZAPCOB
- PL/I: CAZAPPLI

Note:

1. You must modify the sample code to contain the started task and the system parameters.
2. You must modify the COBOL sample code CAZAPCOB.

Environment

Authorization

Problem state key 8, Supervisor state any key

Dispatchable unit mode

TCB

Cross memory mode

PASN = SASN = HASN

Amode

24-bit, 31-bit, or 64-bit

ASC mode

Primary or AR

Interrupt status

Enabled for I/O and external interrupts

Locks

No locks held

Control parameters

Must be in the primary address space, key 8, and below the bar

Error recovery

The API does not provide error recovery

Input registers

Upon entry to CAZAPI01, the general purpose registers (GPRs) contain:

Register	Contents
1	Address of a standard CALL parameter list.
13	Address of a standard register 72-byte save area that must be addressable in primary mode and below the bar.
14	Return address.
15	Entry address of CAZAPI01.

Output registers

When control returns to the caller, the general purpose registers (GPRs) contain:

Register	Contents
0	Reason code.
1	Used as a work register by CAZAPA01.

Register	Contents
2-13	Unchanged.
14	Used as a work register by CAZAPI01.
15	Return code.

When control returns to the caller, the access registers (ARs) contain:

Register	Contents
0	Used as a work register by CAZAPI01.
1-15	Unchanged.

Syntax

```
CALL CAZAPI01, (Command,
Reply,
STCID,
return_code,
reason_code,
), VL
```

It is recommended that the calling program pre-fetch CAZAPI01 instead of including the module in your load module during the link-edit step. This way you can avoid relinking your load module if a newer version of CAZAPI01 becomes available.

Parameters

Command

Specifies a 2-byte length field followed by the input command string to be submitted to Application Performance Analyzer. The length field describes the length of the command string only; it does not include the length of this length field.

Reply

Specifies a 2-byte length field followed by a buffer used by CAZAPI01 to return one or more information/error messages describing the result of processing the command. The length field must contain the maximum length of this buffer; it does not include the length of this length field. It is recommended that the buffer be a minimum of 512 bytes long and be initialized to nulls so that the caller can easily determine whether messages have been returned or not.

If messages are returned then each message will be terminated by a single null character, the last message will be terminated by two consecutive null characters. The length field will be updated to contain the length of the messages including all null characters.

STCID

Specifies a 4-byte field that contains the Application Performance Analyzer STCID to which the command will be submitted. The STCID must be left justified and blank padded.

If the first byte of this field is blank or null then CAZAPI01 will attempt to connect to the currently executing Application Performance Analyzer started task. If more than one Application Performance Analyzer STC is active the request will fail.

return_code

Specifies a 4-byte field to contain the return code.

reason_code

Specifies a 4-byte field to contain the reason code.

VL

Must be coded and causes the high-order bit of the last parameter address to set to 1.

Return codes

When CAZAPI01 returns control to your program, GPR 15 and *return_code* contain a return code. The following list identifies return codes in hexadecimal format and describes what each means:

00

The operation was successful.

08

The operation failed because of an error. (Refer to reason code for an explanation of the error.)

Reason codes

When CAZAPI01 returns control to your program, GPR 0 and *reason_code* contain a reason code. The following table identifies reason codes in hexadecimal and decimal formats and describes what each means:

Table 12. Reason codes		
Hexadecimal	Decimal	Explanation
00	00	Not applicable.
04	04	Caller is not running in TCB mode.
08	08	Caller's PASN and SASN are not equal.
0C	12	Caller is not running with DAT-on.
10	16	Caller is running disabled.
14	20	Caller is in problem state and not key 8.
18	24	Caller is not in primary or AR ASC modes.
1C	28	The STCID field contained a null or blank first character, CAZAPI01 attempted to access the currently executing Application Performance Analyzer STC but found more than one STC executing.
20	32	The specified STCID was not defined to this system.
24	36	There are no Application Performance Analyzer STCs active on this system.
28	40	The specified STCID is not currently active on this system.
2C	44	Application Performance Analyzer's name token was not created. This indicates that no Application Performance Analyzer STC has ever been started on this system since the last IPL.

<i>Table 12. Reason codes (continued)</i>		
Hexadecimal	Decimal	Explanation
30	48	Command string contains an unrecognized command verb. Currently, only the CANCEL, DELETE, KEEP, NEW and TNEW commands are allowed to be submitted via this API.
34	52	The Application Performance Analyzer STC detected an error while processing the command. Refer to the message(s) returned in the Reply buffer for more information.
38	56	The Application Performance Analyzer STC command interface has abended. Depending on the error, an SVC dump may have been created. If an SVC dump was not produced then, the interface's error recovery will have percolated the abend up to the next error handler in the caller's address space.
3C	60	Registration has been denied for Application Performance Analyzer. See message CAZ3969S on <i>Message Guide</i> for details. This message returned in the API caller's reply area.

Abend code

CAZAPI01 will produce a user abend code: 4085 in the event of an recoverable error. The following table identifies abend reason codes in hexadecimal and decimal formats and explains the reason for the abend:

<i>Table 13. Abend code</i>		
Hexadecimal	Decimal	Explanation
FA0	4000	The input parameter pointer was zero.
FA4	4004	Either the input command pointer was zero or the length field contained zeros.
FA8	4008	Either the reply command pointer was zero or the length field contained zeros.
FAC	4012	The STCID pointer was zero.
FB0	4016	The return_code pointer was zero.

Table 13. Abend code (continued)		
Hexadecimal	Decimal	Explanation
FB4	4020	The reason_code pointer was zero.
FB8	4024	The VL bit was turned on prior to the last parameter.
FAC	4028	The VL bit was not turned on on the last parameter.
FC0	4032	Internal error. Contact product support.
FC4	4036	Internal error. Contact product support.

Command descriptions

NEW

The NEW command is used to create a new Observation Request.

NEW

Mandatory.

Indicates that this is a NEW request.

JOBNAME

Optional.

Specifies the name of the job (or started task or TSO user) to be measured. JOBNAME might be specified in conjunction with ASID and/or PID. If specified together, the JOBNAME must match the ASID and/or PID.

Note: At least one of JOBNAME, ASID or PID must be specified. Any combinations of the three can be specified.

Creating multi-job measurements (%)

You can also specify a special pattern character of percent sign "%". This acts as a place holder for zero or more characters in the name. It can be placed anywhere in the name. A patterned name indicates that you want to measure all active or inactive jobs whose JOBNAME matches the pattern. You cannot specify a JOBNAME pattern of "%".

The maximum number of jobs that can be measured from a multi-job request is defined during the installation of Application Performance Analyzer. When this limit is exceeded, Application Performance Analyzer stops creating measurements for this request, and the status of the request is displayed as 'Stoppd'. The measurements that executed (within the limit) are accessible for report viewing under the request. To increase the limit, contact your system programmer.

Example: %MSMPP% causes one sampling request to be created for each active job whose JOBNAME contains "MSMPP".

The ASID and PID keywords are not permitted when the JOBNAME specifies a pattern.

Measuring a specific DB2 stored procedure or user-defined function

To measure a specific DB2 stored procedure or user-defined function, use a dash (-) for the JOBNAME. The information that identifies the DB2 stored procedure or user-defined function must be supplied in the DB2SP keyword. The following keywords are also accepted; SYSTEMS, DESCR, SAMPLES, DURATION, NOTIFY, EXPDAYS, USSOBS, FEATURES, LIBS, DIRS, and DB2IMAX. All other keywords are invalid and will result in an error. This feature is only available when the WLM

Intercept is activated during Application Performance Analyzer installation, and you are given appropriate security access to it. Contact your system programmer for access if necessary.

The ASID and PID keywords are not permitted when the JOBNAME specifies a dash (-).

Measuring a specific IMS transaction across multiple MPP regions

To measure a group of IMS MPP regions that are eligible to schedule a specific IMS transaction code, use a dash (-) for the JOBNAME. The IMS subsystem ID is specified in the IMSID keyword. The transaction code is specified in the ITRAN keyword. The region names are specified in the JOBNAMES keyword. The following keywords are also accepted: SYSTEMS, DESCR, SAMPLES, DURATION, NOTIFY, EXPDAYS, FEATURES, LIBS, and IMSIMAX. All other keywords are invalid and will be ignored or result in an error. This feature is only available when the IMS Intercept is activated during Application Performance Analyzer installation, and you are given appropriate security access to it. Contact your system programmer for access if necessary.

The ASID and PID keywords are not permitted when the JOBNAME specifies a dash (-).

ASID

Optional.

Specifies the ASID of a job to be measured. ASID must be specified as a decimal number and might be specified in conjunction with JOBNAME and/or PID. If specified together, the ASID must match the JOBNAME and/or PID. The ASID keyword is valid only when ACTIVE=YES.

Note: At least one of JOBNAME, ASID or PID must be specified. Any combinations of the three can be specified.

Example: ASID=1023

PID

Optional.

Specifies the USS Process ID of a UNIX process to be measured. PID must be specified as a decimal number and might be specified in conjunction with JOBNAME and/or ASID. If specified together, the PID must match the JOBNAME and/or ASID. The PID keyword is valid only when ACTIVE=YES.

Note: At least one of JOBNAME, ASID or PID must be specified. Any combinations of the three can be specified.

Example: PID=33620804

SYSTEMS

Mandatory within a sysplex.

Specifies a target system within a sysplex. You can also enter an asterisk (*), in which case the target job is measured on the first system to run it. When an asterisk (*) is entered, the keyword ACTIVE=YES is invalid. An asterisk (*) is not allowed when ASID or PID is specified. This keyword is invalid in a non-sysplex environment.

Example: SYSTEMS=SYS3

DESCR

Optional unless set as mandatory during installation.

Specifies a free form text description for this observation request. The text must be within single quotes, and if mandatory must be a minimum of 8 characters.

Example: DESCR= 'Any user text goes here'

SAMPLES

Optional.

If omitted, the default number of samples will be used. Specifies the number of samples to take during the measurement.

Example: SAMPLES=10000

DURATION

Optional.

If omitted, the default duration will be used. Specifies the duration of the measurement in seconds.

Example: DURATION=120

NOTIFY

Optional.

Specifies a TSO userid to notify when the measurement ends.

Example: NOTIFY=USER01

RUNTOEOS

Optional.

Specify YES to indicate that the measurement should continue to run until the job step has completed, even if the target number of observations has been reached.

DELAYSAMPLING

Optional.

This indicates that sampling should be delayed for the specified amount of time (in seconds). After the target job step starts, Application Performance Analyzer will delay the start of the measurement for the number of seconds specified.

EXPDAYS

Optional.

If omitted the installation default will be used.

Specifies the number of days the measurement data for this observation request should be retained on before being automatically deleted. To keep the measurement data indefinitely, use EXPDAYS=0.

Example: EXPDAYS=30

USSOBS

Optional.

Specify the maximum number of spawned address spaces or substeps to measure for a USS observation, up to the maximum defined in the system configuration. The same sampling frequency will be used for each spawned address space or substep. Sampling overhead can be high if several spawned address spaces are running simultaneously.

When this field is specified, the collection of measurements will be grouped under a USS master record on the Observation List panel.

FEATURES

Optional.

Specifies which data extractors, if any, need to be turned on for this measurement. The data extractor values are: CICS, CICS+, IMS, IMS+, DB2, DB2+, DB2V, DB2X, CDB2, MQS, MQ+, Java, ADA, NAT, WAS, SRB. A list of data extractors is separated by commas.

If your installation has any default extractors set, the FEATURES command will override these. If you need to override default extractors and want to turn all extractors off, specify FEATURES=(BATCH).

Example: FEATURES=(CICS,DB2)

DB2IMAX

Optional.

Enter the value to limit the number of DB2+ SQL call interceptions for which full details will be written to the sample file. Collecting full details on every interception allows the F02 Timeline report to report exact times for all SQL calls. The F02 report will be truncated at the number of calls specified in this field. The DB2+ data extractor continues to collect the data it requires for the other reports for the duration of the measurement. The value cannot exceed the default value specified for DB2IMaxTraceSize during Application Performance Analyzer installation.

Example: DB2IMAX=(10000)

IMSIMAX

Optional.

Enter the value to limit the number of IMS+ DLI call interceptions for which full details will be written to the sample file. Collecting full details on every interception allows the I02 and I03 Timeline reports to report exact times for all DLI calls and IMS transactions. The I02 and I03 reports will be truncated at the number of calls specified in this field. The IMS+ data extractor continues to collect the data it requires for the other reports for the duration of the measurement. The value cannot exceed the default value specified for IMSIMaxTraceSize during Application Performance Analyzer installation.

Example: IMSIMAX=(10000)

MQIMAX

Optional.

Enter the value to limit the number of MQ+ call interceptions for which full details are written to the sample file. The Q11 MQ+ Activity Timeline report is truncated at the number of calls that is specified in this field. The MQ+ data extractor continues to collect the data that it requires for the other reports during the measurement. The value cannot exceed the default value that is specified for MQIMaxTraceSize during the installation of Application Performance Analyzer.

Example: MQIMAX=(10000)

LIBS

Optional.

Specifies additional load libraries to be searched. A list of data set names is separated by commas. A maximum of 10 data set names is allowed.

Example: LIBS=(USER1.LOADLIB,TEST1.LOADLIB)

DIRS

Optional.

Specifies up to 440 bytes of HFS directory path names to be searched by Application Performance Analyzer, enclosed in quotes and each separated by one or more spaces. These are applicable only when sampled HFS programs have relative path names. The LIBS and DIRS keywords are mutually exclusive.

Example: DIRS=("/u/axx01 /u/axx01/cpp")

STEP

Optional.

If omitted, the first step will be measured.

Multiple STEP keywords can be specified. Specifying multiple STEP keywords creates a multistep request. A maximum of 20 STEP keywords is allowed.

Each STEP can have multiple positional parameters:

1. stepnum specifies the step number. If stepnum is specified, none of the other 3 step specification parameters can be included.
2. pgmname specifies the program name. If pgmname is specified, none of the other 3 step specification parameters can be included.
3. stepname specifies the step name. It can be specified as just a step name, or in the format stepname.procstep. If this parameter is specified, the stepnum and pgmname parameters must not be specified. If stepname is specified without .procstep, it identifies an EXEC statement that contains a PGM parameter, not one that invokes a procedure.

If the format stepname.procstep is coded, then stepname identifies an EXEC statement that invoked a procedure, and procstep identifies the EXEC statement containing a PGM parameter within that procedure.

This parameter can not be specified when selecting an active job.

Example 1: STEP=3

This indicates that the third step in the job should be measured.

Example 2: STEP=(,TESTPGM1)

This indicates that the first step that runs the program TESTPGM1 should be measured.

Example 3: STEP=(,STEP007)

This indicates that the step named STEP007 should be measured, where STEP007 is the step name on and EXEC statement that executes a program (not an EXEC statement that invokes a procedure).

Example 4: STEP=(,PROC02.STEP007)

This indicates that the step named STEP007 within the procedure invoked by step PROC02 should be measured.

Example 5:STEP=3 STEP=5 STEP=6 STEP=(,STEP012)

This shows STEP being repeated to create a multistep measurement.

ALLSTEPS

Optional.

Specify ALLSTEPS=YES to create a multi-step request which measures all steps in the job. When specified for a threshold measurement on the TNEW command, all steps in the job that meet the threshold criteria are measured. When ALLSTEPS=YES is specified, the STEP keyword is meaningless, and will be ignored if coded.

Example: ALLSTEPS=YES

ACTIVE

Mandatory.

Specify YES if the job is active, or NO if the job is not active.

Example: ACTIVE=YES

CTRAN

Mandatory when CICS is specified in FEATURES, otherwise does not apply.

Specifies one or more CICS trancodes to measure. For all transactions, use CTRAN=*. A list of transactions is separated by commas. A maximum of 16 transactions is allowed.

Example 1: CTRAN=(TRNA,TRNB,TRNC)

Example 2: CTRAN=*

SYSCTRAN

Optional, if omitted the default of NO will be used.

Specify YES if you want to measure the CICS system transactions.

CTERM

Optional.

Specifies one or more CICS terminal ids to measure. A list of terminal ids is separated by commas. You can also specify a terminal id pattern, such as a terminal id prefix followed by an asterisk (*) or an asterisk itself. The asterisk indicates that all terminals starting with the prefix are to be included in the measurement. The asterisk on its own indicates that all terminals are to be included. A maximum of 8 terminal ids / patterns is allowed.

Example:

```
CTERM=(TRM1,TRM2,TRM3)
CTERM=TRM*
CTERM=*
```

NONCTERM

Optional. If omitted, the default value of YES will be used.

Specify NO if you do not want to measure CICS transactions that run non-terminal attached.

ITRAN

Optional.

When measuring a single IMS/MPP or IMS/IFP region as entered in the JOBNAME parameter, this specifies an IMS transaction to include when measuring that IMS/MPP or IMS/IFP region. You can also specify a transaction ID pattern, such as a transaction ID prefix followed by an asterisk (*) or an asterisk by itself. The asterisk indicates that all transaction ids starting with the prefix are to be included in the measurement. The asterisk on its own indicates that all transactions are to be included.

Example:

```
ITRAN=IMSTRN1  
ITRAN=IMSTRN*  
ITRAN=*
```

Note: Values in ITRAN, IPROG and IUSER are ANDed together to determine which transactions are included in a measurement.

Note: When limiting the observation to specific IMS transactions in an MPP or IFP region, Application Performance Analyzer samples only when the transactions are running. The observation continues to run for the requested duration.

When measuring multiple IMS/MPP regions simultaneously, as indicated by a dash '-' in the JOBNAME parameter and a list of IMS/MPP regions in the JOBNAMES parameter, this specifies a single IMS transaction to include when measuring the IMS/MPP regions. In this case, the complete transaction code must be provided and the IPROG and IUSER parameters are not applicable.

Example:

```
JOBNAME=(-) ITRAN=(TXNA) JOBNAMES=("IMSMPP1,IMSMPP2,IMSMPP3")
```

I PROG

Optional.

Specifies an IMS program to include when measuring an MPP or IFP region. You can also specify a program name pattern, such as a program name prefix followed by an asterisk (*) or an asterisk by itself. The asterisk indicates that all programs starting with the prefix are to be included in the measurement. The asterisk on its own indicates that all programs are to be included.

Example:

```
I PROG=IMSPGM1  
I PROG=IMSPGM*  
I PROG=*
```

Note: Values in ITRAN, I PROG and IUSER are ANDed together to determine which transactions are included in a measurement.

Note: When limiting the observation to specific IMS programs in an MPP or IFP region, Application Performance Analyzer samples only when the transactions associated with the programs are running. The observation continues to run for the requested duration.

IUSER

Optional.

Specifies an IMS user id to include when measuring an MPP or IFP region. You can also specify a user id pattern, such as a user id prefix followed by an asterisk (*) or an asterisk by itself. The asterisk indicates that transactions initiated by user IDs starting with the prefix are to be included in the measurement. The asterisk on its own indicates that transactions initiated by all users are to be included.

Example:


```
IUSER=IMSUSR1
IUSER=IMSUSR*
IUSER=*
```

Note: Values in ITRAN, IPROG and IUSER are ANDed together to determine transactions that are included in a measurement.

Note: When limiting the observation to specific IMS users in an MPP or IFP region, Application Performance Analyzer samples only when the transactions initiated by the IMS users are running. The observation continues to run for the requested duration.

DDFFILTERS

Optional

Identifies the DDF filtering criteria that are used to limit the scope of a DDF measurement, to specific correlation id, end user id or workstation id or any combination. It accepts up to three sub-keywords; CORRID, EUSERID and WKSTNID. Values in CORRID, EUSERID, and WKSTNID are ANDed together to determine SQL requests that are included in the measurement. In any of these sub-keywords, you may also specify a wildcard pattern using an asterisk (*) or a percent sign (%). An asterisk is used to indicate one or more characters that can appear in place of the asterisk. It can be used as a prefix or a suffix, or both. Alternatively, a percent sign is used to indicate any single character, and can appear any number of times.

CORRID=(*corrid*)

Optional.

Specify a DB2 correlation id or pattern. This identifies a DB2 correlation id to be included in the measurement when measuring a DDF address space. A correlation id of null (binary zero) may be specified by entering 'NULL' as the *corrid*.

EUSERID=(*euserid*)

Optional. Specify an end user id or pattern. This identifies an end user id to be included in the measurement when measuring a DDF address space. An end user id of null (binary zero) may be specified by entering 'NULL' as the *euserid*.

WKSTNID=(*wkstnid*)

Optional. Specify a workstation id or pattern. This identifies a workstation id to be included in the measurement when measuring a DDF address space. A workstation id of null (binary zero) may be specified by entering 'NULL' as the *wkstnid*.

Example:

```
DDFFILTERS=(CORRID=( , NULL ) , EUSERID=(DDFUSER1) , WKSTNID=( * ) )
```

This indicates that remote SQL with a null correlation id, originating from the user DDFUSER1 from any workstation will be included for the measurement for the observed DDF address space.

DB2SP

Optional.

Identifies the DB2 stored procedure or user-defined function to be measured. The keyword is valid only when you enter a dash (-) for the JOBNAME. It requires 4 out of 5 positional parameters to identify the type (stored procedure or user-defined function), the DB2 subsystem name or group attach name, the schema name and the name of the procedure or function, in the format DB2SP=(*type,ssnm,schema,name,ganm*). The *ssnm* and *ganm* positional parameters are mutually exclusive.

Type can be either P for stored procedure or F for user-defined function. For both *schema* and *name*, you can also specify a name pattern, for example, a name prefix followed by an asterisk (*) or an asterisk by itself. Application Performance Analyzer will measure the first DB2 stored procedure or user-defined function executed by the DB2 subsystem that matches the schema and name concatenation. If a single asterisk is coded in both schema and name, Application Performance

Analyzer will measure the first stored procedure or user-defined function executed by the DB2 subsystem.

```
Example1: DB2SP=(P,DSN1,SCHEMA1,SP1)
```

This indicates that the first occurrence of DB2 stored procedure SCHEMA.SP1, which runs in the DB2 Subsystem DSN1 is to be measured.

```
Example2: DB2SP=(F,,SCHEMA2,UDF2,DGRP)
```

This indicates that the first occurrence of user-defined function SCHEMA2.UDF2 that runs in the DB2 Subsystem belonging to group DGRP is to be measured.

```
Example3: DB2SP=(P,DSN1,SCH*,SP1)
```

This indicates that the first occurrence of stored procedure SP1 with a schema that begins with SCH, that runs in the DB2 Subsystem DSN1 is to be measured.

IMSID

Optional.

Specifies the IMS subsystem ID for an IMS Multiple Region request. An IMS Multiple Region request is identified by specifying a dash in the JOBNAME keyword. Refer to the JOBNAME parameter description for details.

Example:

```
IMSID=(IMSA)
```

JOBNAMES

Optional.

Specifies the names of the IMS MPP regions to be measured for an IMS Multiple Region request. The region names must be separated by commas and enclosed in quotes. An IMS Multiple Region request is identified by specifying a dash in the JOBNAME keyword. Refer to the JOBNAME parameter description for details.

Example:

```
JOBNAMES=( "IMSAMPP1,IMSAMPP4,IMSAMPP5" )
```

WASFILTERS

Optional

Identifies the filtering criteria that are used to limit the scope of a WebSphere control region measurement to specific requests, applications, and origins. It is also used to exclude image files and specific file extensions from the measurement. It accepts the following sub-keywords; REQNAME, APPNAME, ORIGIN, NOIMAGES, and FILEEXT. Values in REQNAME, APPNAME, and ORIGIN are ANDed together to determine the WebSphere activity that is included in the measurement. NOIMAGES and FILEEXT are specified to exclude image files and specific file extensions from the reports.

REQNAME=('reqname')

Optional.

Specify a WebSphere request name or pattern. This identifies a WebSphere request to be included in the measurement. It is a string of non-blank characters up to 79 bytes long. A trailing asterisk can be used as a wildcard character. Embedded asterisks are not treated as wildcards.

APPNAME=('appname')

Optional.

Specify a WebSphere application name or pattern. This identifies a WebSphere application to be included in the measurement. It is a string of non-blank characters up to 79 bytes long. A trailing asterisk can be used as a wildcard character. Embedded asterisks are not treated as wildcards.

ORIGIN=(H|I|J,'origin')

Optional.

Specify the origin type, and an IP address, a host name or a job name to determine the WebSphere activity to be included in the measurement. It is a string of non-blank characters up to 79 bytes long.

H - Indicates the origin is a host name. In this case, the origin is a string of non-blank characters up to 79 bytes long. A trailing asterisk can be used as a wildcard character. WebSphere can sometimes show an IP address as a host name. To filter these, you must specify the filter value as an IP address, not a host name.

I - Indicates the origin is an IPv4 or IPv6 address. If a wildcard is used, it can only appear after a dot separator (for IPv4) or a colon separator (for IPv6). For example: 207.245.47.* or 2001:db8:85a3:0:*. However, a wildcard cannot be used with an IPv6 filter if it contains two consecutive colons. For example, the following filter value is invalid: 2001:db8:85a3::8a2e:*. This is because the two consecutive colons and the asterisk wildcard both represent a varying number of missing values.

J - Indicates the origin is a job name. It can be from 1 to 8 alpha-numeric characters. A trailing asterisk can be used as a wildcard.

NOIMAGES=(Y|N)

Optional.

Specify whether images are to be excluded (Y) or included (N) from the measurement. Image files are identified by request names that end in any of the following file extensions:

```
.gif .jpg .jpeg .png .ico
```

FILEEXT=('extensions')

Optional.

Specify file extensions that are to be excluded from the measurement. One or more file extensions may be specified, each separated by a space. Any requests for those file types will be filtered out. For example: .

```
css .pdf .txt
```

Any WebSphere request whose request name ends in one of the specified file extensions will be filtered out. Each file extension must begin with a period and must be followed by at least one non-blank character. Wildcards cannot be used in this filter.

Example:

```
JOBNAME=(AZSR00A)
WASFILTERS=(REQNAME='*',APPNAME='*',ORIGIN=(I,'99.233.166.160'),
NOIMAGES=Y,FILEEXT='.ccc .txt')
```

This indicates WebSphere activity managed by the WebSphere control region AZSR00A will be measured. It will include all requests and applications that originate from the IP address 99.233.166.160. Images and files with the extension .ccc and .txt will not be included in the measurement.

SCHDDATE

Mandatory if this is a Future Schedule request, otherwise does not apply.

Multiple SCHDDATE keywords can be specified to schedule future requests on multiple dates and times. Date/time is specified in the format: yyyy/mm/dd@hh:mm.

Example:

```
SCHDDATE=2004/12/03@16:00
SCHDDATE=2004/12/10@16:00
SCHDDATE=2004/12/17@16:00
SCHDDATE=2004/12/24@16:00
```

This creates a future schedule request to run a measurement on each of the four dates and times specified.

RETRYAFTER

Optional.

This is only used for future schedule requests (one or more SCHDDATE keywords must be present), where the job is expected to be active (ACTIVE=YES specified). Specifies that Application Performance Analyzer should retry the request if the target job was not active on the first attempt. Also specifies how many times to retry.

Specified in the format: (mm, FOR=nn), where mm is the number of minutes between retry attempts, and nn is the number of times to retry.

Example: RETRYAFTER=(15, FOR=3)

SCHDSPAN

Optional.

This is only used for future schedule requests (one or more SCHDDATE keywords must be present), where the measurement is to begin when the job becomes active (ACTIVE=NO specified). Specifies the number of minutes that this request will wait for the job to become active before Application Performance Analyzer expires the request.

Example: SCHDSPAN=120

RUNAGAIN

Optional.

This indicates that for a specified time interval, if the target job runs again, the measurement should be run again. The For= parm indicates how many times the measurement should potentially be repeated. The time interval is reset after each rerun of the target job. The maximum time interval for a future schedule request is 999 minutes. The maximum time interval for a single occurrence request is 31,680 minutes (22 days).

Example: RUNAGAIN=(60, FOR=3)

This means that for 60 minutes after the target job starts, Application Performance Analyzer will run the measurement again, if the job starts again. It will do this up to three times.

RUNAGAIN=(0, FOR=5)

This means that Application Performance Analyzer will run the measurement the first time the job runs, and again the next five times the job runs.

SAMPDSN

Optional.

Specifies the name of the sample data set to be created for this measurement. This keyword is applicable only when the resulting measurement generates a single observation request. The following options that could potentially generate multiple observation requests will cause the request to fail:

- Multi-step or all steps
- Schedule with more than one date/time combination
- RunAgain
- Collateral DB2
- WebSphere Requests
- IMS Multiple Region Requests
- USS Requests

The SAMPDSN keyword accepts the positional parameter dsn and the keyword parameter REPLACE, in the format SAMPDSN=(dsn, REPLACE=Y|N) where:

- *dsn* - is the data set name for the sample file. Symbol substitution is not allowed for this data set name. You must ensure that appropriate security rules are in place to secure this data set against unauthorized access, while allowing access where necessary. For more details on security access and rules, please refer to the *Application Performance Analyzer for z/OS Customization Guide*.
- REPLACE indicates whether the sample data set is to be replaced, if it already exists. The default is 'N' - don't replace. The rules regarding REPLACE are as follows:
 - When the request is submitted, Application Performance Analyzer checks if the data set exists. If it does and REPLACE=Y is specified, the request is accepted, otherwise it is failed.
 - When sampling completes, Application Performance Analyzer again checks if the data set exists. If it does and REPLACE=Y is specified, the original sample file is deleted and reallocated, otherwise the request is failed.

Note: Use REPLACE=Y with caution. If the data set already exists and is replaced, it is possible that multiple observations may now point to the same sample file. For example: If Request #2 specifies a SAMPDSN data set name that is the same as that of Request #1; and Request #2 replaces this data set with sample data from Request #2; then both requests will now point to the same sample file. Therefore the reports for both requests will be identical.

Example: SAMPDSN=(CAZ . SAMPLE , REPLACE=Y)

This means for this observation request, Application Performance Analyzer will create a sample file with the name CAZ.SAMPLE. If that sample file already exists, Application Performance Analyzer will replace it with the sampling data for this request.

ARGDATA

Optional.

Specifies the dataset name and optional member name containing JCL and PRINT control statements that will be used to submit the batch job to generate the reports.

The ARGDATA keyword accepts the parameters *dsn* and *member*, in the format ARGDATA(*dsn*, *member*):

- *dsn* is the dataset name for Automatic Report Generation. This dataset might be partitioned or physical sequential, and it must have a record format that is fixed length and LRECL=80. The dataset or member contains the complete JCL stream to create observation reports. The JCL stream will be submitted after the observation completes.
- *member* is the member name of a PDS for Automatic Report Generation. The member must reside in a PDS that contains fixed length, LRECL=80 records. The member contains the complete JCL stream to create observation reports. The JCL stream will be submitted after the observation completes.

See *hlq.SCAZSAMP(CAZARG)* for a sample ARG member.

Example: ARGDATA=(' CAZ . ARG ' , ARG1)

TNEW

The TNEW command is used to create a new Observation Request which starts only when the specified threshold criteria has been satisfied for the target job-step or job-steps. The criteria are: CPU Time, Elapsed Time, and EXCP Count.

TNEW

Mandatory.

Indicates that this is a new threshold request.

JOBNAME

Optional.

Specifies the name of the job (or started task or TSO user) to be measured. JOBNAME might be specified in conjunction with ASID and/or PID. If specified together, the JOBNAME must match the ASID and/or PID.

Note: At least one of JOBNAME, ASID or PID must be specified. Any combinations of the three can be specified.

ASID

Optional.

Specifies the ASID of a job to be measured. ASID must be specified as a decimal number and might be specified in conjunction with JOBNAME and/or PID. If specified together, the ASID must match the JOBNAME and/or PID. The ASID keyword is valid only when ACTIVE=YES.

Note: At least one of JOBNAME, ASID or PID must be specified. Any combinations of the three can be specified.

Example: ASID=1023

PID

Optional.

Specifies the USS Process ID of a UNIX process to be measured. PID must be specified as a decimal number and might be specified in conjunction with JOBNAME and/or ASID. If specified together, the PID must match the JOBNAME and/or ASID. The PID keyword is valid only when ACTIVE=YES.

Note: At least one of JOBNAME, ASID or PID must be specified. Any combinations of the three can be specified.

Example: PID=33620804

TMSEL


Mandatory.

Specifies the criteria upon which the measurement will begin. The TMSEL keyword accepts the following parameters: CPU, ELAPSED TIME, and EXCP, in the format TMSEL="(CPU=mm:ss ELAPSED TIME=mm:ss EXCP=nnnnnnnnnn)". When more than one threshold criteria is specified, all the criteria must be met for the measurement to begin.

CPU=mm:ss specifies the threshold amount of CPU time. When the target job-step exceeds this amount of CPU time, the measurement begins. Time can be entered in seconds or in minutes and seconds. To specify the threshold time in minutes and seconds, separate the minutes value from the seconds value using a colon.

ELAPSED TIME=mm:ss specifies the threshold amount of elapsed time. When the target job-step exceeds this amount of elapsed time, the measurement begins. Time can be entered in seconds or in minutes and seconds. To specify the threshold time in minutes and seconds, separate the minutes value from the seconds value using a colon.

EXCP=nnnnnnnnnn specifies the threshold EXCP count. When the target job-step exceeds this EXCP count, the measurement begins.

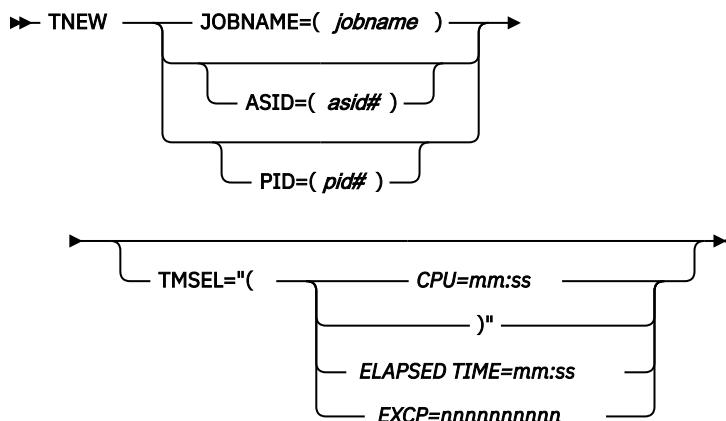

Example:

```
TNEW JOBNAME=TSTJOB01
TMSEL=("CPU=30 ELAPSEDTIME=5:00 EXCP=5000");
```

TNEW accepts the same keywords as the NEW command, with the exception of the Schedule, DB2 stored procedure or user-defined function, and IMS multiple address space keywords, which are not applicable for Threshold Monitor requests. The following keywords are not accepted on the TNEW command: DELAYSAMPLING, DB2SP, IMSID, JOBNAME, RUNAGAIN, SCHDDATE, RETRYAFTER, and SCHDSPAN. Only one STEP keyword is accepted. The ALLSTEPS keyword can be used to measure all steps in the job that meet the threshold criteria.

DELETE

The DELETE command is used to delete one or multiple observation requests.

REQNUM

Mandatory.

Specifies the request number(s) to be deleted.

KEEP

The KEEP command is used to override the expiration date on an observation request, and keep it until it is manually removed.

REQNUM

Mandatory.

Specifies the request number to be kept.

CANCEL

The CANCEL command is used to cancel an active observation request.

REQNUM

Mandatory.

Specifies the request number to be cancelled.

Batch import

The batch import program CAZIMPRT is used to load one or multiple observations or hierarchies of observations into the Application Performance Analyzer R02 Observation Session List. These can be native sample files, previously exported observations, or exported hierarchies of observations. The import program creates a new observation(s) in the target system, assigning a new request number to each observation and maintaining the hierarchies as exported. The date and time of the imported requests are set to the current date and time and the expiry date is recalculated based on the rules of the importing system.

Sample template JCL is supplied in *hlq.SCAZSAMP* in member CAZIMPRT.

```
//CAZIMPRT JOB <job parameters>
//*
//S1      EXEC PGM=CAZIMPRT,REGION=4M,PARM='STCID=stcid'
//STEPLIB DD DISP=SHR,DSN=#hlq.SCAZAUTH
//SYSPRINT DD SYSOUT=*
//SAMP0001 DD DSN=#prefix.request.XMIT,DISP=SHR
//*SAMP0002 DD DSN=#prefix.request.XMIT,DISP=SHR
//*SAMP0003 DD DSN=#prefix.request.XMIT,DISP=SHR
//*SAMP0004 DD DSN=#prefix.request.XMIT,DISP=SHR
//*
//*
//*
//*SAMP9999 DD DSN=#prefix.request.XMIT,DISP=SHR
```

1. Add the JOB parameters to meet your system requirements.

2. On the EXEC statement, replace *stcid* with the Application Performance Analyzer instance id of the system you want to import into. This parameter can be omitted if only one instance of Application Performance Analyzer is running on your image.
3. On the STEPLIB DD statement, replace *hlq.SCAZAUTH* with the name of your installation's authorized library containing Application Performance Analyzer's load modules.
4. To import multiple sample files, include a SAMPnnnn DD statement for each file, where *nnnn* is a value between 0001 and 9999.
5. On the SAMPnnnn DD statement, replace *#prefix.request.XMIT* with the names of the native sample files or TSO XMIT files containing the sample to be imported.

Note: For compatibility, the SAMPIN DD statement is supported for importing a single sample file. When SAMPIN is specified, all other SAMPnnnn DD statements are ignored.

Using the MVS START command to schedule a new measurement

A new Application Performance Analyzer measurement request can be entered by using an MVS START command. The JCL procedure specified in the START command will run a REXX EXEC, which, in turn, calls CAZBATCH with the Application Performance Analyzer NEW command specification. The Application Performance Analyzer NEW command options may be coded in a PDS member (specified on the MVS START command) or as parameters on the MVS START command itself. When NEW command parameters are specified in both the SYSIN member and the START command, the START command parameters override the SYSIN member parameters.

A sample JCL procedure is provided in *your.prefix.SCAZSAMP* member CAZ\$NEW.

```
//CAZ$NEW  PROC  APARM=
//CAZSTEP  EXEC  PGM=IKJEFT01,DYNAMNBR=50,PARM='CAZSTART &APARM
//STEPLIB  DD    DISP=SHR,DSN=#hlq.SCAZAUTH
//SYSEXEC  DD    DISP=SHR,DSN=#hlq.SCAZEXEC
//SYSTSPRT DD    SYSOUT=*
//SYSTSIN  DD    DUMMY
//CAZSYSIN DD    DISP=SHR,DSN=#hlq.SCAZSAMP
```

You must customize this sample as follows:

1. Change *your.prefix* with high level qualifiers that are appropriate for your installation for the Application Performance Analyzer libraries.
2. Update CAZSYSIN if a different library is to be used for the CAZBATCH statements.

When you complete the above changes, place this member in a library that is part of the JES procedure concatenation for started tasks.

A sample REXX EXEC is provided in *your.prefix.SCAZEXEC* member CAZSTART. This EXEC calls CAZBATCH. You need to customize this sample as follows:

1. Change *your.prefix* with high level qualifiers that are appropriate for your installation for the Application Performance Analyzer libraries.
2. Add a value for dsnHLQ if a value other than "sysuid" is required for the HLQ for work data sets.

Sample SYSIN members for procedure CAZ\$NEW are provided in *your.prefix.SCAZSAMP*:

- CAZNEWCI contains a sample NEW command string for a CICS/DB2 measurement.
- CAZNEWIM contains a sample NEW command string for an IMS/DB2/MQ measurement.

Syntax: S CAZ\$NEW,APARM='MEMBER=*pdsmembername NewCommandParms*'

MEMBER

Optional.

Specifies the SYSIN PDS member name that contains the NEW command options.

NewCommandParms

Optional.

Options for the Application Performance Analyzer NEW command that override those coded in the CAZSYSIN member. A subset of NEW command options is supported in the CAZSTART EXEC with abbreviations, due to the 100-byte APARM length limitation. For more information, see *your.prefix*.SCAZEXEC(CAZSTART). Any other options will be passed to CAZBATCH as is.

Example: S CAZ\$NEW,APARM='MEMBER=CAZNEWCI STC=CAZ0 JOBN=CICS54A'

Chapter 15. Realtime Monitor

The Realtime Monitor facility lets you view information about an in-progress measurement. Start this facility by selecting an active measurement from Observation Session List using the “R” line command. You can also choose to have the Realtime Monitor launched automatically when you start a measurement for an active job. Use SETUP in the Observation Session List to select this option.

Auto-refresh mode

In this mode the panel is refreshed automatically to show changing data as it is measured. In auto-refresh mode the keyboard is locked. To halt auto-refresh mode, and unlock the keyboard, press the Attention key. You can then refresh the panel manually by repeatedly pressing the ENTER key.

To re-activate the auto-refresh mode, enter the PULSE primary command. You can abbreviate this as P.

Monitor views

The Realtime Monitor facility offer various views of the measurement data. The upper portion of the screen shows a menu of the available monitor views. To select a view, either enter its code on the command line or place the cursor on the field and press the ENTER key.

ACCUM and CURRENT modes

Some monitor views display data based on either all the accumulated (ACCUM) data for the measurement, or for the last measured “time slice” (CURRENT). “(ACCUM)” or “(CURRENT)” is displayed on the heading line of views affected by this mode setting.

Enter the ACCUM command to set the mode to report accumulate data. You can abbreviate this as A. Enter the CURRENT command to set the mode to report on the most recent time slice. You can abbreviate this as C. Use the SETUP command to adjust the size of the time slice (expressed as number of samples). The default value is 100 samples.

SETUP command

Use the SETUP command to change various default options. You can change the following:

- Panel displayed at startup
- Display auto-refresh enabled
- Auto-refresh interval
- Length of current time slice

View 1. Measurement overview

View 1. Measurement Overview shows an at-a-glance summary of the measurement status and shows a very high level overview of observed resource usage. If in 'autorefresh' mode, data in this screen will refresh automatically at the specified rate. Otherwise press ENTER to refresh the data.

A sample report is shown here:

```

File View Navigate Help
-----
M01: IBM APA for z/OS Realtime Monitor (2132/CICS22A)      Row 00001 of 00025
Command ==> ----- Scroll ==> PAGE
  1. Overview      3. Environment      5. Data Mgmt
  2. CPU Util.    4. CPU/Modules
-----
View 1. Measurement Overview
-----
+Measurement Progress-----+
| Requested   90,000  100.0%  |
| Samples Done 39,673  44.0%  |
| CPU Active   4,314  10.8%  |
| WAIT        34,393  86.6%  |
| Queued       966    2.4%  |
+-----+

+System Resource Usage-----+
| CPU time TCB   21.96 sec  | No.of TCBs      9  |
| CPU time SRB   3.50 sec  | EXCPs          0  |
| Storage frames 6,611     | Dataspace frames 0  |
| Pages in       0         | Pages out       0  |
+-----+

+DB2 Activity-----+
| SQL call count 7,809     | DB2 plan        PFSAMPA |
| SQL samples    2,287     | DB2 DBRM        PFSAMPC |
+-----+

+CICS Transactions-----+
| Active txns    0         | Current TranId   n/a  |
| Suspended txns 8         | CICStaskId       1,672 |
+-----+

```

Measurement progress

This section shows the progress of the measurement by reporting the total number of samples completed. The sample counts are further subdivided by CPU Active samples, TCB WAIT samples, and Queued samples.

Under heading	This is displayed
Requested	The number of samples requested. A fixed percentage value of 100 percent is shown here as this number of samples represents the entire measurement. The actual number of samples performed could exceed this value if the “run to end of step” option was selected. Similarly the measurement could terminate before the indicated number of samples is done if the measured step terminates first.
Samples Done	The number of samples done. This is the number of samples performed so far. A percentage value and histogram indicate the ratio of samples completed to the number of requested samples.
CPU Active	The number of samples done in which one or more CPUs were executing instructions in the measured region. A percentage value and histogram indicate the ratio of the number of CPU Active samples to the total number of samples completed so far.
WAIT	The number of samples done in which all TCBs were in WAIT (non dispatchable) state. A percentage value and histogram indicate the ratio of the number of WAIT samples to the total number of samples completed so far.

Under heading	This is displayed
Queued	The number of samples done in which no TCBs were CPU active and at least one TCB was dispatchable. This indicates a state in which work was not being done in the measured region because no CPU (or memory) was available. A percentage value and histogram indicates the ratio of the number of Queued samples to the total number of samples completed so far.

System resource usage

This section shows various aspects of general resource usage observed during the measurement interval. Resources quantified here are: CPU time, storage usage, EXCPs, and paging.

Under heading	This is displayed
CPU Time TCB	The number of CPU seconds consumed by all TCBs in the measured region for the duration of the measurement interval.
No. of TCBs	The number of TCBs in existence at the time of the last data refresh.
CPU Time SRB	The number of CPU seconds consumed in SRB mode in the measured region for the duration of the measurement interval.
EXCPs	The number of EXCPs (Execute Channel Program) performed during the measurement interval.
Storage Frames	The number of 4K byte page frames (real storage) for virtual storage assigned to the address space at the time of the last data refresh.
Data Space Frames	The number of 4K byte page frames (real storage) for Data Space storage assigned to the address space at the time of the last data refresh.
Pages in	The number of page in operations performed during the measurement interval.
Pages out	The number of page out operations performed during the measurement interval.

DB2 activity

This section shows information about DB2 activity observed during the measurement interval.

Under heading	This is displayed
SQL call count	The number of SQL calls counted during the measurement interval. This information is available only if the DB2+ feature was enabled for the measurement.
SQL samples	The number of samples in which SQL call processing was in progress.
DB2 Plan	The name of the DB2 Plan for the last SQL request whose execution was sampled. This information is available only if the DB2 feature was enabled for the measurement.
DB2 DBRM	The name of the DB2 DBRM for the last SQL request whose execution was sampled. This information is available only if the DB2 feature was enabled for the measurement.

CICS transactions

This section shows information about CICS transactions that are currently active. This information is available only if the address space being measured is a CICS region and the CICS measurement feature is enabled.

Under heading	This is displayed
Active txns	The number of CICS transactions currently active (includes suspended transactions).
Current TranId	The transaction ID of the currently executing CICS transaction.
Suspended txns	The number of CICS transactions currently suspended. This number is also included in the Active txns value.
CICS TaskId	The task number of the CICS transaction currently executing.

View 2. CPU utilization

View 2. CPU Utilization quantifies distribution of CPU usage. The quantifications are reported in two modes: Overall and Current.

Overall mode appears on the left side of the screen and shows accumulated quantifications based on the overall measurement. Each quantity is an overall sample count. It is also expressed as a percentage and illustrated by a histogram.

Current mode appears on the right side of the screen and shows quantifications representing the last measured time slice. Each quantity is a sample count for the time slice and is also illustrated by a histogram. (Use the SETUP command to adjust the size of the time slice.)

If in “auto-refresh” mode data in this screen will refresh automatically at the specified rate. Otherwise press ENTER to refresh the data.

A sample report is shown here:

```

File View Navigate Help
-----
M01: IBM APA for z/OS Realtime Monitor (2132/CICS22A)      Row 00001 of 00028
Command ==>----- Scroll ==> PAGE

  1. Overview      3. Environment    5. Data Mgmt
  2. CPU Util.     4. CPU/Modules

View 2. CPU Utilization
-----
+Overall CPU Activity 7 min 7.81 sec -----+ +Current 0.66 sec -----+
| Samples      64,179   71.3% -----+ | 100 ' ' ' ' ' ' ' ' |
| CPU Active    5,597    8.7% -+ | 39 =====+
| WAIT         57,303   89.2% -----+ | 52 =====+
| Queued        1,279    1.9% -+ | 9 =+
+-----+ +-----+

+CPU Usage Distribution -----+ +Current -----+
| CPU Active    5,597    8.7% -+ | 39 ' ' ' ' ' ' ' ' |
| Application   104     1.8% -+ | 1 =+
| System       2,119   37.8% -----+ | 18 =====+
| DB2 SQL       217     3.8% -+ | 0+
| Data Mgmt      0      0.0% -----+ | 0+
| Unresolved    3,164   56.4% -----+ | 20 =====+
+-----+ +-----+

+CPU Modes -----+ +Current -----+
| CPU Active    5,604    8.7% -+ | 39 ' ' ' ' ' ' ' ' |
| Supv Mode     3,828   68.3% -----+ | 23 =====+
| Prob Mode     1,776   31.6% -----+ | 16 =====+
| In SVC         424     7.5% -+ | 2 =+
| AMODE 24        0      0.0% -----+ | 0+
| AMODE 31       5,604  100.0% -----+ | 39 =====+
| AMODE 64        0      0.0% -----+ | 0+
| User key       1,887   33.6% -----+ | 16 =====+
| System key     3,717   66.3% -----+ | 23 =====+
+-----+ +-----+

```

CPU activity

This section shows sample counts for the overall measurement and for the current time slice. These are categorized as CPU Active, WAIT and Queued.

Under heading	This is displayed
Samples	The number of samples performed in the overall measurement and in the time slice. The percentage shown in the Overall CPU Activity section represents the ratio of the number of samples completed to the number of samples requested.
CPU Active	The number of samples done in which one or more CPUs were executing instructions in the measured region. The percentage value indicates the ratio of the total number of CPU Active samples to the total number of samples completed so far. The first histogram represents this percentage and shows the proportion of the overall measurement time in which CPU activity was observed. The second sample count shows the number of CPU Active samples in the current time slice. The second histogram shows the proportion of the current time slice in which CPU activity was observed.
CPU WAIT	The number of samples done in which all TCBs were in WAIT (non dispatchable) state. The percentage value indicates the ratio of the total number of CPU WAIT samples to the total number of samples completed so far. The first histogram represents this percentage and shows the proportion of the overall measurement time in which all TCBs were in WAIT state. The second sample count shows the number of CPU WAIT samples in the current time slice. The second histogram shows the proportion of the current time slice in which all TCBs were observed to be in WAIT state.

Under heading	This is displayed
Queued	The number of samples done in which no TCBs were CPU active and at least one TCB was dispatchable. This indicates a state in which work was not being done in the measured region because no CPU (or memory) was available. The percentage value indicates the ratio of the total number of Queued samples to the total number of samples completed so far. The first histogram represents this percentage and shows the proportion of the overall measurement time in which a TCB was dispatchable and not serviced. The second sample count shows the number of Queued samples in the current time slice. The second histogram shows the proportion of the current time slice in which one or more TCBs was dispatchable and not serviced.

CPU usage distribution

This section shows a breakdown of CPU active TCB observations. CPU active observations are broken down by categories: Application code, System services, DB2 and Data management.

Under heading	This is displayed
CPU Active	The number of observations of CPU Active TCBs. This value could be higher than the number of CPU Active samples because each CPU Active TCB is counted. Two or more TCBs could be serviced concurrently by separate CPUs. The percentage value indicates the ratio of the total number of CPU Active samples to the total number of samples completed so far. The first histogram represents this percentage and shows the proportion of the overall measurement time for which CPU activity was observed. The second sample count shows the number of CPU Active TCB observations in the current time slice.
Application	The number of CPU Active TCB observations in which execution was observed in application programs. This is a subset of the CPU Active observation count. The percentage value indicates the ratio of the number of application program observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed in application code. The second count shows the number of application code CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in application code in this time slice.
System	The number of CPU Active TCB observations in which execution was observed in system services. This is a subset of the CPU Active observation count. The percentage value indicates the ratio of the number of system services observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed in system routines. The second count shows the number of system services CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in system services in this time slice.

Under heading	This is displayed
DB2 SQL	The number of CPU Active TCB observations in which execution was in DB2 routines servicing SQL requests. This is a subset of the CPU Active observation count. The percentage value indicates the ratio of the number of DB2 observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be processing SQL requests. The second count shows the number of DB2 services CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in DB2 services in this time slice.
Data management	The number of CPU Active TCB observations in which execution was in the servicing of Data Management requests. This is a subset of the CPU Active observation count. The percentage value indicates the ratio of the number of Data Management service observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be processing Data Management requests. The second count shows the number of Data Management services CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in Data Management services in this time slice.
Unresolved	The number of CPU Active TCB observations in which execution was in object code in storage locations for which no load module information could be obtained. This can occur for modules fetched into CSA by a region other than the one being measured. This quantity is a subset of the CPU Active observation count. The percentage value indicates the ratio of the number of unresolved location observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in unresolved storage locations. The second count shows the number of unresolved storage location CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in unresolved storage locations in this time slice.

CPU modes

This section shows a breakdown of CPU active TCB observations by mode of CPU execution. These modes are not all mutually exclusive. For example, execution in Problem State could also be counted as execution in AMODE 31.

Under heading	This is displayed
CPU Active	The number of observations of CPU Active TCBs. This value could be higher than the number of CPU Active samples because each CPU Active TCB is counted. Two or more TCBs could be serviced concurrently by separate CPUs. The percentage value indicates the ratio of the total number of CPU Active samples to the total number of samples completed so far. The first histogram represents this percentage and shows the proportion of the overall measurement time for which CPU activity was observed. The second sample count shows the number of CPU Active TCB observations in the current time slice.

Under heading	This is displayed
Supv Mode	The number of CPU Active TCB observations in which execution was in Supervisor Mode. The percentage value indicates the ratio of the number of Supervisor Mode observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in Supervisor Mode. The second count shows the number of Supervisor Mode CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in Supervisor Mode in this time slice.
Prob Mode	The number of CPU Active TCB observations in which execution was in Problem Mode. The percentage value indicates the ratio of the number of Problem Mode observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in Problem Mode. The second count shows the number of Problem Mode CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in Problem Mode in this time slice.
In SVC	The number of CPU Active TCB observations in which execution was in a Supervisor Call. The percentage value indicates the ratio of the number of SVC execution observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in a Supervisor Call. The second count shows the number of Problem Mode CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in SVC execution in this time slice.
AMODE 24	The number of CPU Active TCB observations in which execution was in 24 bit addressing mode. The percentage value indicates the ratio of the number of AMODE 24 observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in AMODE 24. The second count shows the number of AMODE 24 CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in AMODE 24 in this time slice.
AMODE 31	The number of CPU Active TCB observations in which execution was in 31 bit addressing mode. The percentage value indicates the ratio of the number of AMODE 31 observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in AMODE 31. The second count shows the number of AMODE 31 CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in AMODE 31 in this time slice.
AMODE 64	The number of CPU Active TCB observations in which execution was in 64 bit addressing mode. The percentage value indicates the ratio of the number of AMODE 64 observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in AMODE 64. The second count shows the number of AMODE 64 CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in AMODE 64 in this time slice.

Under heading	This is displayed
User key	The number of CPU Active TCB observations in which execution was in user storage key (Key 8). The percentage value indicates the ratio of the number of user key observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in user key. The second count shows the number of user key CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in user key in this time slice.
System key	The number of CPU Active TCB observations in which execution was in system storage key (not key 8). The percentage value indicates the ratio of the number of system key observations to the number of CPU Active observations. The first histogram represents this percentage and shows the proportion of the overall CPU time for which CPU activity was observed to be in system key. The second count shows the number of system key CPU Active observations in the current time slice. The histogram represents the proportion of CPU time in system key in this time slice.

View 3. Measurement environment

The data reported here is static and shows the measurement request parameters and information about the measurement environment.

A sample report is shown here:

```

File View Navigate Help
-----
M01: IBM APA for z/OS Realtime Monitor (2132/CICS22A)      Row 00001 of 00028
Command ==>----- Scroll ==> PAGE
  1. Overview      3. Environment      5. Data Mgmt
  2. CPU Util.    4. CPU/Modules

View 3. Measurement Environment
-----
+Request Parameters-----+
| Request number      2132
| Description         CICS region
| Data extractors     CICS,DB2,DB2+
+-----+
| Requesting user     USR01      Nbr of samples      90,000
| Time of request     09:53:34   Duration            600 sec
| Date of request     Tue May-31-2005 Active/pending       Active
| Job name            CICS22A    Proc step name      n/a
| Step name/number    n/a        Delay time           none
| Step program        n/a
+-----+
+Measurement Environment-----+
| Job name            CICS22A    Region size <16MB   1,712,128K
| Job number          STC02108   Region size >16MB   4K
| Step name           CICS22A    Step program        DFHSIP
| ASID                71         Region type          CICS TS 2.2
| DB2 Attach type     CICS
+-----+
| System ID           X235       IBM APA Version     1.100A
| SMFID               X235       O/S level           z/OS 01.06.00
+-----+
| Nbr of CPUs         2          CPU model            1247
| CPU rate factor     6,015      CPU version          0A
| MIPS per CPU        54         SUS per second       2660.0
+-----+

```

Request parameters

These values were established when the measurement was requested.

Under heading	This is displayed
Request number	The unique 5-digit identifier assigned to the measurement.
Description	A description specified when the measurement was requested.
Data extractors	The specified data extractors (DB2, CICS, etc.)
Requesting user	The TSO user ID of the user that requested the measurement.
Time of request	The time of day the request was made.
Date of request	The date upon which the request was made.
Job name	The name of the job that was specified to be measured.
Step name/number	The step name or step number that was specified to be measured, if applicable.
Step program	The name of the step program that was specified to be measured, if applicable.
Number of samples	The number of samples specified.
Duration	The specified measurement duration.
Active/pending	Indicates whether the measurement request specified an active job (an immediate measurement) or one that was to run later when execution of the job step is detected.
Proc step name	The procedure step name, if specified.
Delay time	The number of seconds specified for which the start of the measurement was to be delayed from the start of the job step.

Measurement environment

Values relating to the environment in which the measurement took place are reported here.

Under heading	This is displayed
Job name	The name of the measured job.
Job number	The job number of the measured job assigned by JES.
Step name	The name of the measured step.
ASID	The ASID (address space ID) of the measured job.
DB2 attach type	The type of DB2 attachment, if DB2 data recorded.
Region size < 16MB	The region size in the 24 bit address range.
Region size > 16MB	The region size above the 24 bit address range.
Step program	The name of the measurement step program (specified in the EXEC JCL statement).
Region type	The type of region (Batch, TSO, IMS, CICS, etc.) measured.
System ID	The system identifier of the system on which the measurement took place.
SMFID	The SMF ID assigned to the system on which the measurement took place.
IBM APA vers.	The version of IBM Application Performance Analyzer for z/OS that performed the measurement.
O/S Level	The operating system and level.

Under heading	This is displayed
Nbr of CPUs	The number of CPUs in the system on which the measurement took place.
CPU rate factor	The factor used to determine CPU performance.
MIPS per CPU	The speed, in machine instructions per second, of one CPU. This is derived using the CPU rate factor.
CPU model	The CPU model number.
CPU version	The CPU version.
SUs per second	The number of service units per CPU second.

View 4. CPU active modules

Overall CPU activity

A sample report is shown here:

```

File View Navigate Help
-----
M01: IBM APA for z/OS Realtime Monitor (2132/CICS22A)      Row 00001 of 00034
Command ==>----- Scroll ==> PAGE
  1. Overview      3. Environment  5. Data Mgmt
  2. CPU Util.    4. CPU/Modules

View 4. CPU Active Modules (CURRENT)
-----
+Overall CPU Activity 8 min 14.33 sec -----+ +Current 0.66 sec -----+
| Samples      74,159  82.3% -----+ | | 100 '-----' |
| CPU Active   7,584  10.2% --+ | | 42 =====+
+-----+ +-----+
Name      Description      Percent of CPU Time * 10.00% ±15.6%
          *....1....2....3....4....5....6....7....8....9
DFHSIP CICS Services      11.90 =====
DFHPGDM PG domain - initi  7.14 =====
185C6xxx Unresolved Addres 4.76 ==
152D3xxx Unresolved Addres 4.76 ==
186E3xxx Unresolved Addres 2.38 =
17AEFxxx Unresolved Addres 2.38 =
17D88xxx Unresolved Addres 2.38 =
DFHMCX   BMS fast path mod 2.38 =
18227xxx Unresolved Addres 2.38 =
18542xxx Unresolved Addres 2.38 =
17848xxx Unresolved Addres 2.38 =
-----

```

Under heading	This is displayed
Samples	The number of samples performed in the overall measurement. The percentage shown section represents the ratio of the number of samples completed to the number of samples requested. This percentage is also represented by a histogram.
CPU Active	The number of samples done in which one or more CPUs were executing instructions in the measured region. The percentage value indicates the ratio of the total number of CPU Active samples to the total number of samples completed so far. The histogram represents this percentage and shows the proportion of the overall measurement time in which CPU activity was observed.

Current

This shows the number of samples in the current time slice and the number of these samples in which CPU activity was observed. The heading shows the elapsed time of the time slice.

Under heading	This is displayed
Samples	The number of samples performed in the current time slice.
CPU Active	The number of samples in the current time slice in which one or more CPUs were executing instructions in the measured region. The histogram represents the proportion of the time slice in which CPU activity was observed.

Module attribution

Each detail line in this section shows a load module name and the percentage of observed CPU activity attributed to the module. The quantifications shown in this section apply to the full measurement if in ACCUM mode and to the last time slice if in CURRENT mode. Enter the ACCUM command or the CURRENT command to switch between these two modes.

Under heading	This is displayed
Name	The name of the module in which CPU activity was observed. Use the “+” line command to expand this line to show CSECT information. For an address range for which a module name could not be determined, this shows a hexadecimal address range.
Description	A functional description of the module if one is available.
Percent of CPU Time	The percentage of CPU time consumed while executing in the module. This is the ratio of the number of CPU Active TCB observations in the module to the total number of CPU Active observations.

View 5. Data mgmt service time

In ACCUM mode, files for which EXCPs were processed during the measurement are shown. In CURRENT mode, files for which EXCPs were processed since the last data refresh are shown. In both cases the detail lines are sorted in descending sequence by EXCP count since the last data refresh.

A sample report is shown here:

```
File View Navigate Help
-----
M01: IBM APA for z/OS Realtime Monitor (2133/CICS22A)      Row 00001 of 00004
Command ==>----- Scroll ==> PAGE
  1. Overview      3. Environment    5. Data Mgmt
  2. CPU Util.     4. CPU/Modules

View 5. Data Mgmt Service Time (ACCUM)
-----
DDNAME   Type    EXCPs   CPU-Wait-Queued   Dataset Name
VSAM1    VSAM     4,568   =====         USR01.DATA.TESTPF
INFILE   QSAM      45          USR01.TESTPF2.INFILE
OUTFILE  QSAM     20          USR01.TESTPF2.OUTFILE
STEPLIB          2          APL1.RTEST.LOADLIB
-----
```

Under heading	This is displayed
DDNAME	The DDNAME to which the file is allocated. A separate line appears for each OPEN of the DDNAME. A separate line also appears for each data set in a concatenation.

Under heading	This is displayed
Type	The type of file access (QSAM, BSAM, etc.) is reported if this information was determined. Measurement of execution in a data management routine for the file must have taken place for this to be reported.
EXCPs	In ACCUM mode, the number of EXCPs since the first file activity measurement. In CURRENT mode, the number of EXCPs since the last data refresh.
CPU-Wait-Queued	A histogram showing the proportion of samples in which execution was observed in data management routines servicing access of the file. The colors green, red and yellow indicate CPU active, Wait and Queued respectively. The width of the field represents 100 percent of the measurement interval for ACCUM mode and 100 percent of the last time slice for CURRENT mode.
Data set Name	The name of the data set.

Chapter 16. Application Performance Analyzer plug-in

Overview of Application Performance Analyzer plug-in

The Application Performance Analyzer plug-in is a desktop application that can be used as an alternative to the main Application Performance Analyzer ISPF interface. This Eclipse-based plug-in encompasses both the observation request and reporting functions. You can use this plug-in to submit new observation requests and to browse the reports that are generated from observation requests.

Installing the Application Performance Analyzer plug-in

The Application Performance Analyzer plug-in is an Eclipse tool for mainframe development. You can download the plug-in from the IBM Mainframe Development website at <https://developer.ibm.com/mainframe/#products>. It is included with IBM Explorer for z/OS Aqua, and available as an installation package along with other IBM Problem Determination Tools plug-ins. After you download the plug-in, follow the installation instructions and select the Application Performance Analyzer plug-in from the plug-ins list.

Connecting to Application Performance Analyzer on z/OS

You need a Connection and Credential to log on to z/OS and connect to Application Performance Analyzer on z/OS. The Application Performance Analyzer plug-in uses a “Problem Determination for z/OS” connection type. Application Performance Analyzer is automatically connected when a PD Tools connection is established. To configure and start a Problem Determination Tools connection, follow the instructions in the "IBM Application Delivery Foundation for z Systems Common Components" section of the desktop Help.

Using the Application Performance Analyzer plug-in

You can find details on using the Application Performance Analyzer plug-in in the desktop Help. In the action bar click **Help**. Scroll down and select **Help Contents**. In the subsequent help window, there is a section called "IBM Application Performance Analyzer User Guide".

Appendix A. Support resources and problem solving information

This section shows you how to quickly locate information to help answer your questions and solve your problems. If you have to call IBM support, this section provides information that you need to provide to the IBM service representative to help diagnose and resolve the problem.

For a comprehensive multimedia overview of IBM software support resources, see the IBM Education Assistant presentation “IBM Software Support Resources for System z® Enterprise Development Tools and Compilers products” at <https://www.ibm.com/support/knowledgecenter>.

- [“Searching knowledge bases” on page 701](#)
- [“Getting fixes” on page 702](#)
- [“Subscribing to support updates” on page 702](#)
- [“Contacting IBM Support ” on page 704](#)

Searching knowledge bases

You can search the available knowledge bases to determine whether your problem was already encountered and is already documented.

- [“Searching the Knowledge Center” on page 701](#)
- [“Searching product support documents” on page 701](#)

Searching the Knowledge Center

You can find this publication and documentation for many other products in the IBM Application Performance Analyzer Knowledge Center at <https://www.ibm.com/support/knowledgecenter/SSFMBH/product.html>. Using the Knowledge Center, you can search product documentation in a variety of ways. You can search across the documentation for multiple products, search across a subset of the product documentation that you specify, or search a specific set of topics that you specify within a document. Search terms can include exact words or phrases, wild cards, and Boolean operators.

To learn more about how to use the search facility provided in the IBM Knowledge Center, you can view the multimedia presentation at <http://www-01.ibm.com/support/knowledgecenter/>.

Searching product support documents

If you need to look beyond the Knowledge Center to answer your question or resolve your problem, you can use one or more of the following approaches:

- Find the content that you need by using the IBM Support Portal at www.ibm.com/software/support or directly at www.ibm.com/support/entry/portal.

The IBM Support Portal is a unified, centralized view of all technical support tools and information for all IBM systems, software, and services. The IBM Support Portal lets you access the IBM electronic support portfolio from one place. You can tailor the pages to focus on the information and resources that you need for problem prevention and faster problem resolution.

Access the IBM Software site (<https://www.ibm.com/products/software>) for specific product details.

- Application Performance Analyzer for z/OS Support
- IBM z/OS Debugger Support
- Enterprise COBOL for z/OS Support
- Enterprise PL/I for z/OS Support

- Fault Analyzer for z/OS Support
- File Export for z/OS Support
- File Manager for z/OS Support
- WebSphere Developer Debugger for System z Support
- WebSphere Studio Asset Analyzer for Multiplatforms Support
- Workload Simulator for z/OS and OS/390® Support
- Search for content by using the IBM masthead search. You can use the IBM masthead search by typing your search string into the Search field at the top of any [ibm.com](https://www.ibm.com)® page.
- Search for content by using any external search engine, such as Google, Yahoo, or Bing. If you use an external search engine, your results are more likely to include information that is outside the [ibm.com](https://www.ibm.com) domain. However, sometimes you can find useful problem-solving information about IBM products in newsgroups, forums, and blogs that are not on [ibm.com](https://www.ibm.com). Include "IBM" and the name of the product in your search if you are looking for information about an IBM product.
- The IBM Support Assistant (also referred to as ISA) is a free local software serviceability workbench that helps you resolve questions and problems with IBM software products. It provides quick access to support-related information. You can use the IBM Support Assistant to help you in the following ways:
 - Search through IBM and non-IBM knowledge and information sources across multiple IBM products to answer a question or solve a problem.
 - Find additional information through product and support pages, customer news groups and forums, skills and training resources and information about troubleshooting and commonly asked questions.

In addition, you can use the built in Updater facility in IBM Support Assistant to obtain IBM Support Assistant upgrades and new features to add support for additional software products and capabilities as they become available.

General information about the IBM Support Assistant can be found on the IBM Software site at <https://www.ibm.com/products/software>.

Getting fixes

A product fix might be available to resolve your problem. To determine what fixes and other updates are available, select a link from the following list:

- [Latest PTFs for Application Performance Analyzer for z/OS](#)
- [Latest PTFs for IBM z/OS Debugger](#)
- [Latest PTFs for Fault Analyzer for z/OS](#)
- [Latest PTFs for File Export for z/OS](#)
- [Latest PTFs for File Manager for z/OS](#)
- [Latest PTFs for Optim™ Move for Db2](#)
- [Latest PTFs for WebSphere Studio Asset Analyzer for Multiplatforms](#)
- [Latest PTFs for Workload Simulator for z/OS and OS/390](#)

When you find a fix that you are interested in, click the name of the fix to read its description and to optionally download the fix.

Subscribe to receive email notifications about fixes and other IBM Support information as described in [Subscribing to Support updates](#).

Subscribing to support updates

To stay informed of important information about the IBM products that you use, you can subscribe to updates. By subscribing to receive updates, you can receive important technical information and updates for specific Support tools and resources. You can subscribe to updates by using the following:

- [RSS feeds and social media subscriptions](#)
- [My Notifications](#)

To subscribe to Support updates, follow the steps below.

1. Click [My notifications](#) to get started. Click **Subscribe now!** on the page.
2. Sign in My notifications with your IBM ID. If you do not have an IBM ID, create one ID by following the instructions.
3. After you sign in My notifications, enter the name of the product that you want to subscribe in the **Product lookup** field. The look-ahead feature lists products matching what you typed. If the product does not appear, use the **Browse for a product** link.
4. Next to the product, click the **Subscribe** link. A green check mark is shown to indicate the subscription is created. The subscription is listed under Product subscriptions.
5. To indicate the type of notices for which you want to receive notifications, click the **Edit** link. To save your changes, click the **Submit** at the bottom of the page.
6. To indicate the frequency and format of the email message you receive, click **Delivery preferences**. Then, click **Submit**.
7. Optionally, you can click the RSS/Atom feed by clicking **Links**. Then, copy and paste the link into your feeder.
8. To see any notifications that were sent to you, click **View**.

RSS feeds and social media subscriptions

For general information about RSS, including steps for getting started and a list of RSS-enabled IBM web pages, visit the IBM Software Support RSS feeds site at <https://www.ibm.com/products/software>. For information about the RSS feed for the IBM Application Performance Analyzer Knowledge Center, refer to the Knowledge Center at <https://www.ibm.com/support/knowledgecenter>.

My Notifications

With My Notifications, you can subscribe to Support updates for any IBM product. You can specify that you want to receive daily or weekly email announcements. You can specify what type of information you want to receive (such as publications, hints and tips, product flashes (also known as alerts), downloads, and drivers). My Notifications enables you to customize and categorize the products about which you want to be informed and the delivery methods that best suit your needs.

To subscribe to Support updates, follow the steps below.

1. Click [My notifications](#) to get started. Click **Subscribe now!** on the page.
2. Sign in My notifications with your IBM ID. If you do not have an IBM ID, create one ID by following the instructions.
3. After you sign in My notifications, enter the name of the product that you want to subscribe in the **Product lookup** field. The look-ahead feature lists products matching what you typed. If the product does not appear, use the **Browse for a product** link.
4. Next to the product, click the **Subscribe** link. A green check mark is shown to indicate the subscription is created. The subscription is listed under Product subscriptions.
5. To indicate the type of notices for which you want to receive notifications, click the **Edit** link. To save your changes, click the **Submit** at the bottom of the page.
6. To indicate the frequency and format of the email message you receive, click **Delivery preferences**. Then, click **Submit**.
7. Optionally, you can click the RSS/Atom feed by clicking **Links**. Then, copy and paste the link into your feeder.
8. To see any notifications that were sent to you, click **View**.

Contacting IBM Support

IBM Support provides assistance with product defects, answering FAQs, and performing rediscovery.

After trying to find your answer or solution by using other self-help options such as technotes, you can contact IBM Support. Before contacting IBM Support, your company must have an active IBM maintenance contract, and you must be authorized to submit problems to IBM. For information about the types of available support, see the information below or refer to the Support portfolio topic in the Software Support Handbook at <https://www-01.ibm.com/support/docview.wss?uid=ibm10733923>.

- For IBM distributed software products (including, but not limited to, Tivoli®, Lotus®, and Rational® products, as well as Db2 and WebSphere products that run on Windows, or UNIX operating systems), enroll in Passport Advantage® in one of the following ways:

Online

Go to the Passport Advantage Web site at <https://www.ibm.com/software/passportadvantage/> and click **How to Enroll**.

By phone

For the phone number to call in your country, go to the Contacts page of the *IBM Software Support Handbook* on the Web at <https://www-01.ibm.com/support/docview.wss?uid=ibm10733923> and click the name of your geographic region.

- For customers with Subscription and Support (S & S) contracts, go to the Software Service Request Web site at <http://www.ibm.com/support/servicerequest>.
- For IBM eServer™ software products (including, but not limited to, Db2 and WebSphere products that run in zSeries, pSeries, and iSeries environments), you can purchase a software maintenance agreement by working directly with an IBM sales representative or an IBM Business Partner. For more information about support for eServer software products, go to the IBM Technical Support Advantage Web site at <http://www.ibm.com/servers/eserver/techsupport.html>.

If you are not sure what type of software maintenance contract you need, call 1-800-IBMSERV (1-800-426-7378) in the United States. From other countries, go to the Contacts page of the *IBM Software Support Handbook* on the Web at <https://www-01.ibm.com/support/docview.wss?uid=ibm10733923> and click the name of your geographic region for phone numbers of people who provide support for your location.

Complete the following steps to contact IBM Support if you run into a problem.

1. [“Define the problem and determine the severity of the problem” on page 704](#)
2. [“Gather diagnostic information” on page 705](#)
3. [“Submit the problem to IBM Support” on page 705](#)

Define the problem and determine the severity of the problem

Define the problem and determine severity of the problem When describing a problem to IBM, be as specific as possible. Include all relevant background information so that IBM Support can help you solve the problem efficiently.

IBM Support needs you to supply a severity level. Therefore, you need to understand and assess the business impact of the problem that you are reporting. Use the following criteria:

Severity 1

The problem has a **critical** business impact. You are unable to use the program, resulting in a critical impact on operations. This condition requires an immediate solution.

Severity 2

The problem has a **significant** business impact. The program is usable, but it is severely limited.

Severity 3

The problem has **some** business impact. The program is usable, but less significant features (not critical to operations) are unavailable.

Severity 4

The problem has **minimal** business impact. The problem causes little impact on operations, or a reasonable circumvention to the problem was implemented.

For more information, see the Getting IBM support topic in the Software Support Handbook at <https://www-01.ibm.com/support/docview.wss?uid=ibm10733923>.

Gather diagnostic information

To save time, if there is a Mustgather document available for the product, refer to the Mustgather document and gather the information specified. Mustgather documents contain specific instructions for submitting your problem to IBM and gathering information needed by the IBM support team to resolve your problem. To determine if there is a Mustgather document for this product, go to the product support page (<https://www.ibm.com/support/home/>) and search on the term Mustgather.

If the product does not have a Mustgather document, please provide answers to the following questions:

- What software versions were you running when the problem occurred?
- Do you have logs, traces, and messages that are related to the problem symptoms? IBM Software Support is likely to ask for this information.
- Can you re-create the problem? If so, what steps were performed to re-create the problem?
- Did you make any changes to the system? For example, did you make changes to the hardware, operating system, networking software, and so on.
- Are you currently using a workaround for the problem? If so, be prepared to explain the workaround when you report the problem.

Submit the problem to IBM Support

You can submit your problem to IBM Support in one of three ways:

Online using the IBM Support Portal

Click **Service request** on the IBM Software Support site at <http://www.ibm.com/software/support>. On the right side of the Service request page, expand the Product related links section. Click Software support (general) and select ServiceLink/IBMLink to open an Electronic Technical Response (ETR). Enter your information into the appropriate problem submission form.

Online using the Service Request tool

The Service Request tool can be found at <http://www.ibm.com/software/support/servicerequest>.

By phone

Call 1-800-IBMSERV (1-800-426-7378) in the United States or, from other countries, go to the Contacts page of the *IBM Software Support Handbook* on [IBM Support](#) website and click the name of your geographic region.

If the problem you submit is for a software defect or for missing or inaccurate documentation, IBM Support creates an Authorized Program Analysis Report (APAR). The APAR describes the problem in detail. Whenever possible, IBM Support provides a workaround that you can implement until the APAR is resolved and a fix is delivered. IBM publishes resolved APARs on the IBM Support website daily, so that other users who experience the same problem can benefit from the same resolution.

After a Problem Management Record (PMR) is open, you can submit diagnostic MustGather data to IBM using one of the following methods:

- FTP diagnostic data to IBM. For more information, refer to <http://www-01.ibm.com//support/docview.wss?uid=swg21154524>.
- If FTP is not possible, email diagnostic data to techsupport@mainz.ibm.com. You must add PMR xxxxx bbb ccc in the subject line of your email. xxxxx is your PMR number, bbb is your branch office, and ccc is your IBM country code. Go to <http://itcenter.mainz.de.ibm.com/ecurep/mail/subject.html> for more details.

Always update your PMR to indicate that data has been sent. You can update your PMR online or by phone as described above.

Appendix B. Creating side files using CAZLANGX

Refer to chapter *Quick start guide for compiling and assembling programs for use with IBM Problem Determination Tools products* in *IBM Application Delivery Foundation for z Systems Common Components: Customization Guide and User Guide* for the recommended method of preparing your programs for use with the IBM Problem Determination Tools products. Alternatively, you may use LANGX side files for your source information files in *Application Performance Analyzer*. This appendix explains the process required to create side files from compiler listings, using the program CAZLANGX. The CAZLANGX module resides in the *IBM Application Delivery Foundation for z Systems Common Components library SIPVMODA*.

The sample JCL below:

- Allocates a new data set *yourhlq.CAZLANGX* to hold the side file, which will be created in the next step.
- Compiles an Enterprise COBOL program.

Note: You can only compile one program per compile step in order to name the compiler listing PDS(E) member (if using a partitioned data set), and to ensure that only one compiler listing is written to the output file.

- Executes CAZLANGX to process the listing and store it as a side file where Application Performance Analyzer can access it.
- Writes the listing as part of the job output.

The sample JCL is provided as member CAZSCMPS in the *hlq.SCAZSAMP* data set.

```
//CAZSCMPS JOB <JOB PARAMETERS>
//          JCLLIB ORDER=(IGY.V3R3M0.SIGYPROC) <== INSTALLATION
//          IGYWC PROC
//*****
//          Licensed Materials - Property of IBM          *
//          5697-N37                                       *
//          (C) Copyright IBM Corp. 2005                  *
//          All Rights Reserved                            *
//          US Government Users Restricted Rights - Use, duplication *
//          or disclosure restricted by GSA ADP Schedule Contract *
//          with IBM Corp.                                *
//*****
//          IBM Application Performance Analyzer for z/OS   *
//          Version 1 Release 1 Modification 0              *
//          This JCL compiles a COBOL program and produces a side file *
//          from the program listing that Application Performance *
//          Analyzer uses to obtain the source information.      *
//          The compiled output is then written to SYSUT2 in the *
//          IEBGENER step.                                     *
//          CAUTION: This is neither a JCL procedure nor a complete *
//          job. Before using this job step, you will have to   *
//          make the following modifications:                 *
//          1) Add the job parameters to meet your system requirements. *
//          2) This job invokes the COBOL procedure IGYWC.      *
//          Update the procedure library name on the JCLLIB      *
//          statement as appropriate.                          *
//          3) Change "#hlq" to the appropriate high-level qualifier. *
//          4) Change "#yourhlq" to the appropriate high-level *
//          qualifier.                                           *
//*****
//          Pre-allocate data set CAZLANGX to which the side file
//          will be written.
//          EXEC PGM=IEFBR14
//CAZLANGX DD DSN=#yourhlq.CAZLANGX,DISP=(NEW,CATLG),
//          UNIT=SYSALLDA,SPACE=(TRK,(20,20,10)),
//          DCB=(RECFM=VB,LRECL=1562,BLKSIZE=0)
//          *
```

```

/** Compile a COBOL program.
/**
//CBLRUN EXEC IGYWC,PARM=COBOL='LIST,MAP,SOURCE,XREF'
//COBOL.SYSIN DD DATA,DLM='##'
CBL APOST,NOOPT,DYNAM,SSRANGE,RENT
    IDENTIFICATION DIVISION.
    PROGRAM-ID. CAZSCBL1
    ENVIRONMENT DIVISION.
    INPUT-OUTPUT SECTION.
    FILE-CONTROL.
    DATA DIVISION.
    FILE SECTION.

    WORKING-STORAGE SECTION.
    01 FILLER PIC X(20) VALUE 'WORKING-STORAGE'.
    01 NUMBERX PIC 999999 COMP-3.
    01 ERROR-FLD.
        05 ERROR-COUNT PIC 999999 COMP-3.
        05 FLDY REDEFINES ERROR-COUNT.
        07 FLDZ PIC XXXX.
    01 BAD-RESULT PIC 99 COMP-3.

    PROCEDURE DIVISION.
    MAIN SECTION.
        DISPLAY '*** CAZSCBL1 - START OF PROGRAM'.
    LOOP SECTION.
    START000.
        MOVE 3 TO ERROR-COUNT.
        ADD 986885 TO ERROR-COUNT GIVING NUMBERX.
        MOVE 'ABCD' TO FLDZ.
        IF NUMBERX > 0 THEN PERFORM CLEAR.
        DISPLAY '*** CAZSCBL1 - END OF PROGRAM'.
        GOBACK.
    CLEAR SECTION.
    START001.
        DIVIDE NUMBERX BY ERROR-COUNT GIVING BAD-RESULT.
        EXIT.
    END PROGRAM CAZSCBL1.

##
//COBOL.SYSPRINT DD DSN=&&COBLIST(CAZSCBL1),
//                DISP=(,PASS),SPACE=(TRK,(10,5,5),RLSE),
//                DCB=(RECFM=FBA,LRECL=133,BLKSIZE=0)
/**
/** Create a side file.
/**
//CAZLANGX EXEC PGM=CAZLANGX,REGION=4096K,
// PARM='CAZSCBL1 (COBOL ERROR '
//STEPLIB DD DISP=SHR,DSN=#hlq.SIPVMODA
//LISTING DD DISP=(OLD,PASS),DSN=&&COBLIST 1
//IDILANGX DD DISP=SHR,DSN=#yourhlq.CAZLANGX
//SYSUDUMP DD SYSOUT=*
/**
/** Print the COBOL listing.
/**
//IEBGENER EXEC PGM=IEBGENER,REGION=4096K
//SYSUT1 DD DISP=OLD,DSN=&&COBLIST(CAZSCBL1)
//SYSUT2 DD SYSOUT=*
//SYSPRINT DD SYSOUT=*
//SYSIN DD *
/**

```

Note: 1 DDname must be LISTING for all types of compiler listings, or SYSADATA for an assembler SYSADATA file.

After you have created and stored a side file, there is no benefit to Application Performance Analyzer in retaining the listing.

If you already have listings, you can turn them into side files. Here is sample JCL to do this:

```

//CAZLANGX JOB <JOB PARAMETERS>
//*****
/** This job produces a side file from a program listing
/** that Application Performance Analyzer can use
/** for obtaining source information.
/** This particular example is set up for a COBOL extraction
/** from CAZ.LISTING.COBOLE(COBOLA) to CAZ.CAZLANGX
//*****
//CAZLANGX EXEC PGM=CAZLANGX,REGION=4096K,
// PARM='COBOLA (COBOL ERROR'


```

```
//STEPLIB DD DISP=SHR,DSN=#hlq.SIPVMOA
//LISTING DD DISP=SHR,DSN=yourhlq.LISTING.COBOL 1
//IDILANGX DD DISP=SHR,DSN=yourhlq.CAZLANGX
//SYSUDUMP DD SYSOUT=*
```

Note: 1 DDname must be LISTING for all types of compiler listings, or SYSADATA for an assembler SYSADATA file.

CAZLANGX parameters

The PARM string passed to CAZLANGX should contain:

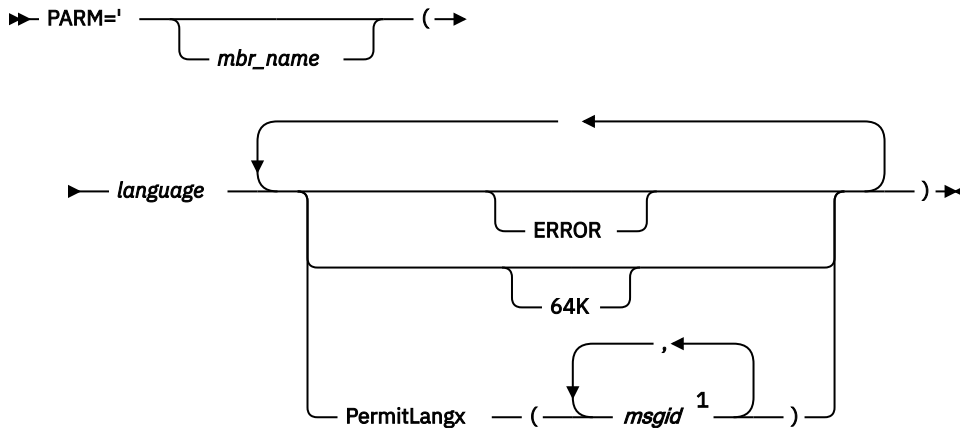

Notes:

¹ Either a comma or a blank character is permitted as a delimiter.

Parameters

mbr_name (Optional)

The compiler listing or ADATA file member name in the input data set identified by the LISTING DD name (for a compiler listing) or the SYSADATA DD name (if an ADATA file). If this parameter is omitted, the JCL must specify for the compiler listing or ADATA file, either a sequential data set, or a PDS(E) data set with member name. Also, the output CAZLANGX member will be named according to the input program name. In the case of COBOL, for example, this is the name found on the PROGRAM-ID source line.

language (Required)

The language of the compiler listing or ADATA file. The options are:

- COBOL
- PLI
- ASM

ERROR (Optional)

A parameter that provides additional diagnostics on variables for which information is incomplete.

64K (Optional)

A parameter that provides side file compatibility with IBM z/OS Debugger. For more information see, [“Side file compatibility with IBM z/OS Debugger” on page 709.](#)

PermitLangx (msgid, ...) (Optional)

A parameter that specifies message IDs for compiler error messages that should be ignored.

Side file compatibility with IBM z/OS Debugger

If using IBM z/OS Debugger, the 64K option should be included as stated for z/OS Debugger EQALANGX when generating side files with the z/OS Debugger EQALANGX or the Application Performance Analyzer

CAZLANGX utilities. This option is also recognized by CAZLANGX, and the side file produced by EQALANGX or CAZLANGX, will then be usable by both z/OS Debugger and Application Performance Analyzer.

For details of how to specify the 64K option, see [“CAZLANGX parameters” on page 709](#).

Including a CAZLANGX step in your SCLM translator

If you use the ISPF/PDF Software Configuration and Library Manager (SCLM) to manage your application software, then you might want to include a CAZLANGX step in your SCLM translator, since Application Performance Analyzer side files generally take up less disk space than compiler listings. Shown in the following are examples of a CAZLANGX step inserted into a High Level Assembler and a COBOL SCLM translator.

High Level Assembler SCLM example

```
*          SYSADATA DDNAME used in HLASM step.
*          (* SYSADATA *)
*          FLMALLOC  IOTYPE=W,DDNAME=SYSADATA,RECFM=VB,RECNUM=90000,      C
*          LRECL=8188,BLKSIZE=8192,PRINT=Y
*
*          * CAZLANGX BUILD TRANSLATOR
*
*          FLMTRNSL  CALLNAM='CAZLANGX',                                C
*                   FUNCTN=BUILD,                                       C
*                   COMPILE=CAZLANGX,                                   C
*                   DSNAM=#hlq.SIPVMDA,                                C
*                   VERSION=3.5.2,                                       C
*                   GOODRC=0,                                           C
*                   PORDER=1,                                           C
*                   OPTIONS='@@FLMMBR(ASM ERROR OFT CAZLANGX FAULT'
*
*          (* SYSADATA *)
*          FLMALLOC  IOTYPE=U,DDNAME=SYSADATA
*
*          (* CAZLANGX *)
*          FLMALLOC  IOTYPE=P,DDNAME=IDILANGX,DFLTYP=IDILANGX,          C
*                   KEYREF=OUT2,BLKSIZE=27998,LRECL=1562,RECFM=VB,      C
*                   RECNUM=100000,DIRBLKS=50,DFLTMEM=*
```

COBOL SCLM example

```
*****
*          --COPY SYSPRINT FILE TO LISTING
*          * The COPYFILE EXEC, in dataset PDFTDEV.PROJDEFS.EXEC contains the
*          * following:
*
*          /* REXX */
*          /*****
*          /* Copy file I to file O.  Both are assumed to be pre-allocated.      */
*          /*****
*          /* PARSE UPPER ARG I", "O .
*          /* "EXECIO * DISKR "I" (STEM R. FINIS "
*          /* "EXECIO * DISKW "O" (STEM R. FINIS "
*          /* RETURN
*
*          *****
*
*          FLMTRNSL  CALLNAM='COPY FILES',                                C
*                   FUNCTN=BUILD,                                       C
*                   COMPILE=COPYFILE,                                   C
*                   DSNAM=PDFTDEV.PROJDEFS.EXEC,                       C
*                   CALLMETH=TSOLNK,                                    C
*                   VERSION=1.0,                                        C
*                   PORDER=1,                                           C
*                   OPTIONS=(SYSPRINT,LISTING),                         C
*                   GOODRC=0
*          FLMALLOC  IOTYPE=W,RECFM=VBA,LRECL=133,                      C
*                   RECNUM=90000,DDNAME=LISTING
*
*          FLMTRNSL  CALLNAM='CAZLANGX',                                C
```

```

          FUNCTN=BUILD,
          COMPILE=CAZLANGX,
          DSNAME=#hlq.SIPVMODA,
          VERSION=3.5.2,
          GOODRC=0,
          PORDER=1,
          OPTIONS='@@FLMMBR(COBOL ERROR OFT CAZLANGX FAULT'
*
*      (* LISTING *)
*      FLMALLOC  IOTYPE=U, DDNAME=LISTING
*
*      (* CAZLANGX *)
*      FLMALLOC  IOTYPE=P, DDNAME=CAZLANGX, DFLTTP=CAZLANGX,
          KEYREF=OUT2, BLKSIZE=27998, LRECL=1562, RECFM=VB,
          RECNUM=10000, DIRBLKS=50, DFLTMEM=*
          C
          C
          C
          C
          C
          C

```

COBOL Report Writer Precompiler

If you are using the COBOL Report Writer Precompiler (program number 5798-DYR), it is important that you run it as a stand-alone precompiler as opposed to invoking it via the COBOL compiler EXIT option. Otherwise, information that is required by Application Performance Analyzer to identify the point of failure source code statement might be missing from the compiler listing.

Symptoms that you might experience if using the COBOL Report Writer Precompiler as a COBOL compiler exit are:

- Return code 3114 from CAZLANGX if trying to convert the COBOL compiler listing file to a side file.
- The following messages issued during fault analysis:
 - IDISF8100S COBOL LISTING file contains NO recognized records
 - IDISF8132S Input or Output file format invalid
- Failure to determine point of failure source line.

Required compiler options for creating listings or CAZLANGX side files

The following are the compiler options needed to produce listings or CAZLANGX side files suitable for Application Performance Analyzer:

OS/VSE COBOL:

- DMAP
- NOCLIST
- NOLST
- NOOPT (Note 1)
- PMAP
- SOURCE
- VERB
- XREF

COBOL compilers (other than OS/VSE COBOL):

- LIST,NOOFFSET (Note 2)
- NOOPT (Note 1)
- MAP
- SOURCE
- XREF(SHORT) (Note 3)

VisualAge® PL/I:

- AGGREGATE
- ATTRIBUTES(FULL)
- LIST
- NEST
- OPTIONS
- SOURCE
- XREF(FULL)

Enterprise PL/I:

- AGGREGATE
- ATTRIBUTES(FULL)
- LIST
- MAP
- NEST
- SOURCE
- STMT
- NONNUMBER
- OFFSET
- XREF(FULL)
- OPTIONS
- NOBLKOFF

PL/I compilers (other than VisualAge PL/I and Enterprise PL/I):

- AGGREGATE
- ATTRIBUTES(FULL)
- ESD
- LIST
- MAP
- NEST
- OPTIONS
- SOURCE
- STMT
- XREF(FULL)

Assembler:

- ADATA

C/C++:

- LIST
- NOOFFSET

Note:

1. Although NOOPT is recommended, the use of OPTIMIZE is allowed (including OPT(1) or OPT(2) for C) , in which case the compiler merges and rearranges statement numbers in the compiled code. The Application Performance Analyzer analysis will be limited to what can be determined from the optimized compiler listing, which can vary from having no effect on the Application Performance Analyzer report, to inaccurate identification of the source line that failed. The source line number will usually be close, but not necessarily accurate with OPTIMIZE. It is dependent on the compiler's rearrangement or elimination of source statements during its optimization processing.

2. Although LIST and NOOFFSET are recommended, the use of NOLIST and OFFSET is allowed, in which case Application Performance Analyzer will not be able to warn the user if the compiler listing is not a good match with what is in storage.
3. XREF(SHORT) is a minimum requirement; XREF(FULL) is permitted and has no detrimental effect.
4. ATTRIBUTES is a minimum requirement; ATTRIBUTES(FULL) is permitted and has no detrimental effect.

TEST option considerations

With all compilers, the additional use of the TEST option may provide program information in addition to what is available via the side files.

If TEST(,SEPARATE) is used when compiling a COBOL program, then a COBOL SYSDEBUG file is written.

If the SYSDEBUG file is to be used instead of a compiler listing, or a CAZLANGX side file created from a compiler listing, then it should be retained for use by z/OS Debugger and Application Performance Analyzer.

Naming compiler listings or side files

Store compiler listings or side files in sequential data sets, or as members of PDS(E) data sets.

If stored in PDS(E) data sets, then the member name must be equal to the primary entry point name or CSECT name of your application program. If the application program contains multiple CSECTs, then they must be compiled separately in order to create separate compiler listing or side file members. If you store with any other name, Application Performance Analyzer will be unable to find the side file or listing.

Note: The PL/I compiler typically renames CSECTs according to an internal compiler algorithm. Therefore, it is not recommended to store PL/I compiler listings or side files using CSECT names as they might not be found by Application Performance Analyzer. Instead, use the primary entry point name.

If compiler listings or side files are stored in sequential data sets, and the data set names follow a convention that permits the program name to be part of the data set name, then the specification of these data sets in the DataSets option can be done easily using variable substitution.

Naming CSECTs for Application Performance Analyzer

To facilitate source code information, Application Performance Analyzer must be able to match CSECT names with the compiler listings or side files provided. For this to be possible, all CSECTs must be named. Whereas the names of CSECTs in programs written in most high-level languages are automatically assigned, special requirements apply to programs written assembler, as explained in the following. Failure to follow these requirements will prevent source code information from being determined for these types of programs.

Assembler programs

It is a requirement that CSECTs in assembler programs are named using either:

- csect_name CSECT
- csect_name START

If using a PDS(E), the csect_name must match the SYSADATA or side file data set member name.

Compiler listings and side file attributes

Compiler listings and side files must be allocated using the following attributes:

DDname Attributes:

CAZADATA

Sequential data set or PDS(E), RECFM=VB, LRECL=8188

CAZLC

Sequential data set or PDS(E), and either:

- RECFM=VB or VBA and LRECL=137
- RECFM=FB or FBA and LRECL=133

CAZLCOB

Sequential data set or PDS(E), RECFM=FBA, LRECL=133

CAZLCOBO

Sequential data set or PDS(E), RECFM=FBA, LRECL=121

CAZSYSDB

Sequential data set or PDS(E), RECFM=FB, LRECL=1024

CAZLANGX

Sequential data set or PDS(E), RECFM=VB, LRECL=1562

CAZLPLI

Sequential data set or PDS(E), RECFM=VBA, LRECL=125

CAZLPLIE

Sequential data set or PDS(E), RECFM=VBA, LRECL=137

For variable length records, the indicated record lengths (LRECL) are minimum values.

In order for Application Performance Analyzer to read the compiler listings or side files, they must not be allocated as temporary data sets (for example, using &&dsname-type data set names in your JCL).

For the purpose of conserving disk space, compiler listings can be stored in ISPF packed format. This is done by using the PACK ON option from within ISPF edit of the file. The ISPF packed format is not permitted for IDILANGX or IDIADATA data sets.

Appendix C. XML document layout

This appendix describes the layout of the XML documents and associates each element to the matching field in the online report.

XML declaration

The XML declaration is included as the first line in the document. It describes the version, encoding and standalone attributes as follows:

```
<?xml version="1.0" encoding="ebcdic-cp-us" standalone="yes" ?>
```

Root tag

The tag pair <ReportSet> and </ReportSet> define the root element.

Layout standards

Immediately following the root tag <ReportSet>, elements describing the details of the completed request are enclosed within a <MeasurementInformation> and </MeasurementInformation> tag pair. This data is viewed online by typing the line command “++” on top of the Request Number on the R02 panel.

The data for individual report sections (e.g., S01, C02, etc.) follow the </MeasurementInformation> closing tag and are enclosed within separate <Report> and </Report> tag pairs.

Immediately following the <Report> tag, every report section contains the following 4 common elements:

- <ReportId>*Report Code*</ReportId>
- <ReportName>*Report Name*</ReportName>
- <MarginOfError>*Margin of Error %*</MarginOfError>
- <MeasurementDivisor>*Measurement Divisor*</MeasurementDivisor>

Report Code and *Report Name* are unique for each report. The *Margin of Error %* value reflects the level of precision calculated for the report. When margin of error is not applicable for a report, this value is empty. The *Measurement Divisor* value contains the total number of samples taken and is used to calculate percentages in the report. Where there are no percentages presented in the report, this value is empty.

In the following tables, numeric data is represented by n, regardless of the size and format of the data.

Measurement information

The measurement information data is displayed online after typing the line command “++” on top of the Request Number in the R02 panel. In the XML document file, this data is enclosed within the <MeasurementInformation> and </MeasurementInformation> tag pair. The table below lists the sub elements for this data.

Field title in online report	XML element
	<MeasurementTaskId> <i>stcid</i> </MeasurementTaskId>
	<MeasurementVersionNumber> <i>version</i> </MeasurementVersionNumber>
	<MeasurementAPARNumber> <i>APAR</i> </MeasurementAPARNumber>
Request Number	<RequestNumber> <i>nnnnn</i> </RequestNumber>
Request Description	<RequestDescription> <i>description</i> </RequestDescription>

Field title in online report	XML element
Request Status	<RequestStatus>status</RequestStatus>
Owner Id	<OwnerId>owner</OwnerId>
Time of Request	<TimeOfRequest>Day Mon-dd-yyyy hh:mm:ss.ss</TimeOfRequest>
Session Start Time	<SessionStartTime>Day Mon-dd-yyyy hh:mm:ss.ss</SessionStartTime>
Session End Time	<SessionEndTime>Day Mon-dd-yyyy hh:mm:ss.ss</SessionEndTime>
Session Duration	<SessionDuration>duration</SessionDuration>
Session Delete Date	<SessionDeleteDate>Day Mon-dd-yyyy</SessionDeleteDate>
Select by Job Name	<Jobname>name</Jobname>
Select by Sys Name	<SysName>name</SysName>
Sample Interval	<SampleInterval>interval</SampleInterval>
Duration	<Duration>duration</Duration>
Sample File DSN	<SampleFileDSN>dsn</SampleFileDSN>
Samples Requested	<SamplesRequested>n</SamplesRequested>
Samples Done	<SamplesDone>n</SamplesDone>
ASID	<ASID>asid</ASID>
Job ID	<JobId>jobid</JobId>
Data Extractors	<Extractors>
	<Extractor>None</Extractor> if none selected
CICS	<Extractor>CICS</Extractor> omitted if not selected
CICS+	<Extractor>CICS+</Extractor> omitted if not selected
IMS	<Extractor>IMS</Extractor> omitted if not selected
IMS+	<Extractor>IMS+</Extractor> omitted if not selected
DB2	<Extractor>DB2</Extractor> omitted if not selected
DB2+	<Extractor>DB2+</Extractor> omitted if not selected
DB2 Variables	<Extractor>DB2V</Extractor> omitted if not selected
Static DB2 Explain	<Extractor>DB2X</Extractor> omitted if not selected
Collateral DB2	<Extractor>CDB2</Extractor> omitted if not selected
MQSeries	<Extractor>MQS</Extractor> omitted if not selected
MQ+	<Extractor>MQ+</Extractor> omitted if not selected
JAVA	<Extractor>JAVA</Extractor> omitted if not selected
ADA	<Extractor>ADA</Extractor> omitted if not selected
NAT	<Extractor>NAT</Extractor> omitted if not selected
WAS	<Extractor>WAS</Extractor> omitted if not selected
SRB	<Extractor>SRB</Extractor> omitted if not selected
	</Extractors>

Performance analysis reports

S01 Measurement Profile

Field title in online report	XML element
Overall CPU Activity	<OverallCPUActivity>
Samples	<Samples>n</Samples>
	<SamplesPercent>n%</SamplesPercent>
Reports	<Reports>C01 C02 C03 C05 C07 W01 W02</Reports>
CPU Active	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
Wait	<Wait>n</Wait>
	<WaitPercent>n%</WaitPercent>
Queued	<Queued>n</Queued>
	<QueuedPercent>n%</Queued>
	</OverallCPUActivity>
CPU Usage Distribution	<CPUUsageDistribution>
CPU Active	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	<Reports>C01 C05 C08 W01</Reports>
Application	<Application>n</Application>
	<ApplicationPercent>n%</ApplicationPercent>
System	<System>n</System>
	<SystemPercent>n%</SystemPercent>
DB2 SQL	<DB2SQL>n</DB2SQL>
	<DB2SQLPercent>n%</DB2SQLPercent>
Data Mgmt	<DataMgt>n</DataMgt>
	<DataMgtPercent>n%</DataMgtPercent>
Unresolved	<Unresolved>n</Unresolved>
	<UnresolvedPercent>n%</UnresolvedPercent>
IMS DLI Call	<IMSDLICall>n</IMSDLICall>
	<IMSDLICallPercent>n%</IMSDLICallPercent>
	</CPUUsageDistribution>
Most CPU Active Modules	<MostCPUActiveModules>
CPU Active	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	<Reports>C02</Reports>

Field title in online report	XML element
	<CPUActiveModules>
<i>Module Name</i>	<Module> <i>name</i> </Module>
	<CPUActive> <i>n</i> </CPUActive>
	<CPUActivePercent> <i>n</i> %</CPUActivePercent>
	</CPUActiveModules>
	</MostCPUActiveModules>
Most CPU Active CSECTS	<MostCPUActiveCSECTS>
Active CPU	<CPUActive> <i>n</i> </CPUActive>
	<CPUActivePercent> <i>n</i> %</CPUActivePercent>
	<Reports>C02</Reports>
	<CPUActiveCSECTS>
CSECT in <i>Module</i>	<CSECT> <i>csect in module</i> </CSECT>
	<CPUActive> <i>n</i> </CPUActive>
	<CPUActivePercent> <i>n</i> %</CPUActivePercent>
	</CPUActiveCSECTS>
	</MostCPUActiveCSECTS>
CPU Modes	<CPUModes>
Active CPU	<CPUActive> <i>n</i> </CPUActive>
	<CPUActivePercent> <i>n</i> %</CPUActivePercent>
Reports	<Reports>S08</Reports>
Supv Mode	<SupvModeActive> <i>n</i> </SupvModeActive>
	<SupvModePercent> <i>n</i> %</SupvModePercent>
Prob Mode	<ProbModeActive> <i>n</i> </ProbModeActive>
	<ProbModePercent> <i>n</i> %</ProbModePercent>
In SVC	<InSVCActive> <i>n</i> </InSVCActive>
	<InSVCPercent> <i>n</i> %</InSVCPercent>
AMODE 24	<AMODE24Active> <i>n</i> </AMODE24Active>
	<AMODE24Percent> <i>n</i> %</AMODE24Percent>
AMODE 31	<AMODE31Active> <i>n</i> </AMODE31Active>
	<AMODE31Percent> <i>n</i> %</AMODE31Percent>
AMODE 64	<AMODE64Active> <i>n</i> </AMODE64Active>
	<AMODE64Percent> <i>n</i> %</AMODE64Percent>
User Key	<UserKeyActive> <i>n</i> </UserKeyActive>
	<UserKeyPercent> <i>n</i> %</UserKeyPercent>
System Key	<SystemKeyActive> <i>n</i> </SystemKeyActive>

Field title in online report	XML element
	<SystemKeyPercent>n%</SystemKeyPercent>
	</CPUModes>
Most Active DB2 Plans	<MostActiveDB2Plans>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>F05</Reports>
	<Plans>
<i>Plan Name</i>	<PlanName>name</PlanName>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</Plans>
	</MostActiveDB2Plans>
Most Active Package/ DBRMs	<MostActivePackageDBRMs>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>F03</Reports>
	<DBRMs>
<i>DBRM Name</i>	<DBRM>name</DRRM>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</DBRMs>
	</MostActivePackageDBRMs>
Most Active SQL Statements	<MostActiveSQLStatements>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>F04</Reports>
	<SQLStatement>
<i>Program:offset:verb</i>	<ProgramOffsetVerb>program:offset:verb</ProgramOffsetVerb>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</SQLStatement>
	</MostActiveSQLStatements>
Most Active IMS PSBs	<MostActiveIMSPSBs>
Samples	<Samples>n</Samples>

Field title in online report	XML element
	<Percent>n%</Percent>
Reports	<Reports>I05 I08 I11</Reports>
	<ActiveIMSPSBs>
PSB Name	<PSBName>name</PSBName>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</ActiveIMSPSBs>
	</MostActiveIMSPSBs>
Most Active IMS DLI Calls	<MostActiveIMSDLICalls>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>I07 I10 I13</Reports>
	<ActiveIMSDLICalls>
Sequence Number:DLI Function Code:PCB Name	<IMSCall>imscall</IMSCall>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</ActiveIMSDLICalls>
	</MostActiveIMSDLICalls>
Request Parameters	<RequestParameters>
Request Number	<RequestNumber>nnnnn</RequestNumber>
Description	<Description>description</Description>
Sample file DSN	<SampleFileDSN>dsn</SampleFileDSN>
Retention	<Retention>Day Mon-dd-yyyy</Retention>
Data Extractors	<DataExtractors>extractor list</DataExtractors>
Data Extractors (continued)	<DataExtractor2>extractor list</DataExtractor2>
Max DB2 Trace Entries	<MaxDB2>max entries</MaxDB2>
Max IMS Trace Entries	<MaxIMS>max entries</MaxIMS>
Max MQ Trace Entries	<MaxMQ>max entries</MaxMQ>
Requesting user	<RequestingUser>userid</RequestingUser>
Nbr of samples	<NumberOfSamples>n</NumberOfSamples>
Time of request	<TimeOfRequest>hh:mm:ss</TimeOfRequest>
Duration	<Duration>n sec</Duration>
Date of request	<DateOfRequest>Day Mon-dd-yyyy</DateOfRequest>
Active/pending	<ActivePending>Status</ActivePending>

Field title in online report	XML element
Job name	<JobName>name</JobName>
Proc step name	<ProcStepName>procstepname</ProcStepName>
Step name/number	<StepName>stepname</StepName>
Delay time	<DelayTime>n</DelayTime>
Step program	<StepProgram>steppgm</StepProgram>
Specific DB2 Parms	<SpecificDB2Parms>P F</SpecificDB2Parms>
DB2 Subsystem	<DB2SubSystem>systemid</DB2SubSystem>
DB2 Group name	<DB2GroupName>groupid</DB2GroupName>
Schema	<Schema>name</Schema>
Name	<Name>name</Name>
Stored Procedure Name	<SSPR_name>SSPRname</SSPR_name>
Correlation ID filters	<CorrelationId>correlID</CorrelationId>
User ID filters	<EndUserId>userID</EndUserId>
Workstation ID filters	<WorkstationId>workstationID</WorkstationId>
CICS transaction filters	<CICSTxnsLine1>tran</CICSTxnsLine1>
CICS transaction filters (continued)	<CICSTxnsLine2>tran</CICSTxnsLine2>
CICS terminal ID filters	<CICSTermIds>termID</CICSTermIds>
CICS System Transactions	<SystemTxns>Y/N</SystemTxns>
CICS Non-terminal Transactions	<NontermTxns>Y/N</NontermTxns>
IMS Transaction Code	<IMSTransactionCode>tranid</IMSTransactionCode>
IMS Program Name	<IMSProgramName>name</IMSProgramName>
IMS User Id	<IMSUserID>userid</IMSUserID>
IMS Subsystem Id	<IMSSubsystemId>systemid</IMSSubsystemId>
IMS Tran Code	<IMSTransCode>trancode</IMSTransCode>
	</RequestParameters>
Measurement environment	<MeasurementEnvironment>
Job name	<JobName>name</JobName>
Region size <16MB	<RegionSizeBelow>nK</RegionSizeBelow>
Job number	<JobNumber>number</JobNumber>
Region size >16MB	<RegionSizeAbove>nK</RegionSizeAbove>
Step name	<StepName>stepname</StepName>
Step program	<StepProgram>steppgm</StepProgram>
Proc step name	<ProcStepName>procstepname</ProcStepName>
Region type	<RegionType>regiontype</RegionType>

Field title in online report	XML element
ASID	<ASID>asid</ASID>
DB2 Attach type	<DB2AttachType>type</DB2AttachType>
System ID	<SystemID>sysid</SystemID>
APA Version	<APAVersion>version</APAVersion>
SMFID	<SMFID>smfid</SMFID>
IBM APA APAR	<APAApar>APAR</APAApar>
O/S level	<OSLevel>oslevel</OSLevel>
DB2 subsystem name	<DB2SubsystemName>db2sysname</DB2SubsystemName>
IMS system id	<IMSSystemId>imssysid</IMSSystemId>
General CPUs	<NbrOfCPUs>n</NbrOfCPUs>
CPU model	<CPUModel>model</CPUModel>
Specialty CPUs	<SpecialtyCPUs>n</SpecialtyCPUs>
CPU rate factor	<CPURateFactor>n</CPURateFactor>
MIPS per CPU	<MIPSPerCPU>n</MIPSPerCPU>
SUs per second	<SUsPerSecond>n</SUsPerSecond>
	</MeasurementEnvironment>
Measurement statistics	<MeasurementStatistics>
Start time	<StartTime>hh:mm:ss</StartTime>
Start date	<StartDate>Day Mon-dd-yyyy</StartDate>
End time	<EndTime>hh:mm:ss</EndTime>
End date	<EndDate>Day Mon-dd-yyyy</EndDate>
Total samples	<TotalSamples>n</TotalSamples>
Duration	<Duration>n min n sec</Duration>
Sampling rate	<SamplingRate>n per sec</SamplingRate>
Report dataspace	<ReportDataspace>nMB</ReportDataspace>
CPU/WAIT samples	<CPUWaitSamples>n</CPUWaitSamples>
Sample dataspace	<SampleDataspace>nMB</SampleDataspace>
TCB samples	<TCBSamples>n</TCBSamples>
Meas significance	<MeasurementSignificance>n%</MeasurementSignificance>
CPU queued samples	<CPUQueuedSamples>n</CPUQueuedSamples>
Pages in	<PagesIn>n</PagesIn>
Overall CPU	<OverallCPU>n%</OverallCPU>
Pages out	<PagesOut>n</PagesOut>
Overall zAAP CPU	<OverallzAAPCPU>n%</OverallzAAPCPU>
EXCPs	<EXCPs>n</EXCPs>

Field title in online report	XML element
Overall zIIP CPU	<OverallzIIPCPU>n%</OverallzIIPCPU>
	</MeasurementStatistics>
CPU consumption	<CPUConsumption>
CPU active samples	<CPUActiveSamples>n</CPUActiveSamples>
CPU time TCB	<CPUTimeTCB>n sec</CPUTimeTCB>
CPU active time	<CPUActiveTime>n%</CPUActiveTime>
CPU time SRB	<CPUTimeSRB>n sec</CPUTimeSRB>
CPU WAIT samples	<CPUWaitSamples>n</CPUWaitSamples>
Service Units	<ServiceUnits>n</ServiceUnits>
CPU WAIT time	<CPUWaitTime>n%</CPUWaitTime>
Measurement SRB	<MeasurementSRB>n sec</MeasurementSRB>
	<zAAPCPUConsumption>
zAAP CPU Time	< zAAPCPUTime>n sec< /zAAPCPUTime>
zAAP Time on CP	< zAAPTimeonCP >n sec</ zAAPTimeonCP >
Task Time on CP	< TaskTimeonCP>n sec</TaskTimeonCP>
Norm. Factor	< NormFactor>n</ NormFactor>
Normalized Time	< NormalizedTime>n sec</ NormalizedTime>
Enclave CPU time	<EnclaveCPUTime>n sec</EnclaveCPUTime>
	</zAAPCPUConsumption>
	</CPUConsumption>
DDF CPU consumption	<DDFCPUConsumption>
Task CPU time	<TaskCPUTime>n sec</TaskCPUTime>
zIIP time	<zIIPTime>n sec</zIIPTime>
Enclave CPU time	<EnclaveCPUTime>n sec</EnclaveCPUTime>
zIIP on CP time	<zIIPonCPTime>n sec</zIIPonCPTime>
	</DDFCPUConsumption>
	<ClientEnclaveConsumption>
Client SRB Time	<ClientSRBTime>n sec</ClientSRBTime>
Total TCB Time	<TotalTCBTime>n sec</TotalTCBTime>
	</ClientEnclaveConsumption>
Virtual Storage Map	<VirtualStorageMap>
	<Region>
Storage Type	<Name>storage type</Name>
Start Address	<Start>start address</Start>
End Address	<End>end address</End>

Field title in online report	XML element
Length of Storage	<Length> <i>length of storage</i> </Length>
	</Region>
	</VirtualStorageMap>

S02 Load Module Attributes

The table below lists all possible report tag pairs and their sub-elements hierarchically. When the XML document is created, the report tag pairs may be repeated, nested or eliminated as appropriate for the data in the report, and depending on the setup options chosen.

Field title in online report	XML element
	<LoadModuleAttributes>
Module Information for	<ModuleInformationFor> <i>name</i> </ModuleInformationFor>
Load Address	<LoadAddress> <i>n to n</i> </LoadAddress>
Module Size	<ModuleSize> <i>n</i> </ModuleSize>
Attributes	<Attributes> <i>attributes</i> </Attributes>
Module Location	<ModuleLocation> <i>location</i> </ModuleLocation>
SVC Module for	<SVCMModuleFor> <i>n</i> </SVCMModuleFor>
Loadlib DDNAME	<DDName> <i>ddname</i> </DDName>
Load Library	<LoadLibrary> <i>dsn</i> </LoadLibrary>
Program Group	<ProgramGroup> <i>pgmgroup</i> </ProgramGroup>
Subgroup	<SubGroup> <i>subgroup</i> </SubGroup>
Function	<Function> <i>function</i> </Function>
	<ESDInformationFor>
ESD Information for	<ModuleName> <i>name</i> </ModuleName>
	<ESDInformation>
External	<External> <i>external</i> </External>
Offset	<Offset> <i>n</i> </Offset>
Length	<Length> <i>n</i> </Length>
Start Addr	<StartAddr> <i>n</i> </StartAddr>
End Addr	<EndAddr> <i>n</i> </EndAddr>
Entry Points	<EntryPointCompiler>
Compiled by	<CompilerLanguage> <i>language</i> </CompilerLanguage>
	<CompilerVersion> <i>version</i> </CompilerVersion>
at	<TimeStamp> <i>yyyy/mm/dd hh:mm:ss</i> </TimeStamp>
	<EntryPointOffset>
	<HexOffset> <i>+n</i> </HexOffset>
	<EntryPointName> <i>name</i> </EntryPointName>

Field title in online report	XML element
	</EntryPointOffset>
	</EntryPointCompiler>
	</ESDInformation>
	</ESDInformationFor>
	</LoadModuleAttributes>

S03 Load Module Summary

The LoadModuleSummary tag pair and sub-elements are repeated for each module in the report.

Field title in online report	XML element
	<LoadModuleSummary>
Module	<ModuleName> <i>name</i> </ModuleName>
Locn	<Location> <i>location</i> </Location>
Address	<Address> <i>n</i> </Address>
Count	<Count> <i>n</i> </Count>
Size(bytes)	<Size> <i>n</i> </Size>
Attributes	<Attributes> <i>attributes</i> </Attributes>
DDName	<DDName> <i>ddname</i> </DDName>
LoadLibrary	<DatasetName> <i>dsn</i> </DatasetName>
	</LoadModuleSummary>

S04 TCB Summary

The TCBSummary tag pair and sub-elements are repeated for each task in the report. These tag pairs and sub-elements are also nested, with the ATTACHED subtasks relative to the parent tasks that performed the ATTACH function.

Field title in online report	XML element
	<TCBSummary>
TCB_Name	<TCBName> <i>name-index</i> </TCBName>
Address	<Address> <i>n</i> </Address>
Samples	<Samples> <i>n</i> </Samples>
CPU Active	<CPUActive> <i>n%</i> </CPUActive>
CPU WAIT	<CPUWait> <i>n%</i> </CPUWait>
Queued	<Queued> <i>n%</i> </Queued>
	</TCBSummary>

S05 Memory Usage Timeline

The UsageTimeline tag pair and sub-elements are repeated for each time interval.

Field title in online report	XML element
	<UsageTimeline>
SEQN	<SequenceNumber>n</SequenceNumber>
Seconds	<Seconds>n</Seconds>
Storage	<Storage>nK</Storage>
	</UsageTimeline>

S06 Data Space Usage Timeline

The UsageTimeline tag pair and sub-elements are repeated for each time interval.

Field title in online report	XML element
	<UsageTimeline>
SEQN	<SequenceNumber>n</SequenceNumber>
Seconds	<Seconds>n</Seconds>
Storage	<Storage>nK</Storage>
	</UsageTimeline>

S07 TCB Execution Summary

The TCBExecutionSummary tag pair and sub-elements are repeated for each task in the report. These tag pairs and sub-elements are also nested, with the ATTACHED subtasks relative to the parent tasks that performed the ATTACH function.

Field title in online report	XML element
	<TCBExecutionSummary>
TCB_Name	<TCBName>name-index</TCBName>
Seconds	<MeasuredCPU>n Sec</MeasuredCPU>
Storage	<TCBTotalCPU>n Sec</TCBTotalCPU>
	<FirstSample>n</FirstSample>
	<LastSample>n</LastSample>
	</TCBExecutionSummary>

S08 Processor Utilization Summary

The ProcessorUtilizationSummary tag pair and sub-elements are repeated for each CPU state in the report.

Field title in online report	XML element
	<ProcessorUtilizationSummary>
Processor State	<ProcessorState>state</ProcessorState>
Nbr of Samples	<NumberOfSamples>n</NumberOfSamples>
Percentage	<Percentage>n%</Percentage>
	</ProcessorUtilizationSummary>

S09 Measurement Analysis

The DetailLine element data is limited to 200 characters. When the details are greater than 200 characters, multiple DetailLine elements are included.

Field title in online report	XML element
	<MeasurementAnalysis>
	<Summary> <i>summary</i> </Summary>
	<Reports> <i>list of reports</i> </Reports>
	<AnalysisDetail>
	<DetailLine> <i>details</i> </DetailLine>
	</AnalysisDetail>
	</MeasurementAnalysis>

S10 Observation Session Messages

Table 14. S10 Observation Session Messages

Field title in online report	XML element
	<Sysout>
Name	<SysoutName> <i>name</i> </SysoutName>
Description	<SysoutDescription> <i>description</i> </SysoutDescription>
	<Message>
Name	<MessageId> <i>Id</i> </MessageId>
	<MessageSeverity> <i>severity</i> </MessageSeverity>
Description	<MessageDescription> <i>description</i> </MessageDescription>
	<MessageLines>
Description	<MessageText> <i>text</i> </MessageText>
	</MessageLines>
	</Message>
	</Sysout>

C01 CPU Usage by Category

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Category>
Name	<CategoryName> <i>name</i> </CategoryName>
Description	<CategoryDescription> <i>description</i> </CategoryDescription>
	<Measurements> <i>n</i> </Measurements>

Field title in online report	XML element
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</Category>
	<SQLRequest>
Name	<SequenceNumber> <i>n</i> </SequenceNumber>
Description	<ProgramStatementFunction> <i>name(stmt)function</i> </ProgramStatementFunction>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</SQLRequest>
	<LoadModule>
Name	<LoadModuleName> <i>name</i> </LoadModuleName>
Description	<LoadModuleDescription> <i>description</i> </LoadModuleDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</LoadModule>
	<CSECT>
Name	<CSECTName> <i>name</i> </CSECTName>
Description	<CSECTDescription> <i>description</i> </CSECTDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CSECT>
	<NoSymAddressRange>
Name	<AddressRange> <i>address</i> </AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</NoSymAddressRange>
	<DPAGroup>
Name	<DPAGroupName> <i>name</i> </DPAGroupName>
Description	<DPAGroupDescription> <i>description</i> </DPAGroupDescription>
	<Measurements> <i>n</i> </Measurements>

Field title in online report	XML element
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</DPAGroup>
	<SVCRoutine>
Name	<SVCIId> <i>svcid</i> </SVCIId>
Description	<SVCDescription> <i>description</i> </SVCDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</SVCRoutine>
	<DLICall>
Name	<SequenceNumber> <i>n</i> <SequenceNumber>
Description	<FunctionPCBProgramOffset> <i>FuncNameNameOffset</i> </FunctionPCBProgramOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</DLICall>
	<File>
Name	<DDName> <i>ddname</i> </DDName>
Description	<AccessMethod> <i>accessmethod</i> </AccessMethod>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</File>
	<DMRequest>
Name	<MacroName> <i>name</i> </MacroName>
Description	<MacroLocation> <i>location</i> </MacroLocation>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</DMRequest>
	<ADABASCommand>
Name	<Command> <i>n</i> </Command>
Description	<CSECTOffset> <i>offset</i> </CSECTOffset>
	<Measurement> <i>n</i> </Measurement>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>

Field title in online report	XML element
	</ADABASCommand>

C02 CPU Usage by Module

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<LoadModule>
Name	<LoadModuleName> <i>name</i> </LoadModuleName>
Description	<LoadModuleDescription> <i>description</i> </LoadModuleDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	<CSECT>
Name	<CSECTName> <i>name</i> </CSECTName>
Description	<CSECTDescription> <i>description</i> </CSECTDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CSECT>
	</LoadModule>
	<NoSymAddressRange>
Name	<AddressRange> <i>address</i> </AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</NoSymAddressRange>

C03 CPU Usage by Code Slice

The Code Slice tag pair and sub-elements are repeated for each code slice in the report.

Field title in online report	XML element
	<CodeSlice>
Address	<CodeSliceAddress> <i>n</i> </CodeSliceAddress>
Size Location	<SizeAndLocation> <i>n loc+offset</i> </SizeAndLocation>
	<Measurements> <i>n</i> </Measurements>

Field title in online report	XML element
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	<CodeAddress>
Address	<Address> <i>address</i> </Address>
Location	<Location> <i>loc+offset</i> </Location>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CodeAddress>
	</CodeSlice>

C04 CPU Usage Timeline

The Interval tag pair and sub-elements are repeated for each interval reported.

Field title in online report	XML element
	<Interval>
SEQN	<SequenceNumber> <i>n</i> </SequenceNumber>
Seconds	<Seconds> <i>n</i> </Seconds>
Sig	<Significance> <i>n</i> %</Significance>
	<Measurements> <i>n</i> </Measurements>
Percent of Interval * 10.00%	<Percent> <i>n</i> </Percent>
	</Interval>

C05 CPU Usage by Task/Category

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Task>
Name	<TaskName> <i>name</i> </TaskName>
Description	<TCBAddress>TCB= <i>address</i> </TCBAddress>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</Task>
	<Category>
Name	<CategoryName> <i>name</i> </CategoryName>
Description	<CategoryDescription> <i>description</i> </CategoryDescription>

Field title in online report	XML element
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</Category>
	<SQLRequest>
Name	<SequenceNumber> <i>n</i> </SequenceNumber>
Description	<ProgramStatementFunction> <i>name(stmt)function</i> </ProgramStatementFunction>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</SQLRequest>
	<LoadModule>
Name	<LoadModuleName> <i>name</i> </LoadModuleName>
Description	<LoadModuleDescription> <i>description</i> </LoadModuleDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</LoadModule>
	<CSECT>
Name	<CSECTName> <i>name</i> </CSECTName>
Description	<CSECTDescription> <i>description</i> </CSECTDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CSECT>
	<NoSymAddressRange>
Name	<AddressRange> <i>address</i> </AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</NoSymAddressRange>
	<DPAGroup>
Name	<DPAGroupName> <i>name</i> </DPAGroupName>
Description	<DPAGroupDescription> <i>description</i> </DPAGroupDescription>
	<Measurements> <i>n</i> </Measurements>

Field title in online report	XML element
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</DPAGroup>
	<SVCRoutine>
Name	<SVCIId> <i>svcid</i> </SVCIId>
Description	<SVCDescription> <i>description</i> </SVCDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</SVCRoutine>
	<DLICall>
Name	<SequenceNumber> <i>n</i> </SequenceNumber>
Description	<FunctionPCBProgramOffset> <i>FuncNameNameOffset</i> </FunctionPCBProgramOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</DLICall>
	<File>
Name	<DDName> <i>ddname</i> </DDName>
Description	<AccessMethod> <i>accessmethod</i> </AccessMethod>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</File>
	<DMRequest>
Name	<MacroName> <i>name</i> </MacroName>
Description	<MacroLocation> <i>location</i> </MacroLocation>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</DMRequest>
	<ADABASCommand>
Name	<Command> <i>n</i> </Command>
Description	<CSECTOffset> <i>offset</i> </CSECTOffset>
	<Measurement> <i>n</i> </Measurement>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>

Field title in online report	XML element
	</ADABASCommand>

C06 CPU Usage by Task/Module

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Task>
Name	<TaskName> <i>name</i> </TaskName>
Description	<TCBAddress>TCB= <i>n</i> </TCBAddress>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</Task>
	<LoadModule>
Name	<LoadModuleName> <i>name</i> </LoadModuleName>
Description	<LoadModuleDescription> <i>description</i> </LoadModuleDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</LoadModule>
	<CSECT>
Name	<CSECTName> <i>name</i> </CSECTName>
Description	<CSECTDescription> <i>description</i> </CSECTDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CSECT>
	<NoSymAddressRange>
Name	<AddressRange> <i>address</i> </AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</NoSymAddressRange>

C07 CPU Usage by Procedure

Field title in online report	XML element
	<SourceProgramProcedure>
Program	<Program> <i>name</i> </Program>
Procedure Name	<ProcedureName> <i>name</i> </ProcedureName>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</SourceProgramProcedure>
	<Category>
Program	<CategoryName> <i>name</i> </CategoryName>
Procedure Name	<CategoryDescription> <i>description</i> </CategoryDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</Category>

C08 CPU Usage Referred Attribution

Field title in online report	XML element
	<LoadModule>
Name	<LoadModuleName> <i>name</i> </LoadModuleName>
Description	<LoadModuleDescription> <i>description</i> </LoadModuleDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	<CSECT>
Name	<CSECTName> <i>name</i> </CSECTName>
Description	<CSECTDescription> <i>description</i> </CSECTDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	<AttributionOffset>
Name	<Offset> <i>n</i> </Offset>
Description	<OffsetInCSECT>Attribution Offset in <i>name</i> </OffsetInCSECT>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	<SourceStatements>

Field title in online report	XML element
Source Statement in:	<ProcedureName>n</ProcedureName>
	<SourceStatement>source</SourceStatement>
	</SourceStatements>
	</AttributionOffset>
	</CSECT>
	</LoadModule>
	<NoSymAddressRange>
Name	<AddressRange>address</AddressRange>
Description	<AddressRangeDescription>Unresolved Address </AddressRangeDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</NoSymAddressRange>

C09 CPU Usage by PSW/Object Code

Field title in online report	XML element
	<PSW Location>
Address	<Address>n</Address>
Module	<ModuleName>name</ModuleName>
AM	<AddressingMode>n</AddressingMode>
S/P	<SVCNumberorStateStorageKey>aa</SVCNumberorStateStorageKey>
AS	<AddressSpaceMode>mode</AddressSpaceMode>
ASID	<ASID>asid</ASID>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<MachineInstruction>
	<ModuleOffset>name+offset</ModuleOffset>
	<ObjectCode>object code</ObjectCode>
	<DisassembledCode>object code</DisassembledCode>
	</MachineInstruction>
	</PSWLocation>

C10 CPU Usage by Natural Program

Field title in online report	XML element
	<NaturalProgram>

Field title in online report	XML element
Program	<ProgramName> <i>name</i> </ProgramName>
Library	<Library> <i>library</i> </Library>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	<NaturalStatement>
Program	<StatementNumberKey> <i>n</i> </StatementNumberKey>
Library	<StatementNumber>stmt # <i>n</i> </StatementNumber>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</NaturalStatement>
	</NaturalProgram>

W01 WAIT Time by Task/Category

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Task>
Name	<TaskName> <i>name</i> </TaskName>
Description	<TCBAddress>TCB= <i>n</i> </TCBAddress>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</Task>
	<Category>
Name	<CategoryName> <i>name</i> </CategoryName>
Description	<CategoryDescription> <i>description</i> </CategoryDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</Category>
	<SQLRequest>
Name	<SequenceNumber> <i>n</i> </SequenceNumber>
Description	<ProgramStatementFunction> <i>name(stmt)function</i> </ProgramStatementFunction>
	<Measurements> <i>n</i> </Measurements>

Field title in online report	XML element
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</SQLRequest>
	<LoadModule>
Name	<LoadModuleName> <i>name</i> </LoadModuleName>
Description	<LoadModuleDescription> <i>description</i> </LoadModuleDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</LoadModule>
	<CSECT>
Name	<CSECTName> <i>name</i> </CSECTName>
Description	<CSECTDescription> <i>description</i> </CSECTDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</CSECT>
	<NoSymAddressRange>
Name	<AddressRange> <i>address</i> </AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</NoSymAddressRange>
	<DPAGroup>
Name	<DPAGroupName> <i>name</i> </DPAGroupName>
Description	<DPAGroupDescription> <i>description</i> </DPAGroupDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</DPAGroup>
	<SVCRoutine>
Name	<SVCIId> <i>svcid</i> </SVCIId>
Description	<SVCDDescription> <i>description</i> </SVCDDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>

Field title in online report	XML element
	</SVCRoutine>
	<DLICall>
Name	<SequenceNumber> <i>n</i> </SequenceNumber>
Description	<FunctionPCBProgramOffset> <i>FuncNameNameOffset</i> </FunctionPCBProgramOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</DLICall>
	<File>
Name	<DDName> <i>ddname</i> </DDName>
Description	<AccessMethod> <i>accessmethod</i> </AccessMethod>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</File>
	<DMRequest>
Name	<MacroName> <i>name</i> </MacroName>
Description	<MacroLocation> <i>location</i> </MacroLocation>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</DMRequest>
	<ADABASCommand>
Name	<Command> <i>n</i> </Command>
Description	<CSECTOffset> <i>offset</i> </CSECTOffset>
	<Measurement> <i>n</i> </Measurement>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</ADABASCommand>

W02 WAIT Time by Task/Module

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Task>
Name	<TaskName> <i>name</i> </TaskName>

Field title in online report	XML element
Description	<TCBAddress>TCB= <i>n</i> </TCBAddress>
	<Measurements> <i>n</i> </Measurements>
Percent of TIME in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</Task>
	<LoadModule>
Name	<LoadModuleName> <i>name</i> </LoadModuleName>
Description	<LoadModuleDescription> <i>description</i> </LoadModuleDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of TIME in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</LoadModule>
	<CSECT>
Name	<CSECTName> <i>name</i> </CSECTName>
Description	<CSECTDescription> <i>description</i> </CSECTDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of TIME in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</CSECT>
	<NoSymAddressRange>
Name	<AddressRange> <i>address</i> </AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of TIME in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</NoSymAddressRange>

W03 WAIT Referred Attribution by Task

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Task>
Name	<TaskName> <i>name</i> </TaskName>
Description	<TCBAddress>TCB= <i>n</i> </TCBAddress>
	<Measurements> <i>n</i> </Measurements>

Field title in online report	XML element
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	</Task>
	<LoadModule>
Name	<LoadModuleName> <i>name</i> </LoadModuleName>
Description	<LoadModuleDescription> <i>description</i> </LoadModuleDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	<CSECT>
Name	<CSECTName> <i>name</i> </CSECTName>
Description	<CSECTDescription> <i>description</i> </CSECTDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	<AttributionOffset>
Name	<Offset> <i>n</i> </Offset>
Description	<OffsetInCSECT>Attribution Offset in <i>csectname</i> </OffsetInCSECT>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>
	<SourceStatements>
Source Statement in:	<ProcedureName> <i>name</i> </ProcedureName>
	<SourceStatement> <i>source</i> </SourceStatement>
	</SourceStatements>
	</AttributionOffset>
	</CSECT>
	</LoadModule>

W04 WAIT Time by Task ENQ/RESERVE

Field title in online report	XML element
	<Task>
Name	<TaskName> <i>name</i> </TaskName>
Description	<TCBAddress>TCB= <i>n</i> </TCBAddress>
	<Measurements> <i>n</i> </Measurements>
Percent of Time in WAIT * 10.00%	<Percent> <i>n</i> </Percent>

Field title in online report	XML element
	<Enqueue>
Name	<QName>name</QName>
Description	<RName>name</RName>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</Enqueue>
	</Task>

W05 WAIT Time by Tape DDNAME

Field title in online report	XML element
	<WaitForTape>
DDNAME	<DDName>ddname</DDName>
Device	<Device>description</Device>
	<Measurements>n</Measurements>
Percent of Time in WAIT * 10.00%	<Percent>n</Percent>
	</WaitForTape>

D01 DASD Usage Time by Device

Field title in online report	XML element
	<ByVolser>
Volume>Cyl	<Volser>volser</Volser>
Unit-Dev>DD	<UnitDevice>unit-device</UnitDevice>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<ByCylinder>
Volume>Cyl	<Cylinder>Cyl_n</Cylinder>
Unit-Dev>DD	<DDName>ddname</DDName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</ByCylinder>
	</ByVolser>

D02 DASD Usage Time by DDNAME

Field title in online report	XML element
	<ByDDName>
DDNAME>Cyl	<DDName>ddname</DDName>
Volume>Unit	<Volser>volser</Volser>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<ByCylinder>
DDNAME>Cyl	<Cylinder>Cyl_n</Cylinder>
Volume>Unit	<UnitDevice>unit-device</UnitDevice>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</ByCylinder>
	</ByDDName>

D03 DASD Usage Time by Dataset

Field title in online report	XML element
	<ByDataset>
Dataset Name>DDName	<DatasetName>dsn</DatasetName>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<ByDDName>
Dataset Name>DDName	<DDName>ddname</DDName>
	<Volser>volser</Volser>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</ByDDName>
	</ByDataset>

D04 Dataset Attributes

Field title in online report	XML element
	<DatasetAttributes>
	<FileType>filetype</FileType>
	<DDName>ddname</DDName>
OPENed at	<OpenTime>hh:mm:ss.ss</OpenTime>
	<OpenDate>Day Month dd yyyy</OpenDate>

Field title in online report	XML element
	<FileDefinition>
DDNAME	<DDName>ddname</DDName>
Open Intent	<OpenIntent>intent</OpenIntent>
Dataset Name	<DatasetName>dsn</DatasetName>
	<ManagementClass>class</ManagementClass>
	<StorageClass>class</StorageClass>
	<DataClass>class</DataClass>
Device Type	<DeviceType>type</DeviceType>
Nbr of Extents	<NbrOfExtents>n</NbrOfExtents>
Dataset Org	<DatasetOrg>dsorg</DatasetOrg>
Block Size (BLKSIZE)	<BlockSize>n</BlockSize>
RECFM	<RecordFormat>rfm</RecordFormat>
Record Size (LRECL)	<RecordSize>n</RecordSize>
Data Buffers	<DataBuffers>n</DataBuffers>
	<VOLERS>
Volume Serial	<Volser>volser</Volser>
	</VOLERS>
	</FileDefinition>
	<VSAMDataComponent>
DDNAME	<DDName>ddname</DDName>
Open Intent	<OpenIntent>intent</OpenIntent>
Dataset Name	<DatasetName>dsn</DatasetName>
	<ManagementClass>class</ManagementClass>
	<StorageClass>class</StorageClass>
	<DataClass>class</DataClass>
Device Type	<DeviceType>type</DeviceType>
% Free Bytes in CI	<PercentFreeBytesInCI>n%</PercentFreeBytesInCI>
CI Splits (Initial)	<CISplitsInitial>n</CISplitsInitial>
CI Splits (Last)	<CISplitsLast>n</CISplitsLast>
CI Size	<CISize>n</CISize>
CA Splits (Initial)	<CASplitsInitial>n</CASplitsInitial>
CA Splits (Last)	<CASplitsLast>n</CASplitsLast>
Record Size (LRECL)	<RecordSize>n</RecordSize>
Logical Records (Initial)	<RecordsInitial>n</RecordsInitial>
Logical Records (Last)	<RecordsLast>n</RecordsLast>

Field title in online report	XML element
Number of Extents	<NbrOfExtents>n</NbrOfExtents>
Deleted Records (Initial)	<DeletedRecordsInitial>n</DeletedRecordsInitial>
Deleted Records (Last)	<DeletedRecordsLast>n</DeletedRecordsLast>
SHAREOPTIONS	<ShareOptions>(n n)</ShareOptions>
Insrted Records (Initial)	<InsertedRecordsInitial>n</InsertedRecordsInitial>
Insrted Records (Last)	<InsertedRecordsLast>n</InsertedRecordsLastl>
Organization	<Organization>org</Organization>
Retrvd Records (Initial)	<RetrievedRecordsInitial>n</RetrievedRecordsInitial>
Retrvd Records (Last)	<RetrievedRecordsLast>n</RetrievedRecordsLast>
CIs per CA	<CIsPerCa>n</CIsPerCa>
Updated Records (Initial)	<UpdatedRecordsInitial>n<UpdatedRecordsInitial>
Updated Records (Last)	<UpdatedRecordsLast>n<UpdatedRecordsLast>
Free CIs per CA	<FreeCIsPerCa>n</FreeCIsPerCa>
Bytes Free Space (Initial)	<BytesFreeSpaceInitial>n</BytesFreeSpaceInitial>
Bytes Free Space (Last)	<BytesFreeSpaceLast>n</BytesFreeSpaceLast>
Free Bytes per CI	<FreeBytesPerCI>n</FreeBytesPerCI>
Number of EXCPs (Initial)	<NumberOfEXCPsInitial>n</NumberOfEXCPsInitial>
Number of EXCPs (Last)	<NumberOfEXCPsLast>n</NumberOfEXCPsLast>
% Free CIs in CA	<PercentFreeCisInCA>n%</PercentFreeCisInCA>
Strings	<Strings>n</Strings>
String Waits	<StringWaits>n</StringWaits>
String Waist HWM	<StringWaitsHWM>n</StringWaitsHWM>
Data Buffers	<DataBuffers>n</DataBuffers>
Index Buffers	<IndexBuffers>n</IndexBuffers>
	<VOLSERS>
Volume Serial	<Volser>volser</Volser>
	</VOLSERS>
	</VsamDataComponent>
	<VSAMIndexComponent>
Dataset Name	<DatasetName>dsn</DatasetName>
	<ManagementClass>class</ManagementClass>
	<StorageClass>class</StorageClass>
	<DataClass>class</DataClass>
Device Type	<DeviceType>type</DeviceType>
% Free Bytes in CI	<PercentFreeBytesInCI>n%</PercentFreeBytesInCI>

Field title in online report	XML element
CI Splits (Initial)	<CISplitsInitial>n</CISplitsInitial>
CI Splits (Last)	<CISplitsLast>n</CISplitsLast>
CI Size	<CISize>n</CISize>
CA Splits (Initial)	<CASplitsInitial>n</CASplitsInitial>
CA Splits (Last)	<CASplitsLast>n</CASplitsLast>
Record Size (LRECL)	<RecordSize>n</RecordSize>
Logical Records (Initial)	<RecordsInitial>n</RecordsInitial>
Logical Records (Last)	<RecordsLast>n</RecordsLast>
Number of Extents	<NbrOfExtents>n</NbrOfExtents>
Deleted Records (Initial)	<DeletedRecordsInitial>n</DeletedRecordsInitial>
Deleted Records (Last)	<DeletedRecordsLast>n</DeletedRecordsLast>
SHAREOPTIONS	<ShareOptions>(n n)</ShareOptions>
Insrted Records (Initial)	<InsertedRecordsInitial>n</InsertedRecordsInitial>
Insrted Records (Last)	<InsertedRecordsLast>n</InsertedRecordsLast>
Organization	<Organization>org</Organization>
Retrvd Records (Initial)	<RetrievedRecordsInitial>n</RetrievedRecordsInitial>
Retrvd Records (Last)	<RetrievedRecordsLast>n</RetrievedRecordsLast>
CIs per CA	<CIsPerCa>n</CIsPerCa>
Updated Records (Initial)	<UpdatedRecordsInitial>n<UpdatedRecordsInitial>
Updated Records (Last)	<UpdatedRecordsLast>n<UpdatedRecordsLast>
Free CIs per CA	<FreeCIsPerCa>n</FreeCIsPerCa>
Bytes Free Space (Initial)	<BytesFreeSpaceInitial>n</BytesFreeSpaceInitial>
Bytes Free Space (Last)	<BytesFreeSpaceLast>n</BytesFreeSpaceLast>
Free Bytes per CI	<FreeBytesPerCI>n</FreeBytesPerCI>
Number of EXCPs (Initial)	<NumberOfEXCPsInitial>n</NumberOfEXCPsInitial>
Number of EXCPs (Last)	<NumberOfEXCPsLast>n</NumberOfEXCPsLast>
% Free CIs in CA	<PercentFreeCisInCA>n%</PercentFreeCisInCA>
	<VOLSERS>
Volume Serial	<Volser>volser</Volser>
	</VOLSERS>
	</VsamIndexComponent>
	<DasdPerformance>
Avg Response Time	<AvgResponseTime>n</AvgResponseTime>
Avg Pending Time	<AvgPendingTime>n</AvgPendingTime>
Avg Disconnect Time	<AvgDisconnectTime>n</AvgDisconnectTime>

Field title in online report	XML element
Avg Connect Time	<AvgConnectTime>n</AvgConnectTime>
Avg Queued Time	<AvgQueuedTime>n</AvgQueuedTime>
Total I/Os	<TotalIOs>n</TotalIOs>
Cache Candidates	<CacheCandidates>n</CacheCandidates>
Cache Hits	<CacheHits>n</CacheHits>
Write Candidates	<WriteCandidates>n</WriteCandidates>
Write Hits	<WriteHits>n</WriteHits>
	</DasdPerformance>
Concatenated Datasets	<ConcatenatedDatasets>
	<DSName>dsn</DSName> Repeated as necessary
	</ConcatenatedDatasets>
	</DatasetAttributes>

D05 DASD EXCP Summary

Field title in online report	XML element
	<DASDEXCPSummary>
DDNAME	<DDName>ddname</DDName>
Type	<Type>type</Type>
Concat	<ConcatenationNumber>+n</ConcatenationNumber>
At Start	<StartEXCPs>n</StartEXCPs>
At End	<EndEXCPs>n</EndEXCPs>
During Measurement	<DifferenceEXCPs>n</DifferenceEXCPs>
	</DASDEXCPSummary>

D06 DASD VSAM Statistics

Field title in online report	XML element
	<VSAMStatistics>
DDNAME	<DDName>ddname</DDName>
Retrvd	<RecordsRetrieved>n</RecordsRetrieved>
Added	<RecordsAdded>+n</RecordsAdded>
Insrtd	<RecordsInserted>n</RecordsInserted>
Deletd	<RecordsDeleted>n</RecordsDeleted>
Updatd	<RecordsUpdated>n</RecordsUpdated>
EXCPs	<EXCPs>n</EXCPs>
FreeSpc	<ChangeFreeSpace>+n</ChangeFreeSpace>

Field title in online report	XML element
CISplts	<ChangeCISplits>+n</ChangeCISplits>
CASplts	<ChangeCASplits>+n</ChangeCASplits>
Str Wt	<StringWaits>n</StringWaits>
StrHWM	<StringWaitsHWM>n</StringWaitsHWM> >
	</VSAMStatistics

D07 DASD Activity Timeline

Field title in online report	XML element
	<DASDActivityTimeline>
	<Samples>n</Samples>
	<Duration>n</Duration>
DDN	<DDN>ddname</DDN>
Type	<Type>type</Type>
Vol	<Vol>volser</Vol>
Unit	<Unit>unit</Unit>
	<Intervals>
	<IntervalPct>n</IntervalPct> Repeated 50 times
	</Interval>
	</DASDActivityTimeline>

D08 DASD I/O Wait Time

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<ByDDName>
Name	<DDName>ddname</DDName>
Description	<Volser>volser</Volser>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<SVCRoutine>
Name	<SVCIId>svcid</SVCIId>
Description	<SVCDDescription>description</SVCDDescription>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	</SVCRoutine>

Field title in online report	XML element
	<DMRequest>
Name	<MacroName> <i>name</i> </MacroName>
Description	<MacroLocation> <i>location</i> </MacroLocation>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</DMRequest>
	<LoadModule>
Name	<LoadModuleName> <i>name</i> </LoadModuleName>
Description	<LoadModuleDescription> <i>description</i> </LoadModuleDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</LoadModule>
	<CSECT>
Name	<CSECTName> <i>name</i> </CSECTName>
Description	<CSECTDescription> <i>description</i> </CSECTDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CSECT>
	</ByDDName>

D09 VSAM Buffer Pool Usage

Field title in online report	XML element
	<LSRPool>
LSR Pool	<PoolNumber> <i>n</i> </PoolNumber>
Type (Data/Index)	<Type> <i>type</i> </Type>
Reads (Initial)	<ReadsInitial> <i>n</i> </ReadsInitial>
Reads (Last)	<ReadsLast> <i>n</i> </ReadsLast>
Reads (Difference)	<ReadsDifference> <i>n</i> </ReadsDifference>
Buffer Size	<BufferSize> <i>n</i> </BufferSize>
Reads Avoided (Initial)	<ReadsAvoidedInitial> <i>n</i> </ReadsAvoidedInitial>
Reads Avoided (Last)	<ReadsAvoidedLast> <i>n</i> </ReadsAvoidedLast>
Reads Avoided (Difference)	<ReadsAvoidedDifference> <i>n</i> </ReadsAvoidedDifference>
Buffers	<Buffers> <i>n</i> </Buffers>
User Writes (Initial)	<UserWritesInitial> <i>n</i> </UserWritesInitial>
User Writes (Last)	<UserWritesLast> <i>n</i> </UserWritesLast>

Field title in online report	XML element
User Writes (Difference)	<UserWritesDifference>n</UserWritesDifference>
Hiperspace Buffers	<HiperspaceBuffers>n</HiperspaceBuffers>
Non-user Writes (Initial)	<NonUserWritesInitial>n</NonUserWritesInitial>
Non-user Writes (Last)	<NonUserWritesLast>n</NonUserWritesLast>
Non-user Writes (Difference)	<NonUserWritesDifference>n</NonUserWritesDifference>
	</LSRPool>

G01 Coupling Facility Statistics

Field title in online report	XML element
	<CouplingFacilityStatistics>
Facility Summary	<CFName>name</CFName>
CF Storage	<CFStorage>nK</CFStorage>
CF Storage Used	<CFStorageUsed>nK</CFStorageUsed>
CF Dump Storage	<CFDumpStorage>nK</CFDumpStorage>
CF Storage for Structures	<CFStorageForStructures>nK</CFStorageForStructures>
Subchannel Contention Count	<SubchannelContentionCount>n</SubchannelContentionCount>
Subchannel Contention Time uSec	<SubchannelContentionCountuSec>n</SubchannelContentionCountuSec>
Failed Request Count	<FailedRequestCount>n</FailedRequestCount>
Failed Request Time uSec	<FailedRequestTimeuSec>n</FailedRequestTimeuSec>
Number of Processors	<NumberOfProcessors>n</NumberOfProcessors>
Processor Utilization	<ProcessorUtilization>n%</ProcessorUtilization>
	</CouplingFacilityStatistics>

G02 Coupling Facility Mean Service Times

Field title in online report	XML element
	<CouplingFacilityServiceTimes>
Name	<CFName>name</CFName> or <StructureName>name</StructureName>
Number of Requests (Sync)	<RequestsSync>n</RequestsSync>
Number of Requests (Async)	<RequestsAsynch>n</RequestsAsynch>
Number of Requests (Queued)	<RequestsQueued>n</RequestsQueued>
Number of Requests (Delay)	<RequestsDelay>n</RequestsDelay>

Field title in online report	XML element
Mean uSeconds (Sync)	<SecondsSync> <i>n</i> </SecondsSync>
Mean uSeconds (Async)	<SecondsAsynch> <i>n</i> </SecondsAsynch>
Mean uSeconds (Queued)	<SecondsQueued> <i>n</i> </SecondsQueued>
Mean uSeconds (Delay)	<SecondsDelay> <i>n</i> </SecondsDelay>
	</CouplingFacilityServiceTimes>

G03 Coupling Facility Total Service Times

Field title in online report	XML element
	<CouplingFacilityServiceTimes>
Name	<CFName> <i>name</i> </CFName> or <StructureName> <i>name</i> </StructureName>
Number of Requests (Sync)	<RequestsSync> <i>n</i> </RequestsSync>
Number of Requests (Async)	<RequestsAsynch> <i>n</i> </RequestsAsynch>
Number of Requests (Queued)	<RequestsQueued> <i>n</i> </RequestsQueued>
Number of Requests (Delay)	<RequestsDelay> <i>n</i> </RequestsDelay>
Total uSeconds (Sync)	<SecondsSync> <i>n</i> </SecondsSync>
Total uSeconds (Async)	<SecondsAsynch> <i>n</i> </SecondsAsynch>
Total uSeconds (Queued)	<SecondsQueued> <i>n</i> </SecondsQueued>
Total uSeconds (Delay)	<SecondsDelay> <i>n</i> </SecondsDelay>
	</CouplingFacilityServiceTimes>

K01 CPU SRB Usage by SRB Type

The following elements might be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CPUSRBUUsageBySRBType>
Name	<Name> <i>name</i> </Name>
Description	<Description> <i>description</i> </Description>
zIIP	<zIIPPercent> <i>n</i> </zIIPPercent>
zAAP	<zAAPPercent> <i>n</i> </zAAPPercent>
GPU	<CPUPercent> <i>n</i> </CPUPercent>
Total	<TotalPercent> <i>n</i> </TotalPercent>
	</CPUSRBUUsageBySRBType>

K02 CPU SRB Usage by PSW/OBbjCode

Field title in online report	XML element
	<PSWLocation>
Address	<Address> <i>n</i> </Address>
Module	<ModuleName> <i>name</i> </ModuleName>
AM	<AddressingMode> <i>n</i> </AddressingMode>
S/P	<SVCNumberorStateStorageKey> <i>aa</i> </SVCNumberorStateStorageKey>
AS	<AddressSpaceMode> <i>mode</i> </AddressSpaceMode>
ASID	<ASID> <i>asid</i> </ASID>
	<Measurements> <i>n</i> </Measurements>
Percent	<Percent> <i>n</i> </Percent>
	<MachineInstruction>
Address	<ModuleOffset> <i>offset</i> </ModuleOffset>
	<ObjectCode> <i>object code</i> </ObjectCode>
	<DisassembledCode> <i>object code</i> </DisassembledCode>
	</MachineInstruction>
	</PSWLocation>

V01 Measurement Variance Summary

The following tag pairs are repeated multiple times in each variance report. The first occurrence of the tag pair reports the base measurement (Ref 01). Following Ref 01, the tag pairs are repeated for every tagged measurement (Ref *n*).

- <MeasurementsAnalyzed></MeasurementsAnalyzed>
- <CPUTimeTCBVariance></CPUTimeTCBVariance>
- <CPUTimeSRBVariance></CPUTimeSRBVariance>
- <EXCPRequestsVariance></EXCPRequestsVariance>
- <ServiceUnitsVariance></ServiceUnitsVariance>
- <CPUActiveSamplesVariance></CPUActiveSamplesVariance>
- <WaitSamplesVariance></WaitSamplesVariance>
- <QueuedSamplesVariance></QueuedSamplesVariance>

Field title in online report	XML element
The Following Measurements are Analyzed	<MeasurementsAnalyzed>
Ref	<Ref> <i>n</i> </Ref>
ReqNum	<ReqNum> <i>n</i> </ReqNum>
Job Name	<JobName> <i>name</i> </JobName>

Field title in online report	XML element
Date	<Date>Mon-dd-yyyy</Date>
Time	<Time>hh:mm</Time>
Description	<Description>description</Description>
	</MeasurementsAnalyzed>
CPU Time TCB	<CPUTimeTCBVariance>
Ref	<Ref>n</Ref>
CPU Time TCB	<CPUTimeTCB>n sec</CPUTimeTCB>
Variance	<Variance>variance</Variance>
	</CPUTimeTCBVariance>
CPU Time SRB	<CPUTimeSRBVariance>
Ref	<Ref>n</Ref>
CPU Time SRB	<CPUTimeSRB>n sec</CPUTimeSRB>
Variance	<Variance>variance</Variance>
	</CPUTimeSRBVariance>
EXCP Requests	<EXCPRequestsVariance>
Ref	<Ref>n</Ref>
EXCP Requests	<EXCPRequests>n</EXCPRequests>
Variance	<Variance>variance</Variance>
	</EXCPRequestsVariance>
Service Units	<ServiceUnitsVariance>
Ref	<Ref>n</Ref>
Service Units	<ServiceUnits>n</ServiceUnits>
Variance	<Variance>variance</Variance>
	</ServiceUnitsVariance>
Percentage of CPU Active Samples	<CPUActiveSamplesVariance>
Ref	<Ref>n</Ref>
Sample Count (CPU Active)	<CPUActive>n</CPUActive>
Sample Count (Total)	<Total>n</Total>
Percentage	<Percentage>n%</Percentage>
Variance	<Variance>variance</Variance>
	</CPUActiveSamplesVariance>
Percentage of WAIT Samples	<WaitSamplesVariance>
Ref	<Ref>n</Ref>
Sample Count (TCB Wait)	<TCBWait>n</TCBWait>

Field title in online report	XML element
Sample Count (Total)	<Total> <i>n</i> </Total>
Percentage	<Percentage> <i>n</i> %</Percentage>
Variance	<Variance> <i>variance</i> </Variance>
	</WaitSamplesVariance>
Percentage of Queued Samples	<QueuedSamplesVariance>
Ref	<Ref> <i>n</i> </Ref>
Sample Count (Queued)	<Queued> <i>n</i> </Queued>
Sample Count (Total)	<Total> <i>n</i> </Total>
Percentage	<Percentage> <i>n</i> %</Percentage>
Variance	<Variance> <i>variance</i> </Variance>
	</QueuedSamplesVariance>

V02 CICS Variance Summary

The following tag pairs are repeated multiple times in each variance report. The first occurrence of the tag pair reports the base measurement (Ref 01). Following Ref 01, the tag pairs are repeated for every tagged measurement (Ref *n*).

- <MeasurementsAnalyzed></MeasurementsAnalyzed>
- <CICSTransactionVariance></CICSTransactionVariance>
- <CICSCPUTimeVariance></CICSCPUTimeVariance>
- <CICSSuspendTimeVariance></CICSSuspendTimeVariance>
- <CICSDispatchTimeVariance></CICSDispatchTimeVariance>
- <CICSMVSDispatchTimeVariance></CICSMVSDispatchTimeVariance>
- <CICSServiceTimeVariance></CICSServiceTimeVariance>

Field title in online report	XML element
The Following Measurements are Analyzed	<MeasurementsAnalyzed>
Ref	<Ref> <i>n</i> </Ref>
ReqNum	<ReqNum> <i>n</i> </ReqNum>
Job Name	<JobName> <i>name</i> </JobName>
Date	<Date> <i>Mon-dd-yyyy</i> </Date>
Time	<Time> <i>hh:mm</i> </Time>
Description	<Description> <i>description</i> </Description>
	</MeasurementsAnalyzed>
CICS Transaction Statistics	<CICSTransactionVariance>
Ref	<Ref> <i>n</i> </Ref>
Task Number Start	<TaskStart> <i>n</i> </TaskStart>

Field title in online report	XML element
Task Number End	<TaskEnd>n</TaskEnd>
Transaction Count	<TranCount>n</TranCount>
Transaction Obsvd	<TranObserved>n</TranObserved>
Rate	<TranRate>n per sec</TranRate>
Variance	<Variance>variance</Variance>
	</CICSSTransactionVariance>
Mean Execution Time	<CICSPUTimeVariance>
Ref	<Ref>n</Ref>
Time	<MeanCPUTime>n sec</MeanCPUTime>
Variance	<Variance>variance</Variance>
	</CICSPUTimeVariance>
Mean Suspend Time	<CICSSuspendTimeVariance>
Ref	<Ref>n</Ref>
Time	<MeanSuspendTime>n sec</MeanSuspendTime>
Variance	<Variance>variance</Variance>
	</CICSSuspendTimeVariance>
Mean CICS Dispatch Delay Time	<CICSDispatchTimeVariance>
Ref	<Ref>n</Ref>
Time	<MeanDispatchTime>n sec</MeanDispatchTime>
Variance	<Variance>variance</Variance>
	</CICSDispatchTimeVariance>
Mean MVS Dispatch Delay Time	<CICSMVSDispatchTimeVariance>
Ref	<Ref>n</Ref>
Time	<MeanMVSDispatchTime>n sec</MeanMVSDispatchTime>
Variance	<Variance>variance</Variance>
	</CICSMVSDispatchTimeVariance>
Mean Service Time	<CICSServiceTimeVariance>
Ref	<Ref>n</Ref>
Time	<MeanServiceTime>n sec</MeanServiceTime>
Variance	<Variance>variance</Variance>
	</CICSServiceTimeVariance>

V03 DB2 Variance Summary

The following tag pairs are repeated multiple times in each variance report. The first occurrence of the tag pair reports the base measurement (Ref 01). Following Ref 01, the tag pairs are repeated for every tagged measurement (Ref *n*).

- <MeasurementsAnalyzed></MeasurementsAnalyzed>
- <DB2SQLVariance></DB2SQLVariance>
- <SQLObservations></SQLObservations>
- <SQLCallsExecuted></SQLCallsExecuted>
- <SQLCallRate></SQLCallRate>
- <SQLCallsCounted></SQLCallsCounted>
- <SQLThroughput></SQLThroughput>
- <SQLServiceTime></SQLServiceTime>
- <SQLCallMaxTime></SQLCallMaxTime>
- <SQLCallMinTime></SQLCallMinTime>
- <SQLCPUTime></SQLCPUTime>
- <SQLCallMaxCPUTime></SQLCallMaxCPUTime>
- <SQLCallMinCPUTime></SQLCallMinCPUTime>

Field title in online report	XML element
The Following Measurements are Analyzed	<MeasurementsAnalyzed>
Ref	<Ref> <i>n</i> </Ref>
ReqNum	<ReqNum> <i>n</i> </ReqNum>
Job Name	<JobName> <i>name</i> </JobName>
Date	<Date> <i>Mon-dd-yyyy</i> </Date>
Time	<Time> <i>hh:mm</i> </Time>
Description	<Description> <i>description</i> </Description>
	</MeasurementsAnalyzed>
SQL calls sampled	<DB2SQLVariance>
Ref	<Ref> <i>n</i> </Ref>
Subsys	<Subsystem> <i>name</i> </Subsystem>
Version	<Version> <i>version</i> </Version>
Calls Sampled	<CallsSampled> <i>n</i> </CallsSampled>
Variance	<Variance> <i>variance</i> </Variance>
	</DB2SQLVariance>
SQL observations	<SQLObservations>
Ref	<Ref> <i>n</i> </Ref>
Count	<SQLCount> <i>n</i> </SQLCount>
Variance	<Variance> <i>variance</i> </Variance>

Field title in online report	XML element
	</SQLObservations>
SQL calls executed	<SQLCallsExecuted>
Ref	<Ref>n</Ref>
Count	<SQLCount>n</SQLCount>
Variance	<Variance>variance</Variance>
	</SQLCallsExecuted>
Avg SQL call rate	<SQLCallRate>
Ref	<Ref>n</Ref>
Rate	<SQLRate>n per sec</SQLRate>
Variance	<Variance>variance</Variance>
	</SQLCallRate>
SQL calls counted	<SQLCallsCounted>
Ref	<Ref>n</Ref>
Count	<SQLCount>n</SQLCount>
Variance	<Variance>variance</Variance>
	</SQLCallsCounted>
SQL throughput	<SQLThroughput>
Ref	<Ref>n</Ref>
Rate	<SQLRate>n per sec</SQLRate>
Variance	<Variance>variance</Variance>
	</SQLThroughput>
SQL service time	<SQLServiceTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</SQLServiceTime>
SQL call max	<SQLCallMaxTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</SQLCallMaxTime>
SQL call min time	<SQLCallMinTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>

Field title in online report	XML element
	</SQLCallMinTime>
SQL CPU time	<SQLCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</SQLCPUTime>
SQL call max CPU time	<SQLCallMaxCPUTime>
Ref	<Ref>n</Ref> >
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</SQLCallMaxCPUTime>
SQL call min CPU time	<SQLCallMinCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</SQLCallMinCPUTime>

V04 IMS Variance Summary

The following tag pairs are repeated multiple times in each variance report. The first occurrence of the tag pair reports the base measurement (Ref 01). Following Ref 01, the tag pairs are repeated for every tagged measurement (Ref n).

- <MeasurementsAnalyzed></MeasurementsAnalyzed>
- <TxnObservations></TxnObservations>
- <TxnsCounted></TxnsCounted>
- <TransactionRate></TransactionRate>
- <TxnThroughput></TxnThroughput>
- <TxnServiceTime></TxnServiceTime>
- <TxnCallMaxTime></TxnCallMaxTime>
- <TxnCallMinTime></TxnCallMinTime>
- <TxnCPUTime></TxnCPUTime>
- <TxnCallMaxCPUTime></TxnCallMaxCPUTime>
- <TxnCallMinCPUTime></TxnCallMinCPUTime>
- <DLIObservations></DLIObservations>
- <DLICallsCounted></DLICallsCounted>
- <DLICallRate></DLICallRate>
- <DLICallThroughput></DLICallThroughput>
- <DLICallServiceTime></DLICallServiceTime>
- <DLICallMaxTime></DLICallMaxTime>
- <DLICallMinTime></DLICallMinTime>

- <DLICallCPUTime></DLICallCPUTime>
- <DLICallMaxCPUTime></DLICallMaxCPUTime>
- <DLICallMinCPUTime></DLICallMinCPUTime>

Field title in online report	XML element
The Following Measurements are Analyzed	<MeasurementsAnalyzed>
Ref	<Ref> <i>n</i> </Ref>
ReqNum	<ReqNum> <i>n</i> </ReqNum>
Job Name	<JobName> <i>name</i> </JobName>
Date	<Date> <i>Mon-dd-yyyy</i> </Date>
Time	<Time> <i>hh:mm</i> </Time>
Description	<Description> <i>description</i> </Description>
	</MeasurementsAnalyzed>
Txn observations	<TxnObservations>
Ref	<Ref> <i>n</i> </Ref>
IMS Subsys	<Subsystem> <i>name</i> </Subsystem>
IMS Version	<Version> <i>version</i> </Version>
Txns Sampled	<TxnsSampled> <i>n</i> </TxnsSampled>
Variance	<Variance> <i>variance</i> </Variance>
	</TxnObservations>
IMS Txns counted	<TxnsCounted>
Ref	<Ref> <i>n</i> </Ref>
Count	<TxnCount> <i>n</i> </TxnCount>
Variance	<Variance> <i>variance</i> </Variance>
	</TxnsCounted>
Transaction rate	<TransactionRate>
Ref	<Ref> <i>n</i> </Ref>
Rate	<TxnRate> <i>n</i> per sec</TxnRate>
Variance	<Variance> <i>variance</i> </Variance>
	</TransactionRate>
Txn throughput	<TxnThroughput>
Ref	<Ref> <i>n</i> </Ref>
Rate	<TxnRate> <i>n</i> per sec</TxnRate>
Variance	<Variance> <i>variance</i> </Variance>
	</TxnThroughput>
IMS Txn svc time	<TxnServiceTime>

Field title in online report	XML element
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</TxnServiceTime>
IMS Txn max svc	<TxnCallMaxTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</TxnCallMaxTime>
IMS Txn min svc	<TxnCallMinTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</TxnCallMinTime>
IMS Txn CPU time	<TxnCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</TxnCPUTime>
IMS Txn max CPU	<TxnCallMaxCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</TxnCallMaxCPUTime>
IMS Txn min CPU	<TxnCallMinCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</TxnCallMinCPUTime>
DLI observations	<DLIObservations>
Ref	<Ref>n</Ref>
Count	<CallsSampled>n</CallsSampled>
Variance	<Variance>variance</Variance>
	</DLIObservations>
DLI call count	<DLICallsCounted>

Field title in online report	XML element
Ref	<Ref>n</Ref>
Count	<CallCount>n</CallCount>
Variance	<Variance>variance</Variance>
	</DLICallsCounted>
DLI call rate	<DLICallRate>
Ref	<Ref>n</Ref>
Rate	<CallRate>n per sec</CallRate>
Variance	<Variance>variance</Variance>
	</DLICallRate>
DLI call thruput	<DLICallThroughput>
Ref	<Ref>n</Ref>
Rate	<CallRate>n per sec</CallRate>
Variance	<Variance>variance</Variance>
	</DLICallThroughput>
DLI svc time	<DLICallServiceTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</DLICallServiceTime>
DLI max svc	<DLICallMaxTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</DLICallMaxTime>
DLI min svc	<DLICallMinTime>
Ref	<Ref>n</Ref>
Time	<ServiceTime>n sec</ServiceTime>
Variance	<Variance>variance</Variance>
	</DLICallMinTime>
DLI CPU time	<DLICallCPUTime>
Ref	<Ref>n</Ref>
Time	<CPUTime>n sec</CPUTime>
Variance	<Variance>variance</Variance>
	</DLICallCPUTime>
DLI max CPU time	<DLICallMaxCPUTime>

Field title in online report	XML element
Ref	<Ref> <i>n</i> </Ref>
Time	<CPUTime> <i>n</i> sec</CPUTime>
Variance	<Variance> <i>variance</i> </Variance>
	</DLICallMaxCPUtime>
DLI min CPU time	<DLICallMinCPUtime>
Ref	<Ref> <i>n</i> </Ref>
Time	<CPUTime> <i>n</i> sec</CPUTime>
Variance	<Variance> <i>variance</i> </Variance>
	</DLICallMinCPUtime>

CICS Performance analysis reports

E01 CICS Session Statistics

Field title in online report	XML element
	<CICSSummary>
CICS Release	<CICSRelease> <i>CICS Release</i> </CICSRelease>
First Transaction TaskId	<FirstTaskId> <i>n</i> </FirstTaskId>
Last Transaction TaskId	<LastTaskId> <i>n</i> </LastTaskId>
Number of TaskId Increments	<TaskIdIncrements> <i>n</i> </TaskIdIncrements>
Number of Observed Transactions	<ObservedTransactions> <i>n</i> </ObservedTransactions>
Transaction Rate (per sec)	<TransactionRate> <i>n</i> </TransactionRate>
Peak Active Txns (Observed)	<PeakActiveTransactionsObserved> <i>n</i> </PeakActiveTransactionsObserved>
Peak Active Txns (Overall)	<PeakActiveTransactionsOverall> <i>n</i> </PeakActiveTransactionsOverall>
Max Task <MaxTask> <i>n</i> </MaxTask>	Execution Time <ExecutionTime> <i>n</i> </ExecutionTime>
Suspend Time	<SuspendTime> <i>n</i> </SuspendTime>
CICS Dispatch Delay Time	<CICSDispatchDelayTime> <i>n</i> </CICSDispatchDelayTime>
MVS Dispatch Delay Time	<MVSDispatchDelayTime> <i>n</i> </MVSDispatchDelayTime>
Service Time	<ServiceTime> <i>n</i> </ServiceTime>
Program Requests	<ProgramRequests> <i>n</i> </ProgramRequests>
Terminal Messages	<TerminalMessages> <i>n</i> </TerminalMessages>
Storage Getmains	<StorageGetmains> <i>n</i> </StorageGetmains>
Storage Freemains	<StorageFreemains> <i>n</i> </StorageFreemains>
File I/O Requests	<FileIORequests> <i>n</i> </FileIORequests>

Field title in online report	XML element
Temporary Storage Requests	<TemporaryStorageRequests>n</TemporaryStorageRequests>
Transient Data Requests	<TransientDataRequests>n</TransientDataRequests>
Journal Write Requests	<JournalWriteRequests>n</JournalWriteRequests>
System Dumps	<SystemDumps>n</SystemDumps>
System Dumps Suppressed	<SystemDumpsSuppressed>n</SystemDumpsSuppressed>
Transaction Dumps	<TransactionDumps>n</TransactionDumps>
Transaction Dumps Suppressed	<TransactionDumpsSuppressed>n</TransactionDumpsSuppressed>
Storage Violations	<StorageViolations>n</StorageViolations>
Short on Storage occurrences	<ShortOnStorageOccurrences>n</ShortOnStorageOccurrences>
Times at MaxTask	<TimesAtMaxTask>n</TimesAtMaxTask>
Times at Class MaxTask	<TimesAtClassMaxTask>n</TimesAtClassMaxTask>
	<TransactionCounts>
TranId	<TransactionId>tranid</TransactionId>
Count	<TransactionCount>n</TransactionCount>
	</TransactionCounts>
	</CICSSummary>

E02 CICS CPU and Use Counts by Pgm

Field title in online report	XML element
	<DetailLine>
Name	<Name>name</Name>
Calls	<Description>n</Description>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</DetailLine>

E03 CICS CPU Usage by Transaction

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId>tranid</TransactionId>

Field title in online report	XML element
NTxns/Description	<CICSTxnCount> <i>n</i> </CICSTxnCount>
	<Description> <i>description</i> </Description>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CICSTranId>
	<CICSProgram>
Name	<Program> <i>name</i> </Program>
NTxns/Description	<Description> <i>description</i> </Description>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT> <i>name</i> </CSECT>
NTxns/Description	<Offset> <i>offset</i> </Offset>
NTxns/Description	<Command> <i>command</i> </Command>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CICSCommand>
	<CICSService>
Name	<Program> <i>name</i> </Program>
NTxns/Description	<Description> <i>description</i> </Description>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CICSService>
	<CICSSQL>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
NTxns/Description	<SQLVerb> <i>verb</i> </SQLVerb>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CICSSQL>
	<CICSDLI>

Field title in online report	XML element
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
NTxns/Description	<DLIRequest>dlirequest</DLIRequest>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CICSCLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
NTxns/Description	<Command>command</Command>
	<Measurement>n</Measurement>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</ADABASCommand>

E04 CICS Mean Service Time by Txn

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId>transid</TransactionId>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTranId>
	<CICSProgram>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>

Field title in online report	XML element
Service	<ServiceTime>n</ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT>name</CSECT>
Description	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason>reason</WaitReason>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<SQL>offset</SQL>
Description	<Description>sqlverb</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>

Field title in online report	XML element
	</CICSSQL>
	<CICSDLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSDLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

E05 CICS Total Service Time by Txn

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId>tranid</TransactionId>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTranId>
	<CICSProgram>

Field title in online report	XML element
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT> <i>name</i> </CSECT>
Description	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason> <i>reason</i> </WaitReason>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT> <i>name</i> </CSECT>
Name	<SQL> <i>offset</i> </SQL>

Field title in online report	XML element
Description	<Description> <i>sqlverb</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<DLIRequest> <i>dlirequest</i> </DLIRequest>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSDLI>
	<ADABASCommand>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</ADABASCommand>

E06 CICS Total Service Time by Task ID

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId> <i>tranid</i> </TransactionId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n%</i> </MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>

Field title in online report	XML element
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTranId>
	<CICSTaskId>
Name	<TaskId> <i>tasknumber</i> </TaskId>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTaskId>
	<CICSProgram>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT> <i>name</i> </CSECT>
Description	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason> <i>reason</i> </WaitReason>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>

Field title in online report	XML element
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<SQLVerb> <i>sqlverb</i> </SQLVerb>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<DLIRequest> <i>dlirequest</i> </DLIRequest>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSDLI>
	<ADABASCommand>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>

Field title in online report	XML element
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</ADABASCommand>

E07 CICS Wait by Txn

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId> <i>tranid</i> </TransactionId>
NTxns/Description	<CICSTxnCount> <i>n</i> </CICSTxnCount>
	<Description></Description>
	<Measurements> <i>n</i> </Measurements>
Percent of Wait Time * 10.00%	<Percent> <i>n</i> </Percent>
	<CICSWait>
Name	<WaitReason> <i>reason</i> </WaitReason>
NTxns/Description	<Description> <i>description</i> </Description>
	<Measurements> <i>n</i> </Measurements>
Percent of Wait Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CICSWait>
	</CICSTranId>

E08 CICS Mean Service Time by Termid

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSTerminal>
Name	<TerminalId> <i>termid</i> </TerminalId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n</i> %</MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTerminal>
	<CICSTranId>

Field title in online report	XML element
Name	<TransactionId> <i>transid</i> </TransactionId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n%</i> </MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTranId>
	<CICSProgram>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT> <i>name</i> </CSECT>
Description	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason> <i>reason</i> </WaitReason>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSWait>
	<CICSService>

Field title in online report	XML element
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<SQLVerb> <i>sqlverb</i> </SQLVerb>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSSQL>
	<CICSCLI>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<DLIRequest> <i>dlirequest</i> </DLIRequest>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCLI>
	<ADABASCommand>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</ADABASCommand>

E09 CICS Total Service Time by Termid

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSTerminal>
Name	<TerminalId> <i>termid</i> </TerminalId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n%</i> </MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTerminal>
	<CICSTranId>
Name	<TransactionId> <i>transid</i> </TransactionId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n%</i> </MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTranId>
	<CICSProgram>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT> <i>name</i> </CSECT>
Description	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>

Field title in online report	XML element
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason> <i>reason</i> </WaitReason>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<SQLVerb> <i>sqlverb</i> </SQLVerb>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<DLIRequest> <i>dlirequest</i> </DLIRequest>
Execution	<ExecTime> <i>n</i> </ExecTime>

Field title in online report	XML element
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCLI>
	<ADABASCommand>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</ADABASCommand>

E10 CICS Mean Service Time by User ID

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSUserid>
Name	<Userid> <i>userid</i> </Userid>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n</i> %</MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSUserid>
	<CICSTranId>
Name	<TransactionId> <i>transid</i> </TransactionId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n</i> %</MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>

Field title in online report	XML element
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTranId>
	<CICSProgram>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT> <i>name</i> </CSECT>
Description	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason> <i>reason</i> </WaitReason>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>

Field title in online report	XML element
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<SQLVerb>sqlverb</SQLVerb>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSCLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

E11 CICS Total Service Time by User ID

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<CICSUserid>
Name	<Userid>userid</Userid>

Field title in online report	XML element
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n%</i> </MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSUserid>
	<CICSTranId>
Name	<TransactionId> <i>transid</i> </TransactionId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n%</i> </MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTranId>
	<CICSProgram>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT> <i>name</i> </CSECT>
Description	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCommand>

Field title in online report	XML element
	<CICSWait>
Name	<WaitReason> <i>reason</i> </WaitReason>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<SQLVerb> <i>sqlverb</i> </SQLVerb>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<DLIRequest> <i>dlirequest</i> </DLIRequest>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSDLI>
	<ADABASCommand>

Field title in online report	XML element
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

E12 CICS CPU/Service Time by Transaction

Field title in online report	XML element
	<CPUTimeByTransaction>
Name	<Transaction>name</Transaction>
NTxns	<NumberOfTxns>n</NumberOfTxns>
% of CPU	<PctCPUTime>n%</PctCPUTime>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
	<CPUTimeByTransactionDetail>
Name	<TaskNumber>n</TaskNumber>
Description	<StartTime>hh.mm.ss.ss</StartTime>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
	</CPUTimeByTransactionDetail>
	</CPUTimeByTransaction>

IMS Performance analysis reports

I01 IMS Measurement Profile

Field title in online report	XML element
IMS Environment	<IMSEnvironment>
DFSRR00 parms	<DFSRR00Parms>parms</DFSRR00Parms>
IMS system id	<SystemId>systemid</SystemId>

Field title in online report	XML element
IMS region name	<RegionName>name</RegionName>
IMS version	<Version>version</Version>
IMS region type	<RegionType>regiontype</RegionType>
	</IMSEnvironment>
Most Active IMS PSBs	<MostActiveIMSPSBs>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>I05 I08 I11</Reports>
	<ActiveIMSPSBs>
	<PSBName>name</PSBName>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</ActiveIMSPSBs>
	</MostActiveIMSPSBs>
Most Active IMS Transactions	<MostActiveIMSTransactions>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>I04 I06 I09 I12</Reports>
	<ActiveIMSTransactions>
	<TransactionId>tranid</TransactionId>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</ActiveIMSTransactions>
	</MostActiveIMSTransactions>
Most Active IMS DLI Calls	<MostActiveIMSDLICalls>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>I07 I10 I13</Reports>
	<ActiveIMSDLICalls>
	<IMSCall>imscall</IMSCall>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</ActiveIMSDLICalls>
	</MostActiveIMSDLICalls>

Field title in online report	XML element
Most CPU consumptive DLI	<MostCPUConsumptiveDLI>
Total DLI CPU time	<CPUTime>n</CPUTime>
	<Percent>n%</Percent>
Reports	<Reports>I18 I19 I20 I21</Reports>
	<CPUConsumptiveDLI>
	<IMSCall>imscall</IMSCall>
	<CPUTime>n</CPUTime>
	<CPUTimePercent>n%</CPUTimePercent>
	</CPUConsumptiveDLI>
	</MostCPUConsumptiveDLI>
Most Frequent Transactions	<MostFrequentTransactions>
Total txns counted	<Transactions>n</Transactions>
	<Percent>n%</Percent>
Reports	<Reports>I03 I04 I16 I17</Reports>
	<FrequentTransactions>
	<TransactionId>tranid</TransactionId>
	<TransactionsCounted>n</TransactionsCounted>
	<PercentOfTransactions>n%</PercentOfTransactions>
	</FrequentTransactions>
	</MostFrequentTransactions>
Most Frequent DL/I Calls	<MostFrequentDLICalls>
Total DLI call count	<Samples>n</Samples>
	<Percent>n%</Percent>
	Reports <Reports>I02 I17 I18</Reports>
	<FrequentDLICalls>
	<IMSCall>imscall</IMSCall>
	<Samples>n</Samples>
	<Percent>n%</Percent>
	</FrequentDLICalls>
	</MostFrequentDLICalls>
Transaction Statistics	<TransactionStatistics>
IMS Txns counted	<TransactionsCounted>n</TransactionsCounted>
Transaction rate	<TransactionRate>n per sec</TransactionRate>
Txn observations	<TransactionObservations>n</TransactionObservations>

Field title in online report	XML element
Txn throughput	<TransactionThroughput> <i>n</i> per sec</TransactionThroughput>
IMS Txn svc time	<TransactionServiceTime> <i>n</i> sec</TransactionServiceTime>
IMS Txn CPU time	<TransactionCPUTime> <i>n</i> sec</TransactionCPUTime>
IMS txn max svc	<TransactionMaximumService> <i>ns</i> sec</TransactionMaximumService>
IMS Txn max CPU	<TransactionMaximumCPU> <i>n</i> sec</TransactionMaximumCPU>
IMS Txn min svc	<TransactionMinimumService> <i>n</i> sec</TransactionMinimumService>
IMS Txn min CPU	<TransactionMinimumCPU> <i>n</i> sec</TransactionMinimumCPU>
	</TransactionStatistics>

I02 IMS DL/I Call Timeline

The DLICallTimeline tag pair and sub-elements are repeated for each DLI call.

Field title in online report	XML element
	<DLICallTimeline>
CallSeq	<CallSeq> <i>n</i> </CallSeq>
Func	<Function> <i>function</i> </Function>
PCB Name	<PCBName> <i>name</i> </PCBName>
Id	<Id> <i>n</i> </Id>
Location	<Location> <i>location</i> </Location>
Stat	<Status> <i>status</i> </Status>
Call Time	<CallTime> <i>hh:mm:ss.ss</i> </CallTime>
Duration	<Duration> <i>n</i> </Duration>
	</DLICallTimeline>

I03 IMS Transaction Timeline

The IMSTransactionTimeLine tag pair and sub-elements are repeated for each IMS transaction.

Field title in online report	XML element
	<IMSTransactionTimeLine>
TranCode	<TransactionCode> <i>tranid</i> </TransactionCode>
PSB/PCB	<PSBName> <i>name</i> </PSBName>
Location	<LTERM> <i>lterm</i> </LTERM>
Txn Time	<TransactionTime> <i>hh:mm:ss.ss</i> </TransactionTime>
Duration	<Duration> <i>n</i> </Duration>
	<DLICallTimeLine>
TranCode	<CallSeq> <i>n</i> </CallSeq>
PSB/PCB	<PCBName> <i>name</i> </PCBName>
Id	<Id> <i>n</i> </Id> Func

Field title in online report	XML element
	<Function> <i>function</i> </Function>
Location	<Location> <i>location</i> </Location>
Stat	<Status> <i>status</i> </Status>
Txn Time	<CallTime> <i>hh:mm:ss.ss</i> </CallTime>
Duration	<Duration> <i>n</i> </Duration>
	</DLICallTimeline>
	</IMSTransactionTimeLine>

I04 IMS Transaction Activity Timeline

Field title in online report	XML element
	<IMSTransactionActivityTimeLine>
TranCode	<Samples> <i>n</i> </Samples>
PSB/PCB	<Duration> <i>n</i> </Duration>
Location	<Txn> <i>tranid</i> </Txn>
Txn Time	<TransactionTime> <i>hh:mm:ss.ss</i> </TransactionTime>
Duration	<PSB> <i>name</i> </PSB>
	<Txns> <i>n</i> </Txns>
	<Intervals>
	<IntervalCount> <i>n</i> </IntervalCount> Repeated 50 times
	</Interval>
	</IMSTransactionActivityTimeLine>

I05 to I13

This section describes the common tag pairs and elements of the XML detail lines shared by reports I05 through I13. The same information is categorized and displayed differently in each report. The report names covered by the following XML are:

- I05 IMS CPU Usage by PSB
- I06 IMS CPU Usage by Txn
- I07 IMS CPU Usage by DL/I Call
- I08 IMS WAIT Time by PSB
- I09 IMS WAIT Time by Txn
- I10 IMS WAIT Time by DL/I Call
- I11 IMS DL/I Activity by PSB
- I12 IMS DL/I Activity by Txn
- I13 IMS DL/I Activity by DL/I Call

The XML elements presented below may be repeated multiple times and appear under different parent elements. In the XML document, all elements are listed in hierarchical order as they appear in the online report.

Field title in online report	XML element
	<Category>
Name	<CategoryName> <i>name</i> </CategoryName>
Description	<CategoryDescription> <i>description</i> </CategoryDescription >
	<Measurements> <i>n</i> </Measurements>
Percent of xxx Time * 10.00%	<Percent> <i>n</i> </Percent>
	</Category>
	<CSECT>
Name	<CSECTName> <i>name</i> </CSECTName>
Description	<CSECTDescription> <i>description</i> </CSECTDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of xxx Time * 10.00%	<Percent> <i>n</i> </Percent>
	</CSECT>
	<DLICall>
Name	<SequenceNumber> <i>n</i> </SequenceNumber>
Description	<FunctionPCBProgramOffset> <i>FuncNameNameOffset</i> </ FunctionPCBProgramOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of xxx Time * 10.00%	<Percent> <i>n</i> </Percent>
	</DLICall>
	<DMRequest>
Name	<MacroName> <i>name</i> </MacroName>
Description	<MacroLocation> <i>location</i> </MacroLocation>
	<Measurements> <i>n</i> </Measurements>
Percent of xxx Time * 10.00%	<Percent> <i>n</i> </Percent>
	</DMRequest>
	<DPAGroup>
Name	<DPAGroupName> <i>name</i> </DPAGroupName>
Description	<DPAGroupDescription> <i>description</i> </DPAGroupDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of xxx Time * 10.00%	<Percent> <i>n</i> </Percent>
	</DPAGroup>
	<File>

Field title in online report	XML element
Name	<DDName>ddname</DDName>
Description	<AccessMethod>accessmethod</AccessMethod>
	<Measurements>n</Measurements>
Percent of xxxTime * 10.00%	<Percent>n</Percent>
	</File>
	<LoadModule>
Name	<LoadModuleName>name</LoadModuleName>
Description	<LoadModuleDescription>description</LoadModuleDescription>
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</LoadModule>
	<NoSymAddressRange>
Name	<AddressRange>address</AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</NoSymAddressRange>
	<PSB>
Name	<PSBName>name</PSBName>
Description	<Description>description</Description>
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</PSB>
	<SQLRequest>
Name	<SequenceNumber>n</SequenceNumber>
Description	<ProgramStatementFunction>name(stmt)function</ProgramStatementFunction>
	<Measurements>n</Measurements>
Percent of xxx Time * 10.00%	<Percent>n</Percent>
	</SQLRequest>
	<SVCRoutine>
Name	<SVCIId>svcid</SVCIId>

Field title in online report	XML element
Description	<SVCDescription> <i>description</i> </SVCDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of xxx Time * 10.00%	<Percent> <i>n</i> </Percent>
	</SVCRoutine>

I14 IMS PSB/PCB Attributes

Field title in online report	XML element
	<IMSPSBAttributes>
PSB name	<PSBName> <i>name</i> </PSBName>
IMS system	<IMSSystem> <i>imssystem</i> </IMSSystem>
No.of PCBs	<NumberOfPCBs> <i>n</i> </NumberOfPCBs>
LIST=NO PCBs	<LISTNOPCBs> <i>n</i> </LISTNOPCBs>
Txn count	<TransactionCount> <i>n</i> </TransactionCount>
DL/I calls	<DLICalls> <i>n</i> </DLICalls>
Sample count	<SampleCount> <i>n</i> </SampleCount>
	<IMSPCBs>
PCBNum	<PCBNumber> <i>n</i> </PCBNumber>
Name	<PCBName> <i>name</i> </PCBName>
Type	<PCBType> <i>type</i> </PCBType>
DBD/LTRM	<DBDLterm> <i>name</i> </DBDLterm>
PROCOPT	<PROCOPT> <i>procopt</i> </PROCOPT>
LIST	<List> <i>yesno</i> </List>
	</IMSPCBs>
	</IMSPSBAttributes>

I15 IMS DL/I Call Attributes

Field title in online report	XML element
	<DLICallAttributes>
DL/I Call Id	<DLICallId> <i>n</i> </DLICallId>
Function code	<FunctionCode> <i>code</i> </FunctionCode>
PSB Name	<PSBName> <i>name</i> </PSBName>
PCB Naame	<PCBName> <i>name</i> </PCBName>
IMS Id-Region	<IMSIdRegion> <i>imsid-region</i> </IMSIdRegion>
PCB Number	<PCBNumber> <i>n</i> </PCBNumber>
Call type	<CallType> <i>calltype</i> </CallType>

Field title in online report	XML element
CSECT/module	<CSECTModule> <i>csect in module</i> </CSECTModule>
Offset of call	<OffsetOfCall> <i>n</i> </OffsetOfCall>
Sample count	<SampleCount> <i>n</i> </SampleCount>
Call count	<CallCount> <i>n</i> </CallCount>
DLI CPU time	<DLICPUTime> <i>n</i> </DLICPUTime>
Service time	<ServiceTime> <i>n</i> </ServiceTime>
	<DLICall>
SSA/FSA	<SSANum> <i>n</i> </SSANum>
	<SSA> <i>ssa</i> </SSA>
	</DLICall>
	</DLICallAttributes>

I16 IMS Transaction Service Times

Field title in online report	XML element
	<IMSTransactionServiceTimes>
TranCode	<TransactionCode> <i>transid</i> </TransactionCode>
PSB/PGM	<PSBProgram> <i>name</i> </PSBProgram>
Txns	<TransactionCount> <i>n</i> </TransactionCount>
Fetch	<FetchCount> <i>n</i> </FetchCount>
Sched	<ScheduleCount> <i>n</i> </ScheduleCount>
Total time	<TotalTime> <i>n</i> </TotalTime>
Avg/Txn	<AverageTimePerTransaction> <i>n</i> </AverageTimePerTransaction>
CPU Time	<CPUTime> <i>n</i> </CPUTime>
	</IMSTransactionServiceTimes>

I17 IMS Transaction DL/I Call Counts

Field title in online report	XML element
	<IMSTransactionDLICallCounts>
Tran/PCB	<TransactionCode> <i>transid</i> </TransactionCode>
PSB/DBD	<PSBname> <i>name</i> </PSBname>
Total	<DLITotalCount> <i>n</i> </DLITotalCount>
Minimum	<DLIMinimumCount> <i>n</i> </DLIMinimumCount>
Maximum	<DLIMaximumCount> <i>n</i> </DLIMaximumCount>
Average	<DLIAverageCount> <i>n</i> </DLIAverageCount>
	<IMSTransactionDLICallCountsByPCB>
Tran/PCB	<PCBName> <i>name</i> </PCBName>

Field title in online report	XML element
PSB/DBD	<DBDName> <i>name</i> </DBDName>
PCBNum	<PCBNumber> <i>n</i> </PCBNumber>
Func	<Function> <i>function</i> </Function>
Total	<DLITotalCount> <i>n</i> </DLITotalCount>
Minimum	<DLIMinimumCount> <i>n</i> </DLIMinimumCount>
Maximum	<DLIMaximumCount> <i>n</i> </DLIMaximumCount>
Average	<DLIAverageCount> <i>n</i> </DLIAverageCount>
	</IMSTransactionDLICallCountsByPCB>
	</IMSTransactionServiceTimes>

I18 IMS CPU/Service Time by DL/I Call

Field title in online report	XML element
	<IMSCPUTimeByCall>
Call	<CallNumber> <i>n</i> </CallNumber>
Func	<Function> <i>function</i> </Function>
PCB Name	<PCBName> <i>name</i> </PCBName>
Location	<Location> <i>location</i> </Location>
Count	<CallCount> <i>n</i> </CallCount>
Svc time	<DLIServiceTime> <i>n</i> </DLIServiceTime>
Prcnt	<DLIServicePercent> <i>n%</i> </DLIServicePercent>
CPU Time	<DLICPUTime> <i>n</i> </DLICPUTime>
Prcnt	<DLICPUPercent> <i>n%</i> </DLICPUPercent>
	</IMSCPUTimeByCall>

I19 IMS CPU/Service Time by PSB

Field title in online report	XML element
	<IMSCPUTimeByPSB>
PSB Name	<PSBName> <i>name</i> </PSBName>
Txn Count	<TransactionCount> <i>n</i> </TransactionCount>
DL/I Count	<CallCount> <i>n</i> </CallCount>
Svc time	<DLIServiceTime> <i>n</i> </DLIServiceTime>
Prcnt	<DLIServicePercent> <i>n%</i> </DLIServicePercent>
CPU Time	<DLICPUTime> <i>n</i> </DLICPUTime>
Prcnt	<DLICPUPercent> <i>n%</i> </DLICPUPercent>
	</IMSCPUTimeByPSB>

I20 IMS CPU/Service Time by Transaction

Field title in online report	XML element
	<IMSCPUTimeByTransaction>
TranCode	<TransactionCode> <i>transid</i> </TransactionCode>
Txn Count	<TransactionCount> <i>n</i> </TransactionCount>
Service	<TransactionServiceTime> <i>n</i> </TransactionServiceTime>
CPU Time	<TransactionCPUTime> <i>n</i> </TransactionCPUTime>
Svc time	<DLIServiceTime> <i>n</i> </DLIServiceTime>
%of Txn	<DLIServicePercent> <i>n</i> %</DLIServicePercent>
CPU Time	<DLICPUTime> <i>n</i> </DLICPUTime>
%of Txn	<DLICPUPercent> <i>n</i> %</DLICPUPercent>
	</IMSCPUTimeByTransaction>

I21 IMS CPU/Service Time by PCB

Field title in online report	XML element
	<IMSCPUTimeByPCB>
PSB Name	<PSBName> <i>name</i> </PSBName>
PCB Name	<PCBName> <i>name</i> </PCBName>
PCB Num	<PCBNumber> <i>n</i> </PCBNumber>
Count	<CallCount> <i>n</i> </CallCount>
Svc time	<DLIServiceTime> <i>n</i> </DLIServiceTime>
Percent	<DLIServicePercent> <i>n</i> %</DLIServicePercent>
CPU Time	<DLICPUTime> <i>n</i> </DLICPUTime>
Percent	<DLICPUPercent> <i>n</i> %</DLICPUPercent>
	</IMSCPUTimeByPCB>

I22 IMS Region Transaction Summary

The IMSRegionTxns tag pair is repeated for each measured IMS transaction. The last tag pair represents the total for all lines of the report.

Field title in online report	XML element
	<IMSRegionTxns>
TranCode	<TranCode> <i>name</i> </TranCode>
PSB Name	<PSBName> <i>name</i> </PSBName>
Txn count	<TxnCount> <i>n</i> </TxnCount>
Svc/Trn	<SvcPerTrn> <i>n</i> </SvcPerTrn>
CPU/Trn	<CpuPerTrn> <i>n</i> </CpuPerTrn>
DLI/Trn	<DLIPerTrn> <i>n</i> </DLIPerTrn>

Field title in online report	XML element
SQL/Trn	<SQLPerTrn>n</SQLPerTrn>
MQ/Trn	<MQIPerTrn>n</MQIPerTrn>
	</IMSRegionTxns>

DB2 Performance analysis reports

F01 DB2 Measurement profile

Field title in online report	XML element
Most Active DB2 Plans	<MostActiveDB2Plans>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>F05</Reports>
	<Plans>
	<PlanName>name</Planname>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</Plans>
	</MostActiveDB2Plans>
Most Active Package/ DBRM	<MostActiveDBRMs>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>F03</Reports>
	<DBRMs>
	<DBRM>name</DBRM>
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</DBRMs>
	</MostActiveDBRMs>
Most Active SQL Statements	<MostActiveSQL>
Samples	<Samples>n</Samples>
	<Percent>n%</Percent>
Reports	<Reports>F04</Reports>
	<SQLStatement>
	<ProgramOffsetVerb>name:offset verb</ProgramOffsetVerb>

Field title in online report	XML element
	<CPUActive>n</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</SQLStatement>
	</MostActiveSQL>
Most CPU consumptive SQL	<MostCPUConsumptiveSQL>
Total SQL CPU time	<CPUTime>n</CPUTime>
	<Percent>n%</Percent>
Reports	<Reports>F10 F11 F12</Reports>
	<SQLStatement>
	<ProgramOffsetVerb>name:offset verb</ProgramOffsetVerb>
	<CPUActive>n%</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</SQLStatement>
	</MostCPUConsumptiveSQL>
Most Frequent SQL Statements	<MostFrequentSQL>
Total SQL call count	<Samples>n</Samples>
	<Percent>n%</Percent>
	<SQLStatement>
	<ProgramOffsetVerb>name:offset verb</ProgramOffsetVerb>
	<CPUActive>n%</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</SQLStatement>
	</MostFrequentSQL>
Single SQL Call Service Time	<SingleSQLCallServiceTime>
Total SQL service count	<Samples>n</Samples>
	<Percent>n%</Percent>
	<SQLStatement>
	<ProgramOffsetVerb>name:offset verb</ProgramOffsetVerb>
	<CPUActive>n%</CPUActive>
	<CPUActivePercent>n%</CPUActivePercent>
	</SQLStatement>
	</SingleSQLCallServiceTime>
DB2 Measurement Statistics	<DB2MeasurementStatistics>

Field title in online report	XML element
DB2 subsystem name	<SubsystemName>name</SubsystemName>
DB2 Catalog Level	<CatalogLevel>vv.r.mff</CatalogLevel>
DB2 Code Func Level	<CodeFuncLevel>vv.r.mff</CodeFuncLevel>
DB2 Curr Func Level	<CurrFuncLevel>vv.r.mff</CurrFuncLevel>
DB2 version	<Version>version</Version>
SQL calls sampled	<CallsSampled>n</CallsSampled>
SQL observations	<SQLObservations>n</SQLObservations>
SQL calls executed	<CallsExecuted>n</CallsExecuted>
Avg SQL call rate	<CallRate>n per sec</CallRate>
SQL calls counted	<CallsCounted>n</CallsCounted>
SQL throughput	<SQLThroughput>n per sec</SQLThroughput>
SQL service time	<ServiceTime>n sec</ServiceTime>
SQL CPU time	<CPUTime>n sec</CPUTime>
CQL call max time	<CallMaxTime>n sec</CallMaxTime>
SQL call max CPU	<CallMaxCPU>n sec</CallMaxCPU>
SQL call min time	<CallMinTime>n sec</CallMinTime>
SQL call min CPU	<CallMinCPU>n sec</CallMinCPU>
	</DB2MeasurementStatistics>

F02 DB2 SQL Activity Timeline

The SQLActivityTimeline tag pair and sub-elements are repeated for each SQL call.

Field title in online report	XML element
	<SQLActivityTimeline>
Thread	<Thread>n</Thread>
REQCT	<REQCT>n</REQCT>
Program	<Program>name</Program>
Stmt#	<StatementNumber>n</StatementNumber>
SQL Function	<SQLFunction>function</SQLFunction>
Samps	<Samples>n</Samples>
Call Time	<CallTime>hh:mm:ss.ss</CallTime>
Interval	<Interval>n</Interval>
CPU Time	<CPUTime>n</CPUTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>

Field title in online report	XML element
	<PrefetchReq> <i>n</i> </PrefetchReq>
	<SyncWriteIO> <i>n</i> </SyncWriteIO>
	<SQLTextLines>
	<SQLTEXT> <i>sqltext</i> </SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber> <i>n</i> </PrepareStatementNumber>
	<PrepareSequenceNumber> <i>seqno</i> </PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLActivityTimeline>

F03 SQL Activity by DBRM

Field title in online report	XML element
	<DetailLine>
Name	<Name> <i>name</i> </Name>
	<Description></Description>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> %</Percent>
	<SQLRequest>
Name	<SequenceNumber> <i>seqno</i> </SequenceNumber>
Stmt# SQL Function	<ProgramStatementFunction> <i>stmt function</i> </ProgramStatementFunction>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<SQLTextLines>
	<SQLTEXT> <i>sqltext</i> </SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber> <i>n</i> </PrepareStatementNumber>
	<PrepareSequenceNumber> <i>seqno</i> </PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLRequest>
	</DetailLine>

F04 SQL Activity by Statement

Field title in online report	XML element
	<SQLRequest>

Field title in online report	XML element
Seqno	<SequenceNumber>seqno</SequenceNumber>
Program Stmt# SQL Function	<ProgramStatementFunction>name stmt function</ ProgramStatementFunction>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLRequest>

F05 SQL Activity by Plan

Field title in online report	XML element
	<DetailLine>
Seqno	<Name>seqno</Name>
Plan/Pgm	<Description>name</Description>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n %</Percent>
	<SQLRequest>
Seqno	<SequenceNumber>seqno</SequenceNumber>
Plan/Pgm Stmt# SQL Function	<ProgramStatementFunction>name stmt function</ ProgramStatementFunction>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLRequest>
	</DetailLine>

F06 DB2 SQL Statement Attributes

Field title in online report	XML element
	<SQLStatementAttributes>
SQL Statement Id	<StatementId> <i>n</i> </StatementId>
Subsystem name	<SubsystemName> <i>name</i> </SubsystemName>
Attach type	<AttachType> <i>attachtype</i> </AttachType>
Plan name	<PlanName> <i>name</i> </PlanName>
Plan bind time	<PlanBindTime> <i>Mon-dd-yy hh:mm:ss</i> </PlanBindTime>
DBRM name	<DBRMName> <i>name</i> </DBRMName>
DBRM token	<DBRMToken> <i>token</i> </DBRMToken>
DBRM date/time	<DBRMTime> <i>Mon-dd-yy hh:mm:ss</i> </DBRMTime>
Package ID	<PackageId> <i>packageid</i> </PackageId>
Location	<Location> <i>location</i> </Location>
Collectn name	<CollectionName> <i>name</i> </CollectionName>
Pkg BIND time	<PackageBindTime> <i>Mon-dd-yy hh:mm:ss</i> </PackageBindTime>
SQL function	<SQLFunction> <i>function</i> </SQLFunction>
Static/dynamic	<StaticDynamic> <i>static or dynamic</i> </StaticDynamic>
Precmplr stmt#	<PrecompilerStatementNumber> <i>n</i> </PrecompilerStatementNumber>
DBRM section#	<DBRMSectionNumber> <i>n</i> </DBRMSectionNumber>
Prepare stmt#	<PrepareStatementNumber> <i>n</i> </PrepareStatementNumber>
CSECT/module	<CSECTModule> <i>csect in module</i> </CSECTModule>
Offset of call	<OffsetOfCall> <i>n</i> </OffsetOfCall>
Sample count	<SampleCount> <i>n</i> </SampleCount>
SQL req count	<SQLREQCT> <i>n</i> </SQLREQCT>
SQL CPU time	<SQLCPUTime> <i>n</i> </SQLCPUTime>
Service time	<ServiceTime> <i>n</i> </ServiceTime>
	<SQLTextLines>
SQL Statement	<SQLTEXT> <i>sqltext</i> </SQLTEXT>
	</SQLTextLines>
	</SQLStatementAttributes>\t>

F07 SQL WAIT Time by DBRM

Field title in online report	XML element
	<DetailLine>
Name	<Name> <i>name</i> </Name>
	<Description></Description>

Field title in online report	XML element
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> %</Percent>
	<SQLRequest>
Name	<SequenceNumber> <i>seqno</i> </SequenceNumber>
Stmt# SQL Function	<ProgramStatementFunction> <i>stmt function</i> </ProgramStatementFunction>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<SQLTextLines>
	<SQLTEXT> <i>sqltext</i> </SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber> <i>n</i> </PrepareStatementNumber>
	<PrepareSequenceNumber> <i>seqno</i> </PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLRequest>
	</DetailLine>

F08 SQL WAIT Time by Statement

Field title in online report	XML element
	<SQLRequest>
Seqno	<SequenceNumber> <i>seqno</i> </SequenceNumber>
Program Stmt# SQL Function	<ProgramStatementFunction> <i>name stmt function</i> </ProgramStatementFunction>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<SQLTextLines>
	<SQLTEXT> <i>sqltext</i> </SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber> <i>n</i> </PrepareStatementNumber>
	<PrepareSequenceNumber> <i>seqno</i> </PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLRequest>

F09 SQL WAIT Time by Plan

Field title in online report	XML element
	<DetailLine>
Seqno	<Name>seqno</Name>
Plan/Pgm	<Description>name</Description>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n %</Percent>
	<SQLRequest>
Seqno	<SequenceNumber>seqno</SequenceNumber>
Plan/Pgm Stmt# SQL Function	<ProgramStatementFunction>name stmt function</ProgramStatementFunction>
	<Measurements>n</Measurements>
Percent of Time * 10.00%	<Percent>n</Percent>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLRequest>
	</DetailLine>

F10 SQL CPU/Service Time by DBRM

Field title in online report	XML element
	<SQLCPUTimeByDBRM>
Name	<DBRMName>name</DBRMName>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>

Field title in online report	XML element
	<PrefetchReq> <i>n</i> </PrefetchReq>
	<SyncWriteIO> <i>n</i> </SyncWriteIO>
	<SQLCPUTimeByDBRMDetail>
Name	<SequenceNumber> <i>seqno</i> </SequenceNumber>
Stmt#	<StatementNumber> <i>n</i> </StatementNumber>
SQL Function	<SQLFunction> <i>function</i> </SQLFunction>
Nbr of SQL Calls	<NumberOfCalls> <i>n</i> </NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime> <i>n</i> </TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime> <i>n</i> </MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime> <i>n</i> </PctCPUTime>
--Svc Time-- Total	<TotalServiceTime> <i>n</i> </TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime> <i>n</i> </MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime> <i>n</i> </PctServiceTime>
	<SQLTextLines>
	<SQLTEXT> <i>sqltext</i> </SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber> <i>n</i> </PrepareStatementNumber>
	<PrepareSequenceNumber> <i>seqno</i> </PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLCPUTimeByDBRMDetail>
	</SQLCPUTimeByDBRM>

F11 SQL CPU/Service Time by Statement

Field title in online report	XML element
	<SQLCPUTimeByStatement>
Seqno	<SequenceNumber> <i>seqno</i> </SequenceNumber>
Name	<ProgramName> <i>name</i> </ProgramName>
Stmt#	<StatementNumber> <i>n</i> </StatementNumber>
SQL Function	<SQLFunction> <i>function</i> </SQLFunction>
Nbr of SQL Calls	<NumberOfCalls> <i>n</i> </NumberOfCalls>
--CPU Time -- Total	<TotalServiceTime> <i>n</i> </TotalServiceTime>
--CPU Time-- Mean	<MeanCPUTime> <i>n</i> </MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime> <i>n</i> </PctCPUTime>
--Svc Time-- Total	<TotalServiceTime> <i>n</i> </TotalServiceTime>

Field title in online report	XML element
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>
	<PrefetchReq>n</PrefetchReq>
	<SyncWriteIO>n</SyncWriteIO>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLCPUTimeByStatement>

F12 SQL CPU/Service Time by Plan

Field title in online report	XML element
	<SQLCPUTimeByPlan>
Seqno	<SequenceNumber>seqno</SequenceNumber>
Plan/Pgm	<PlanName>name</PlanName>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalServiceTime>n</TotalServiceTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>
	<PrefetchReq>n</PrefetchReq>
	<SyncWriteIO>n</SyncWriteIO>
	</SQLCPUTimeByPlanDetail>
Seqno	<SequenceNumber>seqno</SequenceNumber>

Field title in online report	XML element
Plan/Pgm	<ProgramName>name</ProgramName>
Stmt#	<StatementNumber>n</StatementNumber>
SQL Function	<SQLFunction>function</SQLFunction>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalServiceTime>n</TotalServiceTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLCPUTimeByPlanDetail>
	</SQLCPUTimeByPlan>

F13 DB2 Threads Analysis

Field title in online report	XML element
	<DB2 Threads Analysis>
SeqNum	<SeqNum>n</SeqNum>
Thread Addr	<ThreadAddr>address</ThreadAddr>
Attach	<Attach>type</Attach>
REQCT Range	<REQCTRange>n-n</REQCTRange>
--- SQL Calls --- Executed	<CallsExecuted>n</CallsExecuted>
--- SQL Calls --- Sampled	<CallsSampled>n</CallsSampled>
	</DB2ThreadsAnalysis>
	<ThreadTotals>
	<TotalCallsExecuted>n</TotalCallsExecuted>
	<TotalCallsSampled>n</TotalCallsSampled>
	</ThreadTotals>

F14 DB2 CPU by Plan/Stored Proc

Field title in online report	XML element
	<DetailLine>
Seqno	<Name>seqno</Name>
Description	<Description>name</Description>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<Category>
Seqno	<CategoryName>name</CategoryName>
Description	<CategoryDescription>description</CategoryDescription >
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</Category>
	<CSECT>
Seqno	<CSECTName>name</CSECTName>
Description	<CSECTDescription>description</CSECTDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</CSECT>
	<DMRequest>
Seqno	<MacroName>name</MacroName>
Description	<MacroLocation>location</MacroLocation>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</DMRequest>
	<DPAGroup>
Seqno	<DPAGroupName>name</DPAGroupName>
Description	<DPAGroupDescription>description</DPAGroupDescription>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</DPAGroup>
	<File>
Seqno	<DDName>ddname</DDName>

Field title in online report	XML element
Description	<AccessMethod> <i>accessmethod</i> </AccessMethod>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</File>
	<LoadModule>
Seqno	<LoadModuleName> <i>name</i> </LoadModuleName>
Description	<LoadModuleDescription> <i>description</i> </LoadModuleDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</LoadModule>
	<NoSymAddressRange>
Seqno	<AddressRange> <i>address</i> </AddressRange>
Description	<AddressRangeDescription>Unresolved Address</AddressRangeDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</NoSymAddressRange>
	<SQLRequest>
Seqno	<SequenceNumber> <i>n</i> </SequenceNumber>
Description	<ProgramStatementFunction> <i>name(stmt)function</i> </ProgramStatementFunction>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</SQLRequest>
	<SVCRoutine>
Seqno	<SVCIId> <i>svcid</i> </SVCIId>
Description	<SVCDescription> <i>description</i> </SVCDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</SVCRoutine>

F15 DB2 SQL CPU/Svc Time by Rq Loc

Field title in online report	XML element
	<SQLTimeByRequestLocation>
Name	<LocationName>location</LocationName>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>
	<PrefetchReq>n</PrefetchReq>
	<SyncWriteIO>n</SyncWriteIO>
	<SQLTimeByStatement>
Name	<SequenceNumber>seqno</SequenceNumber>
Plan/Pgm	<PlanName>name</PlanName>
Stmt#	<StatementNumber>n</StatementNumber>
SQL Function	<SQLFunction>function</SQLFunction>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLTimeByStatement>

Field title in online report	XML element
	</SQLTimeByRequestLocation>

F16 DB2 SQL CPU/Svc Time by Enclave

Field title in online report	XML element
	<SQLTimeByEnclave>
Token	<Token> <i>token</i> </Token>
Nbr of SQL Calls	<NumberOfCalls> <i>n</i> </NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime> <i>n</i> </TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime> <i>n</i> </MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime> <i>n</i> </PctCPUTime>
--Svc Time-- Total	<TotalServiceTime> <i>n</i> </TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime> <i>n</i> </MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime> <i>n</i> </PctServiceTime>
	<GetPagesIdx> <i>n</i> </GetPagesIdx>
	<GetPages> <i>n</i> </GetPages>
	<SyncReadIO> <i>n</i> </SyncReadIO>
	<PrefetchReq> <i>n</i> </PrefetchReq>
	<SyncWriteIO> <i>n</i> </SyncWriteIO>
	<SQLTimeByStatement>
Token	<SequenceNumber> <i>seqno</i> </SequenceNumber>
Stmt#	<StatementNumber> <i>n</i> </StatementNumber>
SQL Function	<SQLFunction> <i>function</i> </SQLFunction>
Nbr of SQL Calls	<NumberOfCalls> <i>n</i> </NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime> <i>n</i> </TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime> <i>n</i> </MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime> <i>n</i> </PctCPUTime>
--Svc Time-- Total	<TotalServiceTime> <i>n</i> </TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime> <i>n</i> </MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime> <i>n</i> </PctServiceTime>
	<SQLTextLines>
	<SQLTEXT> <i>sqltext</i> </SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber> <i>n</i> </PrepareStatementNumber>
	<PrepareSequenceNumber> <i>seqno</i> </PrepareSequenceNumber>
	</PrepareInfo>

Field title in online report	XML element
	</SQLTextLines>
	</SQLTimeByStatement>
	</SQLTimeByEnclave>

F17 DB2 SQL CPU/Svc Time by Corrid

Field title in online report	XML element
	<SQLTimeByCorrelationId>
CorrId	<CorrelationId> <i>id</i> </CorrelationId>
Nbr of SQL Calls	<NumberOfCalls> <i>n</i> </NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime> <i>n</i> </TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime> <i>n</i> </MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime> <i>n</i> </PctCPUTime>
--Svc Time-- Total	<TotalServiceTime> <i>n</i> </TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime> <i>n</i> </MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime> <i>n</i> </PctServiceTime>
	<GetPagesIdx> <i>n</i> </GetPagesIdx>
	<GetPages> <i>n</i> </GetPages>
	<SyncReadIO> <i>n</i> </SyncReadIO>
	<PrefetchReq> <i>n</i> </PrefetchReq>
	<SyncWriteIO> <i>n</i> </SyncWriteIO>
	<SQLTimeByStatement>
CorrId	<SequenceNumber> <i>seqno</i> </SequenceNumber>
Stmt#	<StatementNumber> <i>n</i> </StatementNumber>
SQL Function	<SQLFunction> <i>function</i> </SQLFunction>
Nbr of SQL Calls	<NumberOfCalls> <i>n</i> </NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime> <i>n</i> </TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime> <i>n</i> </MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime> <i>n</i> </PctCPUTime>
--Svc Time-- Total	<TotalServiceTime> <i>n</i> </TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime> <i>n</i> </MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime> <i>n</i> </PctServiceTime>
	<SQLTextLines>
	<SQLTEXT> <i>sqltext</i> </SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber> <i>n</i> </PrepareStatementNumber>

Field title in online report	XML element
	<PrepareSequenceNumber>seqno</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLTimeByStatement>
	</SQLTimeByCorrelationId>

F18 DB2 SQL CPU/Svc Time by Wkstn

Field title in online report	XML element
	<SQLTimeByWorkstationId>
Wkstn	<WorkstationId>id</WorkstationId>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<GetPagesIdx>n</GetPagesIdx>
	<GetPages>n</GetPages>
	<SyncReadIO>n</SyncReadIO>
	<PrefetchReq>n</PrefetchReq>
	<SyncWriteIO>n</SyncWriteIO>
	<SQLTimeByStatement>
Wkstn	<SequenceNumber>seqno</SequenceNumber>
Stmt#	<StatementNumber>n</StatementNumber>
SQL Function	<SQLFunction>function</SQLFunction>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>

Field title in online report	XML element
	<PrepareInfo>
	<PrepareStatementNumber> <i>n</i> </PrepareStatementNumber>
	<PrepareSequenceNumber> <i>seqno</i> </PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLTimeByStatement>
	</SQLTimeByWorkstationId>

F19 DB2 SQL CPU/Svc Time by EndUsr

Field title in online report	XML element
	<SQLTimeByEndUser>
EndUsr	<EndUser> <i>user</i> </EndUser>
Nbr of SQL Calls	<NumberOfCalls> <i>n</i> </NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime> <i>n</i> </TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime> <i>n</i> </MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime> <i>n</i> </PctCPUTime>
--Svc Time-- Total	<TotalServiceTime> <i>n</i> </TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime> <i>n</i> </MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime> <i>n</i> </PctServiceTime>
	<SQLTimeByStatement>
EndUsr	<SequenceNumber> <i>seqno</i> </SequenceNumber>
Stmt#	<StatementNumber> <i>n</i> </StatementNumber>
SQL Function	<SQLFunction> <i>function</i> </SQLFunction>
Nbr of SQL Calls	<NumberOfCalls> <i>n</i> </NumberOfCalls>
--CPU Time -- Total	<TotalCPUTime> <i>n</i> </TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime> <i>n</i> </MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime> <i>n</i> </PctCPUTime>
--Svc Time-- Total	<TotalServiceTime> <i>n</i> </TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime> <i>n</i> </MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime> <i>n</i> </PctServiceTime>
	<GetPagesIdx> <i>n</i> </GetPagesIdx>
	<GetPages> <i>n</i> </GetPages>
	<SyncReadIO> <i>n</i> </SyncReadIO>
	<PrefetchReq> <i>n</i> </PrefetchReq>
	<SyncWriteIO> <i>n</i> </SyncWriteIO>

Field title in online report	XML element
	<SQLTextLines>
	<SQLTEXT> <i>sqltext</i> </SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber> <i>n</i> </PrepareStatementNumber>
	<PrepareSequenceNumber> <i>seqno</i> </PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	</SQLTimeByStatement>
	</SQLTimeByEndUser>

F20 DB2 Class 3 Wait Times

The DB2Class3WaitTimesByPlan tag pair and sub-elements are repeated for each DB2 plan in the report.

Field title in online report	XML element
	<DB2Class3WaitTimesByPlan>
Plan Name	<PlanName> <i>name</i> </PlanName>
	<Class3WaitTimes>
Database I/O	<DatabaseIO> <i>n</i> </DatabaseIO>
Read I/O other	<ReadIOOther> <i>n</i> </ReadIOOther>
Write I/O other	<WriteIOOther> <i>n</i> </WriteIOOther>
IRLM Lock/Latch	<IRLMLockLatch> <i>n</i> </IRLMLockLatch>
DB2 Latch	<DB2Latch> <i>n</i> </DB2Latch>
Page Latch	<PageLatch> <i>n</i> </PageLatch>
Log Write I/O	<LogWriteIO> <i>n</i> </LogWriteIO>
Log Read	<LogRead> <i>n</i> </LogRead>
ARC LOG QUIESCE	<ArcLogQuiesce> <i>n</i> </ArcLogQuiesce>
Phase 1 Write	<Phase1Write> <i>n</i> </Phase1Write>
TCP/IP LOB/XML	<TcpipLobXml> <i>n</i> </TcpipLobXml>
Glbl Contention	<GlblContention> <i>n</i> </GlblContention>
Group Messages	<GroupMessages> <i>n</i> </GroupMessages>
CF Requests	<CFRequests> <i>n</i> </CFRequests>
Drain Lock	<DrainLock> <i>n</i> </DrainLock>
Claim Release	<ClaimRelease> <i>n</i> </ClaimRelease>
COMMIT	<TaskSwitchCOMMIT> <i>n</i> </TaskSwitchCOMMIT>
OPEN/CLOSE	<TaskSwitchOPENCLOSE> <i>n</i> </TaskSwitchOPENCLOSE>
SYSLGRNG	<TaskSwitchSYSLGRNG> <i>n</i> </TaskSwitchSYSLGRNG>

Field title in online report	XML element
Data Manager	<TaskSwitchDataManager>n</TaskSwitchDataManager>
Other	<TaskSwitchOther>n</TaskSwitchOther>
	</Class3WaitTimes>
	</DB2Class3WaitTimesByPlan>

Java/USS/HFS Performance analysis reports

J01 Java Summary/Attributes

Field title in online report	XML element
	<JavaSummary>
JVMId	<JVMId>n</JVMId>
Identifier	<Identifier>n</Identifier>
Heap	<Heap>nM</Heap>
Max	<HeapMax>nM</HeapMax>
Description	<Description>description</Description>
	</JavaSummary>
	<ObservedJavaPackages>
	<JavaPackages>
PkgId	<PkgId>n</PkgId>
Package Name	<PackageName>name</PackageName>
	</JavaPackages>
	</ObservedJavaPackages>
	<ObservedJavaClasses>
	<JavaClasses>
ClsId	<ClsId>n</ClsId>
PkgId	<PkgId>n</PkgId>
Class Name	<ClassName>name</ClassName>
	</JavaClasses>
	</ObservedJavaClasses>
	<ObservedJavaMethods>
	<JavaMethods>
MthId	<MthId>n</MthId>
ClsId	<ClsId>n</ClsId>
Method Name	<MethodName>name</MethodName>
	</JavaMethods>
	</ObservedJavaMethods>

J02 Java Heap Usage Timeline

Field title in online report	XML element
	<UsageTimeline>
SEQN	<SequenceNumber>n</SequenceNumber>
Storage	<StorageUsed>nK</Storage Used>
Total	<StorageTotal>nK</StorageTotal>
	</UsageTimeline>

J03 Java CPU Usage by Thread

Field title in online report	XML element
	<JavaCPUbyThread>
JavaId	<JavaId>n</JavaId>
Thread Name	<ThreadName>name</ThreadName>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	</JavaCPUbyThread>

J04 Java CPU Usage by Package

Field title in online report	XML element
	<JavaPackage>
JavaId	<JavaPackageId>n</JavaPackageId>
Pkg/Cls/Mthd	<JavaPackageName>name</JavaPackageName>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<JavaClass>
JavaId	<JavaClassId>n</JavaClassId>
Pkg/Cls/Mthd	<JavaClassName>name</JavaClassName>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<JavaMethod>
JavaId	<JavaMethodId>n</JavaMethodId>
Pkg/Cls/Mthd	<JavaMethodName>name</JavaMethodName>
	<Measurements>n</Measurements>
Percent of CPU Time * 10.00%	<Percent>n</Percent>
	<JavaLine>

Field title in online report	XML element
JavaId	<JavaLineNumberId> <i>n</i> </JavaLineNumberId>
Pkg/Cls/Mthd	<JavaLineNumber> <i>lineno</i> </JavaLineNumber>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</JavaLine>
	</JavaMethod>
	</JavaClass>
	</JavaPackage>

J05 Java CPU Usage by Class

Field title in online report	XML element
	<JavaClass>
JavaId	<JavaClassId> <i>n</i> </JavaClassId>
Class/Method	<JavaClassName> <i>name</i> </JavaClassName>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaMethod>
JavaId	<JavaMethodId> <i>n</i> </JavaMethodId>
Class/Method	<JavaMethodName> <i>name</i> </JavaMethodName>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaLine>
JavaId	<JavaLineNumberId> <i>n</i> </JavaLineNumberId>
Class/Method	<JavaLineNumber> <i>lineno</i> </JavaLineNumber>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</JavaLine>
	</JavaMethod>
	</JavaClass>

J06 Java CPU Usage by Method

Field title in online report	XML element
	<JavaMethod>

Field title in online report	XML element
MthId	<JavaMethodId> <i>n</i> </JavaMethodId>
Method	<JavaMethodName> <i>name</i> </JavaMethodName>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaLine>
MthId	<JavaLineNumberId> <i>n</i> </JavaLineNumberId>
Method	<JavaLineNumber> <i>lineno</i> </JavaLineNumber>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</JavaLine>
	</JavaMethod>

J07 Java CPU Usage by Call Path

Field title in online report	XML element
	<JavaMethod>
MthId	<JavaMethodId> <i>n</i> </JavaMethodId>
Method	<JavaMethodName> <i>name</i> </JavaMethodName>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</JavaMethod>

J09 Java Service Time by Package

Field title in online report	XML element
	<JavaPackage>
JavaId	<JavaPackageId> <i>n</i> </JavaPackageId>
Pkg/Cls/Mthd	<JavaPackageName> <i>name</i> </JavaPackageName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaClass>
JavaId	<JavaClassId> <i>n</i> </JavaClassId>
Pkg/Cls/Mthd	<JavaClassName> <i>name</i> </JavaClassName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaMethod>

Field title in online report	XML element
JavaId	<JavaMethodId> <i>n</i> </JavaMethodId>
Pkg/Cls/Mthd	<JavaMethodName> <i>name</i> </JavaMethodName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaLine>
JavaId	<JavaLineNumberId> <i>n</i> </JavaLineNumberId>
Pkg/Cls/Mthd	<JavaLineNumber> <i>lineno</i> </JavaLineNumber>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</JavaLine>
	</JavaMethod>
	</JavaClass>
	</JavaPackage>

J10 Java Service Time by Class

Field title in online report	XML element
	<JavaClass>
JavaId	<JavaClassId> <i>n</i> </JavaClassId>
Class/Method	<JavaClassName> <i>name</i> </JavaClassName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaMethod>
JavaId	<JavaMethodId> <i>n</i> </JavaMethodId>
Class/Method	<JavaMethodName> <i>name</i> </JavaMethodName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaLine>
JavaId	<JavaLineNumberId> <i>n</i> </JavaLineNumberId>
Class/Method	<JavaLineNumber> <i>lineno</i> </JavaLineNumber>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</JavaLine>
	</JavaMethod>
	</JavaClass>

J11 Java Service Time by Method

Field title in online report	XML element
	<JavaMethod>
MthId	<JavaMethodId> <i>n</i> </JavaMethodId>
Method	<JavaMethodName> <i>name</i> </JavaMethodName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaLine>
MthId	<JavaLineNumberId> <i>n</i> </JavaLineNumberId>
Method	<JavaLineNumber> <i>lineno</i> </JavaLineNumber>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</JavaLine>
	</JavaMethod>

J12 Java Service Time by Call Path

Field title in online report	XML element
	<JavaMethod>
MthId	<JavaMethodId> <i>n</i> </JavaMethodId>
Method	<JavaMethodName> <i>name</i> </JavaMethodName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</JavaMethod>

J14 Java Wait Time by Package

Field title in online report	XML element
	<JavaPackage>
JavaId	<JavaPackageId> <i>n</i> </JavaPackageId>
Pkg/Cls/Mthd	<JavaPackageName> <i>name</i> </JavaPackageName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaClass>
JavaId	<JavaClassId> <i>n</i> </JavaClassId>
Pkg/Cls/Mthd	<JavaClassName> <i>name</i> </JavaClassName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>

Field title in online report	XML element
	<JavaMethod>
JavaId	<JavaMethodId> <i>n</i> </JavaMethodId>
Pkg/Cls/Mthd	<JavaMethodName> <i>name</i> </JavaMethodName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaLine>
JavaId	<JavaLineNumberId> <i>n</i> </JavaLineNumberId>
Pkg/Cls/Mthd	<JavaLineNumber> <i>lineno</i> </JavaLineNumber>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</JavaLine>
	</JavaMethod>
	</JavaClass>
	</JavaPackage>

J15 Java Wait Time by Class

Field title in online report	XML element
	<JavaClass>
JavaId	<JavaClassId> <i>n</i> </JavaClassId>
Class/Method	<JavaClassName> <i>name</i> </JavaClassName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaMethod>
JavaId	<JavaMethodId> <i>n</i> </JavaMethodId>
Class/Method	<JavaMethodName> <i>name</i> </JavaMethodName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaLine>
JavaId	<JavaLineNumberId> <i>n</i> </JavaLineNumberId>
Class/Method	<JavaLineNumber> <i>lineno</i> </JavaLineNumber>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</JavaLine>
	</JavaMethod>
	</JavaClass>

J16 Java Wait Time by Method

Field title in online report	XML element
	<JavaMethod>
MthId	<JavaMethodId> <i>n</i> </JavaMethodId>
Method	<JavaMethodName> <i>name</i> </JavaMethodName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<JavaLine>
MthId	<JavaLineNumberId> <i>n</i> </JavaLineNumberId>
Method	<JavaLineNumber> <i>lineno</i> </JavaLineNumber>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</JavaLine>
	</JavaMethod>

J17 Java Wait Time by Call Path

Field title in online report	XML element
	<JavaMethod>
MthId	<JavaMethodId> <i>n</i> </JavaMethodId>
Method	<JavaMethodName> <i>name</i> </JavaMethodName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</JavaMethod>

H01 HFS Service Time by Path Name

Field title in online report	XML element
	<HFSTimeByPathName>
FileId	<FileId> <i>n</i> </FileId>
Path Name	<PathName> <i>name</i> </PathName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</HFSTimeByPathName>

H02 HFS Service Time by Device

Field title in online report	XML element
	<HFSTimeByDevice>
DevId	<DeviceId> <i>n</i> </DeviceId>

Field title in online report	XML element
Device#>PathName	<DeviceNumber> <i>n</i> </DeviceNumber>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<HFSTimeByPathName>
DevId	<FileId> <i>n</i> </FileId>
Device#>PathName	<PathName> <i>name</i> </PathName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</HFSTimeByPathName>
	</HFSTimeByDevice>

H03 HFS File Activity

Field title in online report	XML element
	<HFSFileActivity>
FileId	<FileId> <i>n</i> </FileId>
PathName	<PathName> <i>name</i> </PathName>
File Type	<FileType> <i>filetype</i> </FileType>
Reads/Writes	<ReadsWrites> <i>n</i> </ReadsWrites>
	</HFSFileActivity>

H04 HFS File Attributes

Field title in online report	XML element
	<HFSFileAttributes>
FileId	<FileId> <i>n</i> </FileId>
Path name	<PathName> <i>name</i> </PathName>
File type	<FileType> <i>filetype</i> </FileType>
Major	<FileTypeMajor> <i>n</i> </FileTypeMajor>
Minor	<FileTypeMinor> <i>n</i> </FileTypeMinor>
Opened	<OpenTime> <i>hh:mm:ss.ss</i> </OpenTime>
Opened	<OpenDate> <i>Day Mon dd yyyy</i> </OpenDate>
Device#	<DeviceNumber> <i>n</i> </DeviceNumber>
Serial#	<SerialNumber> <i>n</i> </SerialNumber>
Open Flags	<OpenFlags> <i>flags</i> </OpenFlags>
File type	<ModeFlagsFileType> <i>type</i> </ModeFlagsFileType>
Permissions: Owner	<PermissionOwner> <i>permission</i> </PermissionOwner>
Permissions: Group	<PermissionGroup> <i>permission</i> </PermissionGroup>

Field title in online report	XML element
Permissions: Other	<PermissionOther> <i>permission</i> </PermissionOther>
	<SetIdFlags> <i>setid</i> </SetIdFlags>
Read Requests Initial	<ReadRequestsFirst> <i>n</i> </ReadRequestsFirst>
Last	<ReadRequestsLast> <i>n</i> </ReadRequestsLast>
Delta	<ReadRequestsDelta> <i>n</i> </ReadRequestsDelta>
Write Requests Initial	<WriteRequestsFirst> <i>n</i> </WriteRequestsFirst>
Last	<WriteRequestsLast> <i>n</i> </WriteRequestsLast>
Delta	<WriteRequestsDelta> <i>n</i> </WriteRequestsDelta>
DIR I/O Blocks Initial	<DirectoryRequestsFirst> <i>n</i> </DirectoryRequestsFirst>
Last	<DirectoryRequestsLast> <i>n</i> </DirectoryRequestsLast>
Delta	<DirectoryRequestsDelta> <i>n</i> </DirectoryRequestsDelta>
Blocks Read Initial	<BlocksReadFirst> <i>n</i> </BlocksReadFirst>
Last	<BlocksReadLast> <i>n</i> </BlocksReadLast>
Delta	<BlocksReadDelta> <i>n</i> </BlocksReadDelta>
Blocks Written Initial	<BlocksWrittenFirst> <i>n</i> </BlocksWrittenFirst>
Last	<BlocksWrittenLast> <i>n</i> </BlocksWrittenLast>
Delta	<BlocksWrittenDelta> <i>n</i> </BlocksWrittenDelta>
Bytes Read Initial	<BytesReadFirst> <i>n</i> </BytesReadFirst>
Last	<BytesReadLast> <i>n</i> </BytesReadLast>
Delta	<BytesReadDelta> <i>n</i> </BytesReadDelta>
Bytes Written Initial	<BytesWrittenFirst> <i>n</i> </BytesWrittenFirst>
Last	<BytesWrittenLast> <i>n</i> </BytesWrittenLast>
Delta	<BytesWrittenDelta> <i>n</i> </BytesWrittenDelta>
	</HFSFileAttributes>

H05 HFS Device Activity

Field title in online report	XML element
	<HFSDeviceActivity>
DevId	<DeviceId> <i>n</i> </DeviceId>
Device#	<DeviceNumber> <i>n</i> </DeviceNumber>
Mount Point	<MountPoint> <i>mountpoint</i> </MountPoint>
Reads/Writes	<ReadsWrites> <i>n</i> </ReadsWrites>
	</HFSDeviceActivity>

H06 HFS Device Attributes

Field title in online report	XML element
	<HFSDeviceAttributes>
DevId	<DeviceId> <i>n</i> </DeviceId>
Device#	<DeviceNumber> <i>n</i> </DeviceNumber>
Dataset name	<DatasetName> <i>dsn</i> </DatasetName>
DD name	<DDName> <i>ddname</i> </DDName>
Physical file system	<PhysicalFileSystem> <i>filesystem</i> </PhysicalFileSystem>
Mount point	<MountPoint> <i>mountpoint</i> </MountPoint>
Mounted	<MountTime> <i>hh:mm:ss.ss</i> </MountTime>
Mounted	<MountDate> <i>Day Mon dd yyyy</i> </MountDate>
Read Requests Initial	<ReadRequestsFirst> <i>n</i> </ReadRequestsFirst>
Last	<ReadRequestsLast> <i>n</i> </ReadRequestsLast>
Delta	<ReadRequestsDelta> <i>n</i> </ReadRequestsDelta>
Write Requests Initial	<WriteRequestsFirst> <i>n</i> </WriteRequestsFirst>
Last	<WriteRequestsLast> <i>n</i> </WriteRequestsLast>
Delta	<WriteRequestsDelta> <i>n</i> </WriteRequestsDelta>
DIR I/O Blocks Initial	<DirectoryRequestsFirst> <i>n</i> </DirectoryRequestsFirst>
Last	<DirectoryRequestsLast> <i>n</i> </DirectoryRequestsLast>
Delta	<DirectoryRequestsDelta> <i>n</i> </DirectoryRequestsDelta>
Blocks Read Initial	<BlocksReadFirst> <i>n</i> </BlocksReadFirst>
Last	<BlocksReadLast> <i>n</i> </BlocksReadLast>
Delta	<BlocksReadDelta> <i>n</i> </BlocksReadDelta>
Blocks Written Initial	<BlocksWrittenFirst> <i>n</i> </BlocksWrittenFirst>
Last	<BlocksWrittenLast> <i>n</i> </BlocksWrittenLast>
Delta	<BlocksWrittenDelta> <i>n</i> </BlocksWrittenDelta>
Bytes Read Initial	<BytesReadFirst> <i>n</i> </BytesReadFirst>
Last	<BytesReadLast> <i>n</i> </BytesReadLast>
Delta	<BytesReadDelta> <i>n</i> </BytesReadDelta>
Bytes Written Initial	<BytesWrittenFirst> <i>n</i> </BytesWrittenFirst>
Last	<BytesWrittenLast> <i>n</i> </BytesWrittenLast>
Delta	<BytesWrittenDelta> <i>n</i> </BytesWrittenDelta>
	</HFSDeviceAttributes>

H07 HFS Activity Timeline

Field title in online report	XML element
	<HFSActivityTimeline>
File Information Samples	<Samples> <i>n</i> </Samples>
Duration	<Duration> <i>n</i> </Duration>
Path Name	<PathName> <i>name</i> </PathName>
FileId	<FileId> <i>n</i> </FileId>
File Type	<FileType> <i>filetype</i> </FileType>
Open for	<OpenFor> <i>mode</i> </OpenFor>
	<Intervals>
	<IntervalPct> <i>n</i> </IntervalPct> Repeated 50 times
	</Interval>
	</HFSActivityTimeline>

H08 HFS Wait Time by Path Name

Field title in online report	XML element
	<HFSTimeByPathName>
FileId	<FileId> <i>n</i> </FileId>
Path Name	<PathName> <i>name</i> </PathName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</HFSTimeByPathName>

H09 HFS Wait Time by Device

Field title in online report	XML element
	<HFSTimeByDevice>
DevId	<DeviceId> <i>n</i> </DeviceId>
Device#>PathName	<DeviceNumber> <i>n</i> </DeviceNumber>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<HFSTimeByPathName>
DevId	<FileId> <i>n</i> </FileId>
Device#>PathName	<PathName> <i>name</i> </PathName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</HFSTimeByPathName>

Field title in online report	XML element
	</HFSTimeByDevice>

H10 HFS Service Time by Request

Field title in online report	XML element
	<HFSTimeByRequest>
ReqId	<RequestId> <i>n</i> </RequestId>
Request>PathName	<Request> <i>request</i> </Request>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<HFSTimeByPathName>
ReqId	<FileId> <i>n</i> </FileId>
Request>PathName	<PathName> <i>name</i> </PathName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</HFSTimeByPathName>
	</HFSTimeByRequest>

H11 HFS Wait Time by Request

Field title in online report	XML element
	<HFSTimeByRequest>
ReqId	<RequestId> <i>n</i> </RequestId>
Request>PathName	<Request> <i>request</i> </Request>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<HFSTimeByPathName>
ReqId	<FileId> <i>n</i> </FileId>
Request>PathName	<PathName> <i>name</i> </PathName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</HFSTimeByPathName>
	</HFSTimeByRequest>

MQSeries Performance analysis reports

Q01 MQSeries Activity Summary

Field title in online report	XML element
	<MQSeriesObjectsObserved>
Object Sequence Number	<ObjectSequenceNumber> <i>n</i> </ObjectSequenceNumber >
Object Manager Name	<QueueManagerName> <i>name</i> </QueueManagerName>
Object Name	<ObjectName> <i>name</i> </ObjectName>
Object Type	<ObjectType> <i>type</i> </ObjectType>
	</MQSeriesObjectsObserved>
	<MQSeriesCallsObserved>
Module	<Module> <i>name</i> </Module>
CSECT	<CSECT> <i>name</i> </CSECT>
Offset	<Offset> <i>n</i> </Offset>
Function	<Function> <i>function</i> </Function>
Queue Mgr	<QueueManager> <i>name</i> </QueueManager>
Object Name	<ObjectName> <i>name</i> </ObjectName>
	</MQSeriesCallsObserved>

Q02 MQSeries CPU Usage by Queue

Field title in online report	XML element
	<MQQueue>
Name	<QueueManager> <i>name</i> </QueueManager>
Description	<QueueName> <i>name</i> </QueueName>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQRequest>
Name	<MQRequestFunction> <i>function</i> </MQRequestFunction>
Description	<ProgramNameOffset> <i>name+offset</i> </ProgramNameOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</MQRequest>
	</MQQueue>

Q03 MQSeries CPU Usage by Request

Field title in online report	XML element
	<MQRequest>
Name	<MQRequestFunction> <i>function</i> </MQRequestFunction>
Description	<ProgramNameOffset> <i>name+offset</i> </ProgramNameOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQQueue>
Name	<QueueManager> <i>name</i> </QueueManager>
Description	<QueueName> <i>name</i> </QueueName>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</MQQueue>
	</MQRequest>

Q04 MQSeries CPU Usage by Txn/Queue

Field title in online report	XML element
	<Transaction>
Name	<TranName> <i>name</i> </TranName>
Description	<TranDescription> <i>description</i> </TranDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQQueue>
Name	<QueueManager> <i>name</i> </QueueManager>
Description	<QueueName> <i>name</i> </QueueName>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQRequest>
Name	<MQRequestFunction> <i>function</i> </MQRequestFunction>
Description	<ProgramNameOffset> <i>name+offset</i> </ProgramNameOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of CPU Time * 10.00%	<Percent> <i>n</i> </Percent>
	</MQRequest>

Field title in online report	XML element
	</MQQueue>
	</Transaction>

Q05 MQSeries Service Time by Queue

Field title in online report	XML element
	<MQQueue>
Name	<QueueManager> <i>name</i> </QueueManager>
Description	<QueueName> <i>name</i> </QueueName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQRequest>
Name	<MQRequestFunction> <i>function</i> </MQRequestFunction>
Description	<ProgramNameOffset> <i>name+offset</i> </ProgramNameOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</MQRequest>
	</MQQueue>

Q06 MQSeries Service Time by Request

Field title in online report	XML element
	<MQRequest>
Name	<MQRequestFunction> <i>function</i> </MQRequestFunction>
Description	<ProgramNameOffset> <i>name+offset</i> </ProgramNameOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQQueue>
Name	<QueueManager> <i>name</i> </QueueManager>
Description	<QueueName> <i>name</i> </QueueName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</MQQueue>
	</MQRequest>

Q07 MQSeries Service Time by Txn/Queue

Field title in online report	XML element
	<Transaction>

Field title in online report	XML element
Name	<TranName> <i>name</i> </TranName>
Description	<TranDescription> <i>description</i> </TranDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQQueue>
Name	<QueueManager> <i>name</i> </QueueManager>
Description	<QueueName> <i>name</i> </QueueName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQRequest>
Name	<MQRequestFunction> <i>function</i> </MQRequestFunction>
Description	<ProgramNameOffset> <i>name+offset</i> </ProgramNameOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</MQRequest>
	</MQQueue>
	</Transaction>

Q08 MQSeries Wait Time by Queue

Field title in online report	XML element
	<MQQueue>
Name	<QueueManager> <i>name</i> </QueueManager>
Description	<QueueName> <i>name</i> </QueueName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQRequest>
Name	<MQRequestFunction> <i>function</i> </MQRequestFunction>
Description	<ProgramNameOffset> <i>name+offset</i> </ProgramNameOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</MQRequest>
	</MQQueue>

Q09 MQSeries Wait Time by Request

Field title in online report	XML element
	<MQRequest>

Field title in online report	XML element
Name	<MQRequestFunction> <i>function</i> </MQRequestFunction>
Description	<ProgramNameOffset> <i>name+offset</i> </ProgramNameOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQQueue>
Name	<QueueManager> <i>name</i> </QueueManager>
Description	<QueueName> <i>name</i> </QueueName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</MQQueue>
	</MQRequest>

Q10 MQSeries Wait Time by Txn/Queue

Field title in online report	XML element
	<Transaction>
Name	<TranName> <i>name</i> </TranName>
Description	<TranDescription> <i>description</i> </TranDescription>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQQueue>
Name	<QueueManager> <i>name</i> </QueueManager>
Description	<QueueName> <i>name</i> </QueueName>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	<MQRequest>
Name	<MQRequestFunction> <i>function</i> </MQRequestFunction>
Description	<ProgramNameOffset> <i>name+offset</i> </ProgramNameOffset>
	<Measurements> <i>n</i> </Measurements>
Percent of Time * 10.00%	<Percent> <i>n</i> </Percent>
	</MQRequest>
	</MQQueue>
	</Transaction>

Q11 MQ+ Activity Timeline

The MQ+ ActivityTimeline tag pair is repeated nested for each MQ call and MQ Queue Manager detail line.

Field title in online report	XML element
	<MQActivityTimeline>
Seqno	<Seqno> <i>n</i> </Seqno>
Call	<Call> <i>call type</i> </Call>
Location	<Location> <i>location</i> </Location>
Msg Len	<MsgLen> <i>n</i> </Msglen>
Call Time	<CallTime> <i>hh:mm:ss.ss</i> </CallTime>
Svc Time	<ServiceTime> <i>n</i> </ServiceTime>
CPU Time	<CPUTime> <i>n</i> </CPUTime>
	<MQActivityTimeLine>
Seqno	<QMgr> <i>queue manager</i> </QMgr>
Call	<ObjectName> <i>queue name</i> </ObjectName>
	</MQActivityTimeline>
	</MQActivityTimeline>

Q12 MQ+ CPU/SVC Time by Queue

The MQ+ CPU Time by Queue tag pair is repeated nested for each MQ Queue Manager and MQ call detail line.

Field title in online report	XML element
	<MQCPUTimebyQueue>
Name	<Name> <i>queue manager</i> </Name>
Description	<Description> <i>queue name</i> </Description>
Nbr of Calls	<NumberOfCalls> <i>n</i> </NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime> <i>n</i> </TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime> <i>n</i> </MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime> <i>n</i> </PctCPUTime>
--Svc Time-- Total	<TotalServiceTime> <i>n</i> </TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime> <i>n</i> </MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime> <i>n</i> </PctServiceTime>
	<MQCPUTimebyQueue>
Name	<Name> <i>call type</i> </Name>
Description	<Description> <i>location</i> </Description>
Nbr of Calls	<NumberOfCalls> <i>n</i> </NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime> <i>n</i> </TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime> <i>n</i> </MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime> <i>n</i> </PctCPUTime>

Field title in online report	XML element
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	</MQCPUTimebyQueue>
	</MQCPUTimebyQueue>

Q13 MQ+ CPU/SVC Time by Request

The MQ+ CPU Time by Request tag pair is repeated nested for each MQ call and MQ Queue Manager detail line.

Field title in online report	XML element
	<MQCPUTimebyRequest>
Name	<Name>call type</Name>
Description	<Description>location</Description>
Nbr of Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	<MQCPUTimebyRequest>
Name	<Name>queue manager</Name>
Description	<Description>queue name</Description>
Nbr of Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime>n</PctCPUTime>
--Svc Time-- Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime>n</PctServiceTime>
	</MQCPUTimebyRequest>
	</MQCPUTimebyRequest>

Q14 MQ+ CPU/SVC Time by Txn

The MQ+ CPU Time by Transaction tag pair is repeated nested for each transaction, MQ Queue Manager, and MQ call detail line.

Field title in online report	XML element
	<MQCPUTimebyTransaction>
Name	<Name> <i>tran</i> </Name>
Description	<Description> <i>descr</i> </Description>
Nbr of Calls	<NumberOfCalls> <i>n</i> </NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime> <i>n</i> </TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime> <i>n</i> </MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime> <i>n</i> </PctCPUTime>
--Svc Time-- Total	<TotalServiceTime> <i>n</i> </TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime> <i>n</i> </MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime> <i>n</i> </PctServiceTime>
	<MQCPUTimebyTransaction>
Name	<Name> <i>queue manager</i> </Name>
Description	<Description> <i>queue name</i> </Description>
Nbr of Calls	<NumberOfCalls> <i>n</i> </NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime> <i>n</i> </TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime> <i>n</i> </MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime> <i>n</i> </PctCPUTime>
--Svc Time-- Total	<TotalServiceTime> <i>n</i> </TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime> <i>n</i> </MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime> <i>n</i> </PctServiceTime>
	<MQCPUTimebyTransaction>
Name	<Name> <i>call type</i> </Name>
Description	<Description> <i>location</i> </Description>
Nbr of Calls	<NumberOfCalls> <i>n</i> </NumberOfCalls>
--CPU Time-- Total	<TotalCPUTime> <i>n</i> </TotalCPUTime>
--CPU Time-- Mean	<MeanCPUTime> <i>n</i> </MeanCPUTime>
--CPU Time-- Pct	<PctCPUTime> <i>n</i> </PctCPUTime>
--Svc Time-- Total	<TotalServiceTime> <i>n</i> </TotalServiceTime>
--Svc Time-- Mean	<MeanServiceTime> <i>n</i> </MeanServiceTime>
--Svc Time-- Pct	<PctServiceTime> <i>n</i> </PctServiceTime>
	</MQCPUTimebyTransaction>
	</MQCPUTimebyTransaction>
	</MQCPUTimebyTransaction>

WebSphere performance analysis reports

B01 WAS Summary

Field title in online report	XML element
	<WASSummary>
System name	<SystemName>name</SystemName>
Sysplex	<SysplexName>name</SysplexName>
Job name	<JobName>name</JobName>
Job id	<JobId>id</JobId>
ASID	<ASID>asid</ASID>
Cell	<Cell>name</Cell>
Node	<Node>name</Node>
Cluster	<Cluster>name</Cluster>
Server	<Server>name</Server>
WAS version	<WASVersion>version</WASVersion>
Service level	<ServiceLevel>level</ServiceLevel>
Total requests	<RequestedObserved>n</RequestedObserved>
IIOP requests	<IIOPRequests>n</IIOPRequests>
HTTP requests	<HTTPRequests>n</HTTPRequests>
HTTPS requests	<HTTPSRequests>n</HTTPSRequests>
MDB Plan A requests	<MDBPlanARequests>n</MDBPlanARequests>
MDB Plan B requests	<MDBPlanBRequests>n</MDBPlanBRequests>
MDB Plan C requests	<MDBPlanCRequests>n</MDBPlanCRequests>
SIP requests	<SIPRequests>n</SIPRequests>
SIPS requests	<SIPSRequests>n</SIPSRequests>
MBean requests	<MBeanRequests>n</MBeanRequests>
OTS requests	<OTSRequests>n</OTSRequests>
Internal requests	<InternalRequests>n</InternalRequests>
Inbound WOLA	<InboundWOLARequests>n</InboundWOLARequests>
Unknown requests	<UnknownRequests>n</UnknownRequests>
Asynchronous requests	<AsynchronousRequests>n</AsynchronousRequests>
Timed out requests	<TimedOutRequests>n</TimedOutRequests>
Outbound WOLA requests	<OutboundWOLA>n</OutboundWOLA>
Outbound unknown	<OutboundUnknown>n</OutboundUnknown>
Total service time	<TotalServiceTime>hh:mm:ss.sss</TotalServiceTime>
WLM queued time	<WLMQueuedTime>hh:mm:ss.sss</WLMQueuedTime>
Dispatched time	<DispatchedTime>hh:mm:ss.sss</DispatchedTime>
Controller time	<ControllerTime>hh:mm:ss.sss</ControllerTime>

Field title in online report	XML element
Asynchronous time	<AsynchronousTime>hh:mm:ss.sss</AsynchronousTime>
Enclave CPU time	<EnclaveCPUTime>hh:mm:ss.sss</EnclaveCPUTime>
Encl zIIP CPU time	<EnclavezIIPCPUTime>hh:mm:ss.sss</EnclavezIIPCPUTime>
Encl zAAP CPU time	<EnclavezAAPCPUTime>hh:mm:ss.sss</EnclavezAAPCPUTime>
Encl CPU s/units	<EnclaveCPUServiceUnits>n</EnclaveCPUServiceUnits>
Encl zIIP s/units	<EnclavezIIPServiceUnits>n</EnclavezIIPServiceUnits>
Encl zAAP s/units	<EnclavezAAPServiceUnits>n</EnclavezAAPServiceUnits>
Async Encl CPU time	<AsyncEnclCPUTime> hh:mm:ss.sss </AsyncEnclCPUTime>
Async Encl zIIP CPU	<AsyncEnclzIIPCPU> hh:mm:ss.sss</AsyncEnclzIIPCPU>
Async Encl zAAP CPU	<AsyncEnclzAAPCPU> hh:mm:ss.sss</AsyncEnclzAAPCPU>
	</WASSummary>

B02 WAS Activity

Field title in online report	XML element
	<WASActivitybyRequest >
Seqno	<Seqno>n</Seqno>
Request, EJB/Webapp, Method/Servlet Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASActivitybyRequest>

B03 WAS Activity by Origin

Field title in online report	XML element
	<WASActivitybyOrigin >
Seqno	<Seqno>n</Seqno>
Origin, EJB/Webapp, Method/Servlet Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>

Field title in online report	XML element
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASActivitybyOrigin>

B04 WAS Activity by Servant

Field title in online report	XML element
	<WASActivitybyServant >
Seqno	<Seqno>n</Seqno>
Servant,Req,EJB/Web, Method/Servlet Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASActivitybyServant>

B05 WAS EJB Activity

Field title in online report	XML element
	<WASEJBActivitybyRequest >
Seqno	<Seqno>n</Seqno>
EJB, Method Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASEJBActivitybyRequest>

B06 WAS EJB Activity by Origin

Field title in online report	XML element
	<WASEJBActivitybyOrigin >
Seqno	<Seqno>n</Seqno>
Origin, EJB, Method Name	<Name>name</Name>

Field title in online report	XML element
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASEJBActivitybyOrigin>

B07 WAS EJB Activity by Servant

Field title in online report	XML element
	<WASEJBActivitybyServant >
Seqno	<Seqno>n</Seqno>
Servant, EJB, Method Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASEJBActivitybyServant>

B08 WAS Servlet/JSP Activity

Field title in online report	XML element
	<WASServletJSPActivitybyRequest >
Seqno	<Seqno>n</Seqno>
Web App, Servlet/JSP Name	<Name>name</Name>
	<Type>type</Type>
Request Count	<Count>n</Count>
--CPU Time-- Total	<TotalCPU>n</TotalCPU>
--CPU Time-- Mean	<MeanCPU>n</MeanCPU>
--Svc Time-- Total	<TotalService>n</TotalService>
--Svc Time-- Mean	<MeanService>n</MeanService>
	</WASServletJSPActivitybyRequest>

B09 WAS Servlet/JSP Activity by Origin

Field title in online report	XML element
	<WASServletJSPActivitybyOrigin>
Seqno	<Seqno> <i>n</i> </Seqno>
Origin, Web App, Servlet/JSP Name	<Name> <i>name</i> </Name>
	<Type> <i>type</i> </Type>
Request Count	<Count> <i>n</i> </Count>
--CPU Time-- Total	<TotalCPU> <i>n</i> </TotalCPU>
--CPU Time-- Mean	<MeanCPU> <i>n</i> </MeanCPU>
--Svc Time-- Total	<TotalService> <i>n</i> </TotalService>
--Svc Time-- Mean	<MeanService> <i>n</i> </MeanService>
	</WASServletJSPActivitybyOrigin>

B10 WAS Servlet/JSP by Activity by Servant

Field title in online report	XML element
	<WASServletJSPActivitybyServant>
Seqno	<Seqno> <i>n</i> </Seqno>
Servant, Web App, Servlet/JSP Name	<Name> <i>name</i> </Name>
	<Type> <i>type</i> </Type>
Request Count	<Count> <i>n</i> </Count>
--CPU Time-- Total	<TotalCPU> <i>n</i> </TotalCPU>
--CPU Time-- Mean	<MeanCPU> <i>n</i> </MeanCPU>
--Svc Time-- Total	<TotalService> <i>n</i> </TotalService>
--Svc Time-- Mean	<MeanService> <i>n</i> </MeanService>
	</WASServletJSPActivitybyServant>

B11 WAS/CICS Calls

Field title in online report	XML element
	<WASCICSCalls>
Name	<Name> <i>Name</i> </Name>
Count	<Count> <i>n</i> </Count>
--Svc Time – Total	<TotalService> <i>n</i> </TotalService>
--Svc Time – Mean	<MeanService> <i>n</i> </MeanService>
	</WASCICSCalls>

B12 WAS/DB2 Calls

Field title in online report	XML element
	<WASDB2Activity>
Seqno	<SequenceNumber>n</SequenceNumber>
WAS Request	<WASRequest>name</WASRequest>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time – Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time – Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time – Mean	<PctCPUTime>n</PctCPUTime>
--Svc Time – Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time – Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time – Mean	<PctServiceTime>n</PctServiceTime>
	</WASDB2Activity>
	<SQLCPUTimeByStatement>
Seqno	<SequenceNumber>n</SequenceNumber>
DB2 Call	<ProgramName>name</ProgramName>
	<StatementNumber>n</StatementNumber>
	<SQLFunction>name</SQLFunction>
Nbr of SQL Calls	<NumberOfCalls>n</NumberOfCalls>
--CPU Time – Total	<TotalCPUTime>n</TotalCPUTime>
--CPU Time – Mean	<MeanCPUTime>n</MeanCPUTime>
--CPU Time – Mean	<PctCPUTime>n</PctCPUTime>
--Svc Time – Total	<TotalServiceTime>n</TotalServiceTime>
--Svc Time – Mean	<MeanServiceTime>n</MeanServiceTime>
--Svc Time – Mean	<PctServiceTime>n</PctServiceTime>
	</SQLCPUTimeByStatement>
	<SQLTextLines>
	<SQLTEXT>text</SQLTEXT>
	<PrepareInfo>
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>n</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>

B13 Async Work Requests

Field title in online report	XML element
	<AsyncWorkRequest>
Seqno	<Seqno> <i>n</i> </Seqno>
Pkg/Class, Work Mgr	<Name> <i>name</i> </Name>
Request Count	<Count> <i>n</i> </Count>
--CPU Time – Total	<TotalCPU> <i>n</i> </TotalCPU>
--CPU Time – Mean	<MeanCPU> <i>n</i> </MeanCPU>
--Svc Time – Total	<TotalService> <i>n</i> </TotalService>
--Svc Time – Mean	<MeanService> <i>n</i> </MeanService>
	</AsyncWorkRequest>

B14 Async Work by Manager

Field title in online report	XML element
	<AsyncWorkbyWorkMgr>
Seqno	<Seqno> <i>n</i> </Seqno>
Work Mgr , Pkg/Class	<Name> <i>name</i> </Name>
Request Count	<Count> <i>n</i> </Count>
--CPU Time – Total	<TotalCPU> <i>n</i> </TotalCPU>
--CPU Time – Mean	<MeanCPU> <i>n</i> </MeanCPU>
--Svc Time – Total	<TotalService> <i>n</i> </TotalService>
--Svc Time – Mean	<MeanService> <i>n</i> </MeanService>
	</AsyncWorkbyWorkMgr>

B15 Async Work by Servant

Field title in online report	XML element
	<AsyncWorkbyServant>
Seqno	<Seqno> <i>n</i> </Seqno>
Servant, Pkg/Class, Work Mgr	<Name> <i>name</i> </Name>
Request Count	<Count> <i>n</i> </Count>
--CPU Time – Total	<TotalCPU> <i>n</i> </TotalCPU>
--CPU Time – Mean	<MeanCPU> <i>n</i> </MeanCPU>
--Svc Time – Total	<TotalService> <i>n</i> </TotalService>
--Svc Time – Mean	<MeanService> <i>n</i> </MeanService>
	</AsyncWorkbyServant>

B16 WOLA Inbound Requests

Field title in online report	XML element
	<WOLAInboundbyRequest>
Seqno	<Seqno> <i>n</i> </Seqno>
Request, EJB/Webapp, Method/Servlet Name	<Name> <i>name</i> </Name>
	<Type> <i>type</i> </Type>
Request Count	<Count> <i>n</i> </Count>
--CPU Time – Total	<TotalCPU> <i>n</i> </TotalCPU>
--CPU Time – Mean	<MeanCPU> <i>n</i> </MeanCPU>
--Svc Time – Total	<TotalService> <i>n</i> </TotalService>
--Svc Time – Mean	<MeanService> <i>n</i> </MeanService>
	</WOLAInboundbyRequest >

B17 WOLA Inbound by Origin

Field title in online report	XML element
	<WOLAInboundbyRequest>
Seqno	<Seqno> <i>n</i> </Seqno>
Origin, Request, EJB/ Webapp, Method/Servlet Name	<Name> <i>name</i> </Name>
	<Type> <i>type</i> </Type>
Request Count	<Count> <i>n</i> </Count>
--CPU Time – Total	<TotalCPU> <i>n</i> </TotalCPU>
--CPU Time – Mean	<MeanCPU> <i>n</i> </MeanCPU>
--Svc Time – Total	<TotalService> <i>n</i> </TotalService>
--Svc Time – Mean	<MeanService> <i>n</i> </MeanService>
	</WOLAInboundbyOrigin>

B18 WOLA Inbound by Servant

Field title in online report	XML element
	<WOLAInboundbyServant>
Seqno	<Seqno> <i>n</i> </Seqno>
Servant, Request, EJB/ Webapp, Method/Servlet Name	<Name> <i>name</i> </Name>
	<Type> <i>type</i> </Type>
Request Count	<Count> <i>n</i> </Count>

Field title in online report	XML element
--CPU Time – Total	<TotalCPU> <i>n</i> </TotalCPU>
--CPU Time – Mean	<MeanCPU> <i>n</i> </MeanCPU>
--Svc Time – Total	<TotalService> <i>n</i> </TotalService>
--Svc Time – Mean	<MeanService> <i>n</i> </MeanService>
	</WOLAI inboundbyServant >

B19 WOLA Outbound Requests

Field title in online report	XML element
	<WOLAOutboundbyRequest>
Seqno	<Seqno> <i>n</i> </Seqno>
Request, Register, Service	<Name> <i>name</i> </Name>
Request Count	<Count> <i>n</i> </Count>
--Bytes-- Sent	<BytesSent> <i>n</i> </BytesSent>
--Bytes-- Rcvd	<BytesRcvd> <i>n</i> </BytesRcvd>
--Svc Time – Total	<TotalService> <i>n</i> </TotalService>
--Svc Time – Mean	<MeanService> <i>n</i> </MeanService>
	</WOLAOutboundbyRequest>

B20 WOLA Outbound by Register

Field title in online report	XML element
	<WOLAOutboundbyRegister>
Seqno	<Seqno> <i>n</i> </Seqno>
Register, Service	<Name> <i>name</i> </Name>
Request Count	<Count> <i>n</i> </Count>
--Bytes-- Sent	<BytesSent> <i>n</i> </BytesSent>
--Bytes-- Rcvd	<BytesRcvd> <i>n</i> </BytesRcvd>
--Svc Time – Total	<TotalService> <i>n</i> </TotalService>
--Svc Time – Mean	<MeanService> <i>n</i> </MeanService>
	</WOLAOutboundbyRequest>

B21 WOLA Outbound by Servant

Field title in online report	XML element
	<WOLAOutboundbyServant>
Seqno	<Seqno> <i>n</i> </Seqno>
Servant, Register, Service	<Name> <i>name</i> </Name>

Field title in online report	XML element
Request Count	<Count> <i>n</i> </Count>
--Bytes-- Sent	<BytesSent> <i>n</i> </BytesSent>
--Bytes-- Rcvd	<BytesRcvd> <i>n</i> </BytesRcvd>
--Svc Time – Total	<TotalService> <i>n</i> </TotalService>
--Svc Time – Mean	<MeanService> <i>n</i> </MeanService>
	</WOLAOutboundbyServant>

Multiple address space reports

X01 CICS Mean Service Time by Txn

This report is generated for multiple CICS address space reporting.

The XML elements presented below can be repeated multiple times and occur under different parent elements. In the XML document, all elements are listed in hierarchical order as they are displayed in the online report.

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId> <i>tranid</i> </TransactionId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n</i> %</MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTranId>
	<CICSApplid>
Name	<Applid> <i>name</i> </Applid>
Description	<Description>Region Applid</Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSApplid>
	<CICSProgram>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>

Field title in online report	XML element
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT> <i>name</i> </CSECT>
Description	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason> <i>reason</i> </WaitReason>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT> <i>name</i> </CSECT>
Name	<SQL> <i>offset</i> </SQL>
Description	<Description> <i>sqlverb</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>

Field title in online report	XML element
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSSQL>
	<CICSCLI>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<DLIRequest> <i>dlirequest</i> </DLIRequest>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCLI>
	<ADABASCommand>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</ADABASCommand>

X02 CICS Total Service Time by Txn

This report is generated for multiple CICS address space reporting.

The XML elements presented below can be repeated multiple times and occur under different parent elements. In the XML document, all elements are listed in hierarchical order as they are displayed in the online report.

Field title in online report	XML element
	<CICSTranId>
Name	<TransactionId> <i>tranid</i> </TransactionId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n</i> %</MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>

Field title in online report	XML element
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTranId>
	<CICSAppId>
Name	<AppId> <i>name</i> </AppId>
Description	<Description>Region AppId</Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSAppId>
	<CICSProgram>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT> <i>name</i> </CSECT>
Description	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason> <i>reason</i> </WaitReason>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service <ServiceTime> <i>n</i> </ServiceTime>	

Field title in online report	XML element
	</CICSWait>
	<CICSService>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT> <i>name</i> </CSECT>
Name	<SQL> <i>offset</i> </SQL>
Description	<Description> <i>sqlverb</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSSQL>
	<CICSDLI>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<DLIRequest> <i>dlirequest</i> </DLIRequest>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSDLI>
	<ADABASCommand>
	<CSECT> <i>name</i> </CSECT>
Name	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>

Field title in online report	XML element
	</ADABASCommand>

X03 CICS Mean Service Time by Term

This report is generated for multiple CICS address space reporting.

The XML elements presented below can be repeated multiple times and occur under different parent elements. In the XML document, all elements are listed in hierarchical order as they are displayed in the online report.

Field title in online report	XML element
	<CICSTerminal>
Name	<TerminalId> <i>termid</i> </TerminalId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n</i> %</MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTerminal>
	<CICSTranId>
Name	<TransactionId> <i>transid</i> </TransactionId>
NTxns	<CICSTxnCount> <i>n</i> </CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError> <i>n</i> %</MarginofErrors>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSTranId>
	<CICSApplid>
Name	<Applid> <i>name</i> </Applid>
Description	<Description>Region Applid</Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSApplid>

Field title in online report	XML element
	<CICSProgram>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSProgram>
	<CICSCommand>
Name	<CSECT> <i>name</i> </CSECT>
Description	<Offset> <i>offset</i> </Offset>
Description	<Command> <i>command</i> </Command>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason> <i>reason</i> </WaitReason>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program> <i>name</i> </Program>
Description	<Description> <i>description</i> </Description>
Execution	<ExecTime> <i>n</i> </ExecTime>
Suspend	<SuspendTime> <i>n</i> </SuspendTime>
Delay	<DelayTime> <i>n</i> </DelayTime>
Service	<ServiceTime> <i>n</i> </ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT> <i>name</i> </CSECT>

Field title in online report	XML element
Name	<Offset>offset</Offset>
Description	<SQLVerb>sqlverb</SQLVerb>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSCLI>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

X04 CICS Total Service Time by Term

This report is generated for multiple CICS address space reporting.

The XML elements presented below can be repeated multiple times and occur under different parent elements. In the XML document, all elements are listed in hierarchical order as they are displayed in the online report.

Table 15. XML Elements for X04 Report Field Titles	
Field title in online report	XML element
	<CICSTerminal>
Name	<TerminalId>termid</TerminalId>
NTxns	<CICSTxnCount>n</CICSTxnCount>

Table 15. XML Elements for X04 Report Field Titles (continued)

Field title in online report	XML element
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTerminal>
	<CICSTranId>
Name	<TransactionId>transid</TransactionId>
NTxns	<CICSTxnCount>n</CICSTxnCount>
Description	<Description></Description>
Error	<MarginofError>n%</MarginofErrors>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSTranId>
	<CICSAppId>
Name	<AppId>name</AppId>
Description	<Description>Region AppId</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSAppId>
	<CICSProgram>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSProgram>
	<CICSCommand>

Table 15. XML Elements for X04 Report Field Titles (continued)

Field title in online report	XML element
Name	<CSECT>name</CSECT>
Description	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCommand>
	<CICSWait>
Name	<WaitReason>reason</WaitReason>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSWait>
	<CICSService>
Name	<Program>name</Program>
Description	<Description>description</Description>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSService>
	<CICSSQL>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<SQLVerb>sqlverb</SQLVerb>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSSQL>
	<CICSCLI>

Table 15. XML Elements for X04 Report Field Titles (continued)

Field title in online report	XML element
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<DLIRequest>dlirequest</DLIRequest>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</CICSCLI>
	<ADABASCommand>
	<CSECT>name</CSECT>
Name	<Offset>offset</Offset>
Description	<Command>command</Command>
Execution	<ExecTime>n</ExecTime>
Suspend	<SuspendTime>n</SuspendTime>
Delay	<DelayTime>n</DelayTime>
Service	<ServiceTime>n</ServiceTime>
	</ADABASCommand>

X05 Combined DB2 IMS MQ Timeline

The CombinedTimeline tag pair is repeated for each DB2, IMS, and MQ call. When an expanded report is requested, SQL text lines, Prepare lines, and MQ Queue Manager lines may also be generated in the XML.

Field title in online report	XML element
	<CombinedTimeline>
Seqno	<SeqNum>n</SeqNum>
System	<System>DB2, IMS or MQ</System>
Function	<Function>function</Function>
Object	<Object>object</Object>
Status	<Status>status</Status>
Call Time	<CallTime>hh:mm:ss.ss</CallTime>
Svc Time	<SvcTime>n</SvcTime>
CPU Time	<CPUTime>n</CPUTime>
	<SQLTextLines>
	<SQLTEXT>sqltext</SQLTEXT>
	<PrepareInfo>

Field title in online report	XML element
	<PrepareStatementNumber>n</PrepareStatementNumber>
	<PrepareSequenceNumber>n</PrepareSequenceNumber>
	</PrepareInfo>
	</SQLTextLines>
	<CombinedTimelineMQ>
	<QueueManager>queue manager</QueueManager>
	<ObjectName>queue name</ObjectName>
	</CombinedTimelineMQ>
	</CombinedTimeline>

X06 IMS MASS Region Summary

The IMSMassRegion tag pair is repeated for each measured IMS region. The last tag pair represents the total for all lines of the report.

Field title in online report	XML element
	< IMSMassRegion>
Region	<RegionName>name</RegionName>
IMS	<IMSID>name</IMSID>
ReqNum	<ReqNum>n</ReqNum>
Txn Count	<TxnCount>n</TxnCount>
Svc/Trn	<SvcPerTrn>n</SvcPerTrn>
CPU/Trn	<CpuPerTrn>n</CpuPerTrn>
SQL/Trn	<DLIPerTrn>n</DLIPerTrn>
CPU Time	<SQLPerTrn>n</SQLPerTrn>
MQ/Trn	<MQIPerTrn>n</MQIPerTrn>

X07 DB2 Stored Procedures Summary

The DB2SP tag pair is repeated for each measured DB2 Stored Procedure name.

Field title in online report	XML element
	< DB2SP>
Name	<DBRMName>name</DBRMName>
DB2 Sysid	<DB2Sysid>name</DB2Sysid>
ReqNum	<ReqNum>n</ReqNum>
Nbr of Invocations	<InvCount>n</InvCount>
SQL Calls/Total	<SQLTotal>29</SQLTotal>
SQL Calls/Average	<SQLAvg>524.15</SQLAvg>

Field title in online report	XML element
Mean CPU Time	<MeanCPU>0.10413</MeanCPU>
Mean SVC Time	<MeanSvc>0.10413</MeanSvc>

Source Program Attribution

P01 Source Program Attribution

Field title in online report	XML element
	<LoadModuleInformation>
Load Module	<LoadModuleName>name</LoadModuleName>
LIB	<LoadLibrary>library</LoadLibrary>
CSECT	<CSECTName>name</CSECTName>
Mapped by	<SourceMappingFile>file</SourceMappingFile>
	<SourceLanguage>language</SourceLanguage>
Compiler	<Compiler>compiler</Compiler>
Compile Time	<CompileTime>yyyy/mm/dd hh:mm:ss</CompileTime>
	</LoadModuleInformation>
	<SourceStatement>
LineNo	<LineNumber>n</LineNumber>
Offset	<Offset>n</Offset>
Prcnt or Count	<Percent>n</Percent> or <Count>n</Count>
Source Statement	<Statement>stmt</Statement>
	<Attribution>
	<Percent>n</Percent> or <Count>n</Count>
	</Attribution>
	</SourceStatement>

Appendix D. Automatic Report Generation Samples

This appendix describes the supplied Automatic Report Generation (ARG) samples that are included in *hlq.SCAZSAMP*.

With the Automatic Report Generation Feature (ARG), you can request the automatic generation of observation reports immediately upon the completion of a successful observation session. Specify a dataset name and optional member name that contain JCL and PRINT control statements that will be used to submit the batch job to generate the reports. For more information on this feature, see [Automatic Report Generation \(ARG\)](#).

The JCL can be enhanced to perform other functions as well, which is tailored to your installation. The following three samples are provided as examples of how the Automatic Report Generation feature may be used.

Member CAZARG

CAZARG is a basic sample. When this sample is customized for your installation, it creates sampling reports in both SYSOUT and PDF format.

```

//RP&SAMP. JOB <job parameters>
//*
//* Member: CAZARG
//* Function: Model JCL for creating sampling reports via the
//* Automatic Report Generation Feature.
//*
//* Before using this job, you must add the job parameters to
//* meet your system requirements.
//*
//* Notes:
//*
//* This JCL contains substitutable variables that enable the job to
//* be reusable without user intervention. These variables will be
//* substituted by APA prior to the JCL being submitted. The
//* variables included here are:
//* 1. &JOB. - Contains the sampled job's JOBNAME.
//* 2. &SAMP. - Contains the sample request number. E.g. Rnnnnn.
//* 3. &SAMPDSN. - Contains the sample file dataset name.
//* 4. &STEPLIB. - Contains the name of the load library containing
//* all APA components.
//* 5. &USERID. - Contains the user ID of the requestor.
//*
//* The user may also specify System symbols wherever appropriate.
//*
//* Documentation on how to use ARG may be found in the
//* Application Performance Analyzer User's Guide.
//*
//-----
//* Ensure that the PDF flat file is deleted as we will be
//* allocating a new one in the next step.
//-----
//STEP1 EXEC PGM=IEFBR14
//DD1 DD DISP=(MOD,DELETE),DSN=&USERID..&JOB..&SAMP..PDF,
// SPACE=(CYL,(1,1))
//
//-----
//* Create the reports.
//* This step will create reports to both SYSOUT and to a PDF file.
//-----
//STEP2 EXEC PGM=CAZPRINT
//STEPLIB DD DISP=SHR,DSN=&STEPLIB.
//SFIN DD DISP=SHR,DSN=&SAMPDSN.
//RPT1 DD SYSOUT=*
//PDF1 DD DISP=(NEW,CATLG),SPACE=(CYL,(1,1)),UNIT=SYSDA,
// DCB=(LRECL=80,RECFM=FB,DSORG=PS),
// DSN=&USERID..&JOB..&SAMP..PDF
//CAZLOG DD SYSOUT=*
//CAZCTL DD *
//PROFILE 01 INPUT=SFIN
//SECTION S01
//SECTION S02 Sequence=NAME
// OmitESD=N
// OmitNUC=N
// OmitPLPA=N
// Omitdup=Y
//SECTION S03 Sequence=NAME
// Omitdup=N
//SECTION S04
//SECTION S05 Intervals=45
//SECTION S06 Intervals=45
//SECTION S10 Levels=4
// MsgE=Y
// MsgW=Y
// MsgI=Y
// MsgD=Y
//PRINT DDNAME=RPT1 LANG=ENU
//CONVERT DDNAME=PDF1 FORMAT=PDF LANG=ENU
//

```

The control statements can be customized to your requirements depending on which reports are required. In the example above, only the “Statistics/Storage” (Sxx) reports are to be printed. For detailed descriptions of the available control statements (ddname CAZCTL), see [“Specifying control statements” on page 640](#).

Member CAZARGRP

When the sample CAZARGRP is customized for your installation, it demonstrates how a user may choose to create sampling reports and email them in printed (plain text) format as an attachment using the Communications Server Simple Mail Transfer Protocol (CSSMTP).

Note: In addition to customization of the included sample, additional configuration might be required, including setup of CSSMTP. For more information, refer to the *"IBM z/OS Communications Server: IP User's Guide and Commands"*. The following sample is meant for only illustration purposes.

```
//RP&SAMP. JOB <job parameters>
//*
//* Member: CAZARGRP
//* Function: Model JCL for creating sampling reports via the
//*           Automatic Report Generation Feature. If CSSMTP is
//*           configured, reports can be e-mailed (plain text) in
//*           STEP3.
//*
//* Before using this procedure, you must make the following
//* modifications:
//*
//* 1) Add the job parameters to meet your system requirements.
//*
//* 2) Change '#cssmtp'. If the ExtWrtName statement is specified in
//* the CSSMTP application configuration, change '#cssmtp' to the
//* external writer name; otherwise, change '#cssmtp' to the CSSMTP
//* application address space name.
//* * Refer to the "IBM z/OS Communications Server: IP User's
//* Guide and Commands" for more information.
//*
//* 3) Change '#mycssmtp.lrecl121' to the name of your
//* SMTP commands dataset. This dataset must have a DCB of
//* RECFM=FBA,LRECL=121,BLKSIZE=27951. An example of the contents
//* of this dataset can be found in the Application Performance
//* Analyzer User's Guide.
//*
//* Notes:
//*
//* This JCL contains substitutable variables that enable the job to
//* be reusable without user intervention. These variables will be
//* substituted by APA prior to the JCL being submitted. The
//* variables included here are:
//* 1. &JOB. - Contains the sampled job's JOBNAME.
//* 2. &SAMP. - Contains the sample request number. E.g. Rnnnnn.
//* 3. &SAMPDSN. - Contains the sample file dataset name.
//* 4. &STEPLIB. - Contains the name of the load library containing
//* all APA components.
//* 5. &USERID. - Contains the user ID of the requestor.
//*
//* The user may also specify System symbols wherever appropriate.
//*
//* Documentation on how to use ARG may be found in the
//* Application Performance Analyzer User's Guide.
//*
//-----
//-----
//* Ensure that the PDF flat file is deleted as we will be
//* allocating a new one in the next step.
```

(Sample CAZARGRP - Continued)

```

/*-----
//STEP1      EXEC PGM=IEFBR14
//DD1        DD  DISP=(MOD,DELETE),DSN=&USERID..&JOB..&SAMP..RPT,
//            SPACE=(CYL,(1,1))
//*
/*-----
/* Create the reports.
/* This step will create reports to both SYSOUT and to a PDF file.
/*-----
//STEP2      EXEC PGM=CAZPRINT
//STEPLIB    DD  DISP=SHR,DSN=&STEPLIB.
//SFIN       DD  DISP=SHR,DSN=&SAMPDSN.
//RPT1       DD  DISP=(NEW,CATLG),SPACE=(CYL,(100,50),RLSE),UNIT=SYSDA,
//            DCB=(RECFM=FBA,LRECL=121,BLKSIZE=0),
//            DSN=&USERID..&JOB..&SAMP..RPT
//CAZLOG      DD  SYSOUT=*
//CAZCTL      DD  *
//PROFILE     01  INPUT=SFIN
//SECTION     S01
//SECTION     S02  Sequence=NAME
//              OmitESD=Y
//              OmitNUC=N
//              OmitPLPA=N
//              Omitdup=N
//SECTION     S03  Sequence=NAME
//              Omitdup=N
//SECTION     S04
//SECTION     S05  Intervals=45
//SECTION     S06  Intervals=45
//SECTION     S07
//SECTION     S08
//SECTION     S09
//PRINT       DDNAME=RPT1              LANG=ENU
//*
//STEP3      EXEC PGM=IEBGGENER
//SYSIN       DD  DUMMY
//SYSPRINT    DD  SYSOUT=*
//SYSUT2      DD  SYSOUT=(B,#cssmtp),
//              DCB=(RECFM=FBA,LRECL=121,BLKSIZE=27951)
//SYSUT1      DD  DSN=#mycssmtp.1rec121,DISP=SHR
//            DD  DSN=&USERID..&JOB..&SAMP..RPT,DISP=SHR
//

```

The control statements can be customized to your requirements depending on which reports are required. In the example above, only the “Statistics/Storage” (S01-S09) reports are to be printed. For detailed descriptions of the available control statements (ddname CAZCTL) see [“Specifying control statements” on page 640](#).

Note: You might want to carefully consider which reports to include when you e-mail them as an attachment. Large measurements can produce exceptionally large reports.

Additionally, you must provide an SMTP commands dataset. This dataset must have a data control block parameter of RECFM=FBA, LRECL=121, BLKSIZE=27951. An example of the content of this dataset is as follows:


```
HELO youimvs
MAIL FROM:<user1@company.com>
RCPT TO:<user1@company.com>
RCPT TO:<user2@company.com>
DATA
FROM:      user@youimvs
TO:        user1@company.com
TO:        user2@company.com
SUBJECT:    APA report auto-sent using ARG
MIME-VERSION: 1.0
CONTENT-TYPE: MULTIPART/MIXED; BOUNDARY="SIMPLE BOUNDARY"

--SIMPLE BOUNDARY
CONTENT-TYPE: TEXT/PLAIN

Please review the attached APA report.

--SIMPLE BOUNDARY
CONTENT-TYPE: TEXT/PLAIN
CONTENT-DISPOSITION: ATTACHMENT; FILENAME=REPORT.TXT
```

For more information about SMTP commands, refer to "*IBM z/OS Communications Server: IP User's Guide and Commands*". The sample above is meant for only illustration purposes.

Member CAZARGXM

When the sample CAZARGXM is customized for your installation, it demonstrates how a user might choose to create sampling reports and email them in XML format as an attachment by using the Communications Server Simple Mail Transfer Protocol (CSSMTP).

Note: In addition to the customization of the included sample, additional configuration might be required, including setup of CSSMTP. For more information, see the "*IBM z/OS Communications Server: IP User's Guide and Commands*". The following sample is meant for only illustration purposes.

```

//RP&SAMP. JOB <job parameters>
//*
//* Member: CAZARGXM
//* Function: Model JCL for creating sampling reports via the
//*           Automatic Report Generation Feature. If CSSMTP is
//*           configured, reports can be e-mailed (XML format) in
//*           STEP3.
//*
//* Before using this procedure, you must make the following
//* modifications:
//*
//* 1) Add the job parameters to meet your system requirements.
//*
//* 2) Change '#cssmtp'. If the ExtWrtName statement is specified in
//* the CSSMTP application configuration, change '#cssmtp' to the
//* external writer name; otherwise, change '#cssmtp' to the CSSMTP
//* application address space name.
//* * Refer to the "IBM z/OS Communications Server: IP User's
//* Guide and Commands" for more information.
//*
//* 3) Change '#mycssmtp.vb.lrecl255' to the name of your
//* SMTP commands dataset. This dataset must have a DCB of
//* RECFM=VB,LRECL=255,BLKSIZE=27795. An example of the contents
//* of this dataset can be found in the Application Performance
//* Analyzer User's Guide.
//*
//* Notes:
//*
//* This JCL contains substitutable variables that enable the job to
//* be reusable without user intervention. These variables will be
//* substituted by APA prior to the JCL being submitted. The
//* variables included here are:
//* 1. &JOB. - Contains the sampled job's JOBNAME.
//* 2. &SAMP. - Contains the sample request number. E.g. Rnnnnn.
//* 3. &SAMPDSN. - Contains the sample file dataset name.
//* 4. &STEPLIB. - Contains the name of the load library containing
//* all APA components.
//* 5. &USERID. - Contains the user ID of the requestor.
//*
//* The user may also specify System symbols wherever appropriate.
//*
//* Documentation on how to use ARG may be found in the
//* Application Performance Analyzer User's Guide.
//*
//*------
//*------
//* Ensure that the PDF flat file is deleted as we will be
//* allocating a new one in the next step.

```

(Sample CAZARGXM - Continued)

```

/*-----
//STEP1      EXEC PGM=IEFBR14
//DD1        DD  DISP=(MOD,DELETE),DSN=&USERID..&JOB..&SAMP..XML,
//            SPACE=(CYL,(1,1))
//*
/*-----
/* Create the reports.
/* This step will create reports to both SYSOUT and to a PDF file.
/*-----
//STEP2      EXEC PGM=CAZPRINT
//STEPLIB    DD  DISP=SHR,DSN=&STEPLIB.
//SFIN       DD  DISP=SHR,DSN=&SAMPDSN.
//XML1       DD  DISP=(NEW,CATLG),SPACE=(CYL,(100,50),RLSE),UNIT=SYSDA,
//            DCB=(RECFM=VB,LRECL=255,BLKSIZE=0),
//            DSN=&USERID..&JOB..&SAMP..XML
//CAZLOG      DD  SYSOUT=*
//CAZCTL      DD  *
//PROFILE    01  INPUT=SFIN
//SECTION    S01
//SECTION    S02  Sequence=NAME
//              OmitESD=Y
//              OmitNUC=N
//              OmitPLPA=N
//              Omitdup=N
//SECTION    S03  Sequence=NAME
//              Omitdup=N
//SECTION    S04
//SECTION    S05  Intervals=45
//SECTION    S06  Intervals=45
//SECTION    S07
//SECTION    S08
//SECTION    S09
//CONVERT     DDNAME=XML1          FORMAT=XML
//*
//STEP3      EXEC PGM=IEBGENER
//SYSIN       DD  DUMMY
//SYSPRINT    DD  SYSOUT=*
//SYSUT2      DD  SYSOUT=(B,#cssmtp),
//              DCB=(RECFM=VB,LRECL=255,BLKSIZE=0)
//SYSUT1      DD  DSN=#mycssmtp.vb.lrec1255,DISP=SHR
//            DD  DSN=&USERID..&JOB..&SAMP..XML,DISP=SHR
//

```

The control statements can be customized to your requirements depending on which reports are required. In the example above, only the “Statistics/Storage” (S01-S09) reports are to be printed. For detailed descriptions of the available control statements (ddname CAZCTL), see [“Specifying control statements” on page 640](#).

Note: You might want to carefully consider which reports to include when you email them as an attachment. Large measurements can produce exceptionally large reports.

Additionally, you must provide an SMTP commands dataset. This dataset must have a data control block parameter of RECFM=VB , LRECL=255 , BLKSIZE=27795. An example of the content of this dataset is as follows:

```
HELO yourmvs
MAIL FROM:<user1@company.com>
RCPT TO:<user2@company.com>
RCPT TO:<user3@company.com>
DATA
FROM:      user1@yourmvs
TO:        user2@company.com
TO:        user3@company.com
SUBJECT:    APA XML report auto-sent using ARG
MIME-VERSION: 1.0
CONTENT-TYPE: MULTIPART/MIXED; BOUNDARY="SIMPLE BOUNDARY"

--SIMPLE BOUNDARY
CONTENT-TYPE: TEXT/PLAIN

Please review the attached APA report.

--SIMPLE BOUNDARY
CONTENT-TYPE: TEXT/PLAIN
CONTENT-DISPOSITION: ATTACHMENT; FILENAME=REPORT.XML
```

For more information about SMTP commands, refer to the *"IBM z/OS Communications Server: IP User's Guide and Commands"*. The sample above is meant for only illustration purposes.

Appendix E. Accessibility

Accessibility features help a user who has a physical disability, such as restricted mobility or limited vision, to use software products successfully. The accessibility features in z/OS provide accessibility for IBM Application Performance Analyzer.

The major accessibility features in z/OS enable users to:

- Use assistive technology products such as screen readers and screen magnifier software
- Operate specific or equivalent features by using only the keyboard
- Customize display attributes such as color, contrast, and font size

Using assistive technologies

Assistive technology products work with the user interfaces that are found in z/OS. For specific guidance information, consult the documentation for the assistive technology product that you use to access z/OS interfaces.

Keyboard navigation of the user interface

Users can access z/OS user interfaces by using TSO/E or ISPF. Refer to the following publications:

- *z/OS TSO/E Primer*
- *z/OS TSO/E User's Guide*
- *z/OS ISPF User's Guide Volume 1*

These guides describe how to use TSO/E and ISPF, including the use of keyboard shortcuts or function keys (PF keys). Each guide includes the default settings for the PF keys and explains how to modify their functions.

Accessibility of this document

The XHTML format of this document that will be provided in the IBM Application Performance Analyzer Knowledge Center at <https://www.ibm.com/support/knowledgecenter/SSFMHB/product.html>, which is accessible to visually impaired individuals who use a screen reader.

To enable your screen reader to accurately read syntax diagrams, source code examples, and text that contains the period or comma picture symbols, you must set the screen reader to speak all punctuation.

When you use JAWS for Windows, the links to accessible syntax diagrams might not work. Use IBM Home Page Reader to read the accessible syntax diagrams.

Appendix F. Notices

References in this publication to IBM products, programs, or services do not imply that IBM intends to make these available in all countries in which IBM operates. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Subject to IBM's valid intellectual property or other legally protectable rights, any functionally equivalent product, program, or service may be used instead of the IBM product, program, or service. The evaluation and verification of operation in conjunction with other products, except those expressly designated by IBM, are the responsibility of the user.

IBM may have patents or pending patent applications covering subject matter in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
500 Columbus Avenue
Thornwood, NY 10594
U.S.A.

Licensees of this program who want to have information about it for the purpose of enabling (1) the exchange of information between independently created programs and other programs (including this one) and (2) the mutual use of the information that has been exchanged, should contact:

IBM Corporation, Department HHX/H3
555 Bailey Avenue
San Jose, CA 95141-1099
U.S.A.

Such information might be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

Trademarks

IBM, the IBM logo, and ibm.com are trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at “Copyright and trademark information” at www.ibm.com/legal/copytrade.shtml.

Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.

Java and all Java-based trademarks and logos are trademarks of Oracle and/or its affiliates.

LINUX is a registered trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Bibliography

IBM Application Performance Analyzer for z/OS documents

Customization Guide, SC27-8401
Messages Guide, SC27-8402
Program Directory, GI13-4303
User's Guide, SC27-8403

Documents for related products

z/OS

ISPF Planning and Customizing, GC34-4814
MVS JCL Reference, SA22-7597
MVS JCL User's Guide, SA22-7598
MVS System Commands, SA22-7627
Security Server RACF® Command Language Reference, SA22-7687
Security Server RACF Security Administrator's Guide, SA22-7683
TSO/E Command Reference, SA22-7782
TSO/E Programming Guide, SA22-7788
TSO/E System Programming Command Reference, SA22-7793
TSO/E User's Guide, SA22-7794
z/OS Initialization and Tuning Reference, SA22-7533

OS/390

ISPF Planning and Customizing, SC28-1298
MVS JCL Reference, GC28-1757
MVS JCL User's Guide, GC28-1758
MVS System Commands, GC28-1781
Security Server (RACF) Command Language Reference, SC28-1919
Security Server (RACF) Security Administrator's Guide, SC28-1915
TSO/E Command Reference, SC28-1969

AT-TLS

z/OS Communications Server: IP Configuration Guide, SC31-8775-15
z/OS Communications Server: IP Configuration Reference, SC31-8776-16
z/OS Security Server RACF Command Language Reference, SA22-7687-13
DB2 9 for z/OS: Configuring SSL for Secure Client-Server Communications, REDP-4630-00

CICS

Application Programming Guide, SC34-5993
Application Programming Primer, SC33-0674
Application Programming Reference, SC34-5994
CICS Supplied Transactions, SC34-5992
CICS Transaction Server for z/OS Release Guide, GC34-6218

DB2 UDB for OS/390 and z/OS

Administration Guide, SC26-9931
Application Programming and SQL Guide, SC26-9933
Command Reference, SC26-9934
Data Sharing: Planning and Administration, SC26-9935

Installation Guide, GC26-9936
Messages and Codes, GC26-9940
Reference for Remote DRDA Requesters and Servers*, SC26-9942
Release Planning Guide, SC26-9943
SQL Reference, SC26-9944
Utility Guide and Reference, SC26-9945

IMS

IMS Version 8 Installation Volume 1: Installation Verification, GC27-1297
IMS Version 7 Installation Volume 1: Installation Verification, GC26-9429

WebSphere MQ

WebSphere MQ for z/OS Concepts and Planning Guide, GC34-6926
WebSphere MQ for z/OS System Administration Guide, GC34-6929
WebSphere MQ for z/OS System Setup Guide, GC34-6927

Glossary

A

abend

Abnormal end of a task. The termination of a task before its completion because of an error condition that cannot be resolved by recovery facilities while the task is executing.

access plan

The set of access paths that are selected by the optimizer to evaluate a particular SQL statement.

APF

Authorized program facility. A facility that permits the identification of programs that are authorized to use restricted functions.

authorized program

A system program or user program that is allowed to use restricted functions.

B

batch

A processing mode in which a predefined series of actions are performed with little or no interaction between the user and the system.

bind

To convert the output from the SQL compiler to a usable control structure.

C

checkpoint

A place in a program at which a check is made, or at which data is recorded, to provide real-time monitoring.

checkpoint data set

A data set that contains checkpoint records.

connection authorization exit

An exit that approves or disapproves requests for a connection to another program.

D

data set

The major unit of data storage and retrieval, consisting of a collection of data in one of several prescribed arrangements and described by control information to which the system has access.

dynamic

Pertaining to events that occur at run time or during processing.

E

explain

To capture detailed information about the access plan that was chosen by the SQL compiler to resolve an SQL statement.

I

ISPF

Interactive system productivity facility. An IBM licensed program that serves as a full-screen editor and dialog manager.

J

JCL

Job control language. A control language that is used to identify a job to an operating system and to describe the job's requirements.

M

monitor

To collect data about an application from the running agents that are associated with the application.

P**panel**

An area of the screen that displays formatted information and that can include entry fields.

Index

A

A01 Source program mapping report [615](#)
A011 Source program mapping pick list [623](#)
A03 Java source program mapping [618](#)
A04 Source mapping dataset list [620](#)
A05 Source mapping common list [622](#)
abend code [668](#)
ACCUM [685](#), [696](#)
action (menu) bar, described [1](#)
active jobs, measure by selecting from a list [28](#)
active jobs, specify job is active [37](#)
ACTIVE keyword in batch interface [662](#), [673](#)
Active status of observation session [10](#)
Adabas
 Adabas category in C01 report [78](#)
 Adabas data extractor, specifying [23](#)
 detail line in CICS reports [195](#), [205](#), [215](#), [226](#), [235](#), [243](#),
 [251](#), [258](#), [576](#), [583](#), [592](#), [600](#)
 displaying the Adabas category in reports [84](#), [100](#), [125](#)
 reporting [82](#)
ADABAS
 reporting in batch [656](#)
ADATA [615](#), [709](#)
Admin/Miscellaneous reports
 A01 Source program mapping [615](#)
 A03 Java source program mapping [618](#)
 A04 Source mapping dataset list [620](#)
 A05 Source mapping common list [622](#)
 A11 Source program mapping pick list [623](#)
aggregated service time [337](#), [340](#), [344](#)
ALL [34](#)
ALLSTEPS keyword in batch interface [662](#), [673](#)
AMODE [73](#), [691](#)
API in batch interface [661](#)
Application Performance Analyzer
 plug-in [699](#)
arithmetic means [161](#), [198](#), [230](#)
ASID [57](#), [115](#), [694](#)
ASID keyword in batch interface [662](#), [670](#), [680](#)
auto deletion of sample files [9](#)
Auto-refresh mode [685](#)
automatic deletion [18](#)

B

B01 WAS Summary report [504](#)
B02 WAS Activity report [507](#)
B03 WAS Activity by Origin report [511](#)
B04 WAS Activity by Servant report [515](#)
B05 WAS EJB Activity report [520](#)
B06 WAS EJB Activity by Origin report [523](#)
B07 WAS EJB Activity by Servant report [526](#)
B08 WAS Servlet/JSP Activity report [529](#)
B09 WAS Servlet/JSP by Origin report [532](#)
B10 – WAS Servlet/JSP by Servant report [535](#)
B11 - WAS/CICS Calls [538](#)

B11 WAS/CICS Calls report [837](#)
B12 - WAS/DB2 Calls [541](#)
B12 WAS/DB2 Calls report [838](#)
B13 - Async Work Requests [544](#)
B14 - Async Work by Work Mgr [547](#)
B15 - Async Work by Servant [549](#)
B16 - WOLA Inbound Requests [552](#)
B17 - WOLA Inbound by Origin [555](#)
B18 - WOLA Inbound by Servant [559](#)
B19 - WOLA Outbound Requests [563](#)
B20 - WOLA Outbound by Register [565](#)
B21 - WOLA Outbound by Servant [567](#)
Batch import [681](#)
Batch interface
 API [661](#)
 CANCEL command [662](#)
 command summary diagram [662](#)
 command syntax [661](#)
 DELETE command [662](#), [681](#)
 KEEP command [662](#)
 NEW command [661](#), [669](#)
 sample JCL [664](#)
 TNEW command [679](#)
Batch interface keywords
 ACTIVE [662](#), [673](#)
 ALLSTEPS [662](#), [673](#)
 ASID [662](#), [670](#), [680](#)
 CTERM [662](#), [673](#)
 CTRAN [662](#), [673](#)
 DB2IMAX [662](#), [671](#)
 DB2SP [662](#), [675](#)
 DDFFILTERS [662](#), [675](#)
 DELAYSAMPLING [662](#), [671](#)
 DESCR [662](#), [670](#)
 DIRS [662](#), [672](#)
 DURATION [662](#), [671](#)
 EXPDAYS [662](#), [671](#)
 FEATURES [662](#), [671](#)
 IMSID [662](#), [676](#)
 IMSIMAX [662](#), [672](#)
 IPROG [662](#), [674](#)
 ITRAN [662](#), [674](#)
 IUSER [662](#), [674](#)
 JOBNAME [662](#), [669](#)
 JOBNAME [662](#), [676](#)
 LIBS [662](#), [672](#)
 NONCTERM [662](#), [673](#)
 NOTIFY [662](#), [671](#)
 RETRYAFTER [662](#), [678](#)
 RUNAGAIN [662](#), [678](#)
 RUNTOEOS [662](#), [671](#)
 SAMPDSN [678](#)
 SAMPLES [662](#), [670](#)
 SCHDDATE [662](#), [677](#)
 SCHDSPAN [662](#), [678](#)
 STEP [662](#), [672](#)
 SYSTRAN [662](#), [673](#)

Batch interface keywords (*continued*)

SYSTEMS [662, 670](#)

USSOBS [662, 671](#)

WASFILTERS [676](#)

BMP [267, 279, 280, 283, 286, 289, 290, 295, 297, 298, 301, 304](#)

buffer pools (VSAM) [158](#)

C

C01 CPU usage by category report [78](#)

C02 CPU usage by module report [85](#)

C03 CPU usage by code slice report [89](#)

C04 CPU usage timeline report [92](#)

C05 CPU usage by task/category report [95](#)

C06 CPU usage by task/module report [102](#)

C07 CPU usage by procedure report [105](#)

C08 CPU usage referred attribution report [109](#)

C09 CPU usage by PSW/object code report [115](#)

C10 CPU usage by Natural Program report [118](#)

CAN (Cancel) line command [9](#)

CANCEL [681](#)

CANCEL command in batch interface [662](#)

CANCEL primary command [2](#)

Cancel status of observation session [10](#)

cancelling an active observation request [9](#)

CAZ\$NEW [682](#)

CAZNEWCI [682](#)

CAZNEWIM [682](#)

CAZPRINT [633, 638](#)

CAZSYSIN [682](#)

CICS

data extractor, overview of [185](#)

data extractor, specifying [23](#)

multiple address space support [186](#)

source program mapping [191, 198, 208, 230, 238, 246, 253, 261, 613](#)

transaction, specifying which ones to measure [26](#)

translation of trancodes to upper case [17](#)

CICS measurement reports

CICS CPU and use count by program report (E02) [189](#)

CICS CPU usage by transaction report (E03) [191](#)

CICS CPU/service time by transaction report (E12) [261](#)

CICS mean service time by terminal ID report (E08) [230](#)

CICS mean service time by terminal ID report (X03) [586](#)

CICS mean service time by transaction report (E04) [198](#)

CICS mean service time by transaction report (X01) [571](#)

CICS mean service time by user ID report (E10) [246](#)

CICS service time by task ID report (E06) [219](#)

CICS session statistics report (E01) [187](#)

CICS total service time by terminal ID report (E09) [238](#)

CICS total service time by terminal ID report (X04) [594](#)

CICS total service time by transaction report (X02) [578](#)

CICS total service time by Txn report (E05) [208](#)

CICS total service time by user ID report (E11) [253](#)

CICS wait by Txn report (E07) [228](#)

CICS trancode [29](#)

CICS+

CICS+ data extractor, specifying [23](#)

data extractor, overview of [186](#)

CICSSusp [199, 209, 214, 220, 229](#)

COBOL

versions supported for source mapping [616](#)

Code slice [89, 91](#)

Collapse [4](#)

Collection name [346](#)

command

MVS START [682](#)

Common data set list [613](#)

completion notification [21](#)

CONNECT [397](#)

CONNECT primary command [3](#)

context help [4, 8](#)

context menu [4, 8](#)

CONVERT statement in print reports JCL [643](#)

CONVERT statement in XML documents [643](#)

Core IDs [75](#)

Coupling facility reports

Coupling facility mean times report (G02) [161](#)

Coupling facility summary report (G01) [160](#)

Coupling facility total times report (G03) [162](#)

CPU Time [40, 72](#)

CPU time percentage calculation [45](#)

CPU usage analysis reports

CPU usage by category report (C01) [78](#)

CPU usage by code slice report (C03) [89](#)

CPU usage by Natural Program report (C10) [118](#)

CPU usage by procedure report (C07) [105](#)

CPU usage by PSW/object code report (C09)

[115](#)

CPU usage by task/category report (C05) [95](#)

CPU usage by task/module report (C06) [102](#)

CPU usage module report (C02) [85](#)

CPU usage referred attribution report (C08) [109](#)

CPU usage timeline report (C04) [92](#)

CPU WAIT analysis reports

WAIT time by tape DDNAME report (W05) [136](#)

WAIT time by task ENQ/RESERVE report (W04) [133](#)

WAIT time by task/category report (W01) [121](#)

WAIT time by task/module report (W02) [126](#)

WAIT time referred attribution report (W03) [129](#)

CSECT [79, 86, 96, 102, 110, 122, 126, 156, 278, 624, 713](#)

CTERM keyword in batch interface [662, 673](#)

CTRAN keyword in batch interface [662, 673](#)

CURRENT [685, 696](#)

customer support [704](#)

Cylinder Address [138, 140](#)

D

D [23](#)

D file type [621](#)

D01 DASD usage by device report [138](#)

D02 DASD usage by DDNAME report [140](#)

D03 DASD usage by data set report [143](#)

D04 Data set attributes report [144](#)

D05 DASD EXCP summary report [147](#)

D06 DASD VSAM statistics report [149](#)

D07 DASD activity timeline report [152](#)

D08 DASD I/O wait time report [154](#)

D09 VSAM buffer pool usage report [158](#)

DASD [46, 138, 140, 143, 144, 147, 149, 152, 154, 158, 279](#)

DASD I/O analysis reports

DASD activity timeline report (D07) [152](#)

DASD EXCP summary report (D05) [147](#)

DASD I/O wait time report (D08) [154](#)

DASD usage by data set report (D03) [143](#)

DASD usage by DDNAME report (D02) [140](#)

DASD I/O analysis reports (*continued*)

- DASD usage by device report (D01) [138](#)
- DASD VSAM buffer pool usage report (D09) [158](#)
- DASD VSAM statistics report (D06) [149](#)
- Data set attributes report (D04) [144](#)
- data extractor [185](#), [265](#), [325](#), [395](#), [437](#), [671](#)
- data extractors (fields in new request) [23](#)
- DATAMG category [278](#)
- DB2
 - data extractor, overview of [326](#)
 - DB2 data extractor, specifying [23](#)
 - DB2 EXPLAIN report [389](#)
 - DB2SQL category in C01 report [78](#), [392](#)
 - DB2V data extractor, specifying [23](#)
 - DB2X data extractor, specifying [23](#)
 - displaying SQL statement text [327](#)
 - multiple address space support [328](#)
 - source program mapping [336](#), [339](#), [343](#), [348](#), [351](#), [354](#), [356](#), [359](#), [363](#), [367](#), [371](#), [374](#), [377](#), [380](#), [384](#), [613](#), [615](#), [620](#), [623](#)
 - SQL statement in DB2SQL category in C01 report [78](#)
 - SQL statement sequence numbers [328](#)
 - stored procedures, report (F14) [367](#)
- DB2 measurement reports
 - DB2 Class 3 Wait Times (F20) [387](#)
 - DB2 CPU by plan/stored proc report (F14) [367](#)
 - DB2 measurement report (F01) [328](#)
 - DB2 SQL activity by DBRM report (F03) [336](#)
 - DB2 SQL activity by plan report (F05) [343](#)
 - DB2 SQL activity by statement report (F04) [339](#)
 - DB2 SQL activity timeline report (F02) [332](#)
 - DB2 SQL CPU/Svc time by Corrid report (F17) [377](#)
 - DB2 SQL CPU/Svc time by DBRM report (F10) [356](#)
 - DB2 SQL CPU/Svc time by enclave report (F16) [374](#)
 - DB2 SQL CPU/Svc time by EndUsr report (F19) [384](#)
 - DB2 SQL CPU/Svc time by plan report (F12) [363](#)
 - DB2 SQL CPU/Svc time by Rq Loc report (F15) [371](#)
 - DB2 SQL CPU/Svc time by stmt report (F11) [359](#)
 - DB2 SQL CPU/Svc time by Wkstn report (F18) [380](#)
 - DB2 SQL statement attributes report (F06) [346](#)
 - DB2 SQL threads analysis report (F13) [366](#)
 - DB2 SQL wait time by DBRM report (F07) [348](#)
 - DB2 SQL wait time by plan report (F09) [354](#)
 - DB2 SQL wait time by statement report (F08) [351](#)
- DB2 package [55](#)
- DB2+ [326](#), [662](#)
- DB2+ data extractor [23](#)
- DB2IMAX keyword in batch interface [662](#), [671](#)
- DB2SP keyword in batch interface [662](#), [675](#)
- DB2V [662](#)
- DB2X [23](#), [662](#)
- DBRM [55](#), [328](#), [332](#), [336](#), [348](#), [356](#)
- DCB [26](#)
- DDF
 - measuring DDF activity [326](#)
- DDFFILTERS keyword in batch interface [662](#), [675](#)
- DDNAME [136](#), [140](#)
- Delay by (field in new request) [21](#)
- delaying initiation of a measurement [21](#)
- DELAYSAMPLING keyword in batch interface [662](#), [671](#)
- DELETE command in batch interface [662](#), [681](#)
- deleting an observation request [8](#)
- DESC [644](#)

- DESC statement in print reports JCL [644](#)
- DESCR keyword in batch interface [662](#), [670](#)
- Description field in observation session [10](#)
- Description, optional field in observation request [20](#)
- DIRS keyword in batch interface [662](#), [672](#)
- DOWN primary command [2](#)
- DPA (Descriptive Program Attribution) groups, described [79](#)
- DPA Group
 - reporting in batch [656](#)
- Duration [18](#)
- Duration (field in new request) [20](#)
- DURATION keyword in batch interface [662](#), [671](#)

E

- E01 CICS session statistics report [187](#)
- E02 CICS CPU and use count by program report [189](#)
- E03 CICS CPU usage by transaction report [191](#)
- E04 CICS mean service time by transaction report [198](#)
- E05 CICS total service time by Txn report [208](#)
- E06 CICS service time by task ID report [219](#)
- E07 CICS wait by Txn report [228](#)
- E08 CICS mean service time by terminal ID report [230](#)
- E09 CICS total service time by terminal ID report [238](#)
- E10 CICS mean service time by user ID report [246](#)
- E11 CICS total service time by user ID report [253](#)
- E12 CICS CPU/service time by transaction report [261](#)
- Elapsed Time [40](#)
- enclave [60](#)
- END primary command [2](#)
- Ended status of observation session [10](#)
- ENQ [133](#)
- ErrMsg status of observation session [10](#)
- EXCP [147](#)
- EXCP Count [40](#)
- Expand [4](#)
- EXPDAYS keyword in batch interface [662](#), [671](#)
- EXPLAIN [389](#)
- EXPORT line command [9](#)
- external symbol [21](#)

F

- F01 DB2 measurement report [328](#)
- F02 DB2 SQL activity timeline report [332](#)
- F03 DB SQL activity by DBRM report [336](#)
- F04 DB2 SQL activity by statement report [339](#)
- F05 DB2 SQL activity by plan report [343](#)
- F06 DB2 SQL statement attributes report [346](#)
- F07 DB2 SQL wait time by DBRM report [348](#)
- F08 DB2 SQL wait time by statement report [351](#)
- F09 DB2 SQL wait time by plan report [354](#)
- F10 DB2 SQL CPU/Svc time by DBRM report [356](#)
- F11 DB2 SQL CPU/Svc time by stmt report [359](#)
- F12 DB2 SQL CPU/Svc time by plan report [363](#)
- F13 DB2 SQL threads analysis report [366](#)
- F14 DB2 CPU by plan/stored proc report [367](#)
- F15 DB2 SQL CPU/Svc time by Rq Loc report [371](#)
- F16 DB2 SQL CPU/Svc time by enclave report [374](#)
- F17 DB2 SQL CPU/Svc time by Corrid report [377](#)
- F18 DB2 SQL CPU/Svc time by Wkstn report [380](#)
- F19 DB2 SQL CPU/Svc time by EndUsr report [384](#)
- F20 DB2 Class 3 Wait Times report [387](#)

Failed status of observation session [10](#)
FEATURES keyword in batch interface [662](#), [671](#)
FIND primary command [2](#)
First Schedule Date (field for future schedule) [37](#)
First Schedule Time (field for future schedule) [37](#)
fixes, getting [702](#)
FPP [280](#), [283](#), [286](#), [289](#), [295](#), [297](#), [301](#), [304](#)
freeze [45](#)
future schedule options in panel 8 [37](#)
future scheduled requests, entering [35](#)

G

G01 Coupling facility summary report [160](#)
G02 Coupling facility mean times report [161](#)
G03 Coupling facility total times report [162](#)
green light [16](#)

H

H01 HFS Service Time by Path Name report [479](#)
H02 HFS Service Time by Device report [481](#)
H03 HFS File Activity report [484](#)
H04 HFS File Attributes report [486](#)
H05 HFS Device Activity report [487](#)
H06 HFS Device Attributes report [489](#)
H07 HFS Activity Timeline report [490](#)
H08 HFS Wait Time by Path Name report [492](#)
H09 HFS Wait Time by Device report [494](#)
H10 HFS Service Time by Request report [497](#)
H11 HFS Wait Time by Request report [499](#)
HELP [4](#)
HELP, displaying HELP panels [2](#)
HFS [437](#)
HFS analysis reports
 HFS Activity Timeline (H07) [490](#)
 HFS Device Attributes (H06) [489](#)
 HFS File Activity (H03) [484](#)
 HFS File Attributes (H04) [486](#)
 HFS Service Time by Device (H02) [481](#)
 HFS Service Time by Path Name (H01) [479](#)
 HFS Service Time by Request (H10) [497](#)
 HFS Wait Time by Device (H09) [494](#)
 HFS Wait Time by Path Name (H08) [492](#)
 HFS Wait Time by Request (H11) [499](#)
 HFSDDevice Activity (H05) [487](#)
HIDE primary command [3](#)

I

I/O activity percentage of time calculation [46](#)
I/O Analysis [43](#)
I01 IMS measurement profile report [267](#)
I02 IMS DL/I call timeline report [271](#)
I03 IMS transaction timeline report [272](#)
I04 IMS transaction activity timeline report [274](#)
I05 IMS DL/I CPU usage by PSB report [280](#)
I06 IMS DL/I CPU usage by transaction report [283](#)
I07 IMS DL/I CPU usage by DL/I call report [286](#)
I081 IMS DL/I WAIT time by PSB report [289](#)
I09 IMS DL/I WAIT time by transaction report [292](#)
I10 IMS DL/I WAIT time by DL/I call report [295](#)
I11 IMS DL/I activity by PSB report [297](#)

I12 IMS DL/I activity by transaction report [301](#)
I13 IMS DL/I activity by DL/I call report [304](#)
I14 IMS PSB/PCB attributes report [306](#)
I15 IMS DL/I call attributes report [308](#)
I16 IMS transaction service times report [309](#)
I17 IMS transaction DL/I call counts report [311](#)
I18 IMS CPU/Svc time by DL/I calls report [313](#)
I19 IMS CPU/Svc time by PSB report [315](#)
I20 IMS CPU/Svc time by transaction report [317](#)
I21 IMS CPU/Svc time by PCB report [319](#)
I22 IMS CPU/Svc time by PCB report [321](#)
IBM Support Assistant, searching for problem resolution [701](#)
IDILANGX [615](#), [707](#)

IMS

 data extractor, overview of [266](#)
 IMS data extractor, specifying [23](#)
 IMS+ data extractor, specifying [23](#)
 IMSDLI category in C01 report [78](#)
 multiple address space support [266](#)
 source program mapping [271](#), [272](#), [280](#), [283](#), [286](#), [289](#),
 [292](#), [295](#), [297](#), [301](#), [304](#)

IMS measurement reports

 IMS CPU/Svc time by DL/I calls (I18) [313](#)
 IMS CPU/Svc time by PCB (I21) [319](#)
 IMS CPU/Svc time by PCB (I22) [321](#)
 IMS CPU/Svc time by PSB (I19) [315](#)
 IMS CPU/Svc time by transaction (I20) [317](#)
 IMS DL/I activity by DL/I call (I13) [304](#)
 IMS DL/I activity by PSB (I11) [297](#)
 IMS DL/I activity by transaction (I12) [301](#)
 IMS DL/I call attributes (I15) [308](#)
 IMS DL/I call timeline (I02) [271](#)
 IMS DL/I CPU usage by DL/I call (I07) [286](#)
 IMS DL/I CPU usage by PSB (I05) [280](#)
 IMS DL/I usage by transaction (I06) [283](#)
 IMS DL/I WAIT time by DL/I call (I10) [295](#)
 IMS DL/I WAIT time by PSB (I08) [289](#)
 IMS DL/I WAIT time by transaction (I09) [292](#)
 IMS measurement profile (I01) [267](#)
 IMS PSB/PCB attributes (I14) [306](#)
 IMS transaction activity timeline (I04) [274](#)
 IMS transaction DL/I call counts (I17) [311](#)
 IMS transaction service times (I16) [309](#)
 IMS transaction timeline (I03) [272](#)

IMS status of observation request [11](#)

IMSID keyword in batch interface [662](#), [676](#)
IMSIMAX keyword in batch interface [662](#), [672](#)
Internet

 searching for problem resolution [701](#)

Interval in Days (field for future schedule) [37](#)
Interval in Minutes (field for future schedule) [37](#)
IPROG keyword in batch interface [662](#), [674](#)

ISPF report navigation

 "-" Collapse line command [6](#)
 "?" HELP line command [4](#)
 "/" Context menu line command [4](#)
 "+" Expand line command [4](#)
 "++" Additional details line command [5](#)
 "SN" Sort by Name line command [6](#)
 "SV" Sort by Value line command [6](#)
 CANCEL primary command [2](#)
 DOWN primary command [2](#)
 END primary command [2](#)
 HIDE primary command [3](#)

ISPF report navigation (*continued*)

- JUMP primary command [2](#)
- LEFT primary command [2](#)
- PREF command [3](#)
- RIGHT primary command [2](#)
- SETUP primary command [3](#)
- SHOW primary command [3](#)
- UP primary command [2](#)
- VERSION primary command [3](#)
- WIN primary command [2](#)

ISPF reports, navigation and control [1](#)

ITRAN keyword in batch interface [662](#), [674](#)

IUSER keyword in batch interface [662](#), [674](#)

J

J01 Java summary and attributes report [440](#)

J02 Java heap usage timeline [441](#)

J03 Java CPU usage by thread [443](#)

J04 Java CPU usage by package report [445](#)

J05 Java CPU usage by class report [448](#)

J06 Java CPU usage by method report [450](#)

J07 Java CPU usage by call path report [453](#)

J09 Java service time by package report [456](#)

J10 Java service time by class report [459](#)

J11 Java service time by method report [462](#)

J12 Java service time by call path report [465](#)

J14 Java wait time by package report [467](#)

J15 Java wait time by class report [470](#)

J16 Java wait time by method report [473](#)

J17 Java wait time by call path report [476](#)

java

- Preloaded loaded JVMTI agent [438](#)

Java

- Considerations for Java [438](#)

- data extractor, overview of [438](#)

- Java data extractor, specifying [23](#)

- NEW [662](#), [669](#)

- source program mapping [618](#)

Java measurement reports

- Java CPU usage by call path (J07) [453](#)

- Java CPU usage by class (J05) [448](#)

- Java CPU usage by method (J06) [450](#)

- Java CPU usage by package (J04) [445](#)

- Java CPU usage by thread (J03) [443](#)

- Java heap usage timeline (J02) [441](#)

- Java service time by call path (J12) [465](#)

- Java service time by class (J10) [459](#)

- Java service time by method (J11) [462](#)

- Java service time by package (J09) [456](#)

- Java summary and attributes (J01) [440](#)

- Java wait time by call path (J17) [476](#)

- Java wait time by class (J15) [470](#)

- Java wait time by method (J16) [473](#)

- Java wait time by package (J14) [467](#)

Java package [440](#)

JCL [636](#)

JCL in batch interface [661](#)

JCL, for printed reports [638](#)

JCL, primary command [17](#)

JCL, sample for batch interface [664](#)

Job Name, specifying target job [18](#)

JOBNAME keyword in batch interface [662](#), [669](#)

JOBNAMES keyword in batch interface [662](#), [676](#)

JUMP primary command [2](#)

K

K01 - CPU SRB Usage by SRB Type report [163](#)

K02 - CPU SRB Usage by PSW/ObjCode report [168](#)

KEEP [681](#)

KEEP command in batch interface [662](#)

KEEP line command [9](#)

knowledge bases, searching for problem resolution [701](#)

Knowledge Center, searching for problem resolution [701](#)

L

LANGX [641](#)

launch reporting [8](#)

LEFT primary command [2](#)

libraries, specifying additional libraries for CSECT resolution [26](#)

LIBS keyword in batch interface [662](#), [672](#)

line commands [632](#)

load module information [78](#), [85](#), [89](#), [95](#), [102](#), [105](#), [109](#), [115](#), [121](#), [126](#), [129](#), [154](#), [189](#), [191](#), [198](#), [208](#), [230](#), [238](#), [246](#), [253](#), [261](#), [271](#), [272](#), [280](#), [283](#), [286](#), [289](#), [292](#), [295](#), [297](#), [301](#), [304](#), [336](#), [339](#), [343](#), [348](#), [351](#), [354](#), [356](#), [359](#), [363](#), [367](#)

look-asides [158](#)

M

MAP statement in print reports JCL [641](#)

Maximum number of DB2+ trace entries, specifying [25](#)

Maximum number of IMS+ trace entries, specifying [25](#)

Measure to step end (field in new request) [20](#)

measurement profile [51](#), [267](#), [328](#)

MOD [16](#)

MOD line command [9](#)

modes [685](#), [691](#)

modify the request [8](#)

modifying an observation request before it starts [9](#)

MPP [267](#), [279](#), [280](#), [283](#), [286](#), [289](#), [290](#), [292](#), [295](#), [297](#), [298](#), [301](#), [304](#)

MQ measurement reports

- MQ+ Activity Timeline (Q11) [423](#)

- MQ+ CPU/SVC Time by Queue (Q12) [426](#)

- MQ+ CPU/SVC Time by Request (Q13) [429](#)

- MQ+ CPU/SVC Time by Txn (Q14) [432](#)

- MQSeries activity summary (Q01) [396](#)

- MQSeries CPU usage by queue (Q02) [398](#)

- MQSeries CPU usage by request (Q03) [401](#)

- MQSeries CPU usage by Txn (Q04) [403](#)

- MQSeries service time by queue (Q05) [406](#)

- MQSeries service time by request (Q06) [409](#)

- MQSeries service time by Txn (Q07) [411](#)

- MQSeries wait time by queue (Q08) [415](#)

- MQSeries wait time by request (Q09) [417](#)

- MQSeries wait time by Txn (Q10) [420](#)

MQI [395](#)

MQSeries

- MQ data extractor, specifying [23](#)

- overview of data extractor [395](#)

- source program mapping [398](#), [401](#), [403](#), [406](#), [409](#), [411](#), [415](#), [417](#), [420](#)

multi-step [10](#)

multiple step measurements, specifying [26](#)
MultJb status of observation request [11](#)
MVSBusy [198](#), [208](#), [219](#), [228](#)
MVSWait [198](#), [208](#), [220](#), [228](#)

N

Natural
 Natural data extractor, specifying [23](#)
NEW [669](#), [682](#)
NEW command in batch interface [661](#), [669](#)
NEW line command [9](#)
NEW primary command [15](#)
non-terminal [673](#)
NONCTERM keyword in batch interface [662](#), [673](#)
NOSYMB category [78](#), [95](#), [106](#), [121](#)
NOTIFY keyword in batch interface [662](#), [671](#)
Notify TSO User (field in new request) [21](#)
Number of Samples (field in new request) [20](#)

O

object code [115](#), [626](#)
observation [15](#), [690](#)
observation request [1](#), [15](#)
observation request, entering a new one [15](#)
Observation session list panel [7](#)
overview of WAS data extractor [503](#)
Owned By field in Observation session list [8](#)

P

P line command for C/C++, using [613](#)
P line command, using [613](#)
P01 Source program attribution report [624](#)
panel 5 input fields
 for an IMS region [31](#)
 for CICS [31](#)
 for DB2 DDF [32](#)
 for DB2 stored procedure [32](#)
 for multiple IMS regions [33](#)
 for user defined function [32](#)
 for WebSphere [33](#)
parallel activity, examples [46](#)
performance reports [12](#), [43](#), [185](#), [265](#), [325](#)
PREF [643](#)
PREF primary command [3](#)
primary commands
 report navigation [1](#)
PRINT statement in print reports JCL [643](#)
printing reports
 ISPF report request facility [634](#)
 overview [633](#)
 PDF format [634](#), [640](#), [644](#)
 preparing JCL [638](#)
 source program mapping [638](#)
 XML document format [634](#), [644](#)
problem determination
 describing problems [705](#)
 determining business impact [704](#)
 submitting problems [705](#)
PROFILE [267](#), [642](#)
PROFILE statement in print reports JCL [641](#)

PSB [279](#), [280](#), [289](#), [297](#), [306](#), [315](#)
PSW [115](#), [276](#)

Q

Q01 MQSeries activity summary report [396](#)
Q02 MQSeries CPU usage by queue report [398](#)
Q03 MQSeries CPU usage by request report [401](#)
Q04 MQSeries CPU usage by Txn report [403](#)
Q05 MQSeries service time by queue report [406](#)
Q06 MQSeries service time by request report [409](#)
Q07 MQSeries service time by Txn report [411](#)
Q08 MQSeries wait time by queue report [415](#)
Q09 MQSeries wait time by request report [417](#)
Q10 MQSeries wait time by Txn report [420](#)
Q11 MQ+ Activity Timeline report [423](#)
Q12 MQ+ CPU/SVC Time by Queue [426](#)
Q13 MQ+ CPU/SVC Time by Request [429](#)
Q14 MQ+ CPU/SVC Time by Txn [432](#)
quantification [105](#)
Quantification [75](#)
queued system state [45](#)

R

R01 Application Performance Analyzer for z/OS performance reports menu [12](#)
R02 Observation session list panel [7](#)
R03 [17](#)
Realtime Monitor [685](#)
reason code [666–668](#)
red light [16](#)
referred attribution
 in C08 CPU usage referred attribution report [109](#)
 in P01 Source program attribution report [624](#)
 in W03 WAIT time referred attribution report [129](#)
REPEAT status of observation session [10](#)
REPORT CODE primary command [2](#)
reports menu [8](#)
ReqNum [8](#)
Request Number [8](#)
request number display colors [9](#)
RESERVE [133](#)
RESET [2](#)
Retain file for days (field in new request) [21](#)
Retry interval (field in new request) [40](#)
RETRYAFTER keyword in batch interface [662](#), [678](#)
return code [666](#), [667](#)
RIGHT primary command [2](#)
RUNAGAIN keyword in batch interface [662](#), [678](#)
RUNTOEOS keyword in batch interface [662](#), [671](#)

S

S01 Measurement profile report [51](#)
S02 Load module attributes report [64](#)
S03 Load module summary report [65](#)
S04 TCB summary report [67](#)
S05 Memory usage timeline report [69](#)
S06 Data space usage timeline report [70](#)
S07 TCB execution summary report [72](#)
S08 Processor utilization summary report [73](#)
S09 Measurement analysis report [76](#)

- S10 – Observation Session Messages [77](#)
- SA [64](#)
- SAMPDSN keyword in batch interface [678](#)
- sample file DSN, in S01 report [55](#)
- Samples [67](#)
- Samples field in Observation Session list [10](#)
- SAMPLES keyword in batch interface [662](#), [670](#)
- sampling [37](#), [44](#)
- SCAZSAMP [682](#)
- SCHDDATE keyword in batch interface [662](#), [677](#)
- SCHDSPAN keyword in batch interface [662](#), [678](#)
- Sched status of observation session [10](#)
- schedule new measurement
 - overview [16](#)
 - Panel 1 - Job Information [17](#)
 - Panel 2 - Options [21](#)
 - Panel 3 - Multi-steps [26](#)
 - Panel 4 - Active Jobs [28](#)
 - Panel 5 - Subsystems [29](#)
 - Panel 6 - Sysplex [34](#)
 - Panel 7 - Schedule [35](#)
 - Panel 8 - Sched Options [37](#)
- Schedule Repeat Count (field for future schedule) [37](#)
- scheduling future measurements [35](#)
- SECTION statement in print reports JCL [642](#)
- Service Request Block (SRB)
 - CPU SRB Usage by PSW/ObjCode (K02) [168](#)
 - CPU SRB Usage by SRB Type (K01) [163](#)
 - SRB data extractor [23](#)
- SETUP primary command
 - In B12 report [544](#)
 - in C01 report [84](#)
 - in C02 report [88](#)
 - in C03 report [91](#)
 - in C04 report [94](#)
 - in C05 report [100](#)
 - in C06 report [104](#)
 - in C07 report [107](#)
 - in C08 report [113](#)
 - in C09 report [117](#)
 - in C10 report [120](#)
 - in D01 report [140](#)
 - in D02 report [143](#)
 - in D03 report [144](#)
 - in D05 report [148](#)
 - in D06 report [151](#)
 - in D07 report [153](#)
 - in E03 report [197](#)
 - in F04 report [343](#)
 - in F05 report [346](#)
 - In F10 report [359](#)
 - In F11 report [362](#)
 - In F12 report [366](#)
 - in F14 report [370](#)
 - In F15 report [373](#)
 - In F16 report [377](#)
 - In F17 report [380](#)
 - In F18 report [384](#)
 - In F19 report [387](#)
 - in K01 report [163](#)
 - in P01 report [626](#)
 - in R02 report [7](#)
 - in S02 report [64](#)

- SETUP primary command (*continued*)
 - in S03 report [66](#)
 - in S05 report [70](#)
 - in S06 report [72](#)
 - in S10 report [78](#)
 - in W01 report [125](#)
 - in W02 report [129](#)
 - in W03 report [133](#)
 - in W04 report [136](#)
 - in W05 report [137](#)
- SHOW primary command [3](#)
- Software Support
 - contacting [704](#)
 - describing problems [705](#)
 - determining business impact [704](#)
 - receiving updates [702](#)
 - submitting problems [705](#)
- sorting detail lines in reports [6](#)
- source program mapping
 - A01 Source Program Mapping panel [615](#)
 - A03 Java source program mapping panel [618](#)
 - A11 Source program mapping pick list [623](#)
 - and printed reports (MAP statement) [641](#)
 - copying an SPM file [615](#)
 - dataset list, specifying [617](#)
 - deleting the SPM entry [618](#)
 - filling the input fields [616](#)
 - From C01 report [78](#)
 - From C02 report [85](#)
 - From C03 report [89](#)
 - From C05 report [95](#)
 - From C06 report [102](#)
 - From C07 report [105](#)
 - From C08 report [109](#)
 - From D08 report [154](#)
 - From E03 report (CICS) [191](#)
 - From E04 report (CICS) [198](#)
 - From E08 report (CICS) [208](#), [230](#)
 - From E09 report (CICS) [238](#)
 - From E10 report (CICS) [246](#)
 - From E11 report (CICS) [253](#)
 - From E12 report (CICS) [261](#)
 - From F03 report (DB2) [336](#)
 - From F04 report (DB2) [339](#)
 - From F05 report (DB2) [343](#)
 - From F07 report (DB2) [348](#)
 - From F08 report (DB2) [351](#)
 - From F09 report (DB2) [354](#)
 - From F10 report (DB2) [356](#)
 - From F11 report (DB2) [359](#)
 - From F12 report (DB2) [363](#)
 - From F14 report (DB2) [367](#)
 - From F15 report (DB2) [371](#)
 - From F16 report (DB2) [374](#)
 - From F17 report (DB2) [377](#)
 - From F18 report (DB2) [380](#)
 - From F19 report (DB2) [384](#)
 - From I02 report (IMS) [271](#)
 - From I03 report (IMS) [272](#)
 - From I05 report (IMS) [280](#)
 - From I06 report (IMS) [283](#)
 - From I07 report (IMS) [286](#)
 - From I08 report (IMS) [289](#)
 - From I09 report (IMS) [292](#)

source program mapping (*continued*)

- From I10 report (IMS) [295](#)
- From I11 report (IMS) [297](#)
- From I12 report (IMS) [301](#)
- From I13 report (IMS) [304](#)
- From Q02 report (MQSeries) [398](#)
- From Q03 report (MQSeries) [401](#)
- From Q04 report (MQSeries) [403](#)
- From Q05 report (MQSeries) [406](#)
- From Q06 report (MQSeries) [409](#)
- From Q07 report (MQSeries) [411](#)
- From Q08 report (MQSeries) [415](#)
- From Q09 report (MQSeries) [417](#)
- From Q10 report (MQSeries) [420](#)
- From Q11 report (MQ+) [423](#)
- From Q12 report (MQ+) [426](#)
- From Q13 report (MQ+) [429](#)
- From Q14 report (MQ+) [432](#)
- From W01 report [121](#)
- From W02 report [126](#)
- From W03 report [129](#)
- loading the SPM file [618](#)
- P line command [613](#)
- P line command for C/C++ [613](#)
- P01 Source program attribution [624](#)
- specifying the associated file [616](#)

Source program mapping

- A05 Source mapping common list panel [622](#)
- Common data set list [613](#)

statistics/storage reports

- Data space usage timeline (S06) [70](#)
- Load module attributes (S02) [64](#)
- Load module summary (S03) [65](#)
- Measurement analysis (S09) [76](#)
- Measurement profile (S01) [51](#)
- Memory usage timeline (S05) [69](#)
- Observation Session Messages (S10) [77](#)
- Processor utilization summary (S08) [73](#)
- TCB execution summary (S07) [72](#)
- TCB summary (S04) [67](#)

Status field in observation session list [10](#)

STEP keyword in batch interface [662](#), [672](#)

Step Specification Field Group (field in new request) [19](#)

STEPS status of observation session [10](#)

Stoppd status of observation session [10](#)

stored procedures

- DB2 CPU by plan/stored proc report (F14) [367](#)

SUB (Submit) line command [9](#)

SUBMIT, primary command [17](#)

SYSTRAN keyword in batch interface [662](#), [673](#)

Sysplex

- specifying target systems [34](#)

System name (field in new request) [19](#)

system states

- CPU executing [45](#)
- CPU waiting [45](#)
- queued [45](#)

SYSTEMS keyword in batch interface [662](#), [670](#)

T

Tagged status of observation request [11](#)

target job

- selecting from a list of active jobs [28](#)

target job (*continued*)

- specifying [18](#)

- specifying system (in sysplex) for [34](#)

target job step

- specifying [19](#)

- specifying for multiple steps [27](#)

Thresh status of observation request [11](#)

Times to Retry (field in new request) [40](#)

TNEW command in batch interface [679](#)

Trig status of observation request [11](#)

Trigger request, entering [42](#)

U

UP primary command [2](#)

USS multiple address space measurements [439](#)

USS observations (field in new request) [21](#)

USS status of observation request [11](#)

USSOBS keyword in batch interface [662](#), [671](#)

V

V01 Measurement variance summary report [171](#)

V02 CICS variance summary report [173](#)

V03 DB2 variance summary report [175](#)

V04 IMS variance summary report [180](#)

Variance reports

- CICS variance summary (V02) [173](#)

- DB2 variance summary (V03) [175](#)

- IMS variance summary (V04) [180](#)

- Measurement variance summary (V01) [171](#)

VERSION primary command [3](#)

Virtual Storage Map [60](#)

VSAM

- DASD VSAM statistics report (D06) [149](#)

- VSAM buffer pool usage report (D09) [158](#)

W

W01 WAIT time by task/category report [121](#)

W02 WAIT time by task/module report [126](#)

W03 WAIT time referred attribution report [129](#)

W04 WAIT time by task ENQ/RESERVE report [133](#)

W05 WAIT time by tape DDNAME report [136](#)

WAS

- WebSphere Application Services data extractor, specifying [23](#)

WAS data extractor

- overview [503](#)

WASFILTERS keyword in batch interface [676](#)

WebSphere (WAS) performance analysis reports

- Async Work by Servant (B15) [549](#)

- Async Work by Work Mgr (B14) [547](#)

- Async Work Requests (B13) [544](#)

- WAS Activity (B02) [507](#)

- WAS Activity by Origin (B03) [511](#)

- WAS Activity by Servant (B04) [515](#)

- WAS EJB Activity (B05) [520](#)

- WAS EJB Activity by Origin (B06) [523](#)

- WAS EJB Activity by Servant (B07) [526](#)

- WAS Servlet/JSP Activity (B08) [529](#)

- WAS Servlet/JSP by Origin (B09) [532](#)

- WAS Servlet/JSP by Servant (B10) [535](#)

WebSphere (WAS) performance analysis reports (*continued*)

WAS Summary (B01) [504](#)

WAS/CICS Calls (B11) [538](#), [837](#)

WAS/DB2 Calls (B12) [541](#), [838](#)

WOLA Inbound by Origin (B17) [555](#)

WOLA Inbound by Servant (B18) [559](#)

WOLA Inbound Requests (B16) [552](#)

WOLA Outbound by Register (B20) [565](#)

WOLA Outbound by Servant (B21) [567](#)

WOLA Outbound Requests (B19) [563](#)

WIN primary command [2](#)

Within Interval (field in new request) [40](#)

X

X01 CICS mean service time by transaction report [571](#)

X02 CICS total service time by transaction report [578](#)

X03 CICS mean service time by terminal ID report [586](#)

X04 CICS total service time by terminal ID report [594](#)

XML documents [638](#)



Product Number: 5655-Q49

SC27-8403-06

